




[Doom](#)

🔍


Search

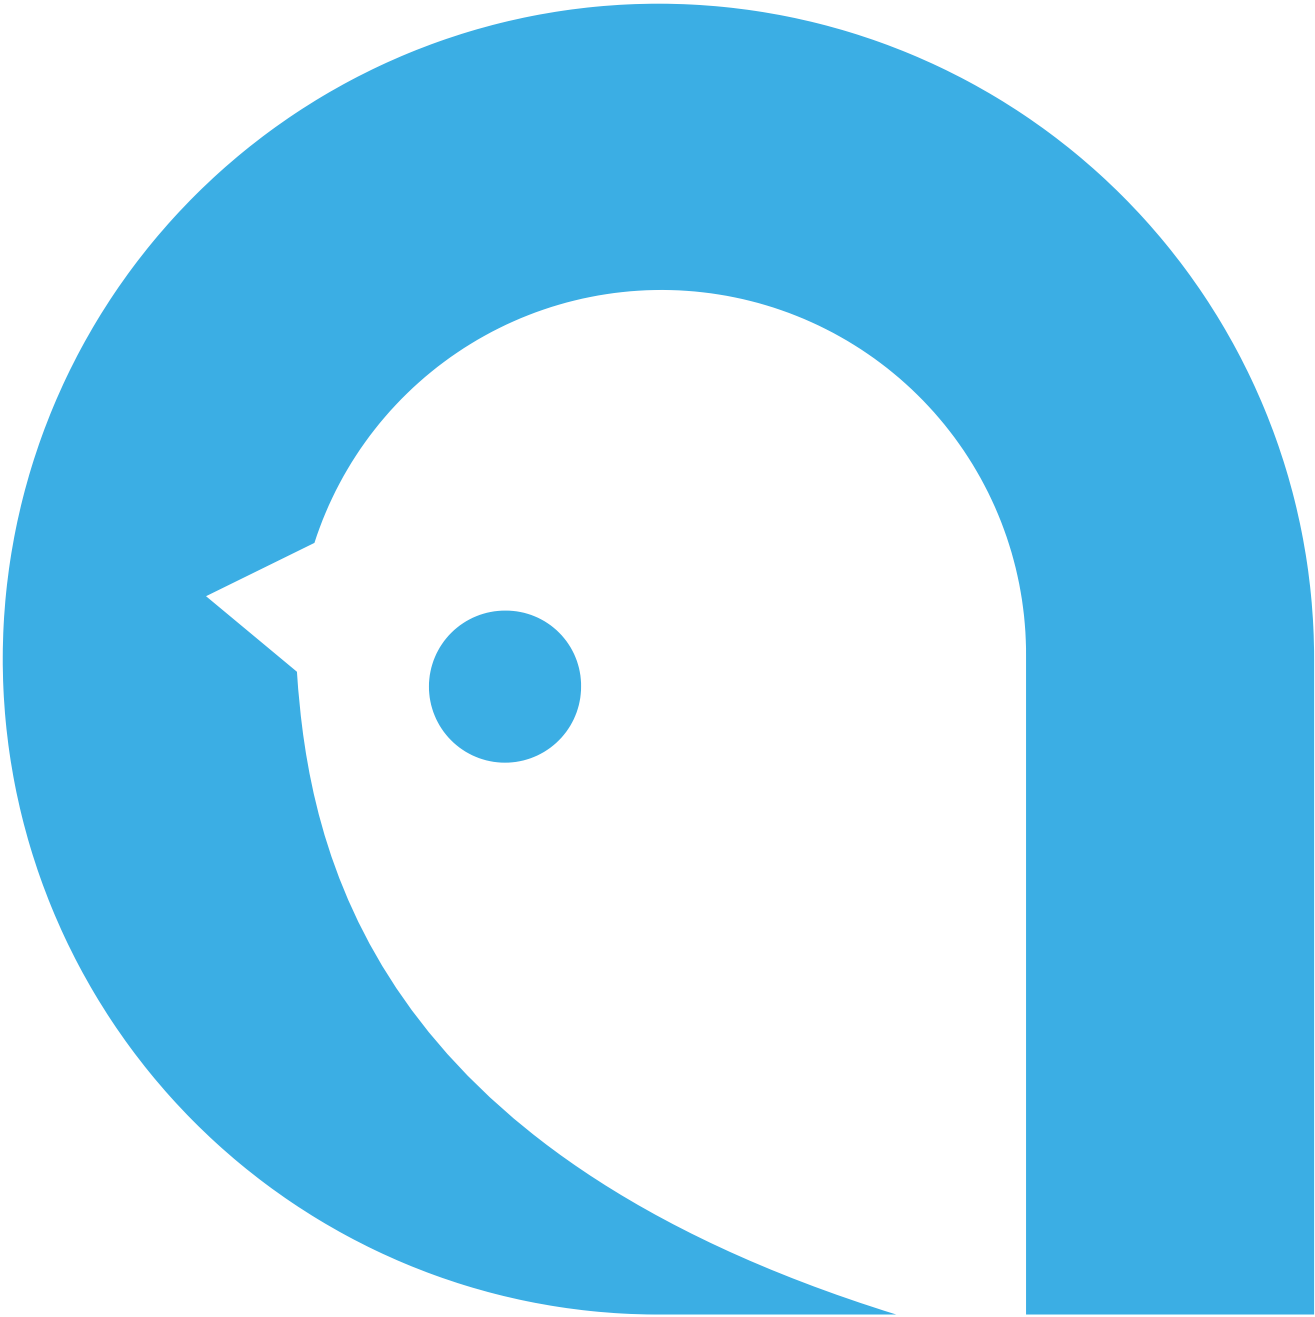


English ▾

- [English](#)
- [_____](#)



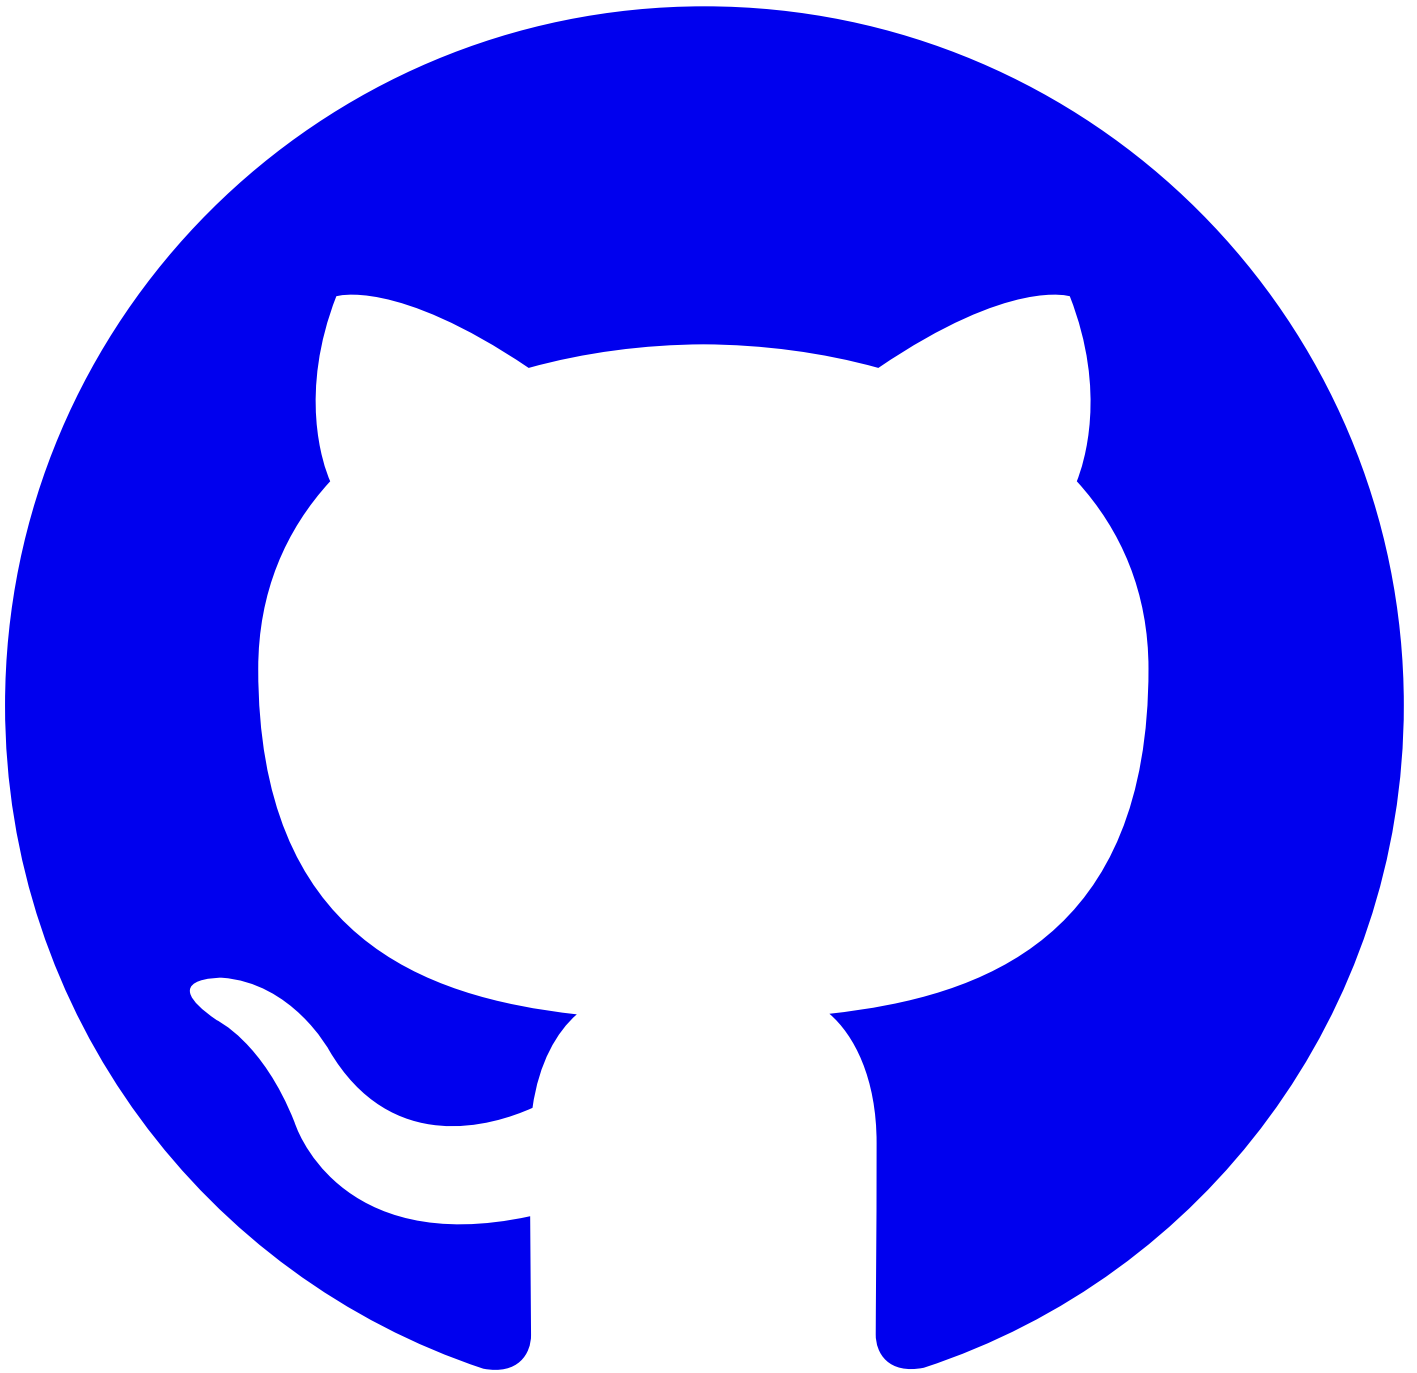

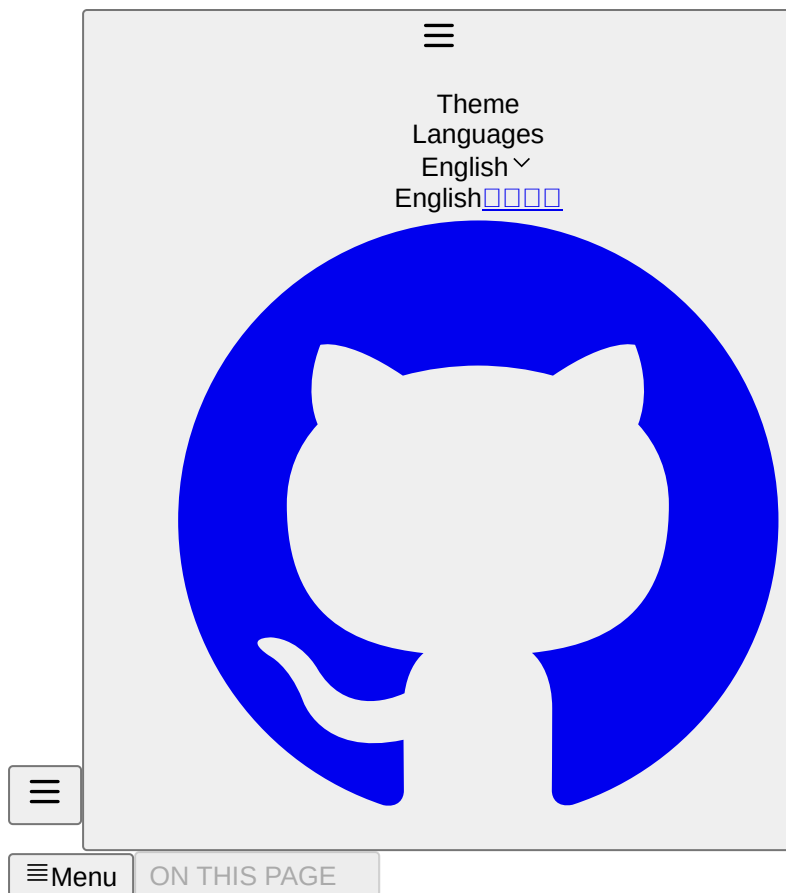

[Introduction](#)

[Getting Started](#)

[Usage](#)

[Configuration](#)



[Convention](#)

[Markdown](#)

[MDX](#)

[Internationalization](#)

[API Documentation](#)

[Permission Description Document](#)

[Referencing Documents](#)

[Deployment](#)

[APIs](#)

[Advanced APIs](#)

[Event APIs](#)

[Search](#)

[Log APIs](#)
>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)
>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)
>

[Workload APIs](#)
>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)
>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)

[CodeQualityBranch](#)

[DaemonSet](#)

[Deployment](#)

[#Event APIs](#)

[Previous page](#) > [Advanced APIs](#)[Next page](#)[Search](#) >





[Doom](#)



English ▾

- [English](#)
- [_____](#)



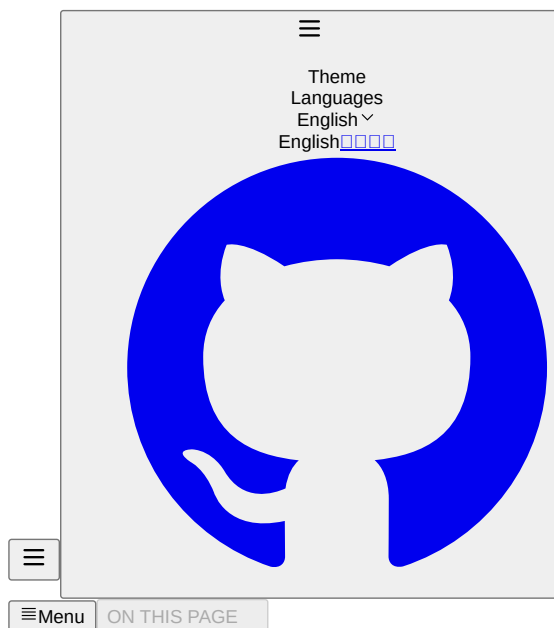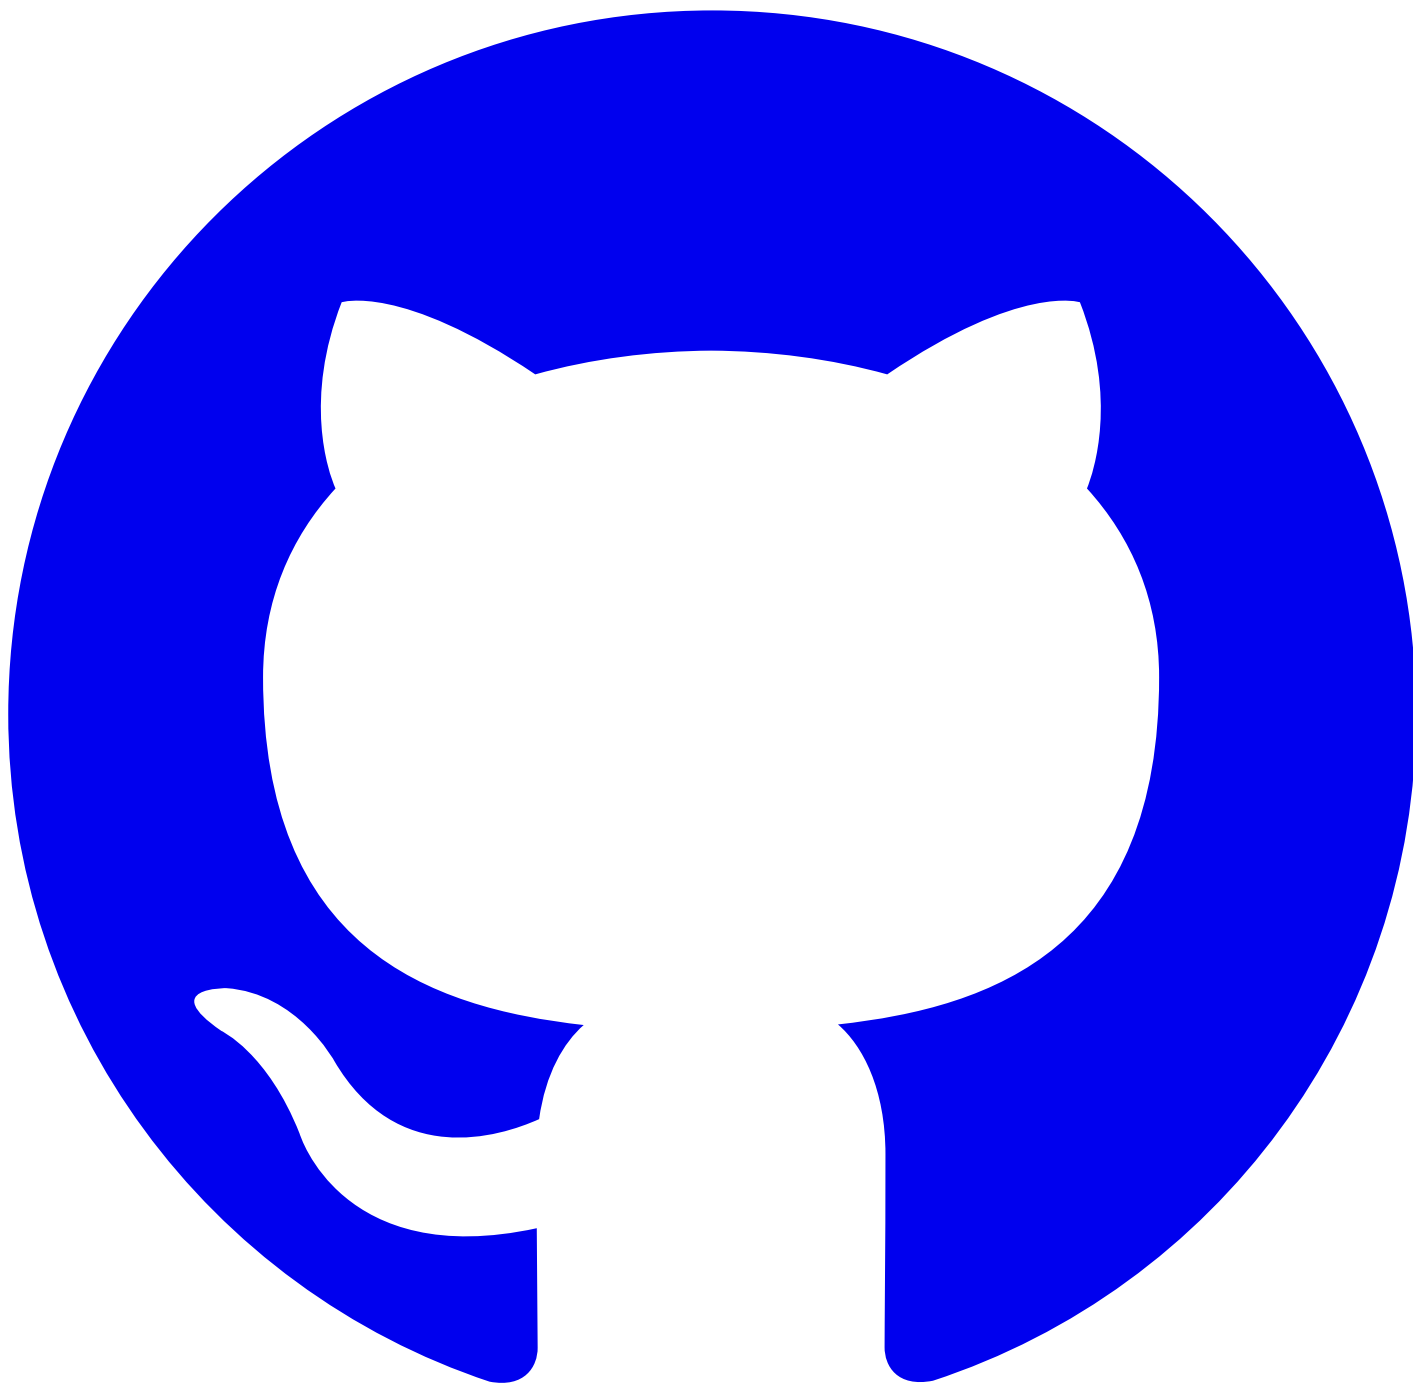

- [Getting Started](#)
- [Usage](#)
- [Configuration](#)
- [Convention](#)
- [Markdown](#)
- [MDX](#)
- [Internationalization](#)
- [API Documentation](#)
- [Permission Description Document](#)
- [Referencing Documents](#)
- [Deployment](#)
- [APIs](#)
- [Advanced APIs](#)
- [Event APIs](#)
- [Search](#)
- [Log APIs](#)
 - >
- [Aggregation](#)
- [Search](#)
- [CodeQualityTaskSummary](#)
- [Projects](#)
- [CRDs](#)
 - >
- [ArtifactCleanupRun - K8sCrd](#)
- [ArtifactCleanupRun](#)
- [Kubernetes APIs](#)
 - >
- [Workload APIs](#)
 - >
- [DaemonSet \[apps/v1\]](#)
- [Deployments \[apps/v1\]](#)
- [Common References](#)
 - >
- [ObjectMeta](#)
- [Status](#)
- [CodeQuality](#)
- [CodeQualityBranch](#)
- [DaemonSet](#)
- [Deployment](#)

[#Search](#)

[#/platform/events.alauda.io/v1/events](#)

[#get](#) Retrieve Kubernetes events

Retrieve the k8s events using query parameters.

[#Parameters](#)

- `start_time` (*in query*): number required
Required: Unix timestamp for start time.
- `end_time` (*in query*): number required
Required: Unix timestamp for end time.
- `cluster` (*in query*): string required
Required: Name of the Kubernetes cluster.
- `pageno` (*in query*): number
Optional: Page number to retrieve.
- `size` (*in query*): number
Optional: Page size, defaults to 30.
- `project` (*in query*): string
Optional: Name of the project.
- `namespace` (*in query*): string
Optional: Event's namespace. Use comma-separated values for multiple namespaces.
- `kind` (*in query*): string
Optional: Event related resource kind. Use comma-separated values for multiple kinds.
- `name` (*in query*): string
Optional: Filter events by name (fuzzy matching).
- `filters` (*in query*): string
Optional: Custom filters.
- `type` (*in query*): string
Optional: Event type (e.g. Normal, Warning, etc.).

[#Response](#)

- 200 [EventsResponse](#): Successful retrieval of events.

[#EventsResponse](#)

- `items`: [][EventItem](#)
List of event items.
- `total_items`: integer
Total number of event items.
- `total_page`: integer
Total number of pages.

[#EventItem](#)

- `spec`: object
Specification details for the event.

[#/platform/events.alauda.io/v1/projects/{project}/clusters/{cluster}/namespaces/{namespace}/events](#)

[#get](#) Retrieve Kubernetes events for a specific project and namespace

Retrieve the k8s events with a business view. For these requests, the cluster, project, and namespace fields must be provided.

#Parameters

- `projectName` (*in path*): string required
Required: Name of the project.
- `clusterName` (*in path*): string required
Required: Name of the cluster.
- `namespace` (*in path*): string required
Required: Namespace for the events.
- `start_time` (*in query*): number required
Required: Unix timestamp for start time.
- `end_time` (*in query*): number required
Required: Unix timestamp for end time.
- `cluster` (*in query*): string required
Required: Name of the Kubernetes cluster.
- `pageno` (*in query*): number
Optional: Page number to retrieve.
- `size` (*in query*): number
Optional: Page size, defaults to 30.
- `kind` (*in query*): string
Optional: Event related resource kind. Use comma-separated values for multiple kinds.
- `name` (*in query*): string
Optional: Filter events by name (fuzzy matching).
- `filters` (*in query*): string
Optional: Custom filters.
- `type` (*in query*): string
Optional: Event type (e.g. Normal, Warning, etc.).

#Response

- 200 [EventsResponse](#): Successful retrieval of events.

#EventsResponse

- `items`: [][EventItem](#)
List of event items.
- `total_items`: integer
Total number of event items.
- `total_page`: integer
Total number of pages.

#EventItem

- `spec`: object
Specification details for the event.

[Previous page](#) > [Event APIs](#)[Next page](#)[Log APIs](#) >