

Doom  [rspress](#)  Alauda           

□ □ □ □

- □□□□□□□□□□□□□□□□□□
- □□□□□□□□
- □□□□□



0000000000 MDX 000 ↗ 0

0000

000000000000 Doom 00

00

00

0000

000000

00

□□ `doom` □□□□

□ □ □ □

□ □ □ □ □ □ □ □

Page 10 of 10

Page 10 of 10

|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|

□ □ □ □

□ □ □ □ □ □

□ □ □ □ □ □

Sitemap  

10/10

11

11

## Markdown

Callouts

Mermaid

📄📄📄

## MDX

📄 MDX 📄📄📄📄📄📄📄📄📄📄

rspress 📄

doom 📄

📄📄📄📄📄

📄📄

📄📄📄📄📄📄📄📄📄

i18n.json

.ts/.tsx

.mdx

## API 📄

📄 API

CRD

📄📄📄

📄 openapi 📄

📄📄📄📄📄

props

📄

0000

000000

00

00000000000000000000 ACP 00

00000

00000

000000

00000000

📄📄

📄📄

📄📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

📄📄📄

📄📄📄📄📄📄

📄📄📄

📄📄 PDF


📄📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
mkdir my-docs && cd my-docs
```

📄 `npm init -y` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `npm`📄`yarn` 📄 `pnpm` 📄📄 `doom:`



```
npm install -D @alauda/doom typescript
```

📄📄📄📄📄📄📄📄:

```
# 创建 docs 目录并初始化
mkdir docs/en && echo '# Hello World' > docs/en/index.md
mkdir docs/zh && echo '# 文档' > docs/zh/index.md
```

在 `package.json` 中添加脚本:

```
{
  "scripts": {
    "dev": "doom dev",
    "build": "doom build",
    "new": "doom new",
    "serve": "doom serve",
    "translate": "doom translate",
    "export": "doom export"
  }
}
```

在 `doom.config.yml` 中添加:

```
title: My Docs
```

在 `tsconfig.json` 中添加:

```
{
  "compilerOptions": {
    "jsx": "react-jsx",
    "module": "NodeNext",
    "moduleResolution": "NodeNext",
    "noUnusedLocals": true,
    "noUnusedParameters": true,
    "resolveJsonModule": true,
    "skipLibCheck": true,
    "strict": true,
    "target": "ESNext",
  },
  "mdx": {
    "checkMdx": true,
  },
}
```

global.d.ts

```
/// <reference types="@alauda/doom/runtime" />
```

.mdx doom



```
doom -h
```

```
# output
```

```
Usage: doom [options] [command]
```

```
Doctor Doom making docs.
```

```
Options:
```

```

  -V, --version                output the version number
  -c, --config <config>       Specify the path to the config file
  -v <version>                 Specify the version of the
documentation, can also be `unversioned` or `unversioned-x.y`
  -b, --base <base>            Override the base of the documentation
  -p, --prefix <prefix>       Specify the prefix of the documentation
base
  -f, --force [boolean]        Force to
                                1. fetch latest reference remotes or
scaffolding templates, otherwise use local cache
                                2. translate ignore hash equality check
and original text (default: false)
  -i, --ignore [boolean]       Ignore internal routes (default: false)
  -d, --download [boolean]     Display download pdf link on nav bar
(default: false)
  -e, --export [boolean]       Run or build in exporting PDF mode,
`apis/**` and `*/apis/**` routes will be ignored automatically (default:
false)
  -I, --include <language...> Include **only** the specific
language(s), `en ru` for example
  -E, --exclude <language...> Include all languages except the
specific language(s), `ru` for example
  -o, --out-dir <path>         Override the `outDir` defined in the
config file or the default `dist/{base}/{version}`, the resulting path
will be `dist/{outDir}/{version}`
  -r, --redirect <enum>        Whether to redirect to the locale
closest to `navigator.language` when the user visits the site, could be
`auto`, `never` or `only-default-lang` (default: "only-default-lang")
  -R, --edit-repo [boolean|url] Whether to enable or override the
`editRepoBaseUrl` config feature, `https://github.com/` prefix could be
omitted (default: false)
  -a, --algolia [boolean|alauda] Whether to enable or use the alauda
(docs.alauda.io) preset for Algolia search (default: false)
  -S, --site-url                Whether to enable the siteUrl for
sitemap generation (default: false)

```

```
-n, --no-open          Do not open the browser after starting
the server
-h, --help             display help for command
```

## Commands :

|                                               |                                     |
|-----------------------------------------------|-------------------------------------|
| <code>dev [options] [root]</code>             | Start the development server        |
| <code>build [root]</code>                     | Build the documentation             |
| <code>preview serve [options] [root]</code>   | Preview the built documentation     |
| <code>new [template]</code>                   | Generate scaffolding from templates |
| <code>translate [options] [root]</code>       | Translate the documentation         |
| <code>export [options] [root]</code>          | Export the documentation as PDF,    |
| <code>`apis/**` and `*/apis/**` routes</code> | will be ignored automatically       |
| <code>lint [root]</code>                      | Lint the documentation              |
| <code>help [command]</code>                   | display help for command            |



□□ yarn dev □□□□□□□□□□□□□□□□□□□□

doom dev -h

```
# output
```

Usage: doom dev [options] [root]

## Start the development server

### Arguments:

```
root      Root directory of the documentation
```

## Options:

```
-H, --host [host]      Dev server host name
-P, --port [port]      Dev server port number
-l, --lazy [boolean]    Whether to enable `lazyCompilation` which
could improve the compilation performance (default: true)
--no-lazy               Do not enable `lazyCompilation`
-h, --help              display help for command
```

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

使用 `yarn build` 命令构建项目，生成 `dist` 目录下的文件。

使用

使用 `yarn serve` 命令启动服务，支持 `-b` 和 `-p` 选项，分别指定构建目录和端口。

使用

使用 `yarn new` 命令创建新项目。

使用

```
doom translate -h
```

```
# output
```

```
Usage: doom translate [options] [root]
```

```
Translate the documentation
```

```
Arguments:
```

```
  root                                Root directory of the documentation
```

```
Options:
```

```
  -s, --source <language>  Document source language, one of en, zh, ru
                             (default: "en")
```

```
  -t, --target <language>  Document target language, one of en, zh, ru
                             (default: "zh")
```

```
  -g, --glob <path...>     Glob patterns of source dirs/files to translate
```

```
  -C, --copy [boolean]      Whether to copy relative assets to the target
                             directory instead of following links (default: false)
```

```
  -h, --help                display help for command
```

- `-g, --glob` 指定要翻译的源目录或文件的glob模式，`glob` 模式支持通配符。

1. `yarn translate -g abc xyz` 命令会在 `<root>/<source>/abc` 目录下，`<root>/<source>/xyz` 目录下，以及 `<root>/<target>/abc` 目录下，`<root>/<target>/xyz` 目录下。

2. `yarn translate -g '*'` `<root>/<source>` `<target>/<source>`

- `-C, --copy` `<root>/<source>` `<target>/<source>` `false` `<root>/<source>`

- `<root>/<source>`

- `<root>/<source>/abc.jpg` `<root>/public/<source>/abc.jpg` `<root>/public/<target>/abc.jpg` `<target>/abc.jpg`
- `<root>/<source>/abc.mdx` `<root>/assets/xyz.jpg` `<root>/<source>/assets/xyz.jpg` `<root>/<target>/assets/xyz.jpg`
- `<root>/<source>/abc.mdx` `<root>/assets/<source>/xyz.jpg` `<root>/<source>/assets/<source>/xyz.jpg` `<root>/<target>/assets/<target>/xyz.jpg` `<target>/xyz.jpg`

- `<root>/<source>`

- `<root>/<source>/abc.jpg` `<root>/public/<target>/abc.jpg` `<target>/abc.jpg`
- `<root>/<source>/abc.mdx` `<root>/assets/<source>/xyz.jpg` `<root>/<target>/assets/<target>/xyz.jpg` `<target>/xyz.jpg` `<root>/assets/<target>/xyz.jpg`

### WARNING

`<root>/<source>` `-g '*'` `<root>/<source>` `source` `<target>` `<root>/<source>` `internalRoutes` `<target>` `<root>/<source>`

### TIP

`<root>/<source>` `AZURE_OPENAI_API_KEY` `<root>/<source>` `Leader`

`<root>/<source>`

```
il8n:
  title:
    en: DevOps Connectors
  additionalPrompts: '📄📄 Connectors 📄📄📄📄📄📄'
  disableAutoTranslation: false
title: DevOps 📄
```

📄📄📄📄📄📄📄📄

## 📄 PDF

### WARNING

📄📄📄📄📄📄📄📄 `yarn build` 📄📄

```
doom export -h
```

```
# output
```

```
Usage: doom export [options] [root]
```

Export the documentation as PDF, ``apis/**`` and ``*/apis/**`` routes will be ignored automatically

#### Arguments:

root                      Root directory of the documentation

#### Options:

-H, --host [host]    Serve host name  
-P, --port [port]    Serve port number (default: "4173")  
-h, --help           display help for command

📄 `yarn export` 📄📄 PDF 📄📄📄📄📄📄 `-b` , `-p` 📄📄📄📄📄📄📄📄 `-b` , `-p`  
📄

📄📄📄📄 `playwright` ➔📄📄📄📄 `build-harbor.alauda.cn/frontend/playwright-`  
`runner:doom` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
.env.yarn
```

```
PLAYWRIGHT_DOWNLOAD_HOST="https://cdn.npmmirror.com/binaries/playwright"
```

pdf doom pdf

```
doom lint -h
```

```
# output
```

```
Usage: doom lint [options] [root]
```

```
Lint the documentation
```

```
Arguments:
```

```
  root                Root directory of the documentation
```

```
Options:
```

```
  -g, --glob <path...>  Glob patterns of source dirs/files to lint
                          (default: "**/*.{js,jsx,ts,tsx,md,mdx}")
  --no-cspell             Disable cspell linting
  -h, --help             display help for command
```

```
doom lint ESLint cspell
```

ESLint / CSPELL:

- `eslint.config.mjs`:

```
import doom from '@alauda/doom/eslint'

export default doom(new URL('docs', import.meta.url))
```

- `cspell.config.mjs`:

```
export { default } from '@alauda/doom/cspell'
```

📁📁📁📁📁📁📁📁📁 CWD 📁 .cspell 📁📁📁📁📁 CSpell 📁📁📁📁📁📁📁📁  
.cspell/k8s.txt 📁

k8s  
kubernetes

📁📁📁📁📁📁📁📁📁📁



📄

📄 `doom` 📄📄

📄📄

📄📄

API 📄📄

📄📄📄📄📄

📄📄📄

📄📄📄

📄📄📄

📄📄📄📄📄

📄📄📄📄📄📄

📄📄📄📄📄

`sites.yaml` 📄

📄📄

📄📄📄📄📄📄

📄📄📄

📄📄📄

Algolia 📄📄

Sitemap 📄



📄

📄“📄📄📄📄”📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

📄📄📄

📄📄

📄

📄

Markdown

Callouts

Mermaid

📄📄📄

MDX

📄 MDX 📄📄📄📄📄📄📄📄📄📄

rspress 📄

doom 📄

📄📄📄📄📄

📄📄

📄📄📄📄📄📄📄📄

i18n.json

.ts/.tsx

.mdx

API 00

00 API

CRD

0000

00 openapi 00

000000

props

00

0000

000000

00

000000000000000000000000 ACP 00

00000

00000

000000

00000000

🏠🏠

🏠🏠

🏠🏠🏠

🏠🏠🏠

API 🏠🏠🏠

🏠🏠🏠🏠🏠🏠

🏠🏠🏠🏠

frontmatterMode

🏠🏠🏠🏠

🏠🏠🏠

🏠🏠🏠🏠🏠

🏠🏠🏠🏠🏠🏠

🏠🏠🏠🏠🏠

sites.yaml 🏠

🏠🏠

🏠🏠🏠🏠🏠🏠

🏠🏠🏠

🏠🏠🏠

Algolia 🏠🏠

Sitemap 🏠

🏠🏠🏠🏠

```

// yaml のドキュメントを doom.config.yaml に
doom.config.yaml を rspress で js/ts
の .js/.ts/.mjs/.mts/.cjs/.cts
にコンパイルする

js/ts のドキュメントを @alauda/doom/config
で defineConfig

```

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

- `lang` 指定生成文档的语言 `en` 指定生成文档的语言  
指定生成文档的语言 `null` 或 `undefined`
- `title` 指定生成文档的标题
- `logo` 指定生成文档的 logo `public` 指定生成文档的 logo  
指定生成文档的 logo `doom` 指定生成文档的 logo
- `logoText` 指定生成文档的 logo 文本
- `icon` 指定生成文档的 favicon `logo`
- `base` 指定生成文档的 base 路径 `product-docs` 指定生成文档的 base 路径 `/`
- `outDir` 指定生成文档的输出目录 `dist/{base}/{version}` 指定生成文档的输出目录  
`dist/{outDir}/{version}` 指定生成文档的输出目录 `version` 指定生成文档的版本

API ☐ ☐ ☐ ☐

**api:**

```
# CRD  doom.config.*  glob  json/yaml
```

**crds:**

```
- docs/shared/crds/*.yaml
```

```
# OpenAPI  doom.config.*  glob  json/yaml
```

**openapis:**

```
- docs/shared/openapis/*.json
```

```
#  openapi  
```

```
#
```

<https://doom.alauda.cn/apis/references/CodeQuality.html#v1alpha1.CodeQualityS>

**references:**

```
  v1alpha1.CodeQualityBranch:
```

</apis/references/CodeQualityBranch#v1alpha1.CodeQualityBranch>

```
#  API  gateway
```

```
pathPrefix: /apis
```

API

```
#  doom.config.*  glob  json/yaml
```

**permission:****functionresources:**

```
# `kubectl get functionresources`
```

```
- docs/shared/functionresources/*.yaml
```

**roletemplates:**

```
# `kubectl get roletemplates -l
```

```
auth.cpaas.io/roletemplate.official=true`
```

```
- docs/shared/roletemplates/*.yaml
```

**reference:**

```

- repo: alauda-public/product-doc-guide #
branch: # [string]
publicBase: # [string] /images/xx.png
docs/public
sources:
- name: anchor #
path: docs/index.mdx# #
doom.config.*
ignoreHeading: # [boolean] true
processors: #
- type: ejsTemplate
data: # ejs `<%= data.xx %>`
frontmatterMode: merge # frontmatter ignore
ignore/merge/replace/remove

```

**frontmatterMode**

- **ignore** frontmatter frontmatter
- **merge** frontmatter key
- **replace** frontmatter frontmatter
- **remove** frontmatter

**releaseNotes:****queryTemplates:**

```

fixed: # ejs jql
unfixed:

```

release-notes.md

```
<!-- release-notes-for-bugs?template=fixed&project=DevOps -->
```

release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```

🐱🐱 `template=fixed&project=DevOps` 🐱🐱 `fixed` 🐱 `queryTemplates` 🐱🐱🐱🐱🐱🐱  
🐱🐱 `query` 🐱🐱 `project=DevOps` 🐱🐱🐱 `ejs` ↗ 🐱🐱🐱🐱🐱 `fixed` 🐱🐱🐱🐱🐱 `jira` `jql` ↗  
🐱🐱 `https://jira.alauda.cn/rest/api/2/search?jql=<jql>` 🐱🐱🐱 `API` 🐱🐱🐱🐱🐱🐱  
`JIRA_USERNAME` 🐱 `JIRA_PASSWORD` 🐱🐱🐱🐱🐱🐱🐱

🐱🐱🐱🐱🐱

`sidebar:`  
 `collapsed: false` # 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱 `false`

🐱🐱🐱🐱🐱🐱🐱

`internalRoutes:` # 🐱🐱🐱🐱 `glob` 🐱🐱🐱🐱 `docs` 🐱🐱🐱 `cli` 🐱🐱 ``-i, --ignore`` 🐱🐱🐱🐱  
🐱🐱🐱/🐱🐱🐱🐱  
- `'*/internal/**'`

🐱🐱🐱🐱🐱🐱🐱🐱

```
onlyIncludeRoutes: # 只包含 docs 下的 cli 目录，忽略其他
  - '**/internalRoutes'
  - '*/internal/**'
internalRoutes:
  - '*/internal/overview.mdx'
```

|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|

```
shiki:
  theme: # optional, https://shiki.style/themes
  langs: # optional, https://shiki.style/languages
  transformers: # optional, only available in js/ts config,
https://shiki.style/guide/transformers
```

## WARNING

plaintext

**sites.yaml** ☐ ☐

[illegible]



```
- name: connectors # 连接器
base: /devops-connectors # 连接器
version: v1.1 # 连接器 ExternalSite/ExternalSiteLink 连接器

displayName: # 连接器 name
  en: DevOps Connectors
  zh: DevOps 连接器

# 连接器
# 连接器
repo: https://github.com/AlaudaDevops/connectors-operator # 连接器
gitlab slug: `alauda/product-docs`
image: devops/connectors-docs # 连接器
```

🔒🔒🔒🔒

## translate:

```
# 将源语言 `sourceLang` 翻译成目标语言 `targetLang`，`userPrompt`，
`additionalPrompts`，`terms`，`titleTranslationPrompt`
# 将 `sourceLang` 翻译成 `targetLang` 的 `terms` 和 `title` 翻译
# `userPrompt` 的翻译
# `additionalPrompts` 的翻译 `frontmatter.il18n` 的 `additionalPrompts`
的翻译
# `terms` 和 `titleTranslationPrompt` 的翻译 AI
的翻译
# 的翻译
```

### systemPrompt: |

You are a professional technical documentation engineer, skilled in writing high-quality technical documentation in <%= targetLang %>. Please accurately translate the following text from <%= sourceLang %> to <%= targetLang %>, maintaining the style consistent with technical documentation in <%= sourceLang %>.

### ## Baseline Requirements

- Sentences should be fluent and conform to the expression habits of the <%= targetLang %> language.
- Input format is MDX; output format must also retain the original MDX format. Do not translate the names of jsx components such as <Overview />, and do not wrap output in unnecessary code blocks.
- **\*\*CRITICAL\*\***: Do not translate or modify ANY link content in the document. This includes:
  - **URLs in markdown links**: [text](URL) - keep URL exactly as is
  - **Reference-style links**: [text][ref] and [ref]: URL - keep both ref and URL unchanged
  - **Inline URLs**: https://example.com - keep completely unchanged
  - **Image links**: ![alt](src) - keep src unchanged, but alt text can be translated
  - **Anchor links**: [text](#anchor) - keep #anchor unchanged
  - Any href attributes in HTML tags - keep unchanged
- Do not translate professional technical terms and proper nouns, including but not limited to: Kubernetes, Docker, CLI, API, REST, GraphQL, JSON, YAML, Git, GitHub, GitLab, AWS, Azure, GCP, Linux, Windows, macOS, Node.js, React, Vue, Angular, TypeScript, JavaScript, Python, Java, Go, Rust, etc. Keep these terms in their original form.
- The title field and description field in frontmatter should be translated, other frontmatter fields should retain and do not translate.
- Content within MDX components needs to be translated, whereas MDX component names and parameter keys do not.
- Do not modify or translate any placeholders in the format of

`__ANCHOR_N__` (where N is a number). These placeholders must be kept exactly as they appear in the source text.

- Keep original escape characters like backslash, angle brackets, etc. unchanged during translation.
- Do not add any escape characters to special characters like `[]`, `()`, `{}`, etc. unless they were explicitly present in the source text. For example:
  - If source has "Architecture [Optional]", keep it as "Architecture [Optional]" (not "Architecture \[Optional]")
  - If source has "Function (param)", keep it as "Function (param)" (not "Function \((param)")
  - Only add escape characters if they were present in the original text
- Preserve and do not translate the following comments, nor modify their content:
  - `{/* release-notes-for-bugs */}`
  - `<!-- release-notes-for-bugs -->`
- Remove and do not retain the following comments:
  - `{/* reference-start */}`
  - `{/* reference-end */}`
  - `<!-- reference-start -->`
  - `<!-- reference-end -->`
- Ensure the original Markdown format remains intact during translation, such as frontmatter, code blocks, lists, tables, etc.
- Do not translate the content of the code block.

```
<% if (titleTranslationPrompt) { %>
<%- titleTranslationPrompt %>
<% } %>
<% if (terms) { %>
<%- terms %>
<% } %>
```

```
<% if (userPrompt || additionalPrompts) { %>
```

```
## Additional Requirements
```

These are additional requirements for the translation. They should be met along with the baseline requirements, and in case of any conflict, the baseline requirements should take precedence.

The text for translation is provided below, within triple quotes:

```
"""
```

```
<% if (userPrompt) { %>
<%- userPrompt %>
<% } %>
```

```
<% if (additionalPrompts) { %>
<%- additionalPrompts %>
```

```
<% } %>
""
<% } %>
```

```
editRepoBaseUrl: alauda/doom/tree/main/docs # https://github.com/
`-R, --edit-repo`
```

```
export:
  - name: Concepts # pdf
    scope: '*/concepts' # glob docs
```

```
lint:
  cspellOptions: #
https://github.com/streetsidesoftware/cspell/tree/main/packages/cspell-
eslint-plugin#options
```

Algolia

```
algolia: # 📄Algolia 📄📄📄📄📄 `--a, --algolia` 📄📄📄📄📄  
  appId: # Algolia 📄 ID  
  apiKey: # Algolia API Key  
  indexName: # Algolia 📄📄
```

📄📄 `public/robots.txt` 📄 Algolia 📄📄📄

## INFO

📄 `rspress` 📄📄📄📄📄 Algolia 📄📄📄📄 [📄📄📄📄 ↗](#) 📄📄📄📄📄📄📄📄📄📄📄  
`@alauda/doom/theme` 📄📄📄📄📄📄📄📄📄📄📄

```
theme/index.ts
```

```
export * from '@alauda/doom/theme'
```

## Sitemap 📄📄

```
siteUrl: https://docs.alauda.cn # 📄📄📄 URL📄📄📄 sitemap📄📄📄 `--S, --site-  
url` 📄📄📄📄📄📄
```

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

□ □ □

11

11

```

index
index.md index.mdx

```

```
├─ index.md
├─ start.mdx
└─ usage
    ├─ index.mdx
    └─ convention.md
```

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

1. `public` □□□□□□□□□□□□□□□□
2. `public/_remotes` □□□□□□□□□□□□□□□□□□□□□□□□□□□□  
`*/public/_remotes` □□ `.gitignore` □□□□□□□□
3. `shared` □□□□□□□□□□□□□□□□□□□□□□□□□□□□

🐱🐱

🐱🐱🐱🐱🐱🐱 `frontmatter` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱

```
---
title: 🐱
description: 🐱
author: 🐱
category: 🐱
---
```

🐱🐱🐱🐱🐱🐱 `MDX` 🐱 `.mdx` 🐱🐱🐱🐱🐱 `frontmatter` 🐱🐱🐱🐱🐱🐱

🐱🐱

🐱 `index.md` 🐱 `index.mdx` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱 `frontmatter` 🐱  
`weight` 🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱 `weight` 🐱🐱🐱🐱🐱🐱

```
---
weight: 1
---
```

**WARNING**  
🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱🐱

🐱🐱

index.mdx Overview

```
#  
  
<Overview />
```



1. `;;,%,#,//,/** */,-- <!-- -->`
2. `[\!code callout]`
3. `:::callouts <div class="doom-callouts"> <Callouts>`

```
```sh
```

```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \ # [!code callout]
+ 8 MiB × (number of vCPUs) \ # [!code callout]
+ 16 MiB × (number of graphics devices) \ # [!code callout]
+ (additional memory overhead) # [!code callout]
```

```
```
```

```
:::callouts
```

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

```
:::
```


```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \ ①
+ 8 MiB × (number of vCPUs) \ ②
+ 16 MiB × (number of graphics devices) \ ③
+ (additional memory overhead) ④
```

- ① Required for the processes that run in the `virt-launcher` pod.
- ② Number of virtual CPUs requested by the virtual machine.
- ③ Number of virtual graphics cards requested by the virtual machine.
- ④ Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

Shiki Transformers ↗

# Mermaid ↗

```
mermaid
graph TD;
  A-->B;
  A-->C;
  B-->D;
  C-->D;
```

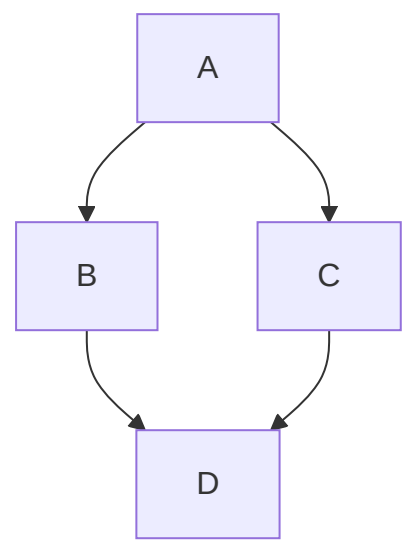

Markdown Preview Mermaid ↗ VSCode

**WARNING**  
 `.md` [issue ↗](#)

```
{width="100" height="100"}
```



# MDX

[MDX](#) [Markdown](#) [Markdown](#) [JSX](#) [rspress MDX](#)

rspress

doom

Overview

Directive

ExternalSite

ExternalSiteLink

AcpApis0verview ExternalApis0verview

Term

props

TermsTable

props

JsonViewer

## rspress

rspress [rspress](#) [.mdx](#)

- Badge
- Card

- [LinkCard](#)
- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

在 `rspress/theme` 中配置

```
preview.mdx

import { SourceCode } from '@rspress/core/theme'

<SourceCode href="/" />
```

# doom 文档

`doom` 是一个用于生成文档的工具

## Overview

文档生成工具

## Directive

在文档中使用 `Directive` 来定义内容

```
- 在 `doc/en` 中定义 `doc/zh` 的内容

<Directive type="danger" title="警告">
  在 `doc/zh` 中定义内容
</Directive>
```

- 在 `( doc/en )` 中，`doc/zh` 用于指定文档语言。默认语言为 `en`。

在

中，`doc/zh` 用于指定文档语言。

在

## ExternalSite

在

```
<ExternalSite name="connectors" />
```

### Note

在 DevOps 中，`ExternalSite` 用于指定文档语言。

[DevOps 文档](#) ↗

## ExternalSiteLink

在

```
<ExternalSiteLink name="connectors" href="link.mdx#hash"
children="Content" />
```

[Content](#) ↗

### TIP

在 mdx 中，`<ExternalSiteLink name="connectors" href="link" children="Content" />`

用于指定文档语言。

```
<ExternalSiteLink name="connectors" href="link">
  Content {/* `p` */}
</ExternalSiteLink>
```

p children

## AcpApisOverview ExternalApisOverview

API

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

### Note

ACP APIs [ACP APIs](#)

### Note

DevOps APIs [DevOps APIs](#)

## Term

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
```

ACP

props



- `name` : □□□□□□□□□□□□□□□□
- `textCase` : □□□□□□□□□□□□ `lower` , `upper` , `capitalize`

## TermsTable



```
<TermsTable />
```

| 公司           | 名称       | 类型 | 名称                           | 类型 | 名称       |
|--------------|----------|----|------------------------------|----|----------|
| company      | 名称       | -  | Alauda                       | -  | 名称       |
| product      | 名称<br>名称 | -  | Alauda Container<br>Platform | -  | 名称       |
| productShort | ACP      | -  | ACP                          | -  | 名称<br>名称 |

## props

- terms : NormalizedTermItem[] □□□□□□□□□□□□□□□□□□□□□□□□

## JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

```
yaml      json
          
key: value
```

□□□□□□□□

□□□□□□□□□□□□□□□□□□ `shared` □□□□□□□□□□□□□□□□□□□□

```
import CommonContent from './shared/CommonContent.mdx'

<CommonContent />
```

□□□□□□□□ `runtime` [↗](#) □□□ API□□□□□□ `.jsx/.tsx` □□□□□□□□□□ `.mdx` □□□□□□□□

```
// shared/CommonContent.tsx
export const CommonContent = () => {
  const { page } = usePageData()
  return <div>{page.title}</div>
}

// showcase/content.mdx
import { CommonContent } from './shared/CommonContent'
<CommonContent />
```

## WARNING

□□□□□□ `.mdx` □□□□□□□□□□ `props` □□□□□□ [issue](#) [↗](#) □□□□□□□□□□ `props` □□□□□□□□  
`.jsx/.tsx` □□□□□□□□

📄📄📄

`alauda` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `en / zh` 📄📄📄📄📄📄📄📄📄📄📄📄  
📄 `public` 📄📄📄 `en / zh` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

📄📄

`i18n.json`

`.ts/.tsx`

`.mdx`

## `i18n.json`

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `docs` 📄📄📄 `i18n.json` 📄📄  
📄📄📄📄📄 `useI18n` 📄📄📄📄📄📄📄📄

docs/i18n.json

```
{
  "title": {
    "zh": "标题",
    "en": "Title"
  },
  "description": {
    "zh": "描述",
    "en": "description"
  }
}
```

## .ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
  const t = useI18n()
  return <h1>{t('title')}</h1>
}
```

## .mdx

```
import { useI18n } from '@rspress/core/runtime'

# {useI18n()}('title')}

{useI18n()}('description')}
```

API ☐ ☐

□□□□□□□□□□ **API** □□□□ **API** □ **CRD (Custom Resource Definition)** □□□□□□□□□□  
□□□□□□

```
| apis
|   | advanced-apis # API
|   | crds # CRDs
|   | references #
```

11

□□ API

props

CRD

props

□ □ □ □

props

□□ openapi □□

□ □ API

advanced-apis/codeQualityTaskSummary.mdx

```
# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary" />
```

文档 CodeQualityTaskSummary

props

- path : OpenAPI schema paths
- pathPrefix : api.pathPrefix
- openapiPath : openapi

CRD

crds/ArtifactCleanupRun.mdx

```
# ArtifactCleanupRun

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />
```

文档 ArtifactCleanupRun

props

- name : CRD metadata.name
- crdPath : openapi CRD

references/CodeQuality.mdx

## # CodeQuality

```
<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

## CodeQuality

## props

- `schema` : OpenAPI schema `definitions` (v2) or `component/schemas` (v3) □□□□
- `openapiPath` : □□□□ `openapi` □□

□□ **openapi** □□

```

    OpenAPIPath  OpenAPIRef  openapi  openapiPath
openapi  openapiPath

```

```
<OpenAPIPath
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
  openapiPath="shared/openapis/katanomi.json"
/>
```

0000000

```

<K8sPermissionTable functions={['devops-testplans', 'devops-testmodules']}
/>

```

00

props

00

props

- functions : string[] - 00000000 FunctionResource 000000

00

| 00                           | 00 | 000<br>00 | 000<br>000 | 000<br>00 | 0000<br>000 | 00<br>00 | 000<br>00 |
|------------------------------|----|-----------|------------|-----------|-------------|----------|-----------|
| 0000<br>devops-<br>testplans | 00 | ✓         | ✓          | ✓         | ✓           | ✓        | ×         |
|                              | 00 | ✓         | ×          | ✓         | ✓           | ✓        | ×         |
|                              | 00 | ✓         | ×          | ✓         | ✓           | ✓        | ×         |
|                              | 00 | ✓         | ×          | ✓         | ✓           | ✓        | ×         |





☐ Markdown ☐☐☐☐

```
<!-- reference-end -->
```

```
{/* reference-end */}
```

```
□□□□□ <!-- reference-start#ref --> □□□□□
```

frontmatterMode

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

**reference:**

```

- repo: alauda-public/product-doc-guide # 文档仓库地址
  branch: # [string] 分支名称
  publicBase: # [string] 文档仓库地址 /images/xx.png 文档仓库地址
docs/public
sources:
- name: anchor # 文档仓库名称
  path: docs/index.mdx# # 文档仓库地址
doom.config.*
  ignoreHeading: # [boolean] 是否忽略 heading true 忽略
  processors: # 处理器
    - type: ejsTemplate
      data: # ejs 模板数据 `<%= data.xx %>` 模板
  frontmatterMode: merge # 文档仓库 frontmatter 模式 ignore 忽略
ignore/merge/replace/remove

```

**frontmatterMode**

- **ignore** 忽略 frontmatter
- **merge** 合并 frontmatter key 冲突时合并
- **replace** 替换 frontmatter
- **remove** 移除 frontmatter

文档仓库地址

```
doom build # 
doom serve # 
```

doom build dist -v

```
# 4.0 4.0
doom build -v 4.0 # 4.0 dist/4.0 {base}/4.0
doom build -v master # master dist/master {base}/master
doom build -v {other} # dist/{other} {base}/{other}

# unversioned unversioned-x.y
doom build -v unversioned # dist/unversioned {base}
doom build -v unversioned-4.0 # 4.0 dist/unversioned {base}
```

```
├─ console-platform
│   ├── 4.0
│   ├── 4.1
│   ├── index.html
│   ├── overrides.yaml
│   └── versions.yaml
├─ console-devops-docs
│   ├── 4.0
│   ├── 4.1
│   ├── index.html
│   ├── overrides.yaml
│   └── versions.yaml
├─ console-tekton-docs
│   ├── 1.0
│   ├── 1.1
│   ├── index.html
│   ├── overrides.yaml
│   └── versions.yaml
```

index.html

```
<!DOCTYPE html>
<html>
  <head>
    <title>Redirecting...</title>
    <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />
  </head>
  <body>
    <p>Redirecting to <a href="/console-docs/4.1">/console-docs/4.1</a>
  </p>
  </body>
</html>
```

配置

#### overrides.yaml

```
# 配置
title:
  en: Doom - Alauda
  zh: Doom - 配置
logoText:
  en: Doom - Alauda
  zh: Doom - 配置
```

#### versions.yaml

```
- '4.1'
- '4.0'
```