

Doom [rspress](#) [Alauda](#)

APIs

[illegible]

Callouts

📄📄📄

📄📄📄

API 📄📄📄

📄📄📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄📄

📄📄📄📄📄📄

📄📄📄📄📄

`sites.yaml` 📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

Algolia 📄📄📄📄

Sitemap 📄📄

📄📄📄📄

📄📄📄

📄📄

📄📄

📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄

`i18n.json`

`.ts/.tsx`

`.mdx`

📄📄📄📄📄📄

`props`

📄📄

Mermaid

MDX

📄📄 MDX 📄📄📄📄

rspress 📄📄

API 📄📄

K8S API

📄📄📄📄

📄📄📄📄📄

📄📄

📄📄📄📄📄📄📄📄📄📄

📄📄📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄📄

APIs

Advanced APIs

CRDs

Kubernetes

Common References

📄📄

📄📄

📄📄📄📄

📄📄📄📄

📄📄📄📄

📄📄📄📄

📄📄📄

📄📄📄📄📄

📄📄📄

📄📄 PDF

📄📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

`mkdir my-docs && cd my-docs`

📄 `npm init -y` 📄📄📄📄📄📄📄📄📄📄📄📄 `npm`📄`yarn` 📄 `pnpm` 📄📄 `doom:`

 `npm`

 `yarn`

 `pnpm`

 `bun`

 `deno`

```
npm install -D @alauda/doom typescript
```

创建文档目录:

```
# 创建 docs 目录
mkdir docs/en && echo '# Hello World' > docs/en/index.md
mkdir docs/zh && echo '# 文档' > docs/zh/index.md
```

在 `package.json` 中添加:

```
{
  "scripts": {
    "dev": "doom dev",
    "build": "doom build",
    "new": "doom new",
    "serve": "doom serve",
    "translate": "doom translate",
    "export": "doom export"
  }
}
```

[Show more](#)

在 `doom.config.yml` 中添加:

```
title: My Docs
```

在 `tsconfig.json` 中添加:

```
{
  "compilerOptions": {
    "jsx": "react-jsx",
    "module": "NodeNext",
    "moduleResolution": "NodeNext",
    "noUnusedLocals": true,
    "noUnusedParameters": true,
    "resolveJsonModule": true,
  }
}
```

[Show more](#)

📄📄📄 `global.d.ts` 📄📄📄📄📄📄

```
/// <reference types="@alauda/doom/runtime" />
```

📄📄📄📄📄 `.mdx` 📄📄📄📄📄📄📄 **doom** 📄📄📄📄📄📄📄

📄📄📄📄📄

```
doom -h

# output
Usage: doom [options] [command]

Doctor Doom making docs.

Options:
```

Show more ▾

📄📄📄📄📄📄📄

📄📄📄📄📄📄

📄 `yarn dev` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
doom dev -h

# output
Usage: doom dev [options] [root]

Start the development server

Arguments:
```

Show more ▾

📄📄📄📄📄

📄 `yarn build` 📄📄📄📄📄📄📄📄📄📄 `dist` 📄📄📄📄📄

📄📄📄📄

📄 `yarn serve` 📄📄📄📄📄📄📄📄📄📄📄 `-b`, `-p` 📄📄📄📄📄📄📄📄 `-b`, `-p`
📄

📄📄📄📄📄📄

📄 `yarn new` 📄📄📄📄📄📄📄📄📄📄

📄📄📄📄

```
doom translate -h

# output
Usage: doom translate [options] [root]

Translate the documentation

Arguments:
```

Show more ▾

- `-g, --glob` 📄📄📄📄📄📄📄📄📄📄📄 `glob` 📄📄📄📄📄📄📄📄
📄📄📄📄📄📄📄📄
- 1. `yarn translate -g abc xyz` 📄📄 `<root>/<source>/abc`, `<root>/<source>/xyz`
📄📄📄📄📄📄📄 `<root>/<target>/abc`, `<root>/<target>/xyz` 📄📄
- 2. `yarn translate -g '*'` 📄📄 `<root>/<source>` 📄📄📄📄📄
- `-C, --copy` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `false` 📄📄
📄📄📄📄📄📄📄📄📄📄📄
- 📄📄📄📄📄

1. `/<source>/abc.jpg` 000000 `<root>/public/<source>/abc.jpg` 0
`<root>/public/<target>/abc.jpg` 0000000000000000 `/<target>/abc.jpg`
2. `<root>/<source>/abc.mdx` 0000 `./assets/xyz.jpg` 000000
`<root>/<source>/assets/xyz.jpg` 0 `<root>/<target>/assets/xyz.jpg` 0000
00000000
3. `<root>/<source>/abc.mdx` 0000 `./assets/<source>/xyz.jpg` 000000
`<root>/<source>/assets/<source>/xyz.jpg` 0
`<root>/<target>/assets/<target>/xyz.jpg` 0000000000000000
`./assets/<target>/xyz.jpg`

• 0000000000

1. `/<source>/abc.jpg` 00000 `<root>/public/<target>/abc.jpg` 0000000000
00000000 `/<target>/abc.jpg` 000000000000000000
2. `<root>/<source>/abc.mdx` 0000 `./assets/<source>/xyz.jpg` 000000
`<root>/<target>/assets/<target>/xyz.jpg` 000000000000000000
`./assets/<target>/xyz.jpg` 00000000
`../<source>/assets/<target>/xyz.jpg`

WARNING

0000000000 `-g '*'` 00000000000000 `source` 0 `target` 0000000000 `internalRoutes`
00000000 `target` 0000000000

TIP

000000000000 `AZURE_OPENAI_API_KEY` 00000000000000 `Leader` 00

0000000000000000000000

```
i18n:
  title:
    en: DevOps Connectors
  additionalPrompts: '🔒🔒🔒 Connectors 🔒🔒🔒🔒🔒🔒'
  disableAutoTranslation: false
title: DevOps 🔒🔒
```

🔒🔒🔒🔒🔒🔒🔒🔒🔒

🔒🔒 PDF

WARNING

🔒🔒🔒🔒🔒🔒🔒🔒🔒 `yarn build` 🔒🔒🔒

```
doom export -h

# output
Usage: doom export [options] [root]

Export the documentation as PDF, `apis/**` and `*/apis/**` routes will be
ignored automatically
```

Show more ▾

🔒 `yarn export` 🔒🔒🔒 PDF 🔒🔒🔒🔒🔒🔒 `-b`, `-p` 🔒🔒🔒🔒🔒🔒🔒🔒 `-b`, `-p` 🔒

🔒🔒🔒🔒 `playwright` ➡ 🔒🔒🔒🔒 `build-harbor.alauda.cn/frontend/playwright-runner:doom` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒

`.env.yarn`

`PLAYWRIGHT_DOWNLOAD_HOST="https://cdn.npmmirror.com/binaries/playwright"`

📄📄📄📄📄📄 pdf 📄📄 doom 📄📄📄📄📄📄📄📄 pdf 📄📄📄📄📄📄📄📄📄📄

📄📄📄📄

```
doom lint -h

# output
Usage: doom lint [options] [root]

Lint the documentation

Arguments:
```

Show more ▾

doom lint 📄 [ESLint](#) 📄 [cspell](#) 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄
[ESLint](#) 📄 / [CSpell](#) 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄:

- `eslint.config.mjs`:

```
import doom from '@alauda/doom/eslint'

export default doom(new URL('docs', import.meta.url))
```

- `cspell.config.mjs`:

```
export { default } from '@alauda/doom/cspell'
```

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `CWD` 📄 `.cspell` 📄📄📄📄📄 `CSpell` 📄📄📄📄📄📄📄📄📄📄
`.cspell/k8s.txt` 📄

```
k8s
kubernetes
```

📄📄📄📄📄📄📄📄📄📄

🐙🐙

🐙🐙

🐙🐙 `doom` 🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙

API 🐙🐙🐙

🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙

`sites.yaml` 🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

Algolia 🐙🐙🐙

Sitemap 🐙🐙

🐙🐙

🐙🐙“🐙🐙🐙🐙🐙🐙”🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙

🐙🐙

🐙🐙

🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

`i18n.json`

`.ts/.tsx`

`.mdx`

🐙🐙🐙🐙🐙🐙

`props`

🐙🐙

Markdown

Callouts

Mermaid

MDX

🐙🐙 MDX 🐙🐙🐙

rspress 🐙🐙

API 🐙🐙

K8S API

🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

🌐🌐

🌐🌐

|

🌐🌐🌐🌐	
🌐🌐🌐🌐	
API 🌐🌐🌐🌐	
🌐🌐🌐🌐🌐🌐🌐🌐	
🌐🌐🌐🌐🌐	
frontmatterMode	
🌐🌐🌐🌐🌐🌐	
🌐🌐🌐🌐🌐	
🌐🌐🌐🌐🌐🌐🌐🌐	
🌐🌐🌐🌐🌐🌐🌐🌐	
🌐🌐🌐🌐🌐🌐🌐	
sites.yaml	🌐🌐
🌐🌐🌐🌐	
🌐🌐🌐🌐🌐🌐🌐🌐🌐	
🌐🌐🌐🌐🌐🌐	
🌐🌐🌐🌐🌐🌐	
Algolia 🌐🌐🌐🌐	
Sitemap 🌐🌐	


```

    doom.config.yaml |
    doom.config.yml | rspress | js/ts |
    .js/.ts/.mjs/.mts/.cjs/.cts |

```

```

❯ js/ts @alauda/doom/config defineConfig
❯

```

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```

--	--	--	--

- `lang` `en` `null` `undefined`
- `title`
- `logo` `public` `doom` `alauda logo`
- `logoText` `logo`
- `icon` `favicon` `logo`
- `base` `product-docs` `/`
- `outDir` `dist/{base}/{version}` `dist/{outDir}/{version}` `version`

API ☐ ☐ ☐ ☐

api:

```
# CRD 0000000000 doom.config.* 00000000 glob 000json/yaml 00
```

crds:

- docs/shared/crds/*.yaml

```
# OpenAPI ***** doom.config.* ***** glob ***json/yaml **
```

openapis:

- docs/shared/openapis/*.json

```
# openapi
```

Show more ▾

□□□□□□ API □□



```
# doom.config.* glob json/yaml
```

permission:

functionresources:

```
# `kubectl get functionresources`
```

- docs/shared/functionresources/*.yaml

roletemplates:

```
# `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
```

- docs/shared/roletemplates/*.yaml

--	--	--	--	--	--

reference:

```
- repo: alauda-public/product-doc-guide # 

```

branch: # [string]

publicBase: # [string] /images/xx.png

docs/public

sources:

- name: anchor #

Show more ▾

frontmatterMode

- `ignore` frontmatter frontmatter
- `merge` frontmatter key
- `replace` frontmatter frontmatter
- `remove` frontmatter

releaseNotes:

queryTemplates:

```
fixed: #  ejs  jql 
unfixed:
```

release-notes.md

```
<!-- release-notes-for-bugs?template=fixed&project=DevOps -->
```

release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```

template=fixed&project=DevOps fixed queryTemplates
query project=DevOps ejs ↗ fixed jira jql
↗ https://jira.alauda.cn/rest/api/2/search?jql=<jql> API
JIRA_USERNAME JIRA_PASSWORD

```
sidebar:  
  collapsed: false # false
```

```
internalRoutes: # glob docs cli -i, --ignore`  
  /  
  - '*/internal/**'
```

```
onlyIncludeRoutes: # glob docs cli -i, --ignore`  
  / `internalRoutes`  
  - '*/internal/**'  
internalRoutes:  
  - '*/internal/overview.mdx'
```

```
shiki:
  theme: # optional, https://shiki.style/themes
  langs: # optional, https://shiki.style/languages
  transformers: # optional, only available in js/ts config, https://shiki.style/guide/transformers
```

WARNING

□□□□□□□□□□□□□□□□ **plaintext** □□

WARNING

□□□□□□□□□□□□□□□□□□□□ **plaintext** □□

`sites.yaml` ☐ ☐

sites.yaml □□□
□□□□

```
- name: connectors # 连接器
  base: /devops-connectors # 连接器
  version: v1.1 # 连接器 ExternalSite/ExternalSiteLink 连接器

displayName: # 连接器名称
  en: DevOps Connectors
  zh: DevOps 连接器
```

Show more

--	--	--	--

translate:

```
# =====ejs ===== `sourceLang`, `targetLang`, `userPrompt`, `additionalPrompts`, `terms`, `titleTranslationPrompt`
#  `sourceLang`  `targetLang`  ``  ``
#    `userPrompt` =====
#    `additionalPrompts`  `frontmatter.i18n`  `additionalPrompts`
=====
#    `terms`  `titleTranslationPrompt` ===== AI
```

Show more ▾

📄📄📄📄📄📄📄📄

```
editRepoBaseUrl: alauda/doom/tree/main/docs # https://github.com/ =====
=====  `-R, --edit-repo` =====
```

📄📄📄📄📄📄

export:

```
- name: Concepts # ===== pdf =====
  scope: '*/concepts' # ===== glob ===== docs  
```

📄📄📄📄📄📄

lint:

```
cspellOptions: # =====cspell ===== https://github.com/streetsidesoftware/cspell/tree/main/packages/cspell-eslint-plugin#options
```

Algolia 📄📄📄📄

```
algolia: # Algolia
appId: # Algolia ID
apiKey: # Algolia API Key
indexName: # Algolia
```

public/robots.txt Algolia

Info

rspress Algolia [docs](#) @alauda/doom/theme

theme/index.ts

```
export * from '@alauda/doom/theme'
```

Sitemap ☐ ☐

```
siteUrl: https://docs.alauda.cn # 指定 URL 生成 sitemap
-url ` 指定 URL 生成 sitemap
```

11

1. `public` □□□□□□□□□□□□□□□□
2. `public/_remotes` □□□□□□□□□□□□□□□□□□□□□□□□□□□□
`*/public/_remotes` □□ `.gitignore` □□□□□□□□□□

shared

frontmatter

```

---
title:  🐼
description:  🐼
author:  🐼
category:  🐼
---
```

MDX

frontmatter

[index.md](#)

index.mdx

frontmatter

weight

weight

[illegible]

index.mdx

Overview

#

<Overview />

Markdown

is [gfm](#) Doom Markdown

Callouts

Mermaid

Callouts

Note

1. ; , % , # , // , /** */ , -- <!-- -->
2. [\\!code callout]
3. :::callouts <div class="doom-callouts"> <Callouts>

```
```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \ # [!code callout]
+ 8 MiB × (number of vCPUs) \ # [!code callout]
+ 16 MiB × (number of graphics devices) \ # [!code callou
t]
+ (additional memory overhead) # [!code callout]
```
```

Show more ▾

```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \ ①
+ 8 MiB × (number of vCPUs) \ ②
+ 16 MiB × (number of graphics devices) \ ③
+ (additional memory overhead) ④
```


- ① Required for the processes that run in the `virt-launcher` pod.
- ② Number of virtual CPUs requested by the virtual machine.
- ③ Number of virtual graphics cards requested by the virtual machine.
- ④ Additional memory overhead:
 - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
 - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
 - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

Shiki Transformers ↗

Mermaid ↗

```
mermaid
graph TD;
    A-->B;
    A-->C;
    B-->D;
    C-->D;

```

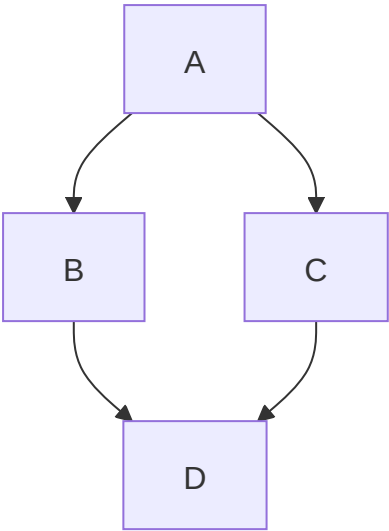

Markdown Preview Mermaid ↗ VSCode

MDX

[MDX](#)   Markdown  Markdown  JSX  [rspress MDX](#)  

[rspress](#) 

doom 

Overview

Directive

ExternalSite

ExternalSiteLink

AcpApisOverview  ExternalApisOverview

Term

props

TermsTable

props

JsonViewer

rspress

[rspress](#)                 

- [Badge](#)
- [Card](#)
- [LinkCard](#)
- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

[rspress/theme](#)

preview.mdx

```
import { SourceCode } from '@rspress/core/theme'  
  
<SourceCode href="/" />
```

doom

[doom](#)

Overview

Directive

[Directive](#)

- 文档(`doc/en`) 文档 `doc/zh`

```
<Directive type="danger" title="危险">
  危险
  `doc/zh`
</Directive>
```

- 文档(`doc/en`) 文档 `doc/zh`

危险

危险 `doc/zh`

危险

ExternalSite

ExternalSite

```
<ExternalSite name="connectors" />
```

Note

DevOps 文档 DevOps 文档
[DevOps 文档](#)

ExternalSiteLink

ExternalSiteLink

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" />
```

[Content](#)

TIP

```
mdx <ExternalSiteLink name="connectors" href="link" children="Content" />
```

```
<ExternalSiteLink name="connectors" href="link">
  Content {/*      `p`      */}
</ExternalSiteLink>
```

□□□□□□□□ p □□□□□□□□□□□□□□□□ children □□□□

AcpApisOverview ☐ **ExternalApisOverview**

□□□□□□ API □□□□

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

Note

ACP APIs [ACP APIs](#)

Note

[DevOps](#)
[APIs](#)
[DevOps](#)
[APIs](#)

Term

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
<Term name="alaudaCloudLink" />
```

ACP [Alauda Cloud](#)

props

- `name`:
- `textCase`: `lower` , `upper` , `capitalize`

TermsTable

```
<TermsTable />
```

company		-	Alauda	-	
product		-	Alauda Container Platform	-	
productShort	ACP	-	ACP	-	

alaudaCloudLink	Alauda Cloud ↗	-	Alauda Cloud ↗	-	-

props

- `terms`: `NormalizedTermItem[]`

JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

`yaml` `json`

`key: value`

`shared`

```
import CommonContent from './shared/CommonContent.mdx'

<CommonContent />
```

runtime ↗ API `.jsx/.tsx` `.mdx`

```
// shared/CommonContent.tsx
export const CommonContent = () => {
  const { page } = usePageData()
  return <div>{page.title}</div>
}

// showcase/content.mdx
import { CommonContent } from './shared/CommonContent'
```

Show more ▾

WARNING

.mdx
 props
 issue ↗
 props
 .jsx/.tsx

alauda 公共领域 en / zh 公共领域
public 公共 en / zh 公共

.mdx

docs i18n.json
useI18n

Show more ▾

.ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
  const t = useI18n()
  return <h1>{t('title')}</h1>
}
```

.mdx

```
import { useI18n } from '@rspress/core/runtime'

# {useI18n()('title')}

{useI18n()('description')}
```

API 文档

本文档提供了关于 API 文档的 K8S API, 以及 API 以及 CRD (Custom Resource Definition) 文档的概述。

```
├─ apis
│   ├── advanced_apis # 高级 API
│   ├── crds # CRDs
│   ├── kubernetes_apis # K8S API
│   └─ references # 参考
```

目录

K8S API

props

API 文档

props

CRD (deprecated)

props

API 文档

props

API 文档 openapi 文档

K8S API

kubernetes_apis/workload/daemonset.mdx

```
# DaemonSet [apps/v1]

<K8sAPI
  name="io.k8s.api.apps.v1.DaemonSet"
  pathPrefix="/kubernetes/{cluster}"
/>
```

00 [DaemonSet](#)0

crds/ArtifactCleanupRun.mdx

```
# ArtifactCleanupRun

<K8sAPI name="artifactcleanupruns.artifacts.katanomi.dev" />
```

00 [ArtifactCleanupRun](#)0

props

- `name`: OpenAPI schema `definitions` (v2) or `components/schemas` (v3) 00000000
CRD `metadata.name`
- `namespaced`: 00000000000000000000 `true` 00 API Endpoints 00000000000000
`namespaces/{namespace}`
- `pathPrefix`: 0000000000000000 `api.pathPrefix`
- `filepath`: 0000 [openapi](#) 000000000000 `openapi` 0 CRD 00
- `apiGroup`: 000000 API 00 `openapi` 0000000000 `x-kubernetes-group-version-kind` 0000
- `apiVersion`: 000000 API 0000CRD 000000 `spec.versions` 00000000
- `apiKind`: 000000 API 000000

00 **API**

```
advanced_apis/codeQualityTaskSummary.mdx

# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summ
```

CodeQualityTaskSummary

props

- path: OpenAPI schema paths
- pathPrefix: api.pathPrefix
- openapiPath: openapi

CRD (deprecated)

WARNING
K8sAPI K8sCrd K8sCrd

```
crds/ArtifactCleanupRun-K8sCrd.mdx

# ArtifactCleanupRun - K8sCrd

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />
```

ArtifactCleanupRun-K8sCrd

props

- name: CRD metadata.name
- crdPath: openapi CRD

--	--	--	--

references/CodeQuality.mdx

CodeQuality

```
<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

CodeQuality

props

- `schema`: OpenAPI schema `definitions` (v2) or `components/schemas` (v3) `□□□□□`
- `openapiPath`: `□□□□ openapi □□`

□□ **openapi** □□

□□ **OpenAPIPath** □ **OpenAPIRef** □□□□□□□□ **openapi** □□□□□□□□□□□□□□□□□□□□

□ openapi □□□□□□□ openapiPath □□□□□

```
<OpenAPIPath
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
  openapiPath="shared/openapis/katanomi.json"
/>
```



```
<K8sPermissionTable functions={['devops-testplans', 'devops-testmodule  
s']} />
```

props

11

props

- `functions`: `string[]` - `FunctionResource`

	□□	□□ □□ □	□□□ □□□	□□ □□ □	□□□ □□□ □	□□ □□	□□ □□ □
□□□□	□□	✓	✓	✓	✓	✓	✗
devops- testplans	□□	✓	✗	✓	✓	✓	✗

☐ Markdown ☐☐☐☐

```
<!-- reference-end -->
```

☐ MDX ☐☐☐☐☐

```
{/* reference-end */}
```

```
<root>/public/_remotes/<name>
```

```

□□□□□ <!-- reference-start#ref --> □□□□□

```

frontmatterMode



reference:

```
- repo: alauda-public/product-doc-guide # 

```

branch: # [string]

publicBase: # [string] /images/xx.png

docs/public

sources:

- name: anchor #

Show more

frontmatterMode

- ignore frontmatter frontmatter
- merge frontmatter key
- replace frontmatter frontmatter
- remove frontmatter

□ □ □ □ □ □ □ □

[illegible]

```
doom build # ████████
doom serve # ██████████
```



```
doom build dist -v
```

```
# 📄📄📄📄📄📄 release-4.0 📄📄 4.0 📄📄  
doom build -v 4.0 # 📄📄 4.0 📄📄📄📄📄 dist/4.0📄📄📄📄📄 {base}/4.0  
doom build -v master # 📄📄 master 📄📄📄📄📄 dist/master📄📄📄📄📄 {base}/mast  
er  
doom build -v {other} # 📄📄📄📄📄📄📄 dist/{other}📄📄📄📄📄 {base}/{other}  
  
# unversioned 📄 unversioned-x.y 📄📄📄📄📄📄📄📄📄📄  
doom build -v unversioned # 📄📄📄📄📄📄📄📄 dist/unversioned📄📄📄📄📄 {b
```

Show more ▾

📄📄📄📄📄📄

```
|— console-platform  
|   |— 4.0  
|   |— 4.1  
|   |— index.html  
|   |— overrides.yaml  
|   |— versions.yaml  
|— console-devops-docs  
|   |— 4.0
```

Show more ▾

index.html

```
<!DOCTYPE html>  
<html>  
  <head>  
    <title>Redirecting...</title>  
    <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />  
  </head>
```

Show more ▾

📄📄📄📄📄📄📄📄

overrides.yaml

```
# 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄  
title:  
  en: Doom - Alauda  
  zh: Doom - 📄📄  
logoText:  
  en: Doom - Alauda
```

Show more ▾

versions.yaml

```
- '4.1'  
- '4.0'
```