

🐙🐙

🐙🐙

🐙🐙 `doom` 🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙

API 🐙🐙🐙

🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙

`sites.yaml` 🐙🐙

🐙🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙🐙🐙🐙

Algolia 🐙🐙🐙

Sitemap 🐙🐙

🐙🐙

🐙🐙“🐙🐙🐙🐙🐙🐙”🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙

🐙🐙🐙

🐙🐙

🐙🐙

🐙🐙🐙

🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙🐙

`i18n.json`

`.ts/.tsx`

`.mdx`

🐙🐙🐙🐙🐙🐙

`props`

🐙🐙

Markdown

Callouts

Mermaid

MDX

🐙🐙 MDX 🐙🐙🐙

rspress 🐙🐙

API 🐙🐙

K8S API

🐙🐙🐙🐙

🐙🐙🐙🐙🐙

🐙🐙

🐙🐙🐙🐙🐙🐙🐙

🐙🐙🐙🐙



🌐🌐

🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐

API 🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐

frontmatterMode

🌐🌐🌐🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐

sites.yaml 🌐🌐

🌐🌐🌐🌐

🌐🌐🌐🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐

🌐🌐🌐🌐🌐

Algolia 🌐🌐🌐🌐

Sitemap 🌐🌐

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

[illegible]

```

js/ts  @alauda/doom/config  defineConfig

```

```
import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```



- `lang` `en` `null` `undefined`
- `title`
- `logo` `public` `doom` `alauda logo`
- `logoText` `logo`
- `icon` `favicon` `logo`
- `base` `product-docs` `/`
- `outDir` `dist/{base}/{version}` `dist/{outDir}/{version}` `version`

**API** ☐ ☐ ☐ ☐

api:

```
# CRD 0000000000 doom.config.* 00000000 glob 000json/yaml 00
```

crds:

- docs/shared/crds/\*.yaml

```
# OpenAPI  doom.config.*  glob  json/yaml  
```

openapis:

- docs/shared/openapis/\*.json

```
# openapi
```

Show more ▾

API



```
# doom.config.* glob json/yaml
```

```
permission:
```

functionresources:

```
# `kubectl get functionresources`
```

- docs/shared/functionresources/\*.yaml

roletemplates:

```
# `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
```

- docs/shared/roletemplates/\*.yaml

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

reference:

```
- repo: alauda-public/product-doc-guide # 

```

branch: # [string]

publicBase: # [string] /images/xx.png

docs/public

sources:

- name: anchor #

Show more ▾

## frontmatterMode

- `ignore` frontmatter frontmatter
- `merge` frontmatter key
- `replace` frontmatter frontmatter
- `remove` frontmatter

releaseNotes:

queryTemplates:

fixed: # ejs jql

unfixed:

release-notes.md

<!-- release-notes-for-bugs?template=fixed&project=DevOps -->

release-notes.mdx

{/\* release-notes-for-bugs?template=fixed&project=DevOps \*/}

template=fixed&project=DevOps fixed queryTemplates  
query project=DevOps ejs ↗ fixed jira jql  
↗ https://jira.alauda.cn/rest/api/2/search?jql=<jql> API  
JIRA\_USERNAME JIRA\_PASSWORD

```
sidebar:  
  collapsed: false # false
```

```
internalRoutes: # glob docs cli -i, --ignore`  
  /  
  - '*/internal/**'
```

```
onlyIncludeRoutes: # glob docs cli -i, --ignore`  
  / `internalRoutes`  
  - '*/internal/**'  
internalRoutes:  
  - '*/internal/overview.mdx'
```

```
shiki:
  theme: # optional, https://shiki.style/themes
  langs: # optional, https://shiki.style/languages
  transformers: # optional, only available in js/ts config, https://shiki.style/guide/transformers
```

**WARNING**

□□□□□□□□□□□□□□□□ **plaintext** □□

**WARNING**

□□□□□□□□□□□□□□□□□□□□ **plaintext** □□

`sites.yaml` ☐ ☐

`sites.yaml`

```
- name: connectors # 连接器
  base: /devops-connectors # 连接器
  version: v1.1 # 连接器 ExternalSite/ExternalSiteLink 连接器

  displayName: # 连接器名称
    en: DevOps Connectors
    zh: DevOps 连接器
```

Show more 

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|



### translate:

```
# =====ejs ===== `sourceLang`, `targetLang`, `userPrompt`, `additionalPrompts`, `terms`, `titleTranslationPrompt`
#  `sourceLang`  `targetLang`  ``  ``
#    `userPrompt` =====
#    `additionalPrompts`  `frontmatter.i18n`  `additionalPrompts`
=====
#    `terms`  `titleTranslationPrompt` ===== AI
```

Show more ▾

📄📄📄📄📄📄📄📄

```
editRepoBaseUrl: alauda/doom/tree/main/docs # https://github.com/ =====
=====  -R, --edit-repo` =====
```

📄📄📄📄📄📄

### export:

```
- name: Concepts # ===== pdf =====
  scope: '*/concepts' # ===== glob ===== docs  
```

📄📄📄📄📄📄

### lint:

```
cspellOptions: # =====cspell ===== https://github.com/streetsidesoftware/cspell/tree/main/packages/cspell-eslint-plugin#options
```

Algolia 📄📄📄📄

```
algolia: # 📄Algolia 📄📄📄📄📄📄📄 ` -a, --algolia` 📄📄📄📄📄
appId: # Algolia 📄 ID
apiKey: # Algolia API Key
indexName: # Algolia 📄📄📄
```

📄📄 `public/robots.txt` 📄 Algolia 📄📄📄

Info

📄 `rspress` 📄📄📄📄📄 Algolia 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄  
`@alauda/doom/theme` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
theme/index.ts

export * from '@alauda/doom/theme'
```

Sitemap 📄📄

```
siteUrl: https://docs.alauda.cn # 📄📄📄 URL📄📄📄📄📄📄📄 ` -S, --site
-url` 📄📄📄📄📄📄📄📄
```

11

```
├─ index.md
├─ start.mdx
└─ usage
    ├─ index.mdx
    └─ convention.md
```

1. `public`
2. `public/_remotes`  
`*/public/_remotes` `.gitignore`

shared

□ □ □

frontmatter

```

---
title:  ""
description:  ""
author:  ""
category:  ""
---
```

MDX

.mdx

frontmatter

11

index.md

index.mdx

frontmatter

weight

weight

[illegible][illegible]

index.mdx

## Overview

#

<Overview />

# Markdown

is [gfm](#) Doom Markdown

Callouts

Mermaid

# Callouts

## Note

1. ; , % , # , // , /\*\* \*/ , -- <!-- -->
2. [\\!code callout]
3. :::callouts <div class="doom-callouts"> <Callouts>

```
```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \ # [!code callout]
+ 8 MiB × (number of vCPUs) \ # [!code callout]
+ 16 MiB × (number of graphics devices) \ # [!code callou
t]
+ (additional memory overhead) # [!code callout]
```
```

Show more ▾


```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \ ①
+ 8 MiB × (number of vCPUs) \ ②
+ 16 MiB × (number of graphics devices) \ ③
+ (additional memory overhead) ④
```

- ① Required for the processes that run in the `virt-launcher` pod.
- ② Number of virtual CPUs requested by the virtual machine.
- ③ Number of virtual graphics cards requested by the virtual machine.
- ④ Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

Shiki Transformers ↗

Mermaid ↗

```
```mermaid
graph TD;
  A-->B;
  A-->C;
  B-->D;
  C-->D;
```
```

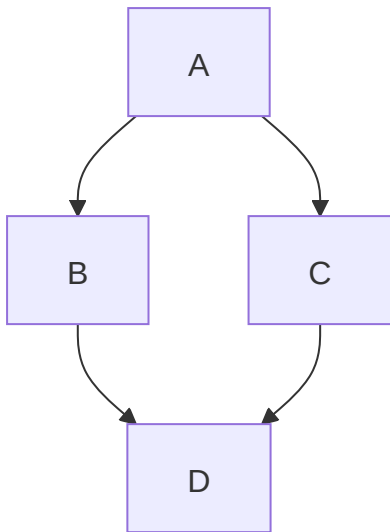

00 [Markdown Preview Mermaid](#) 000 VSCode 000000



# MDX

[MDX](#)   Markdown                                                                                                                                                                                                                                                                                                                                                                                                                     

- [Badge](#)
- [Card](#)
- [LinkCard](#)
- [PackageManagerTabs](#)
- [Steps](#)
- [Tab/Tabs](#)
- [Toc](#)

[rspress/theme](#)

preview.mdx

```
import { SourceCode } from '@rspress/core/theme'  
  
<SourceCode href="/" />
```

# doom

[doom](#)

## Overview

## Directive

[Directive](#)

- 文档(`doc/en`) 文档 `doc/zh`

```
<Directive type="danger" title="危险">
  危险
  `doc/zh`
</Directive>
```

- 文档(`doc/en`) 文档 `doc/zh`

危险

危险 `doc/zh`

危险

## ExternalSite

ExternalSite

```
<ExternalSite name="connectors" />
```

### Note

DevOps 文档 DevOps 文档  
[DevOps 文档](#)

## ExternalSiteLink

ExternalSiteLink

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" />
```

[Content](#)

**TIP**

```
mdx <ExternalSiteLink name="connectors" href="link" children="Content" />
```

```
<ExternalSiteLink name="connectors" href="link">
  Content {/*      `p`      */}
</ExternalSiteLink>
```

□□□□□□□□ p □□□□□□□□□□□□□□ children □□□□

**AcpApisOverview** ☐ **ExternalApisOverview**

□□□□□□ API □□□□

```
<AcpApisOverview />
{/* same as following */}
<ExternalApisOverview name="acp" />

<ExternalApisOverview name="connectors" />
```

### Note

[ACP APIs](#)
[ACP APIs](#)

### Note

[📄 DevOps](#)
[📄 APIs](#)
[📄 DevOps](#)
[📄 APIs](#)
[📄](#)

## Term

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
<Term name="alaudaCloudLink" />
```

ACP [Alauda Cloud](#)

props

- `name`:
- `textCase`: `lower` , `upper` , `capitalize`

TermsTable

```
<TermsTable />
```

| company      |     | - | Alauda                    | - |  |
|--------------|-----|---|---------------------------|---|--|
| product      |     | - | Alauda Container Platform | - |  |
| productShort | ACP | - | ACP                       | - |  |
|              |     |   |                           |   |  |

| alaudaCloudLink | <a href="#">Alauda Cloud ↗</a> | - | <a href="#">Alauda Cloud ↗</a> | - | - |
|-----------------|--------------------------------|---|--------------------------------|---|---|

props

- `terms`: `NormalizedTermItem[]`

JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```

yaml

json

key: value

`shared`

```
import CommonContent from './shared/CommonContent.mdx'

<CommonContent />
```

runtime ↗ API .jsx/.tsx .mdx

```
// shared/CommonContent.tsx
export const CommonContent = () => {
  const { page } = usePageData()
  return <div>{page.title}</div>
}

// showcase/content.mdx
import { CommonContent } from './shared/CommonContent'
```

Show more ▾

WARNING

.mdx
 props
 issue ↗
 props
 .jsx/.tsx

alauda 公共领域 en / zh 公共领域  
public 公共 en / zh 公共

.mdx

docs i18n.json  
useI18n

Show more ▾



## .ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
  const t = useI18n()
  return <h1>{t('title')}</h1>
}
```

## .mdx

```
import { useI18n } from '@rspress/core/runtime'

# {useI18n()('title')}

{useI18n()('description')}
```

# API 文档

本文档提供了关于 API 文档的 K8S API, 以及 API 以及 CRD (Custom Resource Definition) 文档的概述。

```
├─ apis
│   ├── advanced_apis # 高级 API
│   ├── crds # CRDs
│   ├── kubernetes_apis # K8S API
│   └─ references # 参考
```

## 目录

### K8S API

props

### API 文档

props

### CRD (deprecated)

props

### 文档

props

### API 文档 openapi 文档

# K8S API

kubernetes\_apis/workload/daemonset.mdx

```
# DaemonSet [apps/v1]

<K8sAPI
  name="io.k8s.api.apps.v1.DaemonSet"
  pathPrefix="/kubernetes/{cluster}"
/>
```

🔗 [DaemonSet](#)

crds/ArtifactCleanupRun.mdx

```
# ArtifactCleanupRun

<K8sAPI name="artifactcleanupruns.artifacts.katanomi.dev" />
```

🔗 [ArtifactCleanupRun](#)

## props

- `name`: OpenAPI schema `definitions` (v2) or `components/schemas` (v3) 中定义的 CRD `metadata.name`
- `namespaced`: 是否命名空间化 `true` 则 API Endpoints 在 `namespaces/{namespace}`
- `pathPrefix`: 路径前缀 `api.pathPrefix`
- `filepath`: 文件路径 `openapi` 文件 `openapi` 的 CRD 文件
- `apiGroup`: API 组 `openapi` 文件 `x-kubernetes-group-version-kind` 中
- `apiVersion`: API 版本 `CRD` 文件 `spec.versions` 中
- `apiKind`: API 种类

🔗 [API](#)

```
advanced_apis/codeQualityTaskSummary.mdx

# CodeQualityTaskSummary

<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summ
```

CodeQualityTaskSummary

props

- path: OpenAPI schema paths
- pathPrefix: api.pathPrefix
- openapiPath: openapi

CRD (deprecated)

**WARNING**  
K8sAPI K8sCrd K8sCrd

```
crds/ArtifactCleanupRun-K8sCrd.mdx

# ArtifactCleanupRun - K8sCrd

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />
```

ArtifactCleanupRun-K8sCrd

props

- name: CRD metadata.name
- crdPath: openapi CRD

□□□□

```
references/CodeQuality.mdx

# CodeQuality

<OpenAPIRef schema="v1alpha1.CodeQuality" />
```

□□ [CodeQuality](#)□

props

- `schema` : OpenAPI schema `definitions` (v2) or `components/schemas` (v3) □□□□□
- `openapiPath` : □□□□ [openapi](#) □□

□□ **openapi** □□

□□ `OpenAPIPath` □ `OpenAPIRef` □□□□□□□□ `openapi` □□□□□□□□□□□□□□□□□□□□  
□ `openapi` □□□□□□□ `openapiPath` □□□□□

```
<OpenAPIPath
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"
  openapiPath="shared/openapis/katanomi.json"
/>
```



```
<K8sPermissionTable functions={['devops-testplans', 'devops-testmodule  
s']} />
```

props

11

## props

- `functions`: `string[]` - `FunctionResource`

|                      | □□ | □□<br>□□<br>□ | □□□<br>□□□ | □□<br>□□<br>□ | □□□<br>□□□<br>□ | □□<br>□□ | □□<br>□□<br>□ |
|----------------------|----|---------------|------------|---------------|-----------------|----------|---------------|
| □□□□                 | □□ | ✓             | ✓          | ✓             | ✓               | ✓        | ✗             |
| devops-<br>testplans | □□ | ✓             | ✗          | ✓             | ✓               | ✓        | ✗             |
|                      |    |               |            |               |                 |          |               |



☐ Markdown ☐☐☐☐

```
<!-- reference-end -->
```

MDX □□□□

```
{/* reference-end */}
```

□□□□□□□ <root>/public/\_remotes/<name> □□□□

```
□□□□□ <!-- reference-start#ref --> □□□□□
```

frontmatterMode

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|



reference:

```
- repo: alauda-public/product-doc-guide # 

```

branch: # [string]

publicBase: # [string] /images/xx.png

docs/public

sources:
 - name: anchor #

Show more

frontmatterMode

- ignore frontmatter frontmatter
- merge frontmatter key
- replace frontmatter frontmatter
- remove frontmatter

□ □ □ □ □ □ □ □

[illegible]

```
doom build # ████████
doom serve # ████████████████
```



```
doom build dist -v
```

```
# 📄📄📄📄📄📄📄 release-4.0 📄📄 4.0 📄📄  
doom build -v 4.0 # 📄📄 4.0 📄📄📄📄📄 dist/4.0📄📄📄📄📄 {base}/4.0  
doom build -v master # 📄📄 master 📄📄📄📄📄 dist/master📄📄📄📄📄 {base}/mast  
er  
doom build -v {other} # 📄📄📄📄📄📄📄 dist/{other}📄📄📄📄📄 {base}/{other}  
  
# unversioned 📄 unversioned-x.y 📄📄📄📄📄📄📄📄📄📄  
doom build -v unversioned # 📄📄📄📄📄📄📄 dist/unversioned📄📄📄📄📄 {b
```

Show more ▾

📄📄📄📄📄📄📄

```
|— console-platform  
|   |— 4.0  
|   |— 4.1  
|   |— index.html  
|   |— overrides.yaml  
|   |— versions.yaml  
|— console-devops-docs  
|   |— 4.0
```

Show more ▾

index.html

```
<!DOCTYPE html>  
<html>  
  <head>  
    <title>Redirecting...</title>  
    <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />  
  </head>
```

Show more ▾

📄📄📄📄📄📄📄📄

## overrides.yaml

```
# 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄  
title:  
  en: Doom - Alauda  
  zh: Doom - 📄📄  
logoText:  
  en: Doom - Alauda
```

Show more ▾

## versions.yaml

```
- '4.1'  
- '4.0'
```