

Doom [rspress](#) Alauda

APIs

MDX

Markdown

React



MDX

Doom

`doom`

“”

Markdown

Callouts

📄📄📄

📄📄📄

API 📄📄📄

📄📄📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄📄

📄📄📄📄📄📄

📄📄📄📄📄

`sites.yaml` 📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄

Algolia 📄📄📄📄

Sitemap 📄📄

📄📄📄📄

📄📄📄

📄📄

📄📄

📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄

`i18n.json`

`.ts/.tsx`

`.mdx`

📄📄📄📄📄📄

`props`

📄📄

Mermaid

MDX

📄📄 MDX 📄📄📄📄

rspress 📄📄

API 📄📄

K8S API

📄📄📄📄

📄📄📄📄📄

📄📄

📄📄📄📄📄📄📄📄

📄📄📄📄

📄📄📄📄

📄📄📄📄📄

📄📄📄📄📄📄

APIs

Advanced APIs

CRDs

Kubernetes

Common References

📄📄

📄📄

📄📄📄📄

📄📄📄📄

📄📄📄📄

📄📄📄📄

📄📄📄

📄📄📄📄📄

📄📄📄

📄📄 PDF

📄📄📄

📄📄📄📄

📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

`mkdir my-docs && cd my-docs`

📄 `npm init -y` 📄📄📄📄📄📄📄📄📄📄📄📄 `npm`📄`yarn` 📄 `pnpm` 📄📄 `doom:`

 `npm`

 `yarn`

 `pnpm`

 `bun`

 `deno`

```
npm install -D @alauda/doom typescript
```

创建文档目录:

```
# 创建 docs 目录
mkdir docs/en && echo '# Hello World' > docs/en/index.md
mkdir docs/zh && echo '# 文档' > docs/zh/index.md
```

在 `package.json` 中添加:

```
{
  "scripts": {
    "dev": "doom dev",
    "build": "doom build",
    "new": "doom new",
    "serve": "doom serve",
    "translate": "doom translate",
    "export": "doom export"
  }
}
```

[Show more](#)

在 `doom.config.yml` 中添加:

```
title: My Docs
```

在 `tsconfig.json` 中添加:

```
{
  "compilerOptions": {
    "jsx": "react-jsx",
    "module": "NodeNext",
    "moduleResolution": "NodeNext",
    "noUnusedLocals": true,
    "noUnusedParameters": true,
    "resolveJsonModule": true,
  }
}
```

[Show more](#)

📄📄📄 `global.d.ts` 📄📄📄📄📄📄

```
/// <reference types="@alauda/doom/runtime" />
```

📄📄📄📄📄 `.mdx` 📄📄📄📄📄📄📄 **doom** 📄📄📄📄📄📄📄

📄📄📄📄📄

```
doom -h

# output
Usage: doom [options] [command]

Doctor Doom making docs.

Options:
```

Show more ▾

📄📄📄📄📄📄📄

📄📄📄📄📄📄

📄 `yarn dev` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄

```
doom dev -h

# output
Usage: doom dev [options] [root]

Start the development server

Arguments:
```

Show more ▾

📄📄📄📄📄

📄 `yarn build` 📄📄📄📄📄📄📄📄📄📄📄 `dist` 📄📄📄📄📄

📄📄📄📄

📄 `yarn serve` 📄📄📄📄📄📄📄📄📄📄📄 `-b`, `-p` 📄📄📄📄📄📄📄📄 `-b`, `-p`
📄

📄📄📄📄📄📄

📄 `yarn new` 📄📄📄📄📄📄📄📄📄📄

📄📄📄📄

`doom translate -h`

output
`Usage: doom translate [options] [root]`

`Translate the documentation`

`Arguments:`

Show more ▾

- `-g, --glob` 📄📄📄📄📄📄📄📄📄📄📄 `glob` 📄📄📄📄📄📄📄📄
📄📄📄📄📄📄📄📄
- 1. `yarn translate -g abc xyz` 📄📄 `<root>/<source>/abc`, `<root>/<source>/xyz`
📄📄📄📄📄📄📄 `<root>/<target>/abc`, `<root>/<target>/xyz` 📄📄
- 2. `yarn translate -g '*'` 📄📄 `<root>/<source>` 📄📄📄📄📄
- `-C, --copy` 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 `false` 📄📄
📄📄📄📄📄📄📄📄📄📄📄
- 📄📄📄📄📄

1. `/<source>/abc.jpg` 000000 `<root>/public/<source>/abc.jpg` 0
`<root>/public/<target>/abc.jpg` 0000000000000000 `/<target>/abc.jpg`
2. `<root>/<source>/abc.mdx` 0000 `./assets/xyz.jpg` 000000
`<root>/<source>/assets/xyz.jpg` 0 `<root>/<target>/assets/xyz.jpg` 0000
00000000
3. `<root>/<source>/abc.mdx` 0000 `./assets/<source>/xyz.jpg` 000000
`<root>/<source>/assets/<source>/xyz.jpg` 0
`<root>/<target>/assets/<target>/xyz.jpg` 0000000000000000
`./assets/<target>/xyz.jpg`

• 0000000000

1. `/<source>/abc.jpg` 000000 `<root>/public/<target>/abc.jpg` 0000000000
00000000 `/<target>/abc.jpg` 000000000000000000
2. `<root>/<source>/abc.mdx` 0000 `./assets/<source>/xyz.jpg` 000000
`<root>/<target>/assets/<target>/xyz.jpg` 000000000000000000
`./assets/<target>/xyz.jpg` 00000000
`../<source>/assets/<target>/xyz.jpg`

WARNING

0000000000 `-g '*'` 00000000000000 `source` 0 `target` 0000000000 `internalRoutes`
00000000 `target` 0000000000

TIP

000000000000 `AZURE_OPENAI_API_KEY` 00000000000000 `Leader` 00

0000000000000000000000

```
i18n:
  title:
    en: DevOps Connectors
  additionalPrompts: '🔒🔒🔒 Connectors 🔒🔒🔒🔒🔒🔒'
  disableAutoTranslation: false
title: DevOps 🔒🔒
```

🔒🔒🔒🔒🔒🔒🔒🔒🔒

🔒🔒 PDF

WARNING

🔒🔒🔒🔒🔒🔒🔒🔒🔒 `yarn build` 🔒🔒🔒

```
doom export -h

# output
Usage: doom export [options] [root]

Export the documentation as PDF, `apis/**` and `*/apis/**` routes will be
ignored automatically
```

Show more ▾

🔒 `yarn export` 🔒🔒🔒 PDF 🔒🔒🔒🔒🔒🔒 `-b`, `-p` 🔒🔒🔒🔒🔒🔒🔒🔒 `-b`, `-p` 🔒

🔒🔒🔒🔒 `playwright` ➡ 🔒🔒🔒🔒 `build-harbor.alauda.cn/frontend/playwright-runner:doom` 🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒🔒

`.env.yarn`

`PLAYWRIGHT_DOWNLOAD_HOST="https://cdn.npmmirror.com/binaries/playwright"`

📄📄📄📄📄📄 pdf 📄📄 doom 📄📄📄📄📄📄📄📄 pdf 📄📄📄📄📄📄📄📄📄📄

📄📄📄📄

```
doom lint -h

# output
Usage: doom lint [options] [root]

Lint the documentation

Arguments:
```

Show more ▾

doom lint 📄 [ESLint](#) ↗ 📄 [cspell](#) ↗ 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄
[ESLint](#) ↗ / [CSpell](#) ↗ 📄📄📄📄📄📄📄📄:

- `eslint.config.mjs`:

```
import doom from '@alauda/doom/eslint'

export default doom(new URL('docs', import.meta.url))
```

- `cspell.config.mjs`:

```
export { default } from '@alauda/doom/cspell'
```

📄📄📄📄📄📄📄📄 `CWD` 📄 `.cspell` 📄📄📄📄📄 **CSpell** 📄📄📄📄📄📄📄📄
`.cspell/k8s.txt` 📄

```
k8s
kubernetes
```

📄📄📄📄📄📄📄📄





[Doom](#)



- [English](#)
- [_____](#)



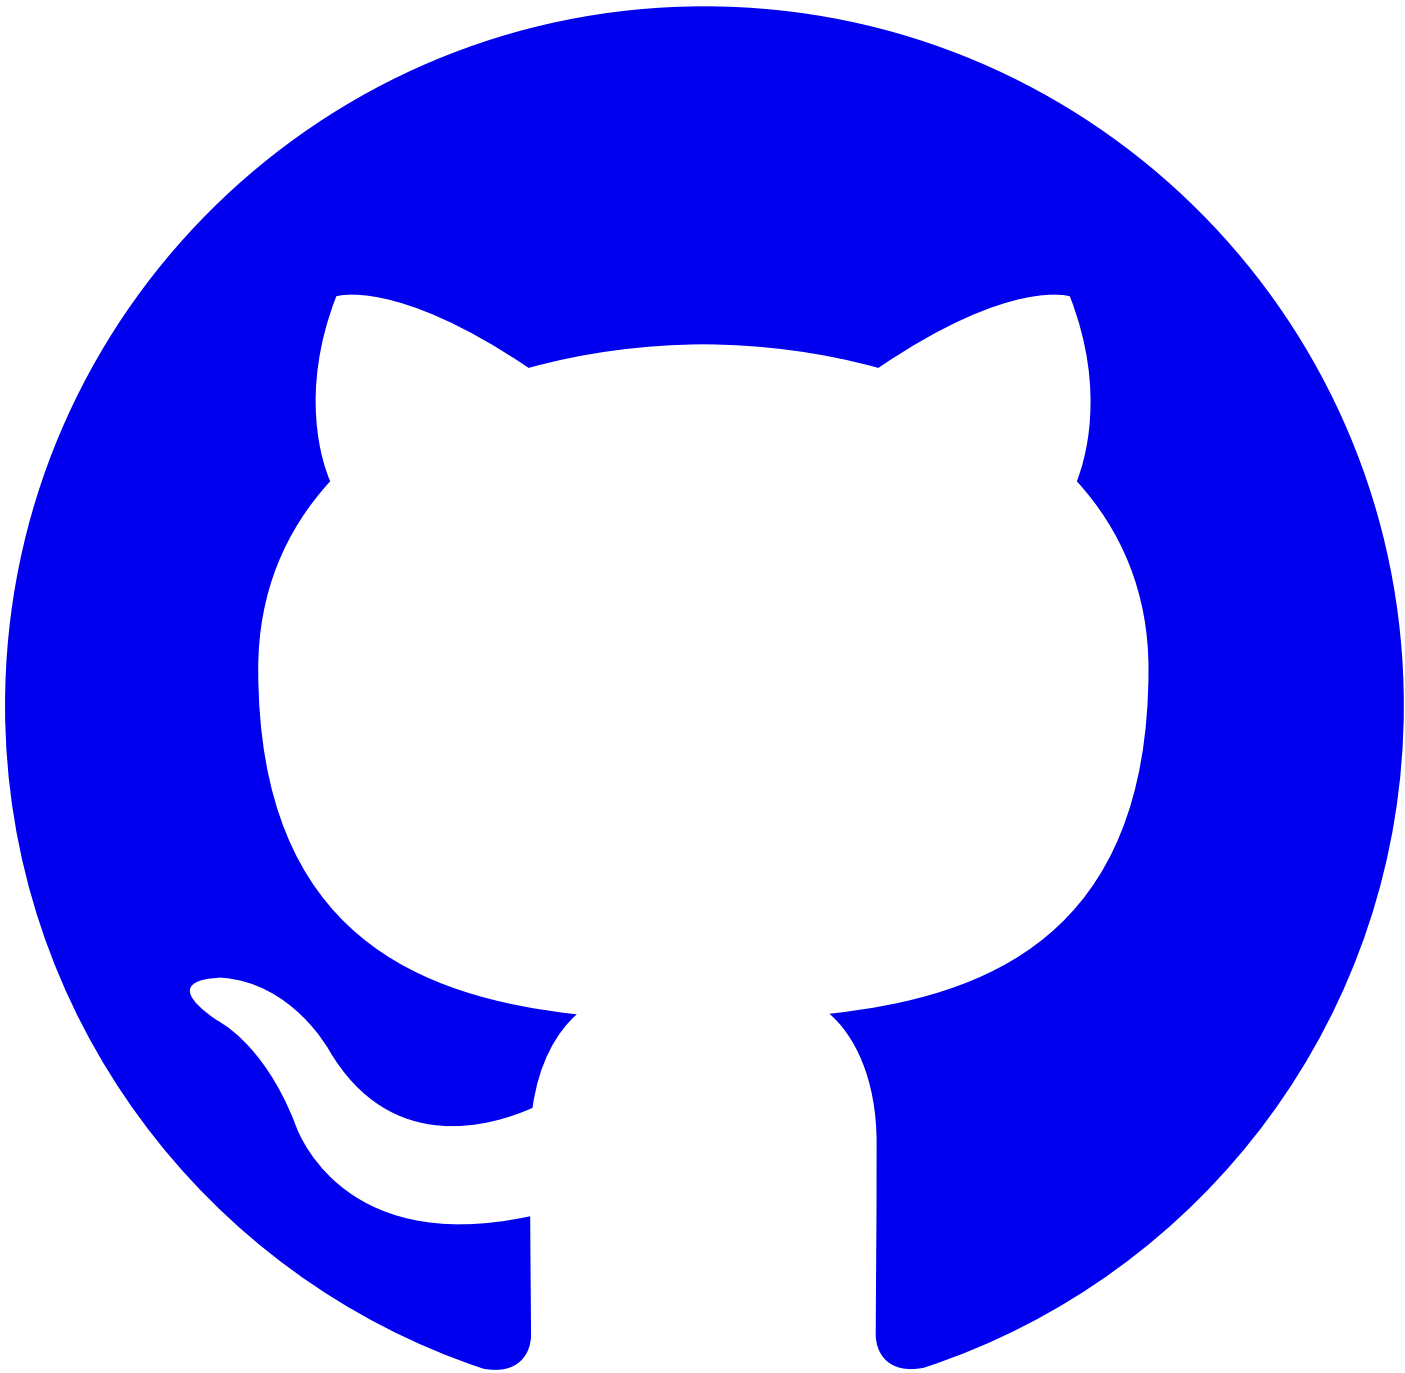

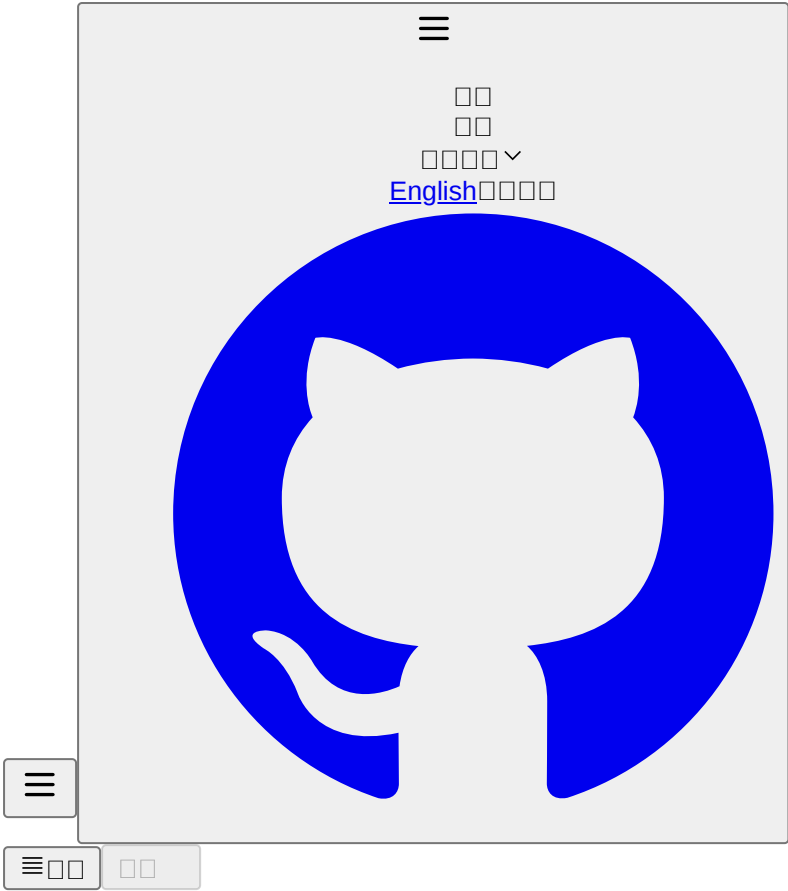

[Markdown](#)

[MDX](#)

[API](#)

[APIs](#)

[Advanced APIs](#)

>

[Event APIs](#)

>

[Search](#)

[Log APIs](#)

>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)

>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)

>

[Workload APIs](#)

>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)

>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)

[CodeQualityBranch](#)

[DaemonSet](#)

[Deployment](#)

[**#**](#)

[_____](#) > [_____](#) >





[Doom](#)



• [English](#)

•



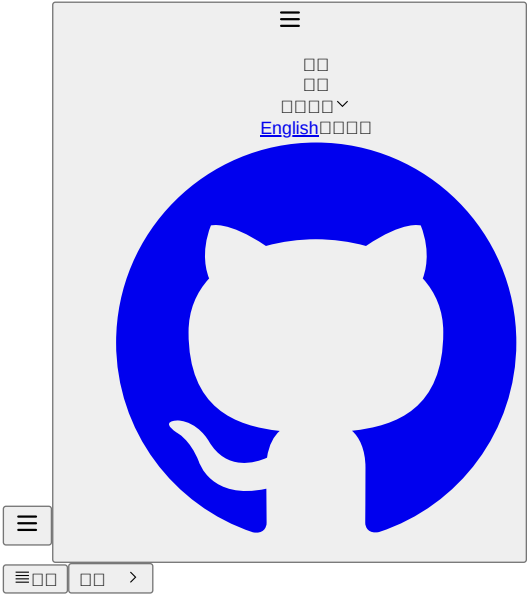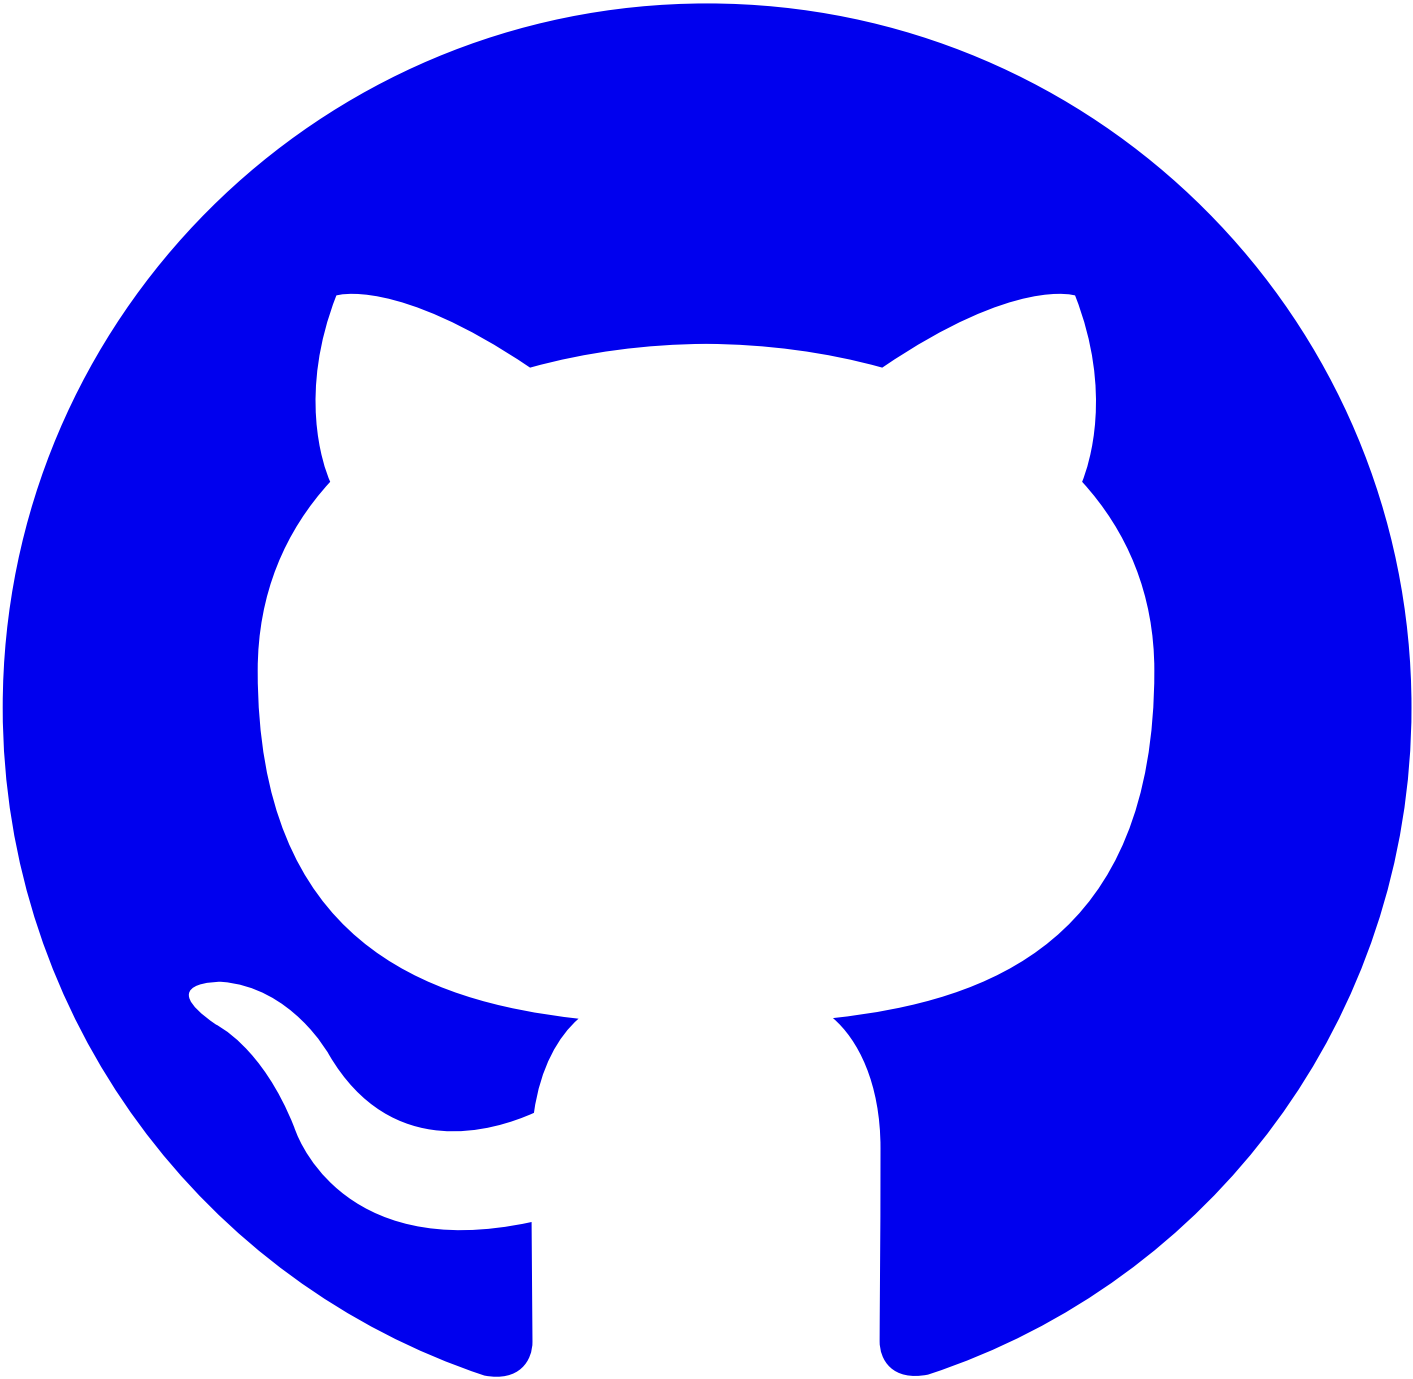

—

—

—

—

[Markdown](#)

[MDX](#)

—

[API](#) —

—

—

—

[APIs](#)

[Advanced APIs](#)

>

[Event APIs](#)

>

[Search](#)

[Log APIs](#)

>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)

>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)

>

[Workload APIs](#)

>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)

>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)

[CodeQualityBranch](#)

[DaemonSet](#)

[Deployment](#)

<#>

<#>

API	frontmatterMode	sites.yaml
Algolia	Sitemap	


#

```
js/ts      yaml      doom.config.yaml      doom.config.yaml      rspress

      js/ts      @alauda/doom/config      defineConfig

import { defineConfig } from '@alauda/doom/config'

export default defineConfig({})
```




#

- lang en null undefined
- title
- logo logo public doom alauda logo
- logoText logo
- icon favicon logo
- base product-docs /
- outDir dist/{base}/{version} dist/{outDir}/{version} version

#API


```
api:
# CRD  doom.config.*  glob  json/yaml 
crds:
- docs/shared/crds/*.yaml
# OpenAPI  doom.config.*  glob  json/yaml 
openapis:
- docs/shared/openapis/*.json
#  openapi 
#  https://doom.alauda.cn/apis/references/CodeQuality.html#v1alpha1.CodeQualitySpec
references:
  v1alpha1.CodeQualityBranch: /apis/references/CodeQualityBranch#v1alpha1.CodeQualityBranch
#  API  gateway 
pathPrefix: /apis
```



[API](#)


#

```
#  doom.config.*  glob  json/yaml 
permission:
functionresources:
# `kubectl get functionresources`
- docs/shared/functionresources/*.yaml
roletemplates:
# `kubectl get roletemplates -l auth.cpaas.io/roletemplate.official=true`
- docs/shared/roletemplates/*.yaml
```



#

```
reference:
- repo: alauda-public/product-doc-guide # 
branch: # [string] 
publicBase: # [string]  /images/xx.png  docs/public
sources:
- name: anchor # 
  path: docs/index.mdx#  # 
  ignoreHeading: # [boolean]  true
  processors: # 
    - type: ejstemplate
      data: # ejs  `<%= data.xx %>` 
frontmatterMode: merge #  frontmatter  ignore  ignore/merge/replace/remove
```




#frontmatterMode

- ignore frontmatter frontmatter
- merge frontmatter key
- replace frontmatter frontmatter
- remove frontmatter


#

```
releaseNotes:
  queryTemplates:
    fixed: # 查询 ejs 的 jql 语句
    unfixed:
```




release-notes.md

```
<!-- release-notes-for-bugs?template=fixed&project=DevOps -->
```



release-notes.mdx

```
{/* release-notes-for-bugs?template=fixed&project=DevOps */}
```



template=fixed&project=DevOps fixed queryTemplates query project=DevOps [ejs](#) fixed
jira [jql](#) https://jira.alauda.cn/rest/api/2/search?jql=<jql> API JIRA_USERNAME JIRA_PASSWORD

#

```
sidebar:
  collapsed: false # 是否折叠侧边栏
```



#

```
internalRoutes: # 路由规则
  - '*/internal/**'
```



#

```
onlyIncludeRoutes: # 只包含的路由规则
  - '*/internal/**'
internalRoutes:
  - '*/internal/overview.mdx'
```



#

```
shiki:
  theme: # optional, https://shiki.style/themes
  langs: # optional, https://shiki.style/languages
  transformers: # optional, only available in js/ts config, https://shiki.style/guide/transformers
```




WARNING

plaintext

#sites.yaml

sites.yaml

```
- name: connectors # 名称
  base: /devops-connectors # 基础路径
  version: v1.1 # 版本号 ExternalSite/ExternalSiteLink 链接
  displayName: # 显示名称 name
    en: DevOps Connectors
    zh: DevOps 连接
  # 图标
  # 仓库地址
  repo: https://github.com/AlaudaDevops/connectors-operator # gitlab 仓库 slug `alauda/product-docs`
  image: devops/connectors-docs # 图片地址
```



#

```
translate:
#  🌑🌑🌑🌑🌑 `sourceLang`, `targetLang`, `userPrompt`, `additionalPrompts`, `terms`, `titleTranslationPrompt`
#  🌑 `sourceLang` 🌑 `targetLang` 🌑 `🌑` 🌑 `🌑` 🌑🌑🌑🌑
#  `userPrompt` 🌑🌑🌑🌑🌑🌑🌑🌑
#  `additionalPrompts` 🌑🌑 `frontmatter.i18n` 🌑 `additionalPrompts` 🌑🌑🌑🌑
#  `terms` 🌑 `titleTranslationPrompt` 🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑 AI 🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑
#  🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑
systemPrompt: |
You are a professional technical documentation engineer, skilled in writing high-quality technical documentation in <%= targetLang %>. P

## Baseline Requirements
- Sentences should be fluent and conform to the expression habits of the <%= targetLang %> language.
- Input format is MDX; output format must also retain the original MDX format. Do not translate the names of jsx components such as <Ove
- **CRITICAL**: Do not translate or modify ANY link content in the document. This includes:
  - URLs in markdown links: [text](URL) - keep URL exactly as is
  - Reference-style links: [text][ref] and [ref]: URL - keep both ref and URL unchanged
  - Inline URLs: https://example.com - keep completely unchanged
  - Image links: ![alt](src) - keep src unchanged, but alt text can be translated
  - Anchor links: [text](#anchor) - keep #anchor unchanged
  - Any href attributes in HTML tags - keep unchanged
- Do not translate professional technical terms and proper nouns, including but not limited to: Kubernetes, Docker, CLI, API, REST, Grap
- The title field and description field in frontmatter should be translated, other frontmatter fields should retain and do not translate
- Content within MDX components needs to be translated, whereas MDX component names and parameter keys do not.
- Do not modify or translate any placeholders in the format of __ANCHOR_N__ (where N is a number). These placeholders must be kept exact
- Keep original escape characters like backslash, angle brackets, etc. unchanged during translation.
- Do not add any escape characters to special characters like [], (), {}, etc. unless they were explicitly present in the source text. F
  - If source has "Architecture [Optional]", keep it as "Architecture [Optional]" (not "Architecture \\[Optional]")
  - If source has "Function (param)", keep it as "Function (param)" (not "Function \\(param)")
  - Only add escape characters if they were present in the original text
- Preserve and do not translate the following comments, nor modify their content:
  - { /* release-notes-for-bugs */ }
  - <!-- release-notes-for-bugs -->
- Remove and do not retain the following comments:
  - { /* reference-start */ }
  - { /* reference-end */ }
  - <!-- reference-start -->
  - <!-- reference-end -->
- Ensure the original Markdown format remains intact during translation, such as frontmatter, code blocks, lists, tables, etc.
- Do not translate the content of the code block.
<%= if (titleTranslationPrompt) { %>
<%- titleTranslationPrompt %>
<% } %>
<%= if (terms) { %>
<%- terms %>
<% } %>

<%= if (userPrompt || additionalPrompts) { %>
## Additional Requirements
These are additional requirements for the translation. They should be met along with the baseline requirements, and in case of any confl


The text for translation is provided below, within triple quotes:
"""
<%= if (userPrompt) { %>
<%- userPrompt %>
<% } %>

<%= if (additionalPrompts) { %>
<%- additionalPrompts %>
<% } %>
"""
<%= } %>
```




#

```
editRepoBaseUrl: alauda/doom/tree/main/docs # https://github.com/ 🌑🌑🌑🌑🌑🌑 ` -R, --edit-repo` 🌑🌑🌑🌑🌑🌑
```




#

```
export:
- name: Concepts # 🌑🌑🌑🌑🌑 pdf 🌑🌑🌑🌑🌑🌑
  scope: '*/concepts' # 🌑🌑🌑🌑🌑🌑🌑🌑🌑🌑 glob 🌑🌑🌑🌑 docs 🌑
```




#

```
lint:
  cspellOptions: # 🌑🌑🌑cspell 🌑🌑🌑🌑 https://github.com/streetsidesoftware/cspell/tree/main/packages/cspell-eslint-plugin#options
```



#Algolia

```
algolia: # 🌑🌑🌑Algolia 🌑🌑🌑🌑🌑🌑 ` -a, --algolia` 🌑🌑🌑🌑🌑🌑
  appId: # Algolia 🌑 ID
  apiKey: # Algolia API Key
  indexName: # Algolia 🌑🌑🌑
```




public/robots.txt Algolia

Info

rspress Algolia [@alauda/doom/theme](#)


theme/index.ts

export * from '@alauda/doom/theme'



#Sitemap


siteUrl: https://docs.alauda.cn # 指定 URL sitemap 生成时 -S, --site-url 指定



[>](#) [>](#)

[API](#) [frontmatterMode](#) [sites.yaml](#)
[Algolia](#) [Sitemap](#)



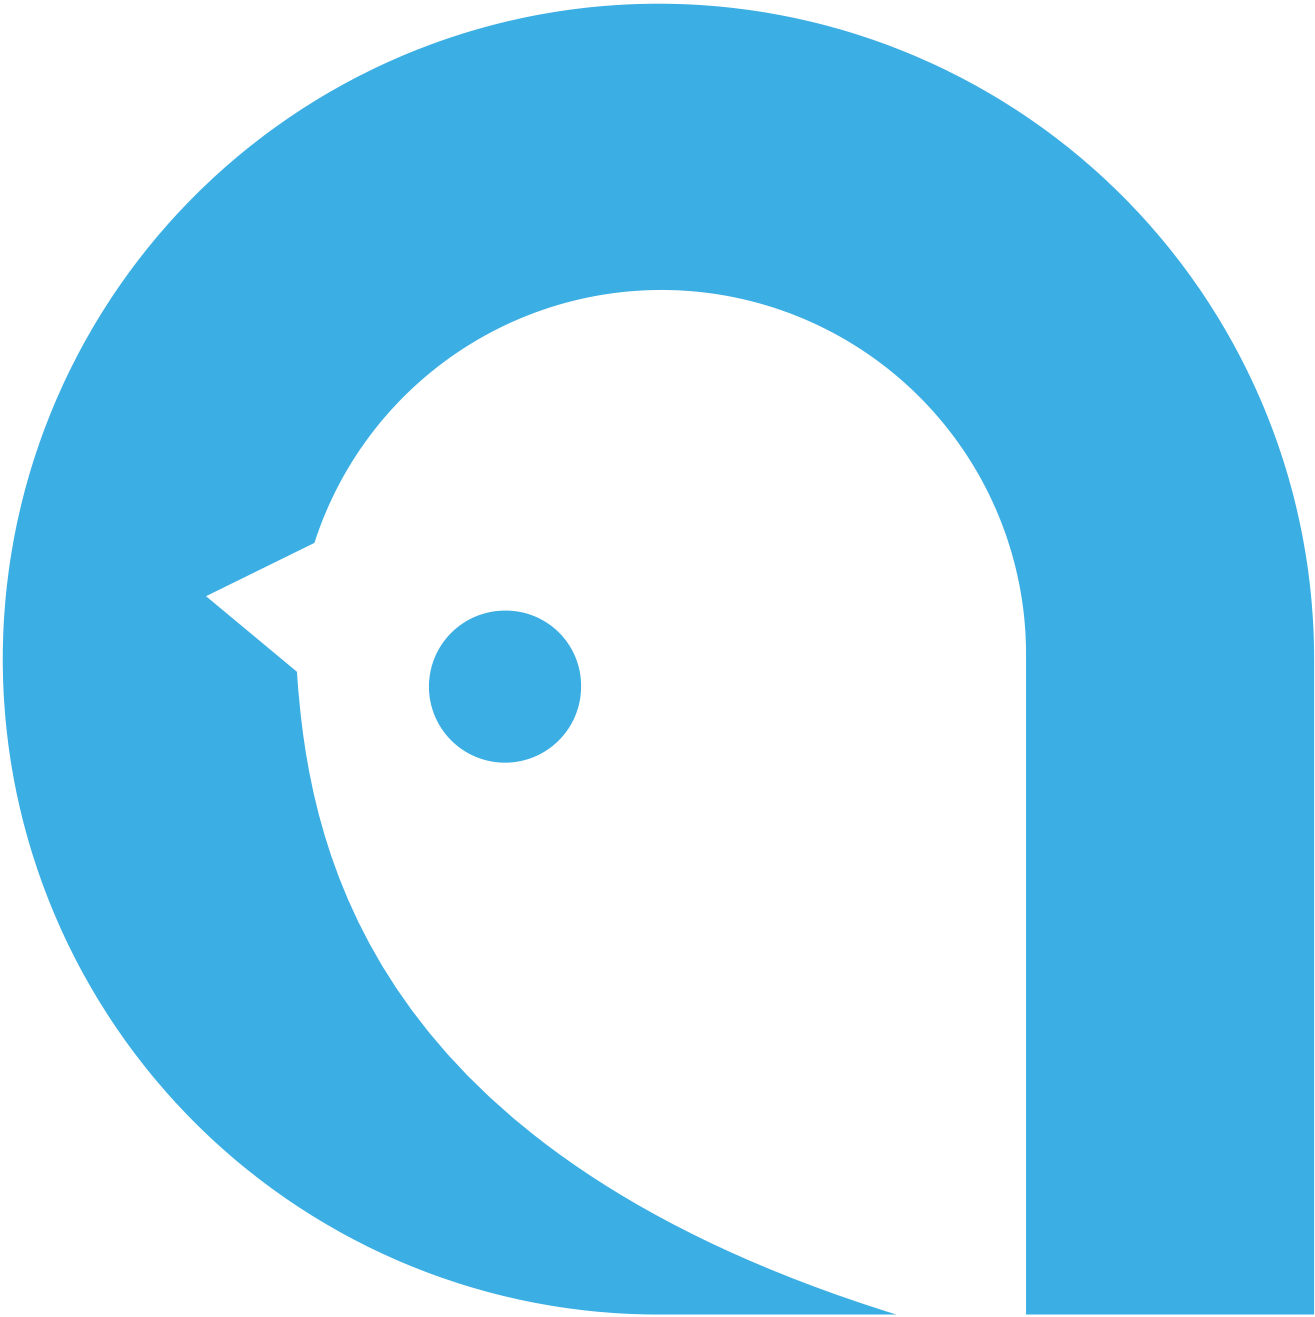



[Doom](#)



- [English](#)
- [_____](#)



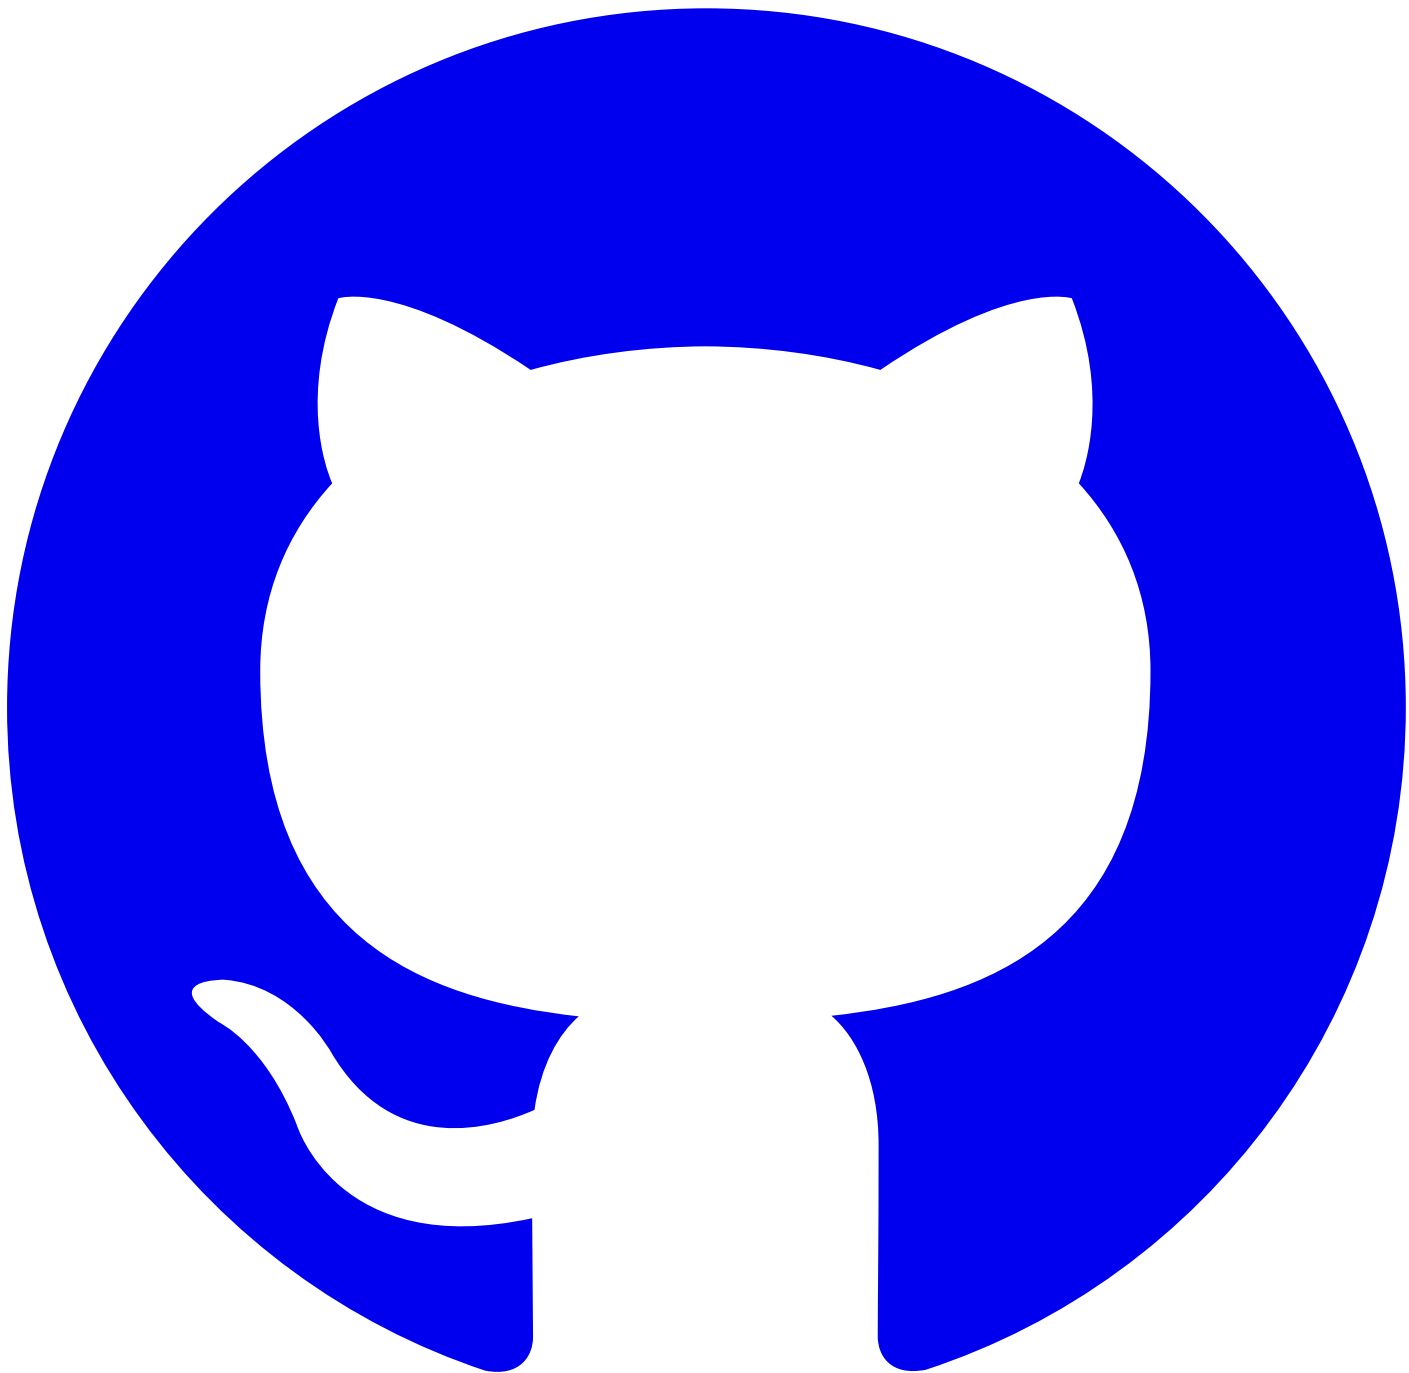

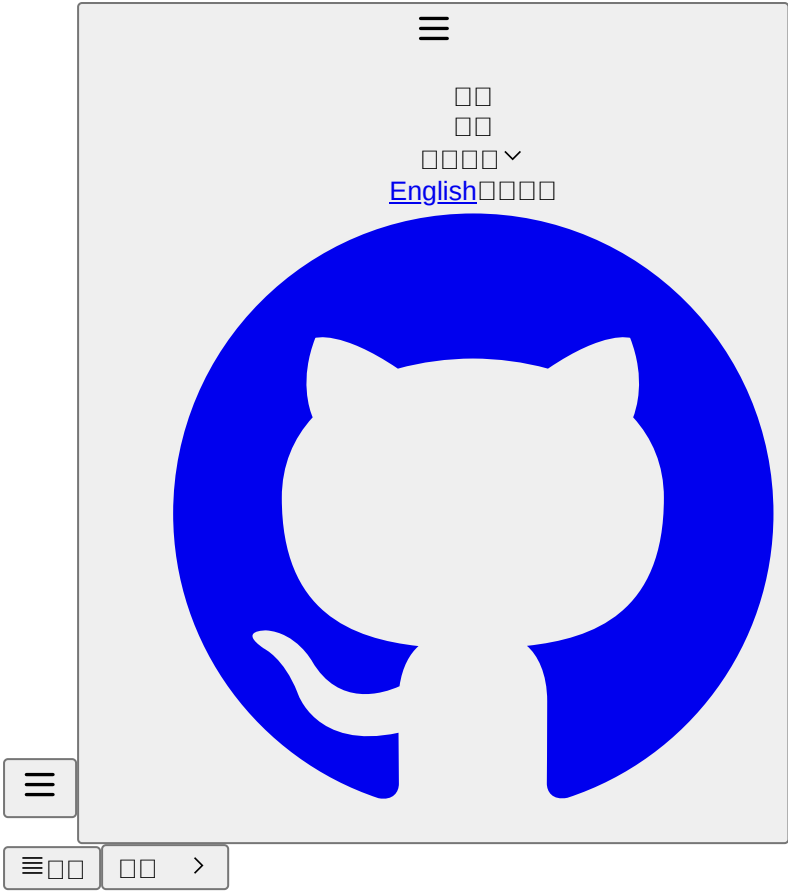

[Markdown](#)

[MDX](#)

[API](#)

[APIs](#)

[Advanced APIs](#)

>

[Event APIs](#)

>

[Search](#)

[Log APIs](#)

>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)

>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)

>

[Workload APIs](#)

>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)

>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)

[CodeQualityBranch](#)

[DaemonSet](#)


[Deployment](#)

<#>

<#>

<#>

```
├─ index.md
├─ start.mdx
├─ usage
│   └─ index.mdx
│       └─ convention.md
```



- #

```

---
title: ""
description: ""
author: ""
category: ""
---
```



frontmatter

#

```
frontmatter    weight
```

The diagram consists of two boxes. The left box shows a green icon of three horizontal lines with a curved arrow pointing from the bottom line to the middle line, followed by a black icon of three horizontal lines with an arrow pointing to the right. The right box shows a black icon of a square with a smaller square inside it, followed by a green checkmark.

#

Overview

```
<Overview />
```



_____ > _____ [Markdown](#) >







[Doom](#)



[English](#)



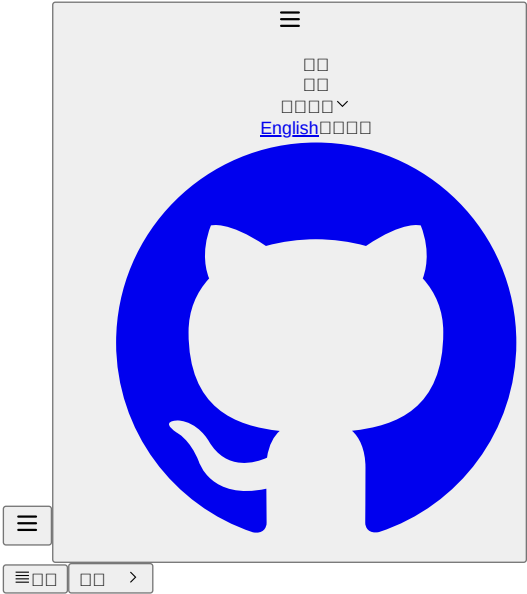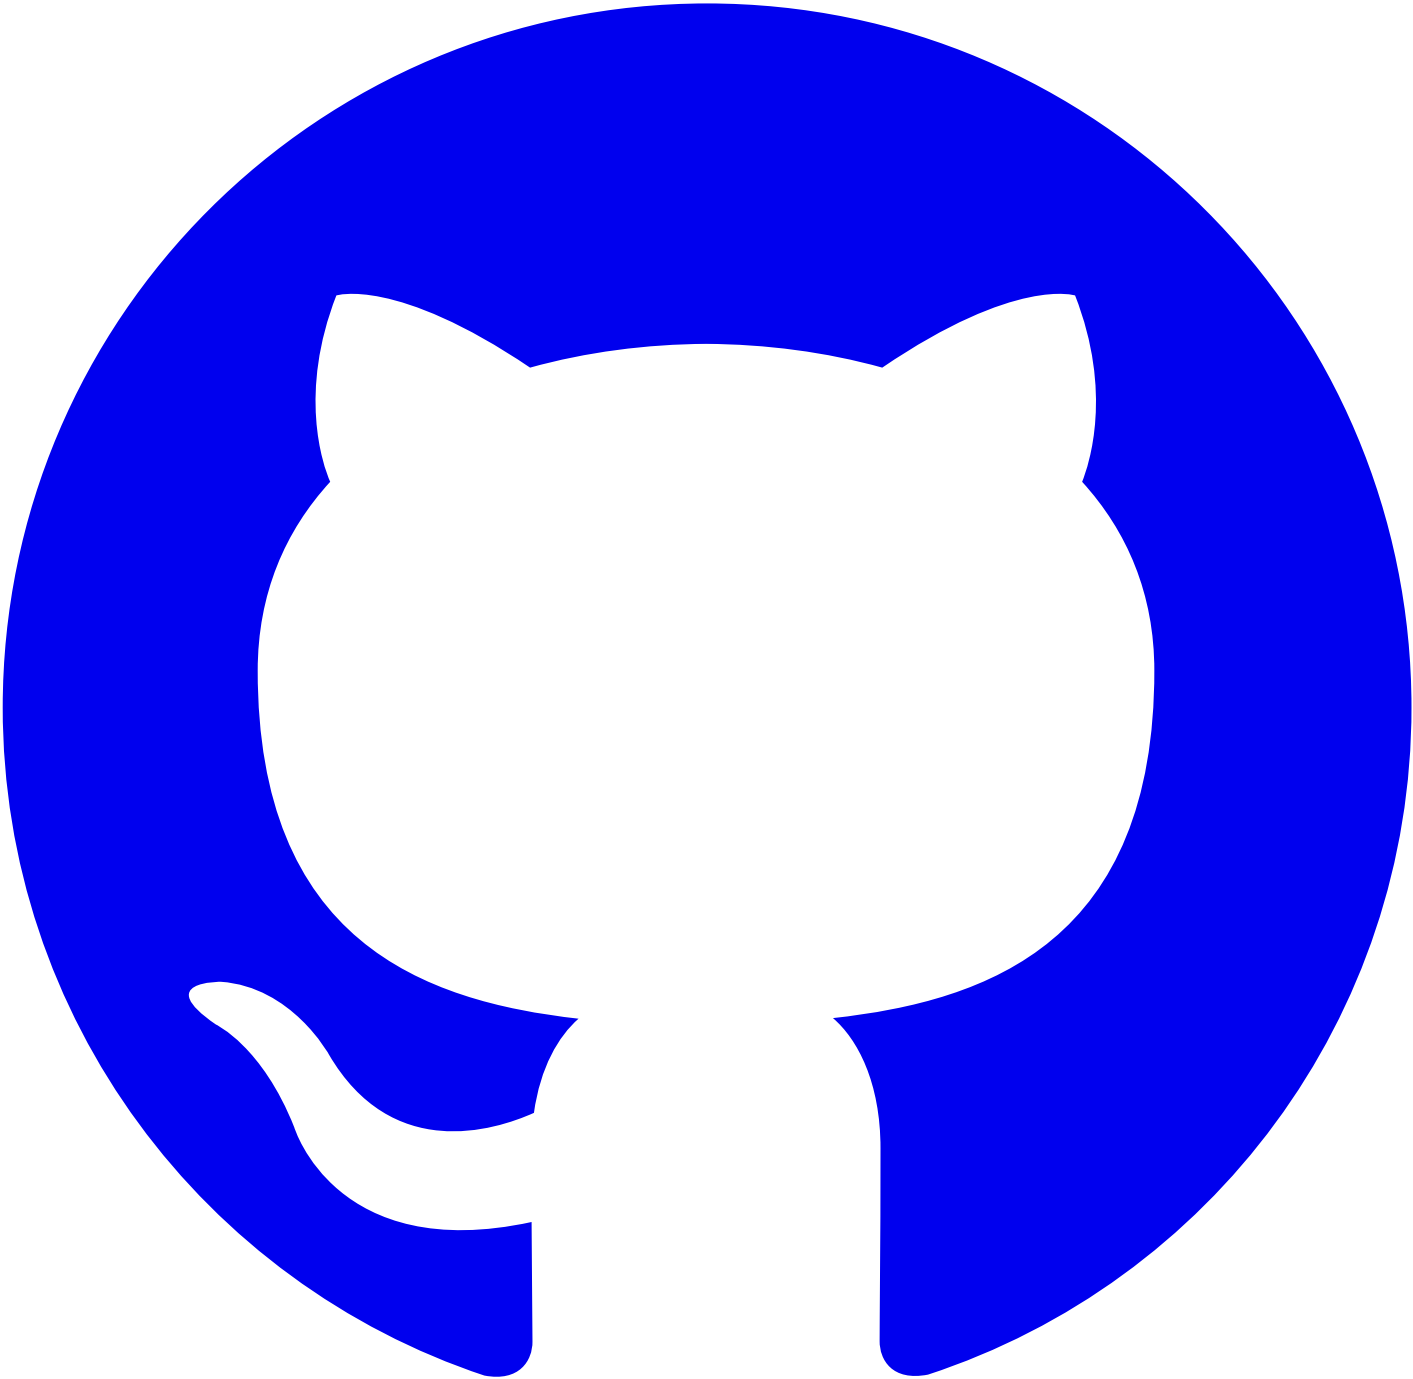

[—](#)

[—](#)

[—](#)

[—](#)

[Markdown](#)

[MDX](#)

[—](#)

[API](#)

[—](#)

[—](#)

[—](#)

[APIs](#)

[Advanced APIs](#)

[>](#)

[Event APIs](#)

[>](#)

[Search](#)

[Log APIs](#)

[>](#)

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)

[>](#)

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)

[>](#)

[Workload APIs](#)

[>](#)

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)

[>](#)

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)

[CodeQualityBranch](#)

[DaemonSet](#)

[Deployment](#)

#Markdown

[gfm](#)

Doom

Markdown

<#>

#Callouts

Note


```
1.      ;,%,#,//,/** */,-,--  <!-- -->
2.      [\\!code callout]
3.      :::callouts              <div class="doom-callouts">  <Callouts>

```sh
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \ # [\\!code callout]
+ 8 MiB × (number of vCPUs) \ # [\\!code callout]
+ 16 MiB × (number of graphics devices) \ # [\\!code callout]
+ (additional memory overhead) # [\\!code callout]
...

:::callouts

1. Required for the processes that run in the `virt-launcher` pod.
2. Number of virtual CPUs requested by the virtual machine.
3. Number of virtual graphics cards requested by the virtual machine.
4. Additional memory overhead:
 - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate
 - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
 - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

:::
```



```
Memory overhead per virtual machine ≈ (1.002 × requested memory) \
+ 218 MiB \
+ 8 MiB × (number of vCPUs) \
+ 16 MiB × (number of graphics devices) \
+ (additional memory overhead)
```



- 1. Required for the processes that run in the virt-launcher pod.
- 2. Number of virtual CPUs requested by the virtual machine.
- 3. Number of virtual graphics cards requested by the virtual machine.
- 4. Additional memory overhead:
  - If your environment includes a Single Root I/O Virtualization (SR-IOV) network device or a Graphics Processing Unit (GPU), allocate 1 GiB additional memory overhead for each device.
  - If Secure Encrypted Virtualization (SEV) is enabled, add 256 MiB.
  - If Trusted Platform Module (TPM) is enabled, add 53 MiB.

[Shiki Transformers](#)

#Mermaid

```
```mermaid
graph TD;
  A-->B;
  A-->C;
  B-->D;
  C-->D;
```
```




[Markdown Preview Mermaid](#) VSCode  
\_\_\_\_>\_\_\_\_MDX>









[Doom](#)



- [English](#)
- [\\_\\_\\_\\_\\_](#)



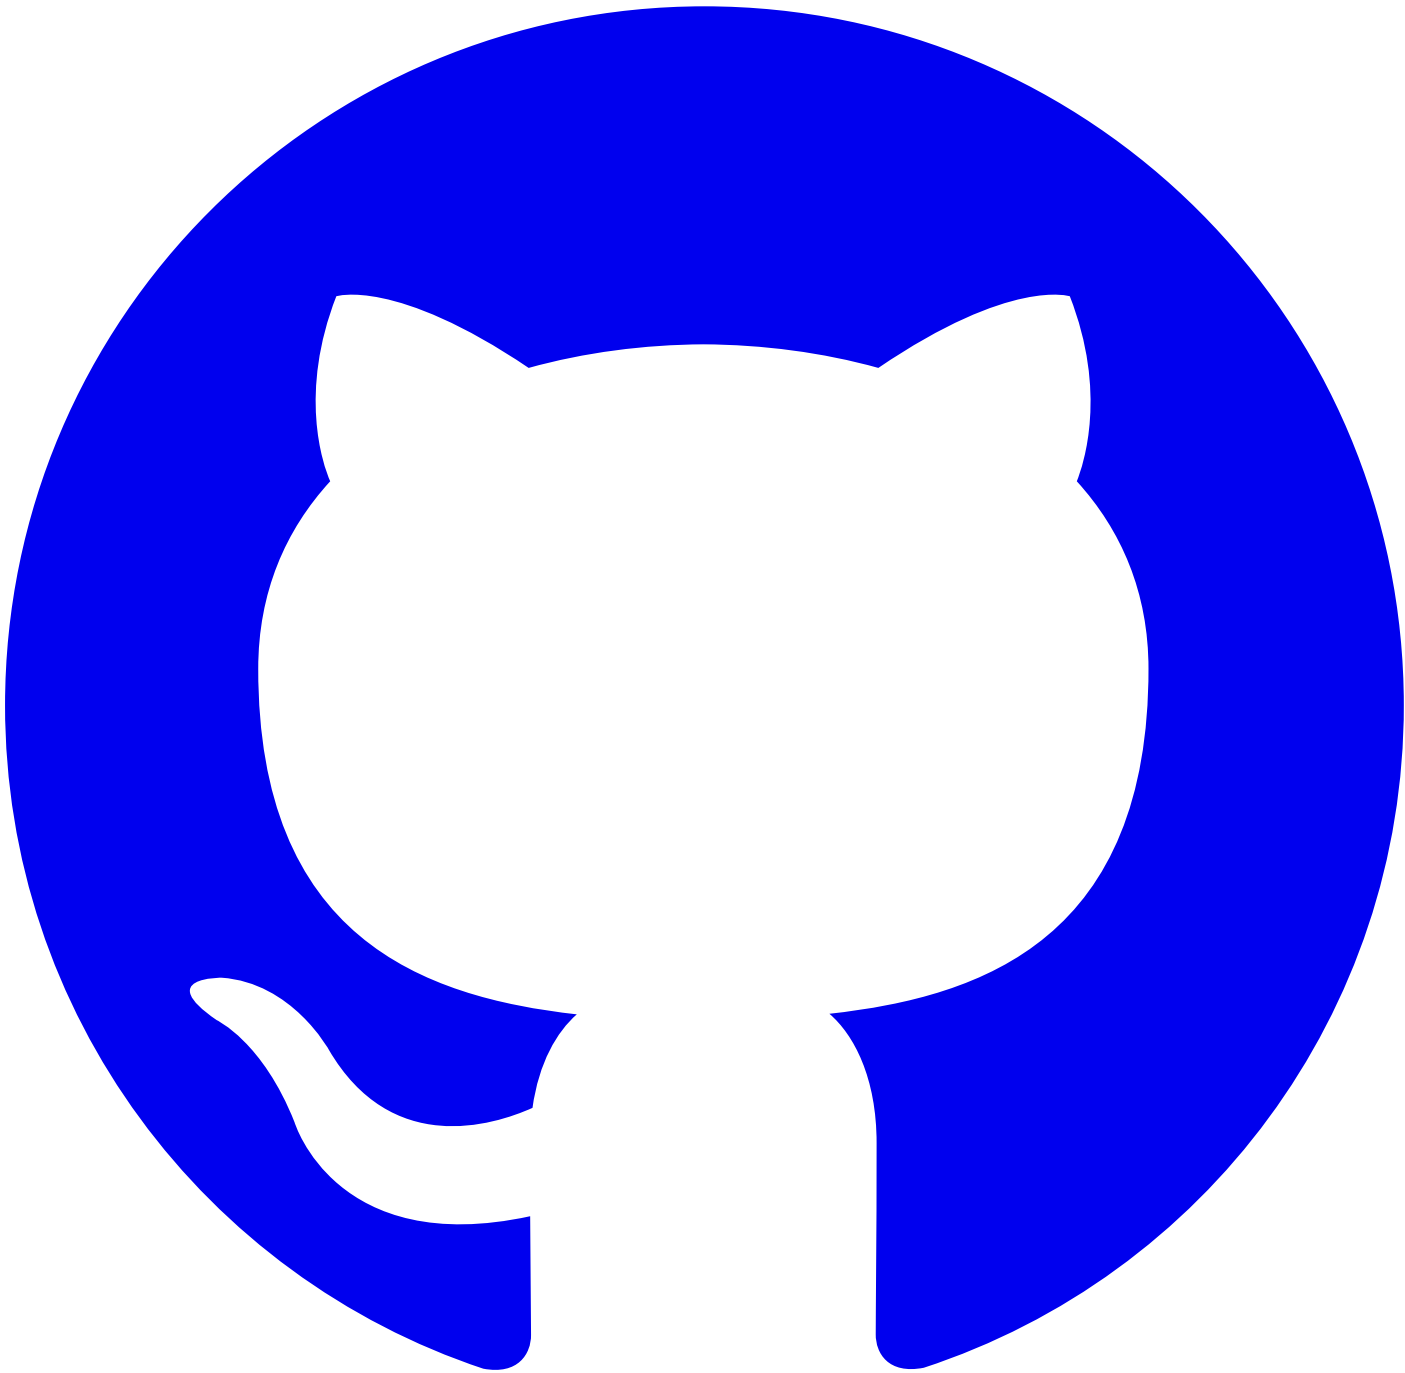

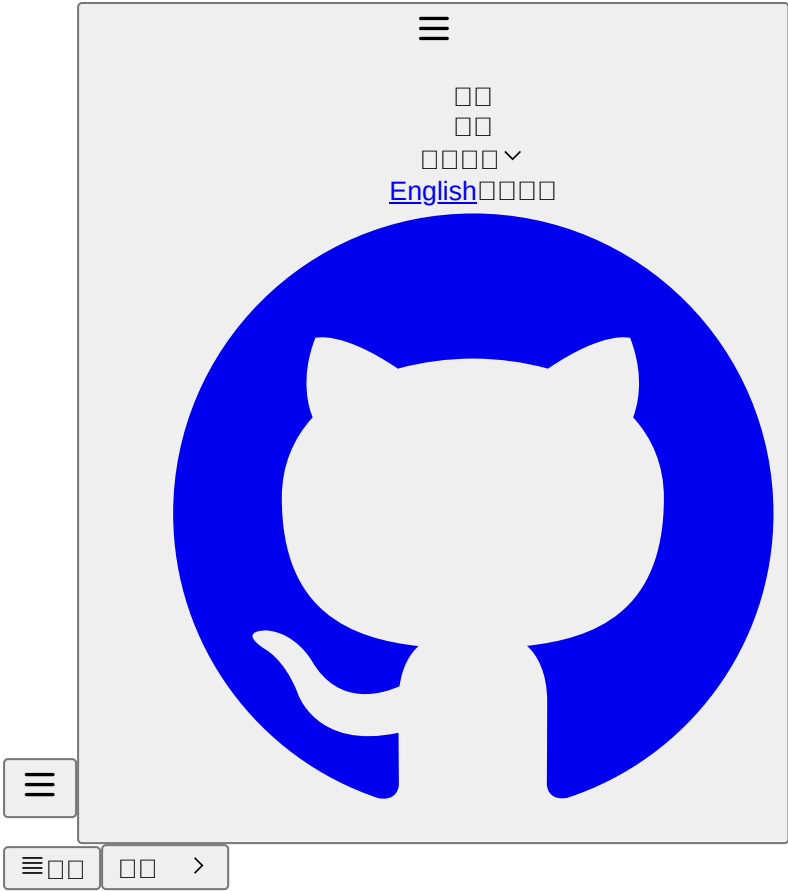

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

[Markdown](#)

[MDX](#)

\_\_\_\_\_

[API](#)

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

[APIs](#)

[Advanced APIs](#)

>

[Event APIs](#)

>

[Search](#)

[Log APIs](#)

>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)

>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)

>

[Workload APIs](#)

>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)

>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)

[CodeQualityBranch](#)

[DaemonSet](#)

[Deployment](#)

# #MDX

[MDX](#)      [Markdown](#)      [Markdown](#)      [JSX](#)      [rspress MDX](#)

## #

[rspress](#)   [doom](#)   [Overview](#)   [Directive](#)   [ExternalSite](#)   [ExternalSiteLink](#)   [AcpApis0verview](#)   [ExternalApis0verview](#)   [Term](#)   [props](#)   [TermsTable](#)   [props](#)   [JsonViewer](#)

#rspress

rspress .mdx


- Badge
- Card
- LinkCard
- PackageManagerTabs
- Steps
- Tab/Tabs
- Toc

rspress/theme

preview.mdx

```
import { SourceCode } from '@rspress/core/theme'

<SourceCode href="/" />
```



#doom

doom

#0overview

#Directive

Directive

```
- 在 `doc/en` 目录下创建 `doc/zh` 目录

<Directive type="danger" title="警告">
 在 `doc/zh` 目录下创建
</Directive>
```



- (doc/en) doc/zh

doc/zh

#ExternalSite

```
<ExternalSite name="connectors" />
```



Note


DevOps

DevOps

[DevOps](#)

## #ExternalSiteLink

```
<ExternalSiteLink name="connectors" href="link.mdx#hash" children="Content" />
```

[Content](#)

TIP

```
mdx <ExternalSiteLink name="connectors" href="link" children="Content" />
```

```
<ExternalSiteLink name="connectors" href="link">
 Content {/* \p\ */}
</ExternalSiteLink>
```



p

children

## #AcpApis0verview ExternalApis0verview

API

```
<AcpApis0verview />
{/* same as following */}
<ExternalApis0verview name="acp" />

<ExternalApis0verview name="connectors" />
```



Note

ACP APIs

[ACP APIs](#)

Note

DevOps

APIs

[DevOps](#)[APIs](#)

## #Term

```
<Term name="company" textCase="capitalize" />
<Term name="product" textCase="lower" />
<Term name="productShort" textCase="upper" />
<Term name="alaudaCloudLink" />
```




## #props

- name: \_\_\_\_\_
- textCase: lower, upper, capitalize

## #TermsTable

```
<TermsTable />
```



company	-	Alauda	-
product	-	Alauda Container Platform	-
productShort	ACP	-	ACP
alaudaCloudLink	<a href="#">Alauda Cloud</a>	-	<a href="#">Alauda Cloud</a>

## #props

- terms: NormalizedTermItem[]

## #JsonViewer

```
<JsonViewer value={{ key: 'value' }} />
```



```
yaml
json
```

```
key: value
```



```
{
 "key": "value"
}
```



## #

\_\_\_\_\_ shared

```
import CommonContent from './shared/CommonContent.mdx'
```

```
<CommonContent />
```



[runtime](#)


API

.jsx/.tsx

.mdx

```
// shared/CommonContent.tsx
export const CommonContent = () => {
 const { page } = usePageData()
 return <div>{page.title}</div>
}

// showcase/content.mdx
import { CommonContent } from './shared/CommonContent'
;<CommonContent />
```



WARNING

.mdx

props

[issue](#)

props


.jsx/.tsx

[> Markdown](#)

[rspress](#) [doom](#) [Overview](#) [Directive](#) [ExternalSite](#) [ExternalSiteLink](#) [AcpApisOverview](#)  
[ExternalApisOverview](#) [Term](#) [props](#) [TermsTable](#) [props](#) [JsonViewer](#)





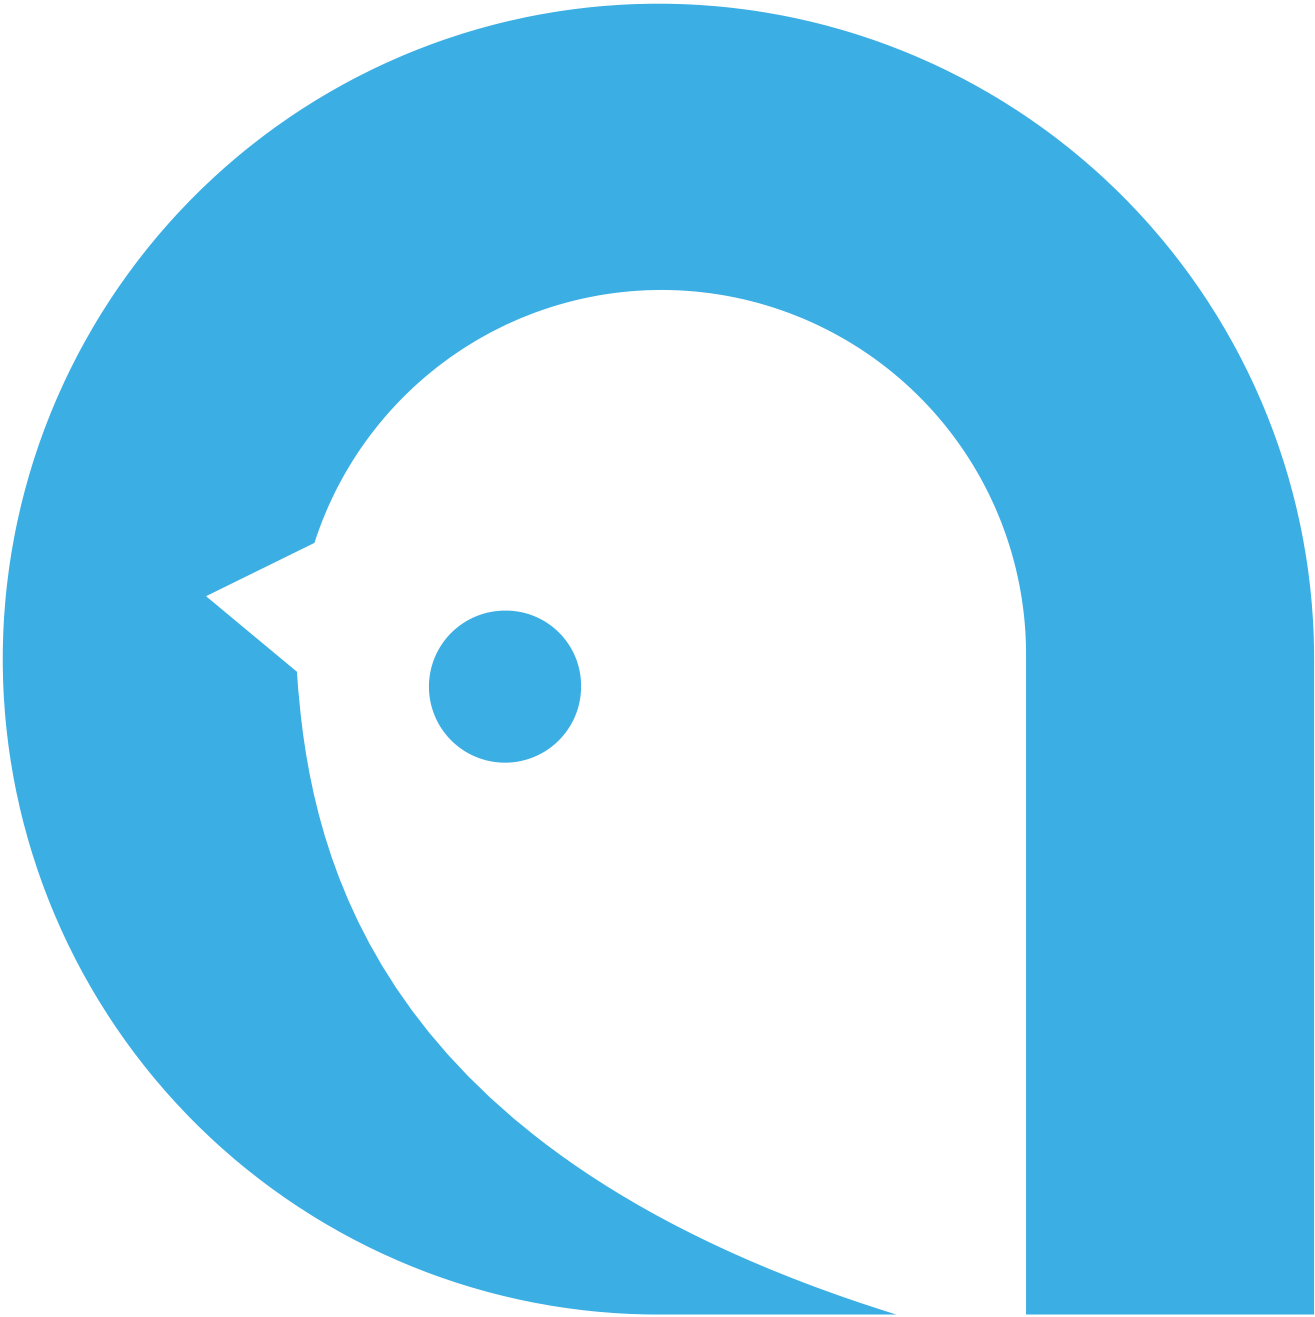



[Doom](#)



- [English](#)
- [\\_\\_\\_\\_\\_](#)



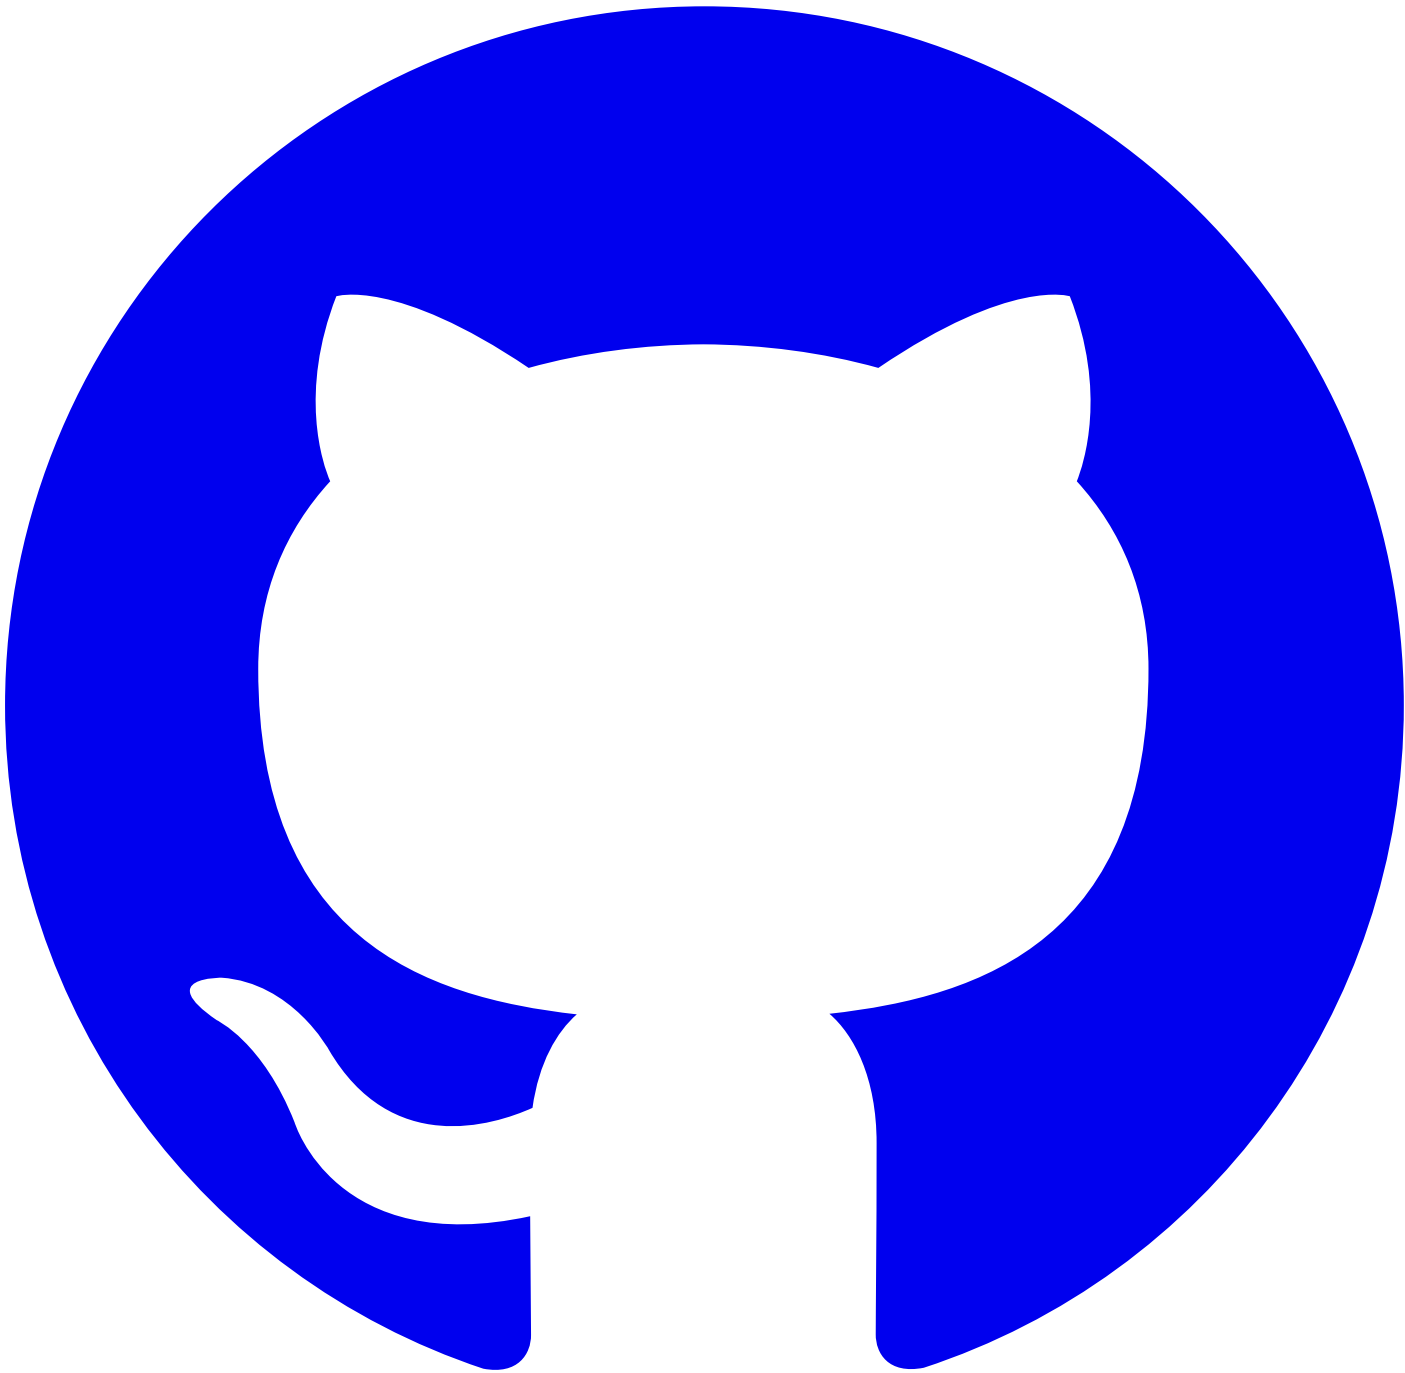

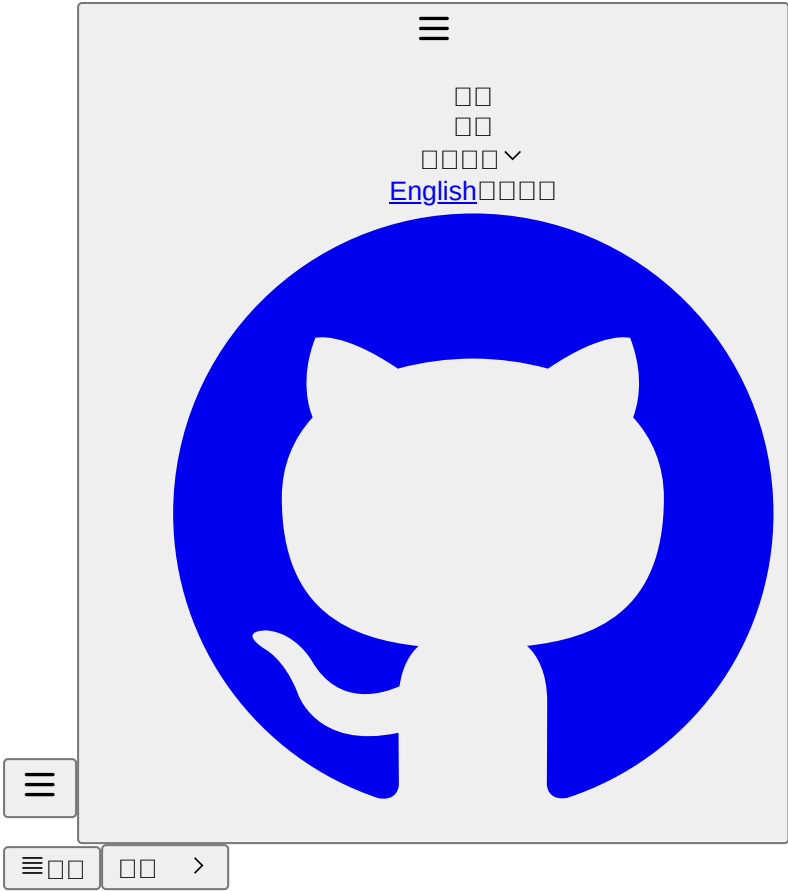

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

[Markdown](#)

[MDX](#)

\_\_\_\_\_

[API](#)

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

[APIs](#)

[Advanced APIs](#)

>

[Event APIs](#)

>

[Search](#)

[Log APIs](#)

>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)

>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)

>

[Workload APIs](#)

>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)

>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)

[CodeQualityBranch](#)

[DaemonSet](#)

[Deployment](#)

<#>

alauda  
public            en/zh

en/zh

<#>

[i18n.json.ts/.tsx.mdx](#)

# #i18n.json

useI18n

docs

i18n.json

docs/i18n.json

```
{
 "title": {
 "zh": "标题",
 "en": "Title"
 },
 "description": {
 "zh": "描述",
 "en": "description"
 }
}
```



# #.ts/.tsx

```
import { useI18n } from '@rspress/core/runtime'

export const CommonContent = () => {
 const t = useI18n()
 return <h1>{t('title')}</h1>
}
```



# #.mdx

```
import { useI18n } from '@rspress/core/runtime'

{useI18n()}('title')}


{useI18n()}('description')}
```



[> MDX](#) [API](#) >

[i18n.json.ts/.tsx.mdx](#)



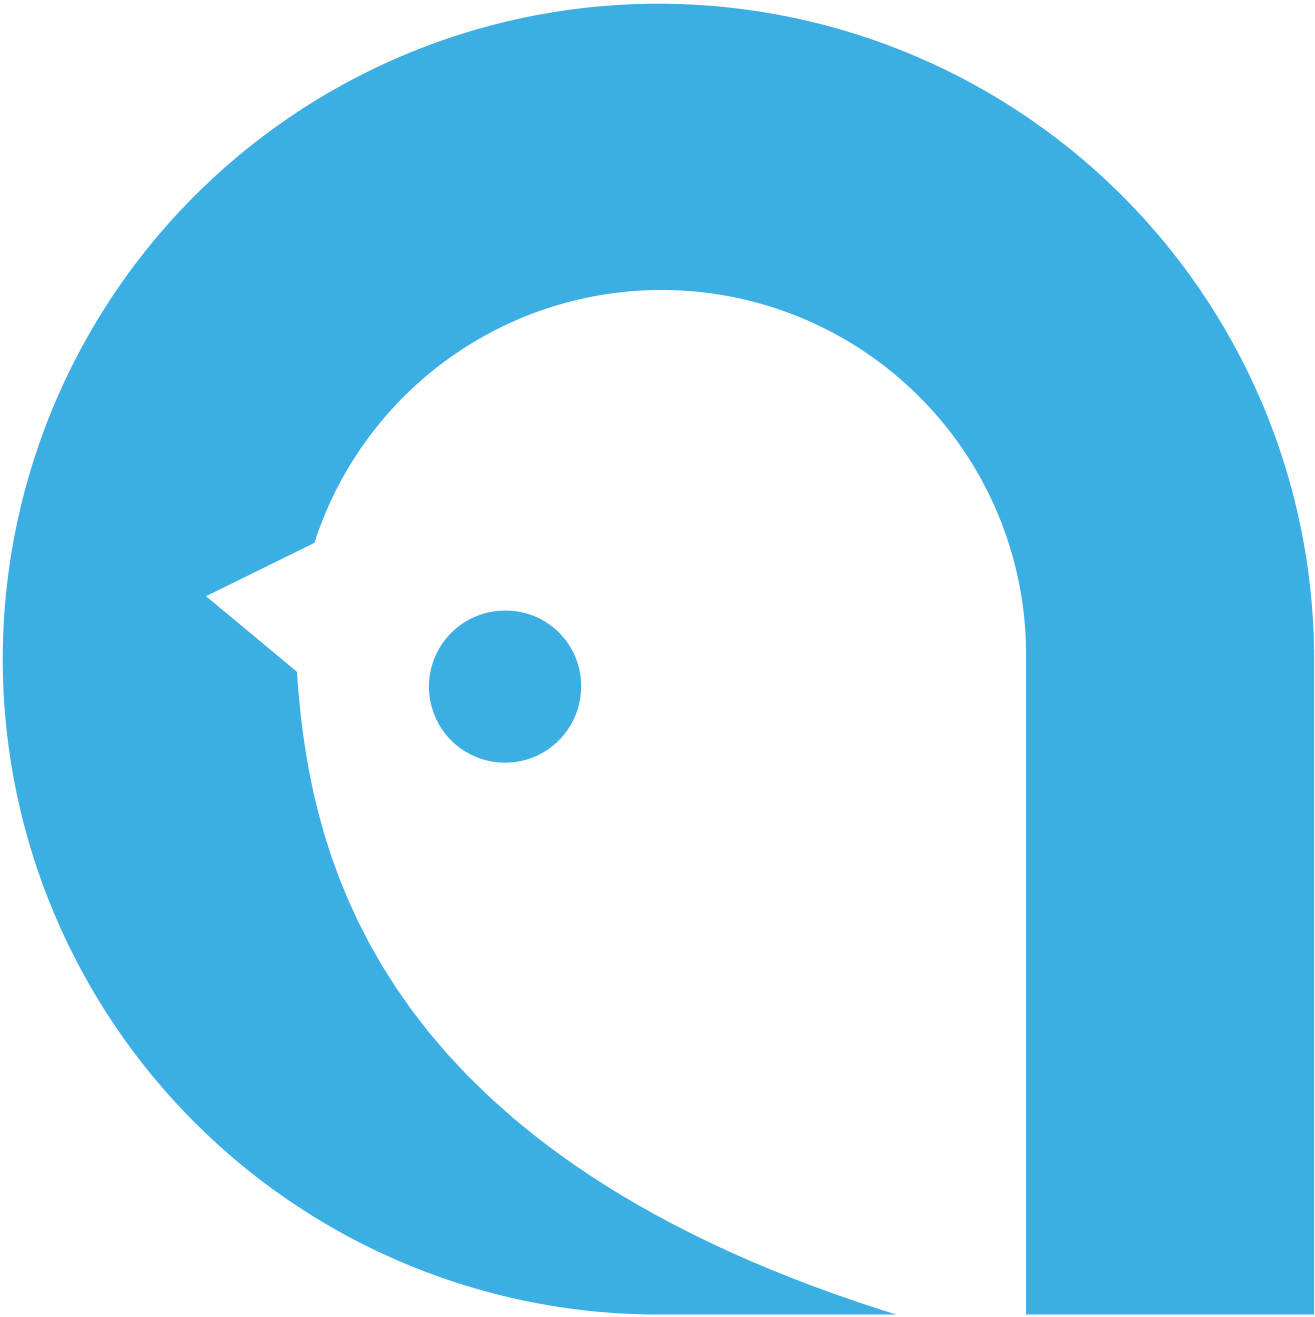



[Doom](#)



- [English](#)
- [\\_\\_\\_\\_\\_](#)



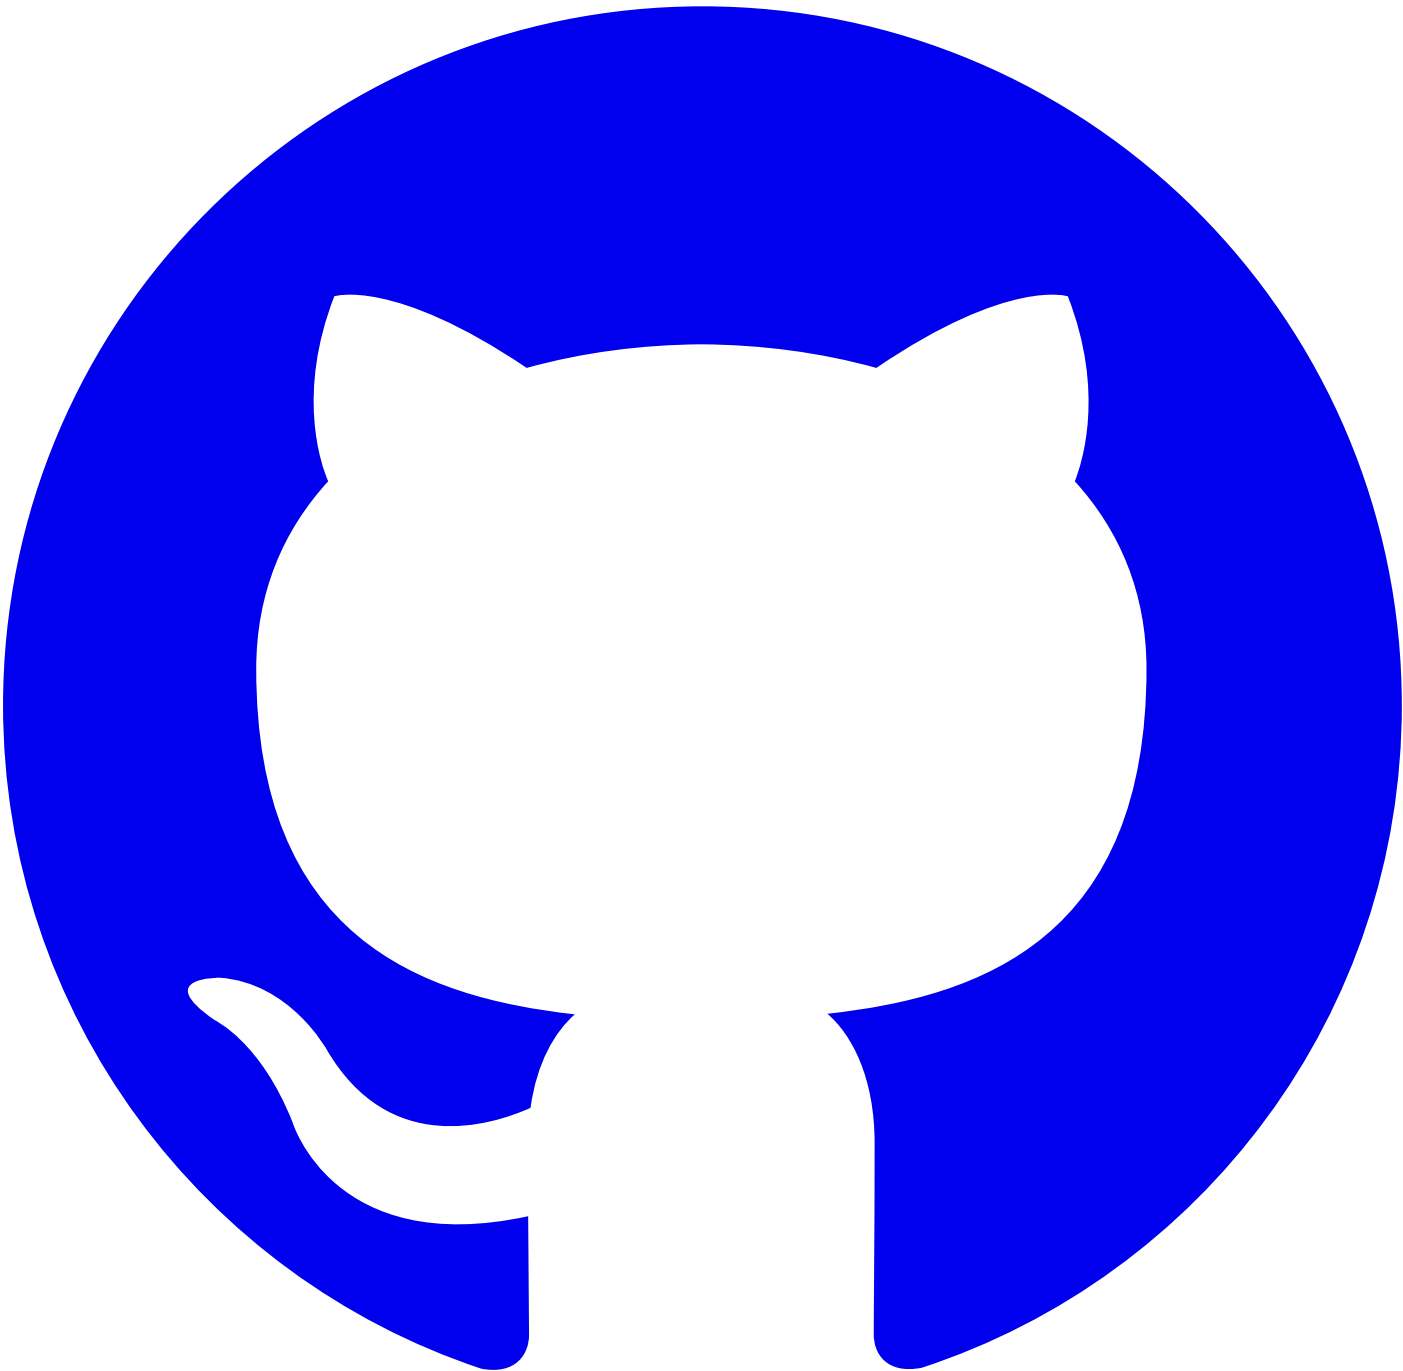

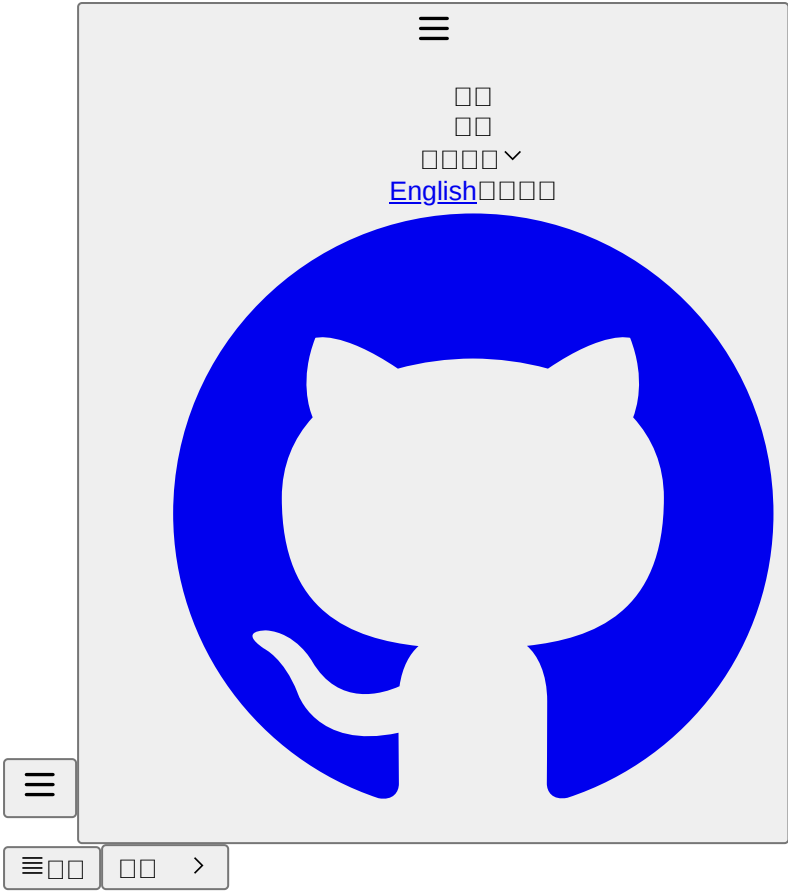

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_ [▼](#)

\_\_\_\_\_

[Markdown](#)

[MDX](#)

\_\_\_\_\_

[API](#)

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

[APIs](#)

[Advanced APIs](#)

>

[Event APIs](#)



>

[Search](#)

[Log APIs](#)

>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)

>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)

>

[Workload APIs](#)

>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)

>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)


[CodeQualityBranch](#)

[DaemonSet](#)

[Deployment](#)

# #API

API      K8S API,      API      CRD (Custom Resource Definition)



kubernetes\_apis # K8S API

references # ☐☐☐☐

⇒⇒

☐✓

#

[K8S API](#) [props](#) [API](#) [propsCRD \(deprecated\)](#) [props](#) [props](#) [openapi](#)

#K8S API

kubernetes\_apis/workload/daemonset.mdx

# DaemonSet [apps/v1]

```
<K8sAPI
 name="io.k8s.api.apps.v1.DaemonSet"
 pathPrefix="/kubernetes/{cluster}"
/>
```

⇒⇒

☐✓

[DaemonSet](#)

crds/ArtifactCleanupRun.mdx

# ArtifactCleanupRun

```
<K8sAPI name="artifactcleanupruns.artifacts.katanomi.dev" />
```

⇒⇒

☐✓

[ArtifactCleanupRun](#)

#props

- name: OpenAPI schema definitions(v2) or components/schemas(v3) CRD  
    metadata.name
- namespaced: true API Endpoints  
    namespaces/{namespace}
- pathPrefix: api.pathPrefix
- filepath: [openapi](#) openapi CRD
- apiGroup: API openapi x-kubernetes-group-version-kind
- apiVersion: API CRD spec.versions
- apiKind: API

# API

advanced\_apis/codeQualityTaskSummary.mdx

# CodeQualityTaskSummary

```
<OpenAPIPath path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary" />
```

⇒⇒

☐✓

[CodeQualityTaskSummary](#)

#props

- path: OpenAPI schema paths
- pathPrefix: `api.pathPrefix`
- openapiPath: [openapi](#)

#CRD (deprecated)


WARNING

K8sAPI      K8sCrd      K8sCrd

crds/ArtifactCleanupRun-K8sCrd.mdx

# ArtifactCleanupRun - K8sCrd

<K8sCrd name="artifactcleanupruns.artifacts.katanomi.dev" />



[ArtifactCleanupRun-K8sCrd](#)

#props

- name: CRD metadata.name
- crdPath: [openapi](#)      CRD

#

references/CodeQuality.mdx

# CodeQuality

<OpenAPIRef schema="v1alpha1.CodeQuality" />



[CodeQuality](#)

#props

- schema: OpenAPI schema definitions(v2) or components/schemas(v3)
- openapiPath: [openapi](#)

#      openapi


OpenAPIPath      OpenAPIRef      openapi      openapi  
                 openapiPath


<OpenAPIPath  
  path="/plugins/v1alpha1/template/codeQuality/task/{task-id}/summary"  
  openapiPath="shared/openapis/katanomi.json"  
>



> >

[K8S API](#) [props](#) [API](#) [propsCRD \(deprecated\)](#) [props](#) [props](#) [openapi](#)



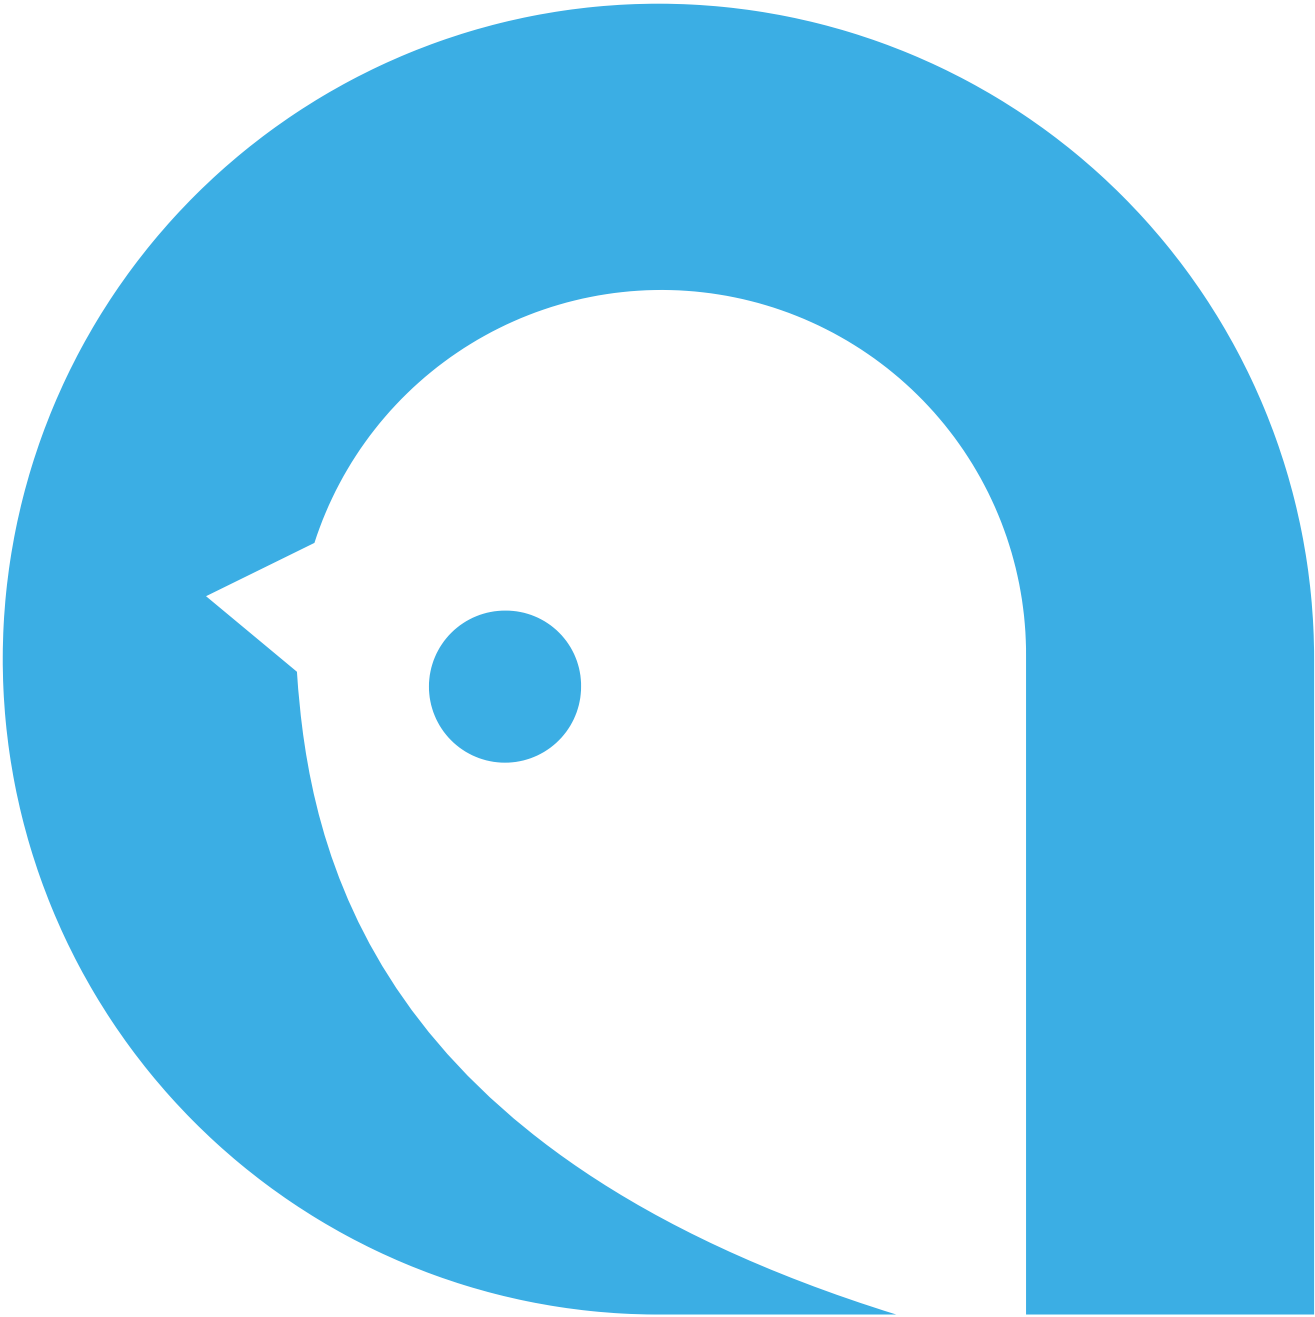



[Doom](#)



- [English](#)
- [\\_\\_\\_\\_\\_](#)



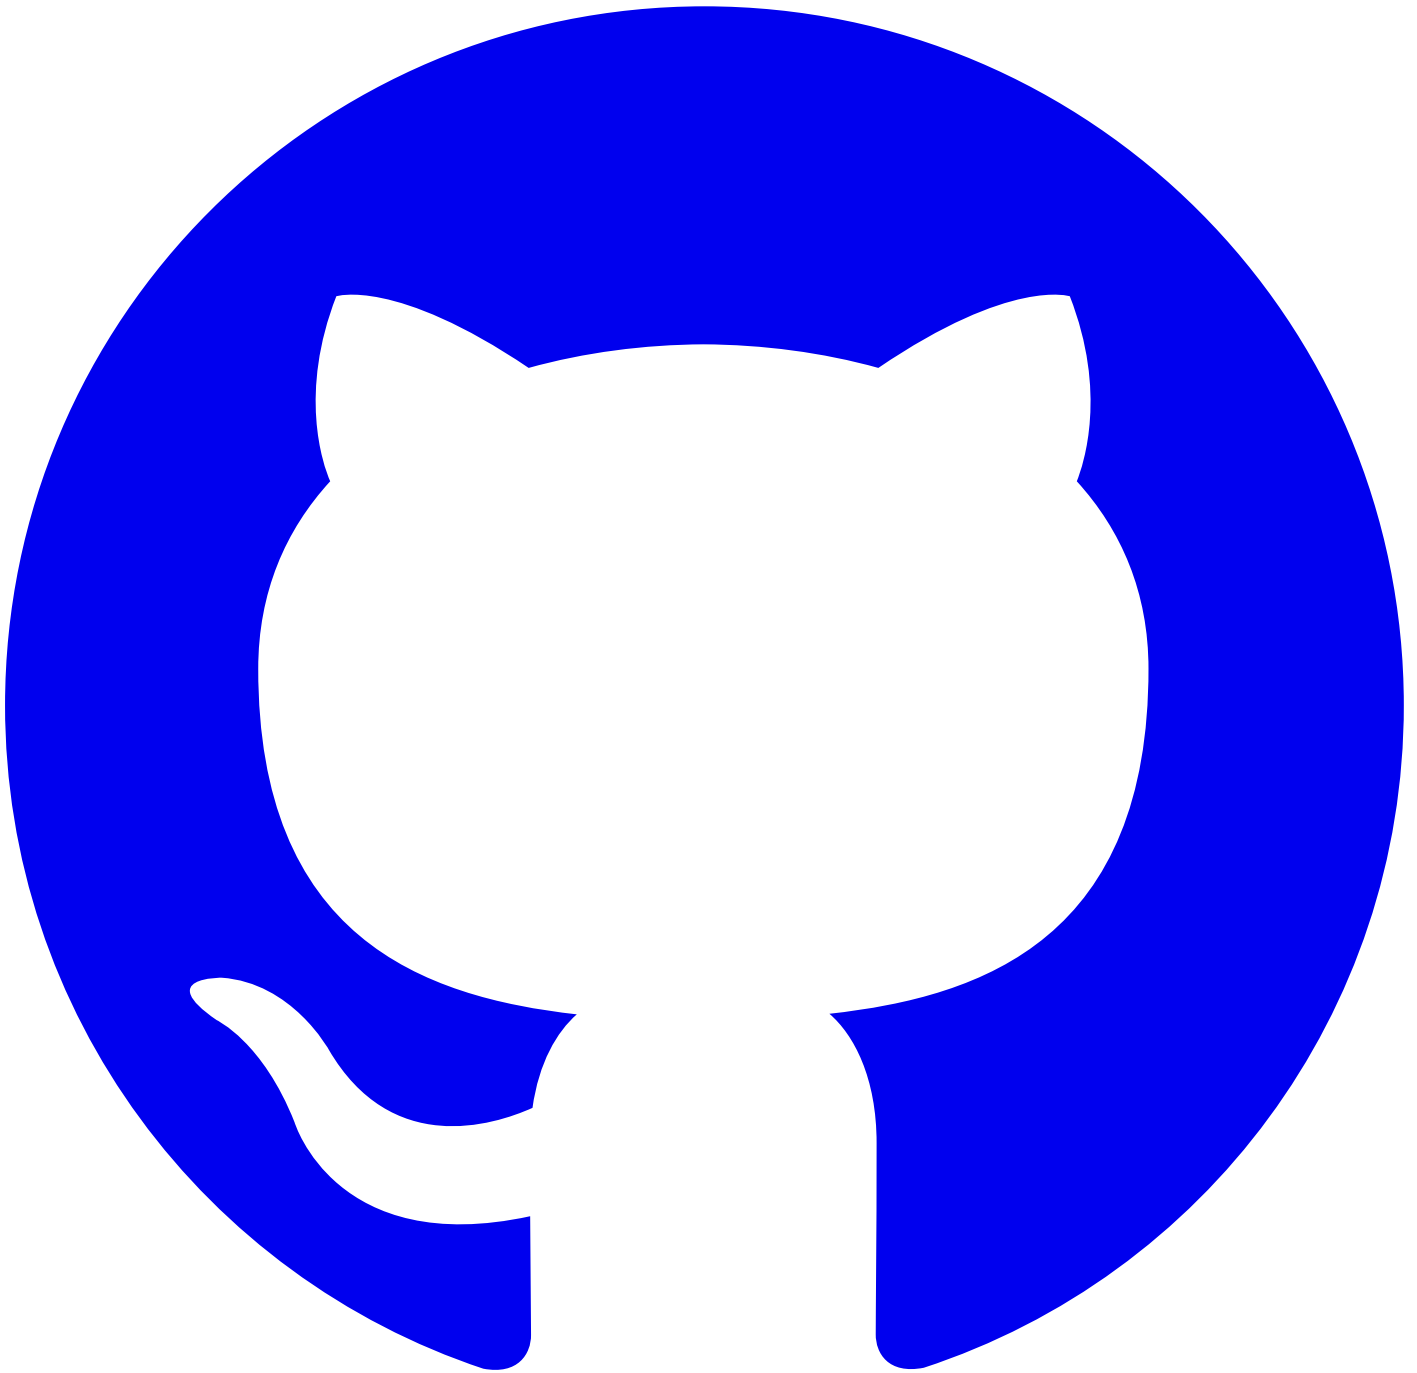

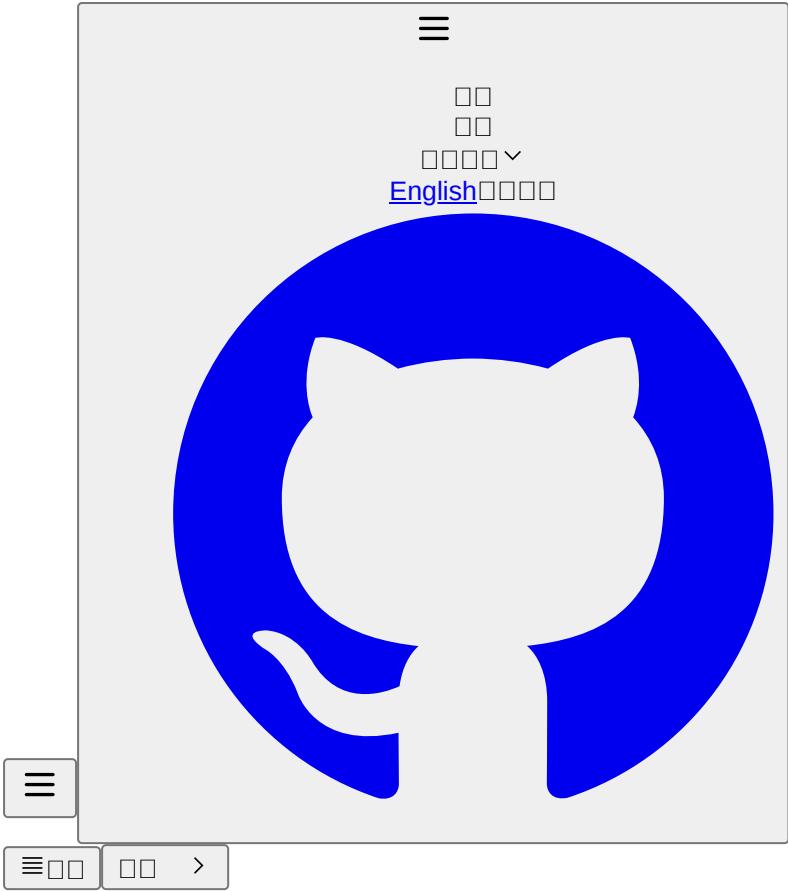

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

[Markdown](#)

[MDX](#)

\_\_\_\_\_

[API](#)

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

[APIs](#)

[Advanced APIs](#)

>

[Event APIs](#)

>

[Search](#)

[Log APIs](#)

>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)

>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)

>

[Workload APIs](#)

>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)

>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)

[CodeQualityBranch](#)

[DaemonSet](#)

[Deployment](#)

<#>

<K8sPermissionTable functions={['devops-testplans', 'devops-testmodules']} />



<#>



[props](#)

<#>props

- functions: string[] - FunctionResource

<#>

	✓	✓	✓	✓	✓	×
	✓	×	✓	✓	✓	×
devops-testplans	✓	×	✓	✓	✓	×
	✓	×	✓	✓	✓	×
	✓	✓	✓	✓	✓	×
	✓	×	✓	✓	✓	×
devops-testmodules	✓	×	✓	✓	✓	×
	✓	×	✓	✓	✓	×

[> API](#)

[props](#)






[Doom](#)


Q



- [English](#)
- [\\_\\_\\_\\_\\_](#)



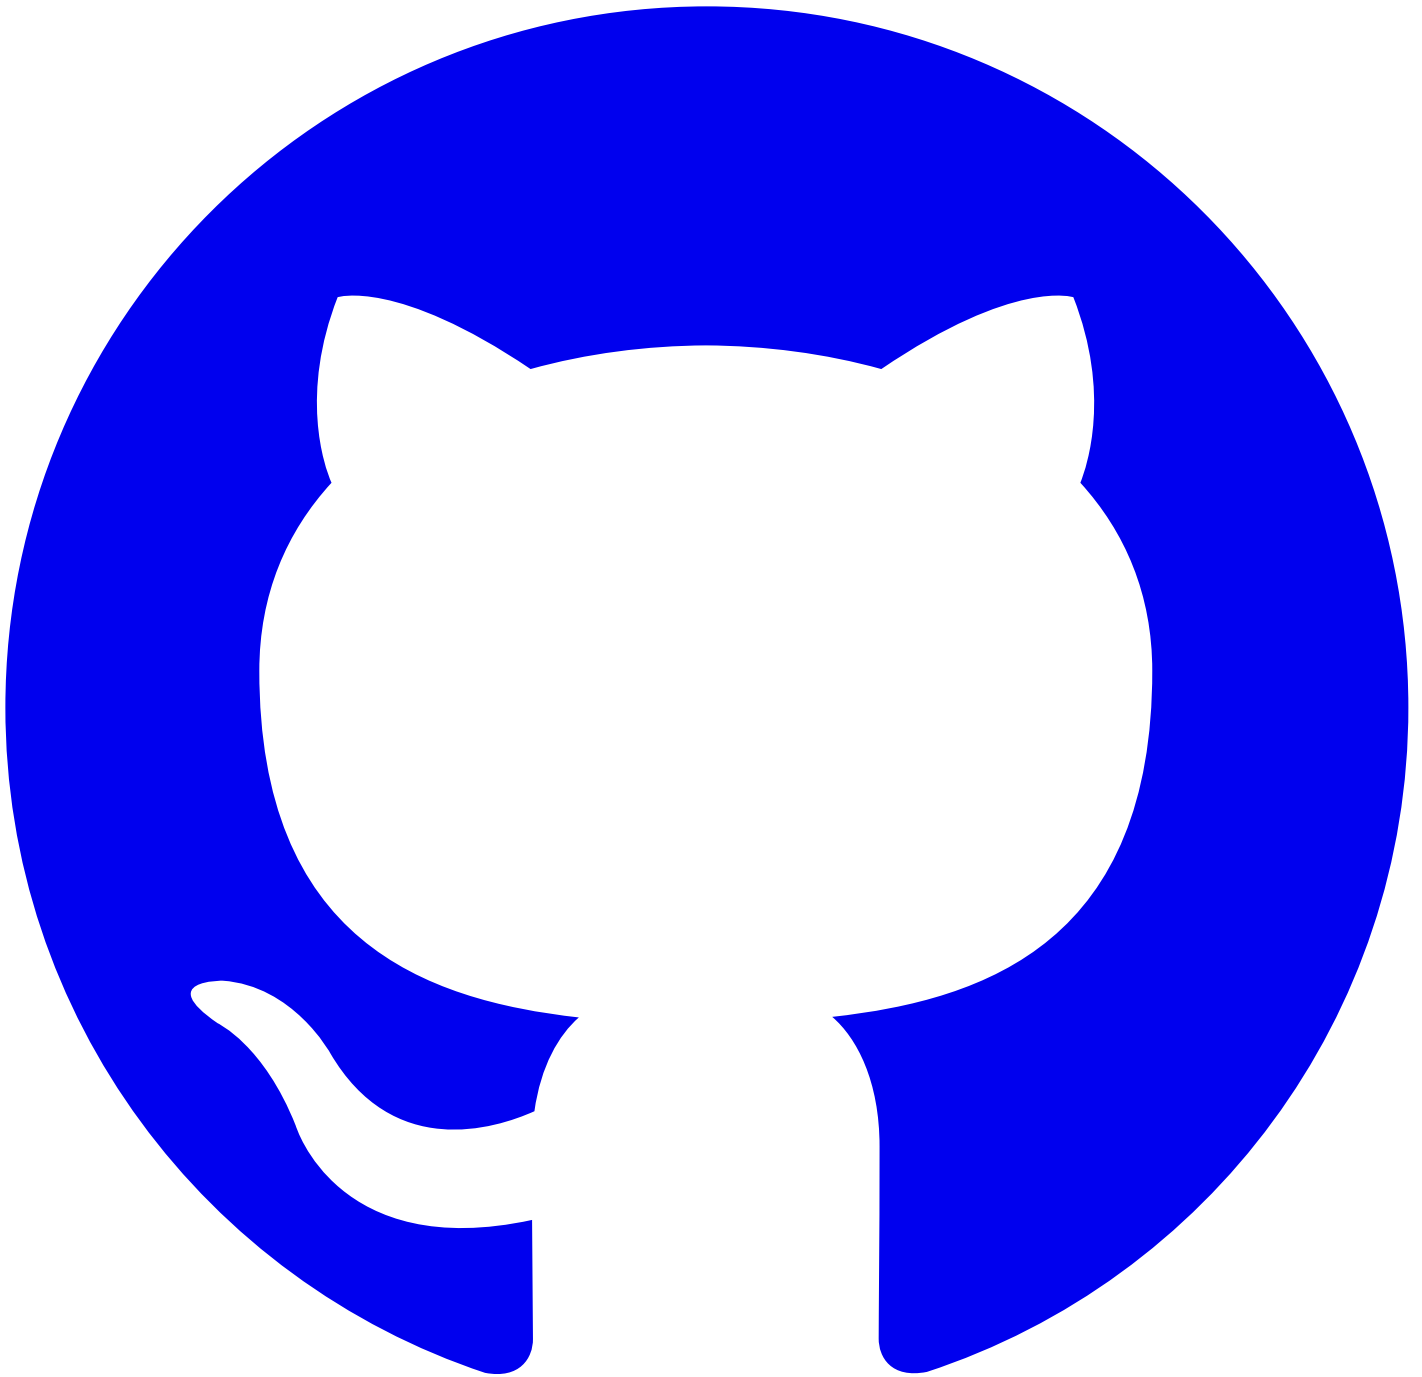

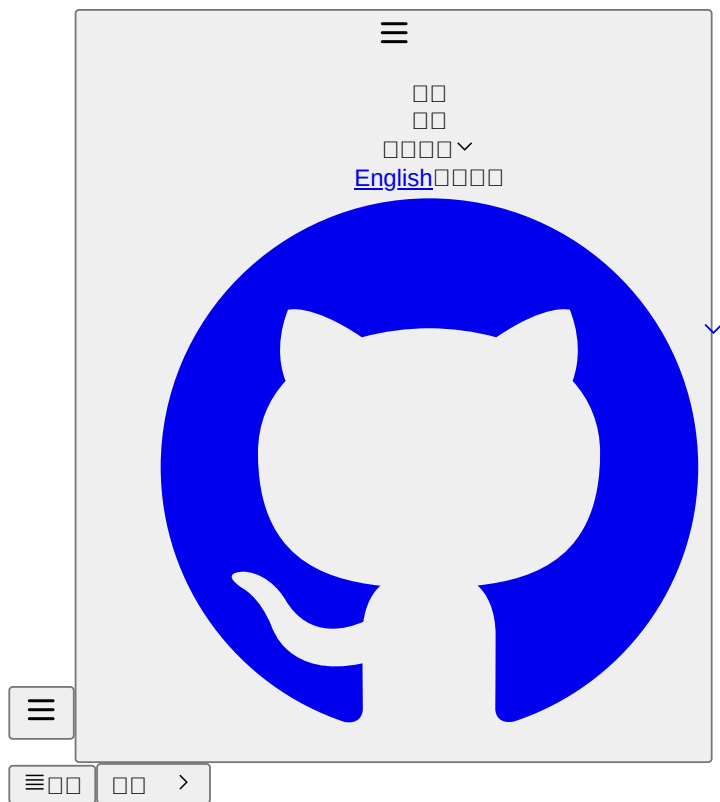

---

---

---



---

---

## Markdown

MDX

---

API

---

---

---

## APIs

## Advanced APIs

---

>

## Event APIs

>

Search

Log APIs

>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#)

[Projects](#)

[CRDs](#)  
>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)  
>

[Workload APIs](#)  
>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)  
>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#)

[CodeQualityBranch](#)

[DaemonSet](#)

[Deployment](#)

<#>

Markdown

```
<!-- reference-start#name -->
<!-- reference-end -->
```



MDX

```
{/* reference-start#name */}
{/* reference-end */}
```



```
name
<root>/public/_remotes/<name>
```


<!-- reference-start#ref -->

#

\_\_\_\_\_ [frontmatterMode](#)

#

reference:  
- repo: alauda-public/product-doc-guide # 📄📄📄📄📄📄📄📄📄📄📄📄📄📄  
branch: # [string] 📄📄📄📄📄📄  
publicBase: # [string] 📄📄📄📄📄📄📄📄 /images/xx.png 📄📄📄📄📄📄📄📄 docs/public  
sources:  
- name: anchor # 📄📄📄📄📄📄📄📄  
path: docs/index.mdx#📄 # 📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄📄 doom.config.\* 📄📄  
ignoreHeading: # [boolean] 📄📄📄📄📄📄📄📄 true📄📄📄📄📄📄📄📄  
processors: # 📄📄📄📄📄📄  
- type: ejsTemplate  
data: # ejs 📄📄📄📄📄 `<%= data.xx %>` 📄  
frontmatterMode: merge # 📄📄📄📄📄📄 frontmatter 📄📄📄📄📄 ignore📄📄📄📄📄 ignore/merge/replace/remove



#frontmatterMode

- |           |             |             |
|-----------|-------------|-------------|
| • ignore  | frontmatter | frontmatter |
| • merge   | frontmatter | key         |
| • replace | frontmatter | frontmatter |
| • remove  | frontmatter |             |

\_\_\_\_\_ > \_\_\_\_\_ >

\_\_\_\_\_ [frontmatterMode](#)






[Doom](#)




- [English](#)
- [\\_\\_\\_\\_\\_](#)



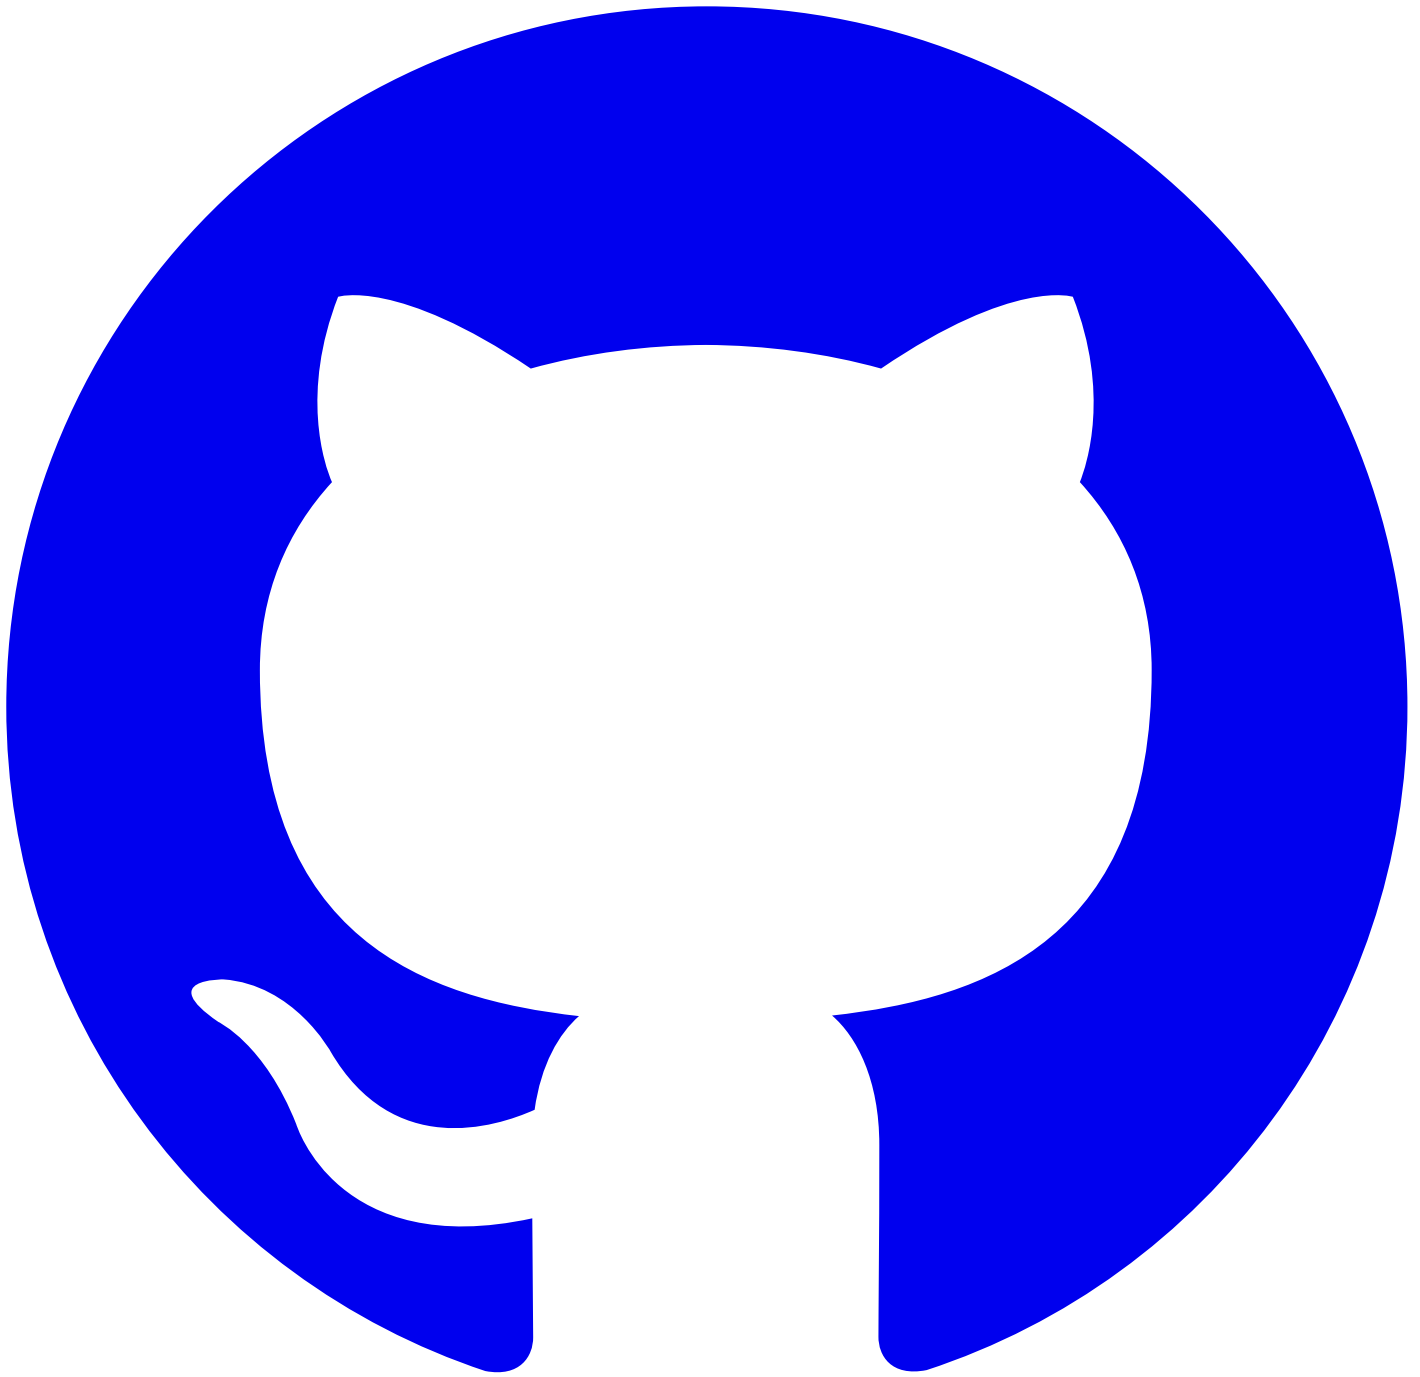



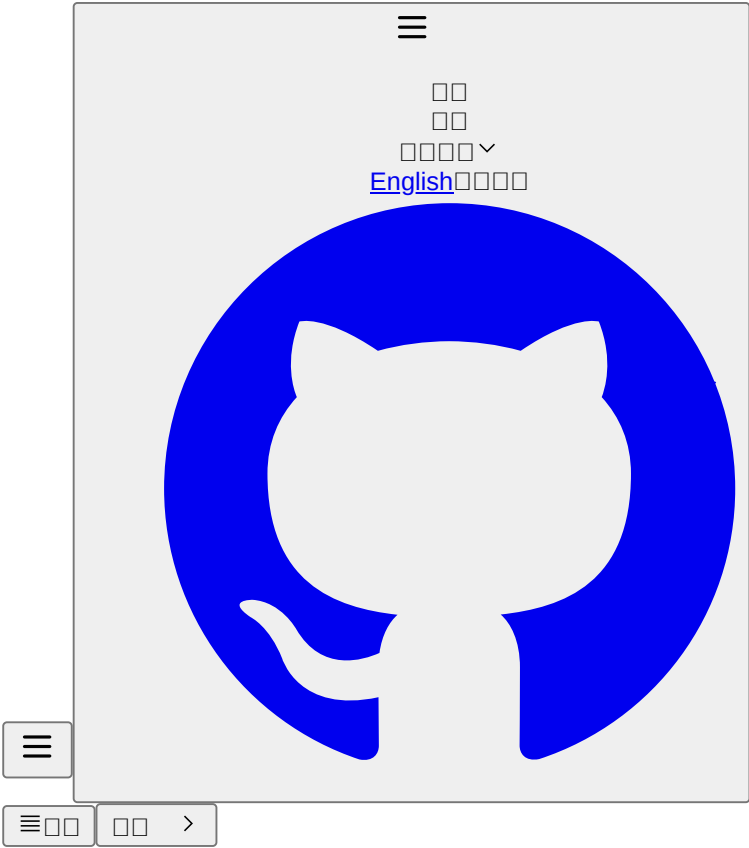

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



\_\_\_\_\_

\_\_\_\_\_

[Markdown](#)

[MDX](#)

\_\_\_\_\_

[API](#)\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

[APIs](#)

[Advanced APIs](#)



[Event APIs](#)



[Search](#)

[Log APIs](#)  
>

[Aggregation](#)

[Search](#)

[CodeQualityTaskSummary](#).

[Projects](#)

[CRDs](#)  
>

[ArtifactCleanupRun - K8sCrd](#)

[ArtifactCleanupRun](#)

[Kubernetes APIs](#)  
>

[Workload APIs](#)  
>

[DaemonSet \[apps/v1\]](#)

[Deployments \[apps/v1\]](#)

[Common References](#)  
>

[ObjectMeta](#)

[Status](#)

[CodeQuality](#).

[CodeQualityBranch](#)

[DaemonSet](#)


[Deployment](#)

<#>

<#>

---

<#>



#

doom build

dist

-v

```
4.0 release-4.0 4.0
doom build -v 4.0 # 4.0 dist/4.0 {base}/4.0
doom build -v master # master dist/master {base}/master
doom build -v {other} # {other} dist/{other} {base}/{other}

unversioned unversioned-x.y
doom build -v unversioned # dist/unversioned {base}
doom build -v unversioned-4.0 # 4.0 dist/unversioned {base}
```



#

```
— console-platform
 — 4.0
 — 4.1
 — index.html
 — overrides.yaml
 — versions.yaml
— console-devops-docs
 — 4.0
 — 4.1
 — index.html
 — overrides.yaml
 — versions.yaml
— console-tekton-docs
 — 1.0
 — 1.1
 — index.html
 — overrides.yaml
 — versions.yaml
```



index.html

```
<!DOCTYPE html>
<html>
 <head>
 <title>Redirecting...</title>
 <meta http-equiv="refresh" content="0; url=/console-docs/4.1" />
 </head>
 <body>
 <p>Redirecting to /console-docs/4.1</p>
 </body>
</html>
```




#

overrides.yaml

```
#
title:
 en: Doom - Alauda
```

zh: Doom - 📄  
logoText:  
en: Doom - Alauda  
zh: Doom - 📄



versions.yaml

- '4.1'
- '4.0'



[>](#) [APIs >](#)

