

1 Introduction

1. **Computers and computation.** Computers, like the mindbrain, have internal states, which are, in the standard case, patterns of voltages over a huge number of interconnected transistors. A computational process is a certain sequence (or evolution) of such states.¹ Not every sequence of states is a computational process, but every computational process is some such sequence. What distinguishes a computational process from a random sequence of states is that in the former there are “meaningful” relations between some states in the sequence.
2. **Programs.** A computer program is a body of expressions (also called ‘code’) that manipulates the states – and thereby the behavior – of a computer. Programs are written in programming languages. Our choice of programming language is **Common Lisp**. We will use the expression ‘LISP’ to refer to it.²
3. **SBCL.** During the term, we will write programs, many of them. For our purposes, the computer that we manipulate via our programs is a machine that is capable of translating the code written in LISP into instructions that are executable by the physical computers. The machine is called SBCL (an acronym for **Steel Bank Common Lisp**). It is not a physical machine; it is an abstract machine, which itself is actually a program. Computer science, like mathematics, thrives on abstractions; if you are new to these subjects, it will take some time to get used to this.
4. **Top-level.** Let us start interacting with the computer. First we need to turn it on by typing ‘rlwrap sbcl’ in the command-line, without the quotes. If you see a *, everything is in order; you are at the **top-level**. Why we call it such will be clarified in a minute.
5. **Structure of the computer.** To make things a little easier for the start, we will assume that our computer is structured into two components: a **workspace** and an **environment**. We will first clarify the function of the workspace; the discussion on the environment will come a little later.

¹In parallel processes, the sequence consists of several threads in parallel.

²Lisp is a family of languages – or dialects if you like. When you consult the web for this course, keep in mind that the particular dialect we will use is Common Lisp.

6. **Workspace.** This can be thought of as the place where all the computations are done; it’s a sort of dynamic component of the computer. What we called the top-level – the * sign – is an access point to the workspace of SBCL. One of the simplest things you can do is to put a number on the workspace through the top-level:³

```
1 * 17
2 17
3 *
```

What’s going on here is simply this: You put the number 17 on the workspace (line 1). SBCL works on this number – actually it automatically works on whatever you put on the workspace. As there is nothing to work on a single number, the result of the work is the number itself. SBCL displays this result to you (line 2). Finally it clears the workspace (line 3).

7. **Procedure calls.** If you want more interesting action on the workspace, you need to occupy SBCL with a **procedure call** – something to really work on. Here is an extremely simple one:

```
1 * (+ 17 3)
2 20
3 *
```

8. **Application.** In the technical parlance the expression (+ 17 3) is an **application**,⁴ where + is the **operator** and the numbers 17 and 3 are **operands**. The operator stands for a **procedure** and the operands provide the **arguments** to the procedure. Here the procedure is arithmetic addition and arguments are the integers 17 and 3.

You put the simple combination (+ 17 3) on the workspace, SBCL works on it, computes the result, displays it to you, and finally clears the workspace.

³You need to hit RETURN after typing the number; and SBCL leaves an empty line after the first line, which we omit to save space.

⁴Also called “combination”.

9. **Prefix notation.** In LISP you always put the operators before their operands. This allows you to increase the number of operands without repeating the operator:

```
1 * (+ 17 3 42 8)
2 70
```

10. **Evaluation.** For SBCL, to work on something put on the workspace is to **evaluate** it; it computes the **value** of the expression.
- 10.1. Numbers evaluate to themselves – SBCL gives back exactly what it takes;
- 10.2. Applications (=procedure calls) evaluate to the result of applying the procedure to its arguments.
11. **REPL.** The other name of the top-level is REPL – Read-Evaluate-Print Loop. It should be obvious why.
12. **Complex applications.** Applications can have other applications as their operands:

```
1 * (+ 17 (* 3 4))
2 29
```

There is no theoretical limit to the complexity of an application.

13. The Great Rule of Evaluation.

- 13.1. Evaluate the operator to get the procedure;
- 13.2. Evaluate the operands one-by-one, from left to right to get the arguments;
- 13.3. Apply the procedure to the arguments to compute the value of the application.
14. Looking at 13, you may wonder how does SBCL evaluate an operator like +, and what is the value obtained.

The operator + is a **symbol**. It is the symbol that names the addition operation (or procedure). The procedure itself is stored somewhere in our

computer. Evaluating an operator symbol is to look-up and fetch the procedure stored under the name of that symbol. When SBCL finds the application (+ 17 (* 3 4)) on the workspace, it runs the Great Rule of Evaluation on this application. It first evaluates the + symbol to get the addition procedure, then evaluates 17 to 17, then evaluates the application (* 3 4). In order to perform this last step, it has to run the Great Rule again, this time on this smaller application – get the procedure stored under the name of *, evaluate 3 to 3, 4 to 4, apply the procedure to the arguments to get 12. Now this twelve becomes the second argument of the procedure that was fetched as the value of +. Finally applying the addition procedure to 17 and 12 gives the value 29, which gets printed to the screen by the top-level.

15. **Environment.** We said above that our computer has two components: workspace and environment. We saw a little about the workspace, now it's time to talk about the environment. The environment is a collection of storage locations called **variables** – you can think of them as pigeonhole mail boxes you find in the hall of apartments or the secretarial offices of academic departments. All sorts of things can be stored in variables – numbers and procedures are the examples we encountered so far. You can also think of the environment as a sort of dictionary that contains all the words known to the computer at that point.

Besides the objects stored in them, some variables may also have names. For instance, the variable that hosts the addition procedure has the name +. When SBCL evaluates the symbol + it consults the environment and finds the box that is named + and brings a copy⁵ of the procedure stored in that box to the workspace, so that it can add the arguments.⁶

Ask SBCL about (sqrt 9) or (max 8 21 13); you'll get what you expected, because SBCL has variables named sqrt and max in its environment by default – it “knows” the meaning of these symbols.

16. **Manipulating the environment.** You can ask SBCL to name a variable in the environment by:

⁵This, like almost all the things we deal with at the moment, is a metaphor, which will be very useful when we study recursion.

⁶Of course, the truth about the environment is also more complicated than we assume at this stage. We will gradually learn more about it.

```
1 (defvar area)
```

This is the simplest way you can manipulate the current environment. You tell SBCL that you intend to use the symbol `area` as the name of a variable, without yet telling SBCL what to store in the variable. If you want to do that as well, then you need to do:

```
1 (defvar radius 13)
```

Now you both named a variable and stored a number in it. You can recall that number by simply asking SBCL to evaluate the symbol `radius`, by entering it to the top-level.

17. **Special forms.** There are two important things about `DEFVAR` – actually also about all similar creatures: One, a `DEFVAR` form is not an application. If it were, you would get an error as SBCL would try to evaluate `RADIUS`, which, at that time, has no value to return. `DEFVAR` is an instance of what is called a **special form**. What makes special forms special is the fact that they do not follow the Great Rule of Evaluation. Every special form has its own ways; and therefore you have to learn them case-by-case.

The second important thing about `DEFVAR` is the fact that it always *evaluates* its second operand and stores the *value* obtained in a variable that is named by the first operand. For instance, the following move has an identical effect as the above in terms of environment manipulation:

```
1 (defvar radius (sqrt 169))
```

since `DEFVAR` evaluates the application `(SQRT 169)` to 13 and stores this value, rather than the application itself, in the variable named `RADIUS`.

18. **SETF.** `DEFVAR` is a one-shot tool. You define a variable with it, either storing an initial value in it or not. If you want to manipulate the value stored in the variable afterwards, you need `SETF`. For instance,

```
1 (setf area (* pi (* radius radius)))
```

does this for the variable named by the symbol `AREA`. `SETF` also is a special form. It first evaluates its second operand and puts the value obtained into the variable named by the symbol it received as its first operand.

19. **Side-effects versus Values.** Now we come to perhaps the most vital distinction in programming, that between **side-effects** and (return) **values**. It is a fairly simple distinction, but if you do not understand this distinction absolutely clearly and internalize it, you will find programming very hard and confusing. This is especially so for programming languages like LISP.

Apparently `DEFVAR` and `SETF` are quite similar special forms in terms of what they are doing. You might have, however, noticed that they diverge in what they return as values: `DEFVAR` returns a symbol – namely the one you used to name the variable, while `SETF` returns the value it obtained after evaluating its second operand. How do we know? We know because when we enter them to the top-level, that's what we get in return; remember that the top-level – or REPL – reads, evaluates and prints. These behaviors are hard-wired into these special forms. That's what I meant when I said you have to learn them case-by-case.

Now let us further sharpen our terminology. We have seen two types of expressions so far: (i) applications like `(+ 3 (/ 8 2))` and (ii) special forms like `(DEFVAR X 8)`. Looking at expressions, it is impossible to tell whether they are applications or special forms – what about `(CONS 5 (* 8 7))` for instance – you simply need to know their meaning. Let us abstract above the level of meaning and call applications and special forms collectively as **forms**.⁷ There is a crucial behavior that unites forms in LISP. Let us put this in bold face:

Every form in LISP has (=evaluates to) a value.

Besides the values they return, `DEFVAR` and `SETF` manipulate the environment. These are simple examples of **side-effects**. Applications usually only return values; whereas special forms may have side-effects in addition to returning a value. Whenever you encounter a new form in LISP, first thing is to get clear about whether it's a special form or an application, so that you can learn what will be its return value and side-effects, if there is any.

⁷ Another common name is “S-expression”.

20. Let us see what we had so far:

```
1 (defvar radius 13)
2 (defvar area)
3 (setf area (* pi (* radius radius)))
```

You can ask the top-level the values of radius and area by having it evaluate them.

The symbols DEFVAR, SETF, PI and * are all known by SBCL by default; they are always present in the environment. The symbols RADIUS and AREA are added to the environment by DEFVAR. In the third line, when the SETF form is put on the workspace, SBCL evaluates (* pi (* 13 13)) and stores the resulting value in the variable named AREA. This storing action is the side-effect of evaluating the SETF form. The value returned is some number close to 530.9291, which will be printed at the top-level.

At this point, it is also important to notice the difference between the occurrence of the symbol radius. The first occurrence is at an operand position of a special form and does not get evaluated. The second and third occurrences are at operand positions of an application, and therefore they get evaluated – in this case to the value stored in the variable they name.

Let us leave SBCL by typing (exit) or pressing Ctrl-D; and restart it by typing rlwrap sbcl. If you try to get the value of the symbol RADIUS, you will discover that it's gone. The environment manipulated by DEFVAR gets erased when the machine is shut down.

21. **Abstraction with DEFUN.** The symbols like radius and area above are names of **variables**. You can think of variables as stores that you can put things inside and recall these things by using the names of these stores. We could have computed the number we computed above without the help of the variable we named as radius:

```
1 (defvar area)
2 (setf area (* pi (* 13 13)))
```

The only advantage the previous version has over this one is that we would be able to reach the value of the radius if we wanted to – it was stored in the

variable named radius; with the second version, the value 13 is not stored anywhere.

The real importance of using named variables, however, comes from the fact that, besides variables, you can also give names to **procedures**. (You can think of variables as nouns and procedures as verbs of the programming language). For instance, the way we take the square of a number appears too clumsy, let us define a more concise way of doing it:

```
1 (defun square (x) (* x x))
```

What we do here basically is to “teach” the computer a new word by giving its meaning as a recipe for a certain action. The action is simply taking something and multiplying it with itself. (Notice that we do not need defvar here.)

Using names to refer to variables and procedures are fundamental abstractions in programming.

21.1. The general structure of a DEFUN form is:⁸

```
(defun <procedure-name> (<parameters>) <body>)
```

21.2. The procedure name and the names of parameters are totally up to whoever defines the procedure. Therefore the following definitions are as good as the one given above

```
1 (defun sqr (x) (* x x))
2 (defun square (y) (* y y))
```

21.3. DEFUN is a special form.

21.3.1. Its side-effect is manipulating the environment: It causes the name <procedure-name> to get associated with a variable that holds the definition of the procedure. You can think of this definition as a piece of program that is executable by the computer.

21.3.2. Its return value is the procedure name.

⁸Throughout we use <...> to mark meta variables; the variables we use in talking about components of LISP code.

21.4. The body of a procedure is a sequence of zero or more forms. In SQUARE there is only one form.

21.5. A DEFUN'ed procedure is called as an application; it is no different than other procedures recognized by SBCL by default. For instance:

```
1 (square (- 4 1))
```

is an ordinary application, which is evaluated in accord with the Great Rule of Evaluation. First the symbol SQUARE is evaluated to give the program that takes squares, then the only operand is evaluated to give the argument 3; then the procedure is applied to the argument to give the result 9.

22. **Environment manipulation by LET.** SBCL comes with a built-in environment. This can be thought as a global environment that is available for all the computations that would be performed in SBCL. Certain constructs in LISP create a local environment that is temporarily available, where the span of the environment is explicitly stated by the programmer. LET is one such construct.

```
(let ((<variable_1> <expr_1>)
      (<variable_2> <expr_2>)
      .
      .
      .
      (<variable_n> <expr_n>))
  <body>
)
```

Here is the simple area example put in LET form:

```
1 (let ((radius 13)) (* pi (* radius radius)))
```

23. **If/when you get confused about DEFUN.** There is an alternative way of thinking about DEFUN'ed procedures. Assume we defined a squaring procedure named SQUARE as above. Now, SBCL knows about the definition. When we put (square (- 4 1)) on the top-level and therefore on the workspace,

you can think what SBCL does as follows: It checks whether a procedure named SQUARE is in the environment. Then if it finds it, fetches the *body* of the definition to the workspace, wraps it inside a LET, declaring the parameters via this LET by copying the operands *without evaluating them*. According to this model, SBCL translates (square (- 4 1)) to,

```
1 (let ((x (- 4 1))) (* x x))
```

Now we have a form on the workspace that consists of applications headed by procedures that are known to SBCL by default – which we will call built-in procedures. At this point the Great Rule of Evaluation runs in the normal fashion and computes the value 9.

23.1. It needs to be emphasized that there is no distinction between DEFUN'ed procedures and the built-in procedures like *, MAX, etc. All applications actually work according to the Great Rule. The substitution model I gave above aims to make how procedure definitions work clearer. In the beginning you may consult to this method to understand how things work; later on you will drop it entirely.

24. **Further abstraction.** Having defined a procedure for squaring numbers, we can change the SETF form of area computation to:

```
1 (setf area (* pi (square radius)))
```

But why stop here? Let us define a procedure that computes the area of a circular region on the basis of its radius, assuming that we already DEFUN'ed a procedure named SQUARE:

```
1 (defun area (radius) (* pi (square radius)))
```

Let's see the working of the substitution method: the computation starts with the procedure call via the application (area 13).

```
1 (let ((radius 13))
2   (* pi (square radius)))
```

This is one step substitution; if you want to articulate the working of SQUARE in LET as well, the next step would be:

```
1 (let ((radius 13))
2   (* pi (let ((x radius))
3           (* x x))))
```

25. **Example: Sum of cubes.** Here is a procedure definition that computes the sum of the cubes of two numbers:

```
1 (defun sum-of-cubes (x y) (+ (cube x) (cube y)))
```

When you try to enter this definition to the top-level, SBCL will warn you that it does not know a function named CUBE. In order for SUM-OF-CUBES to work, you need to define CUBE as well. Here is how:

```
1 (defun cube (x) (* x x x))
```

26. **Programs.** So far we have been entering all our forms at the top-level. There are some drawbacks of this. One is that all the definitions you make get lost when you quit the top-level (which you can do either by entering (exit) or pressing the key sequence Ctrl-D. Another is that you might want to see what you have defined so far; this might be hard to do when entering definitions one by one, especially when you have many of them. There is another drawback which is hard to realize at the moment, as we are entering very simple forms. As our forms get complicated we will need certain typographical aids to make our codes easier to read. In order to deal with these drawbacks, we collect our definitions in a file. When we load the file at the top-level, the effect will be entering each definition at the top-level with a single stroke. For instance our circular area procedure can be kept in a file, together with the squaring procedure, which it uses:

```
1 (defun square (x)
2   (* x x))
3
4 (defun area (radius)
5   (* pi (square radius)))
```

We will call such collections of code **programs**.

Exercise 1.1

Define a procedure that takes two numbers and returns their average. □

Exercise 1.2

Define a procedure that takes two numbers and returns the number obtained by dividing their product by their average. For the inputs 3 and 4, your program must return 12/3.5. In your solution, use the procedure you defined for Exercise 1.1. □

Exercise 1.3

Define a function that takes three arguments x , y and n , and returns the result of the following function:

$$\frac{x^n}{7 - y/2} \times \frac{y^{2/3} + 17}{4}$$

Exponentiation can be performed by the built-in EXPT. For instance 2^3 can be computed by (EXPT 2 3). □

Exercise 1.4

In order to convert a temperature in Fahrenheit into Celsius, you need to subtract 32 from it and multiply the result by 5/9. Define a procedure that converts from degrees Fahrenheit to degrees Celsius. □

2 Making decisions

1. **Predicates.** Procedures that return T or NIL, that is “true” or “false”, or “yes” or “no” are predicates.

- 1.1. All sorts of numeric comparisons are predicates. Try and observe the following at the top-level:

```

1 (defvar k 0)
2 (defvar s 8)
3 (= k s)
4 (< k s)
5 (<= s 8)
6 (zerop k)
7 (numberp s)

```

2. The most basic special form to make a decision is IF, which has the form:

(if <test> <success> <failure>)

- 2.1. **test** – any LISP form can be a test; we will say that a test **succeeds**, if the evaluation of the test returns a value other than NIL – e.g. the symbol T or a number, or any other thing apart from NIL, and that it **fails**, otherwise. Note that not only predicates but any LISP form can stand as a test.
- 2.2. **success** – an expression that will be *evaluated and returned* in case the test succeeds;
- 2.3. **failure** – an expression that will be *evaluated and returned* in case the test fails.
3. Let us observe IF in action. Here is a procedure definition which takes an integer and halves it if it's even, and multiplies it by 3 and adds 1, if it's odd. One mathematical fact useful here is that if an integer is not even, it must be odd.

```

1 (defun change (n)
2   (if (evenp n)

```

```

3     (/ n 2)
4     (+ (* 3 n) 1)))

```

- 3.1. Our procedure is meant to operate on integers, as the concepts evenness and oddness apply to integers. If you try your procedure with a floating point number (“float” for short) like 3.8, you will get an error. Try it, see the error, and return to the top-level by Ctrl-D or entering the number corresponding to ABORT.
- 3.2. Let us improve our procedure a little. Our plan is to first check whether the input is an integer, if not, round it to the nearest integer, and then do what we want.

```

1 (defun change (n)
2   (if (integerp n)
3       (/ n 2)
4       (+ (* 3 n) 1))
5   (if (evenp (round n))
6       (/ (round n) 2)
7       (+ (* 3 (round n)) 1))))
8

```

Now our procedure can handle floats by rounding them to the nearest integers – 8.3 give 4, 8.7 gives 28 as result.

- 3.3. It is impossible to miss the duplication of effort here. Almost exactly the same IF form is repeated twice; once with N and once with (ROUND N). Such repetitions are clear calls for abstraction. Let us separate the part of our procedure that checks integerhood from the rest; that way we can keep our original CHANGE, but call it with the argument given, if it's an integer, or the rounded version of it, if it's a floating point number. Here is how to do it:

```

1 (defun change (n)
2   (if (evenp n)
3       (/ n 2)
4       (+ (* 3 n) 1)))
5
6 (defun changer (n)

```

```

7  (if (integerp n)
8      (change n)
9      (change (round n))))

```

Now, things look tidier. Notice that we defined CHANGE before CHANGER. This is not absolutely necessary. Why we did it this way is to avoid a **warning** from SBCL, which processes procedure definitions in order, and it would get puzzled if the order was reversed, as, when processing the definition of CHANGER it would bump into a procedure name, CHANGE, which it doesn't know at that moment. Such warnings are safe to ignore. But if you don't want to see them, define your procedures in the "correct" order. You can also silence the warnings of SBCL if you want to, but this is not advised, as some warnings are useful in correcting some errors in your program.

- 3.4. We can shorten this code further. An important feature of LISP is that it works with return values. Every form returns a value. In this example we need to send a number to the procedure CHANGE. We first check the number for integerhood and call CHANGE accordingly. We can also make the decision at the argument position of CHANGE. Here is the revised version for CHANGER:

```

1 (defun changer (n)
2   (change (if (integerp n)
3               n
4               (round n))))

```

It is very important for the rest of your adventure that you understand (and like) this transformation.

- 3.5. We still have a problem. We have been assuming that if something is not an integer, it must be a float. Of course this is not true; try to call the procedure with something that is not an integer *and* not a float, say (CHANGER T), using the built-in symbol T that stands for truth.
- 3.6. Here is an improved version that checks for numberhood as well:

```

1 (defun change (n)
2   (if (evenp n)
3       (/ n 2)
4       (+ (* 3 n) 1)))

```

```

5 (defun changer (n)
6   (if (numberp n)
7       (change (if (integerp n)
8                   n
9                   (round n)))
10      nil))
11

```

Now we have a definition for CHANGER that works for any sort of input whatsoever; when provided a non-number input, it simply returns NIL. Note that the failure expression of the inner IF is NIL, this is perfectly OK, since NIL and T, like numbers, evaluate to themselves.

- 3.7. Also note that the third operand of IF is optional; if you do not provide it, NIL is returned if the test fails; therefore the above could equivalently be written without the final NIL.
4. **Negation.** In constructing your tests, there will be times you would like to have the opposite of the outcome of the test. For instance assume you want to see whether something is *not* a number. In such a case the test to use is simply (not (numberp n)). This will return T if n is not a number, and NIL, if it is. In other words, NOT forms are single operand applications.
5. **Multi-way decisions.** IF is perfect for decisions involving a limited number of options. When things get more complicated, heavily nested IF forms become harder to read. The special form COND is used in such cases. Its syntax may appear a little complicated in comparison to IF, but one gets used to it after a few shots.
- Assume a variant of the changer task: We halve an even number, we do what we did with odd numbers this time with numbers divisible by 3, and we leave the number as it is otherwise. This problem is a little more complex than the original. The reason is that, in the original, once we see that a number is not even, then, as we are sure that it is odd, we were able to apply the "three times *n* plus one" procedure; but now, non-evenness does not guarantee the applicability of "three times *n* plus one". If you want to stick with IF, you will need to nest another IF at the failure slot of the evenness test. The task can be handled without nesting IFs as follows:


```

1 (defun changer-cond (n)
2   (cond ((not (numberp n)) nil)
3         ((evenp n) (/ n 2))
4         ((zerop (rem n 3)) (+ (* 3 n) 1))
5         (t n)))

```

6. **Procedures can call themselves.** Here is a further improved version of CHANGER-COND, which can handle floats as well as integers. If it discovers an input that is a number but not an integer, it rounds it and calls another instance of the same procedure to handle the rounded float (= integer).

```

1 (defun changer-cond (n)
2   (cond ((not (numberp n)) nil)
3         ((not (integerp n)) (changer-cond (round n)
4         )))
4   ((zerop (rem n 3)) (+ (* 3 n) 1))
5   (t n)))

```

7. A COND clause that only has a test, returns the value of the test, if it succeeds. Therefore, you can have the final clause of the above program simply as (n). It is, however, advisable to avoid such shortcuts, they may impair the readability of your program.
8. Everything doable by COND is also doable by IF and PROGN (which you haven't seen yet), but COND makes life easier for complex decisions.
9. AND and OR head sequences of expressions with special evaluation algorithms:
- 9.1. AND: Evaluate the expressions from left to right until you reach either the end or an expression that evaluates to NIL; return the value of the last expression.
- 9.2. OR: Evaluate the expressions from left to right until you reach either the end or an expression that evaluates to something other than NIL; return the value of the last expression.

Exercise 2.1

Define a procedure named ASCENDINGP that takes three numbers as input and returns T if the numbers are in ascending order, and NIL otherwise. Equality means ascension, therefore (ASCENDINGP 3 4 4) must return T.

□

Exercise 2.2

Define a procedure that takes two numbers and returns -1 if their difference is negative, 0 if they are equal, and 1 if their difference is positive. You do not need to check for numberhood, assume that the user will always give numbers as input. You are allowed to compute the difference of the input numbers *only once*; and SETF and DEFVAR are forbidden.

□

Exercise 2.3

Solve Ex. 2.2, this time by checking for numberhood as well. Your program should return NIL if any (or both) of the numbers is not a number. Do NOT use AND.

□

Exercise 2.4

Define a procedure that takes three numbers and returns T if all the three are integers and returns NIL otherwise. Do NOT use AND.

□

Exercise 2.5

Write a function HOWCOMPUTE taking 3 numbers, telling the basic arithmetic operation that is used to compute the third number from the first two – it should say so if it cannot find it. Your response can be one of ADDED, MULTIPLIED, DIVIDED, SUBTRACTED, DONT-KNOW.⁹ Use COND in your answer.

□

Exercise 2.6

Define a function that takes two arguments and returns the greater of the two.¹⁰ Use the predicate >= for comparison and return a symbol that indicates error, in case any of the arguments is not a number.

□

⁹Touretzky 1990, ex. 4.13

¹⁰Graham (1996), p. 29, ex. 4.

Exercise 2.7

Define a procedure that takes three arguments and returns the greatest of the three. Use the predicate `>=` for comparison and return a symbol that indicates error, in case any of the arguments is not a number.

Exercise 2.8

Define a procedure that takes three numbers and gives back the second largest of them. Use only IF and comparison predicates like `<`, `<=`, etc.

Exercise 2.9

Define a procedure that takes three numbers and gives back the sum of the squares of the larger two.

Exercise 2.10

Solve Ex. 2.8 using COND.

Exercise 2.11

Define a procedure named `halver` that halves a given number until the result becomes less than 1 and returns that result – solve the problem by making your procedure call itself. Here is an example interaction with such a procedure:

```
* (halver 1/3)

1/3
* (halver 8)

1/2
* (halver 9)

9/16
* (halver 12)

3/4
*
```

☐
Exercise 2.12

Rewrite `(AND X Y Z W)` by using `cond COND`.¹¹

☐
Exercise 2.13

Write COND statements equivalent to: `(NOT U)` and `(OR X Y Z)`.¹²

☐
Exercise 2.14

Write the final version of the `CHANGE-COND` program using only AND and OR, no IF, no COND.

☐
Exercise 2.15

The following definition is meant to mimic the behavior of IF using AND and OR.

```
☐ 1 (defun custom-if (test succ fail) ; wrong!
2   (or (and test succ) fail))
```

☐

But it is unsatisfactory in one case, what is it? Define a better procedure which avoids this failure.¹³

☐

¹¹Touretzky 1990:ex. 4.19.

¹²Winston and Horn 1984:Problem 4-6.

¹³Touretzky 1990.

3 Repetition

1. Computation frequently involves repeating a task with different inputs and conditions. As the number of repetitions depend on the input, one needs a mechanism that repeats the task until certain conditions are fulfilled. When designing a repetition you need to decide on roughly three things: 1. when to stop; 2. what to do/return when stopped; 3. how to continue.

Let us take the task of computing the remainder of dividing an integer m by n . At first glance, you may not look at the task as a repetition task; this must be something that can be solved in a single step, you might think. There is, however, a very nice way to solve the problem that involves repetition. First take the following mathematical definition,

$$Rem(m,n) = \begin{cases} 0, & \text{if } m = n, \\ m, & \text{if } m < n, \\ Rem((m-n),n), & \text{otherwise} \end{cases} \quad (1)$$

You may find this a little puzzling at first sight, so it is important to spend some time on this to get used to it. The first two cases come from the definition of what is it to divide an integer by another. To convince yourself about the validity of the third step, just observe that, *if the first two conditions do not hold*, you cannot change the result of $Rem(m,n)$ by turning into $Rem((m-n),n)$; whatever the result of the first is, the result of the second will be the same number.

Now we can directly express the Definition 1 in LISP:

```
1 (defun remain (m n)
2   (cond ((= m n) 0)
3         ((< m n) m)
4         (t (remain (- m n) n))))
```

2. Now a similar example. Assume we are to add two numbers together and we cannot use +; all we are allowed to use is incrementing and decrementing an integer by 1. Again, we first construct a definition:

$$Add(m,n) = \begin{cases} n, & \text{if } m = 0, \\ Add((m-1), (n+1)) & \text{otherwise} \end{cases} \quad (2)$$

Yes, this is even stranger than the definition for remainder. But, again, looking at the second clause, it simply tells the truth – the result of adding 3 to 4 cannot be anything different than the result of adding 2 to 5. It is straightforward to implement the definition in LISP,

```
1 (defun add (m n)
2   (cond ((zerop m) n)
3         (t (add (- m 1) (+ n 1)))))
```

3. Here is another perspective on the same problem, with a slightly different definition:

$$Add(m,n) = \begin{cases} n, & \text{if } m = 0, \\ 1 + Add((m-1),n) & \text{otherwise} \end{cases} \quad (3)$$

This translates into LISP as,

```
1 (defun add2 (m n)
2   (cond ((zerop m) n)
3         (t (+ 1 (add2 (- m 1) n)))))
```

Exercise 3.1

Define a procedure that multiplies two integers using only addition as a primitive arithmetic operation.

□

Exercise 3.2

The factorial of a non-negative integer is defined as follows:

$$F(n) = \begin{cases} 1, & \text{if } n = 0 \\ n \times F(n-1), & \text{otherwise} \end{cases}$$

Define a procedure that computes the factorial of a given integer.

Exercise 3.3

Define a recursive procedure that computes the sum of the squares of the first n non-negative integers. For instance the sum you need to compute for the input 10 is:

$$1^2 + 2^2 + 3^2 + \dots + 10^2 = 385$$

Exercise 3.4

The way to toss a fair coin in LISP is to do (random 2), which would evaluate to 0 or 1 with a fifty-fifty chance.

PRINT is a special form. It evaluates its first argument, returns the value computed, and, as a side-effect, prints the computed value on the screen.

Define a recursive procedure TOSS that takes a non-negative integer n , tosses a coin n number of times, printing the result (0 or 1) on the screen in each toss. (Hint: AND is useful when you want to evaluate two forms in succession.)

Exercise 3.5

Collatz' Conjecture says that starting with any positive integer, by running the function C defined below, you will eventually reach number 1.

$$C(n) = \begin{cases} 1, & \text{if } n = 1 \\ C(n/2), & \text{if } n \text{ is even} \\ C(3n+1), & \text{if } n \text{ is odd} \end{cases} \quad (5)$$

Define a procedure COLL that implements the function C. Before running your procedure, type (trace coll) at the top-level and observe how your initial input approaches to 1.

Exercise 3.6

Define a recursive procedure that takes two integers, say x and y , and returns the sum of all the integers in the range including and between x and y . Do not use a formula that directly computes the result.

□

Exercise 3.7

Define a tail-recursive factorial procedure.

□

Exercise 3.8

Define a two operand procedure that raises its first operand to the power of the second. You are allowed to use multiplication and subtraction. Define two versions, with and without an accumulator. You can check the behavior of your procedure by comparing it with LISP's EXPT, which does the same thing.

□

□

Exercise 3.9

The Fibonacci numbers are defined for non-negative integers as follows:

$$Fib(n) = \begin{cases} n, & \text{if } n < 2 \\ Fib(n-1) + Fib(n-2), & \text{otherwise} \end{cases} \quad (6)$$

Define a procedure that gives the Fibonacci number of a given integer. Define,

- a version without using accumulator(s);
- a version with accumulator(s); here you can have two versions, one where you use a separate counter, and another where you use n itself as the counter.

□

Exercise 3.10

Here is a method, known as Newton's Method, for finding square roots:

In order to find the square root of x ,

1. Start with a guess $y = 1$.

□

2. Check if y^2 is close enough to x ; say the difference is not larger than 0.00001.
3. If yes, stop and report y as the result; if no, update your guess by replacing y with $\frac{x+y}{2}$ and return to step 2.

Write a program that computes the square root of a given number by this method. Divide your program into procedure definitions. You need to use 1.0 as the initial guess, otherwise LISP will generate fractions rather than floating point numbers.

Exercise 3.11

Sum of a geometric progression. A geometric progression is defined by two numbers, the initial term a and a common ratio r :

$$a, ar, ar^2, ar^3 \dots$$

For instance with $a = 7$ and $r = 2$, you'll have:

$$7, 14, 56, 112, \dots$$

The sum of the first n terms of a geometric progression with the initial term a and the common ratio r is:

$$\sum_{j=0}^n ar^j = a + ar + ar^2 + \dots + ar^n$$

Define a recursive procedure that returns the sum of a geometric progression with n terms and the initial term a and the common ratio r .

Exercise 3.12

(RANDOM N) returns a random number between and including 0 and $n - 1$. Define a procedure that takes two arguments n and r , and prints r random numbers between and including 0 and n . You will need to use PRINT; you can discover how it works by trying it at REPL.

Exercise 3.13

You can find at code/var/primep.lisp on our Github site a program that checks

wether a given integer is prime or not.¹⁴ Define a procedure that takes an integer, changes it by Collatz' function until it reaches a prime number. Return the prime number that is reached.

You can use the PRIMEP predicate in your program by loading the program it is defined in (the primep.lisp must be in the same folder as your own program):

```
(load "primep.lisp")
```

Your program has to behave as follows:

```
1
2 CL-USER> (foo 18)
3
4 9
5 28
6 14
7 7
8 T
9 CL-USER> (foo 17)
10 T
11 CL-USER>
```

Exercise 3.14

Your task is to write a program that takes a positive ($n > 0$) integer as an input and reduce it to 1 by using the Collatz' function. While doing this, you are required to report any prime number you encounter along the way. Besides reporting the primes, your program should also report *and return* the sum of these primes.

You need to write two versions: one, call it K00, where you accumulate the sum as you go along and return it when you reach 1; the other, call it F00, where you do not accumulate the answer as you go along.

Here is a sample interaction for both versions:

```
1 CL-USER> (foo 17)
2 Found a prime: 17
3 Found a prime: 13
4 Found a prime: 5
```

¹⁴Prime numbers are those integers greater than 1 that are divisible only by 1 and themselves.

```

5 Found a prime: 2
6 The sum of primes is: 37
7 37
8 CL—USER>

```


You need to use `FORMAT` to print to screen. Check Section 9, item 1, on how. Note that `FORMAT` returns `NIL` as a return value (when its first argument is `T`), so putting it in an `OR` as a first element will guarantee that what is next in the `OR` will be evaluated.

Finally, use an optional argument in the `K00` version for your accumulator.

4 Conses and Lists

4.1 Conses

1. Three building blocks: **symbols**, **numbers**, **addresses** of memory locations called **cells**.
 - 1.1. Numbers include, but are not limited to, integers $\{\dots -3, -2, -1, 0, 1, 2, 3 \dots\}$ and floats.
 - 1.2. Symbols include, but are not limited to, combinations of numbers, alphabetical characters, some special symbols like ‘?’ and ‘-’. Symbols can include numbers, but the resulting expression should not be a number itself.
 - 1.3. An address is a binary number (typically 32bit) that points to a cell, where symbols, numbers, lists, procedures and other objects are stored.
2. Another type of entity is a **cons**, a concatenation of two addresses, which is stored in a cell.
 - 2.1. Therefore, an address, by virtue of uniquely identifying a cell, can point to a symbol, a number, a procedure or a cons.
 - 2.2. Or, equivalently, cells host symbols, numbers, procedures and conses.
 - 2.3. The two parts forming a cons are called `CAR` and `CDR`, respectively.
 - 2.4. A cons is used to pair two objects residing in the cells pointed to by the `CAR` and the `CDR` of the cons:¹⁵



3. You can construct a cons of two objects by applying the procedure `CONS`; for instance,

```
1 ( cons 2 3 )
```

will return a cons of 2 and 3. Witness that

¹⁵Think of it as an ordered pair in set theory.


```

1 (let ((k (cons 2 3)))
2   (consp k))

```

will return T.

You can reach the components of a cons by the built-ins CAR and CDR:¹⁶

```

1 (let ((k (cons 2 3))) (car k)) ==> 2
2 (let ((k (cons 2 3))) (cdr k)) ==> 3

```

4.2 Lists

1. List is the central data structure in LISP, which stands for Lis(t) P(rocessor).

1.1. Lists are represented as sequences of objects separated by white space and enclosed in parentheses:

```

1 (1 3 9)
2 (RED GREEN BLUE)
3 (1 GREEN)
4 ()
5 (7)


```

2. We call an object in a list its element.


3. The empty list is represented in two equivalent ways: NIL and () – both evaluate to themselves.

4. Lists are represented internally as conses. The CAR of the cons points to the first element of the list, while the CDR of the cons points to the rest of the list (= the list without its first element).

4.1. The single element list (7) is represented as:



4.2. The two element list (2 TWO) is represented as:




and so on...

4.3. The only exception to cons-based representation of lists is the empty list, which is the object NIL, which is not a cons.

4.4. Lists can be nested (= lists as elements of lists).

4.4.1. Take for example ((RED 122) (GREEN 231) (BLUE 15)):¹⁷

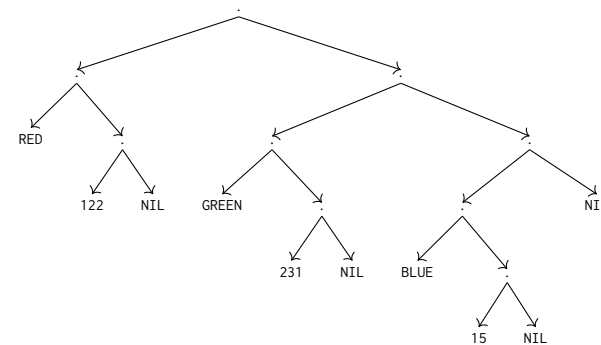

5. **QUOTE:** Notice that trying to get the first element of the list (1 2 3) by (car (1 2 3)) results in error. The reason is that SBCL attempts to interpret the form (1 2 3) as an application, seeking a procedure definition under the

¹⁶Note that instead of giving full top-level interaction, we designate the return value by ==>, which is not part of LISP.

¹⁷From here on we adopt the convention that the left branch leaving a cons is CAR and the right branch is CDR, to be able to omit the labels on the edges.

name 1. This is so because CAR is an application, its argument needs to get evaluated. But in this case we mean a list to be just a list and would not want LISP to evaluate that expression as a procedure call. To tell LISP *not* to evaluate an expression and leave it as it is, put the expression in quotes; just like one does in natural language. The following would behave well:

```
1 (car (quote (1 2 3)))
2 (cdr (quote (a b c)))
```

- 5.1. As one needs so frequently to quote expressions, there is a shorthand for QUOTE:

```
1 (car '(1 2 3))
2 (cdr '(a b c))
```

6. **Quoting symbols:** Preventing evaluation by quoting applies to symbols as well. This enables one to use symbols as data; a quoted symbol evaluates to the symbol itself.

Note that '(a b c) is not the same as ('a 'b 'c), make sure that you understand why.

7. **Constructing lists:** The most basic constructor for lists is CONS, it adds an object (CAR) to the front of a list (CDR). Another constructor is LIST, it simply evaluates and collects its operands into a list. Yet another is APPEND, which joins together lists. CONS is always two argument, while LIST and APPEND take as many arguments as they like, including zero. Try and observe the difference between the following:

```
1 (cons '(1 2) '(3))
2 (list '(1 2) '(3))
3 (append '(1 2) '(3))
```

8. **Dotted lists:** In a normal list, as you break down the list into its conses, you will always find a “bottom” cons where an object is consed with the empty list NIL. In a dotted list this “bottom” cons does not involve NIL. For instance you can cons two non-NIL objects and form a dotted list:

```
1 (cons 'a 'b) ==> (A . B)
```

You can go on consing to this dotted list:

```
1 (cons 'x (cons 'a 'b)) ==> (X A . B)
```

SBCL will visually indicate a dotted list by a dot before the CDR. Normal lists and dotted lists differ in their final CDRs.

9. **Accessing list elements:** We already know how to access the first element, namely by CAR. What about other elements? One way is to combine CARs and CDRs. For instance having,

```
1 (defvar k '(1 (2 3) 4))
```

to get the list (2 3) you can make (car (cdr k));
or to get 2 (car (car (cdr k))); or to get 3 (car (cdr (car (cdr k)))).

LISP provides the built-ins FIRST to TENTH. Some people like to use FIRST for CAR and REST for CDR.

You can combine the successive CARs and CDRs as in CDDR or CADAR up to a certain level. The convention is to match the nested operators from right to left and inside to outside. For instance (cadr x) is equivalent to (car (cdr x)), which is equivalent to (second x).

Finally, the built-in NTH takes a non-negative integer and a list, and gives the element at that index position, where indexing starts with 0 – an index out of the range of the list returns NIL.

Exercise 4.1

Construct the lists formed by the below expressions, using only CONS, elements, and NIL – do not forget the quotes where needed.

(a) (list 'a 'b 'c)

(b) (list 'a 'b NIL)

Exercise 4.2

Write forms consisting only of CONS, NIL, ' , A, B, C, D, which evaluate to the lists below.

- (a) (A B C D)
- (b) (A (B (C D)))
- (c) (A (B (C) D))
- (d) (((A (B (C) D))))

Exercise 4.3

Give the sequences of car's and cdr's needed to get x in the following expressions; for convenience name the list under discussion as lst – the first one is answered to clarify the question:

- (a x b d)
(car (cdr lst))
- (a b x d)
- (a (b (x d)))
- (a (b (d) x))
- (((a (b (x) d))))

Exercise 4.4

Given the list ((A B) (C D) (E F)),¹⁸

1. Write what you would get from it by applying the following in order,¹⁹

¹⁸Touretzky, ex. 2.15.

¹⁹Do not directly check on the computer, first attempt it on paper.

□

- (a) CAR
- (b) CDR CDR
- (c) CAR CDR
- (d) CDR CAR
- (e) CDR CDR CAR
- (f) CDR CAR CDR CDR

2. Which sequences of CARs and CDRs would get you A, B and F?

□

□

Exercise 4.5

Write down what the following expressions evaluate to; work them out before trying on the computer. Some expressions might cause an error; just mark them as an error, no need to specify the error itself.

1. (cons 2)
2. (cons 2 NIL)
3. (cons 3 '(2))
4. (cons 3 (2))
5. (cons NIL NIL)
6. (cons (1 2) NIL)
7. (cons '(1 2) NIL)
8. (cons (A B) NIL)
9. (cons ('A 'B) NIL)
10. (cons '(A B) NIL)
11. (cons '(A B) '(C D))

□

12. (list 1 4)
13. (list 1 '4)
14. (list '1 4)
15. (list 'A B)
16. (list 'A 4)
17. (list 'A 'B)
18. ('list 1 4)
19. (+ 3 '4)
20. ('+ 1 4)
21. (list 3 'times '(- 5 2) 'is 9)
22. (list 3 'times (- 5 2) 'is '9)

□

Exercise 4.6

Write down what the following expressions evaluate to; work them out before trying on the computer.

1. (if (listp '(list 1 2)) 'ok 'not-really)
2. (if (null (nil)) 'vice 'versa)
3. (and (listp (if (> 2 4) (- 2 4) (+ 2 4)))
(if (> 2 4) (- 2 4) (+ 2 4)))
4. (or (listp (if (> 2 4) (- 2 4) (+ 2 4)))
(if (> 2 4) (- 2 4) (+ 2 4)))
5. (or (and (or 'or) 'and) 'or)

□

Exercise 4.7 (*)

The Collatz sequence (see Exercise 3.5) of a positive integer is the sequence starting with the number itself and ending with 1, where the numbers in-between are the results of Collatz steps. For instance the Collatz sequence of 3 is 3 10 5 16 8 4 2 1.

Given a non-negative integer, compute the count of even and odd numbers in its Collatz sequence. Return the result as a list of two numbers, the first is the even count and the second is the odd count. The solution for 3 will be (5 3). □

4.3 Procedures on lists

1. **Example (membership):** LISP has a built-in membership procedure called MEMBER for lists. Let's define our own:

```

1 (defun memberp (item lst)
2   (cond ((endp lst) nil) ; test if lst is empty or
          not
3         ((equal item (car lst)) t)
4         (t (memberp item (cdr lst)))))

```

2. **List predicates:**

- 2.1. **NULL vs. ENDP:** Note that the test for emptiness of a list is ENDP. There is another predicate NULL which behaves quite like ENDP, giving T for NIL. The two predicates diverge in their behavior for non NIL inputs. NULL gives NIL for anything that is not NIL; but ENDP gives an error if its argument is not a list.
- 2.2. **LISTP vs. CONSP:** Any cons will answer T to CONSP. All lists are conses with the only exception of NIL. Therefore, NIL is the only thing that will answer NIL to CONSP and T to LISTP. Yes, a little complicated; make sure you get it right.

There is also ATOM, which is a predicate²⁰ that answers T to expressions that answer NIL to CONSP.

²⁰Note that NULL and ATOM do not follow the general convention of ending predicate names with 'p'. □

3. **Example (length):** Now our own version of the built-in LENGTH, first without an accumulator:

```

1 (defun len (lst)
2   (if (endp lst)
3       0
4       (+ 1 (len (cdr lst)))))

```

and now with an accumulator:

```

1 (defun len-acc (lst &optional (counter 0))
2   (if (endp lst)
3       counter
4       (len-acc (cdr lst) (+ counter 1))))

```

Exercise 4.8

Define a procedure named INSERT-2ND, which takes a list and an object, and gives back a list where the element is inserted after the first element of the given list. Assume that the input list will have at least one element. Here is a sample interaction:

```

1 * (insert-2nd 'b '(a c))
2
3 (A B C)
4 * (insert-2nd '(b k) '(a c))
5
6 (A (B K) C)
7 *

```

Exercise 4.9

Define a procedure named REPLACE-2ND, which is like INSERT-2ND, but *replaces* the element at the 2nd position. Assume that the input list will always have at least two elements.

Exercise 4.10

Define a procedure SWAP, that takes a two element list and switches the order of the elements. You are allowed to use only CAR, CDR, CONS and NIL as built-ins. ☐

Exercise 4.11

Define a procedure that takes a list and an object, and returns a list where the object is added to the end of the list. ☐

Exercise 4.12

Define your own procedure APPEND2 that appends two list arguments into a third list. You are not allowed to use APPEND, LIST and REVERSE – use just CONS. ☐

Exercise 4.13

Using CAR and CDR, define a procedure to return the fourth element of a list.²¹ ☐

Exercise 4.14

Define a procedure AFTER-FIRST that takes two lists and inserts all the elements in the second list after the first element of the first list. Given (A D E) and (B C), it should return (A B C D E). ☐

Exercise 4.15

The procedure WRAP-2 takes a two element list, and wraps each element inside a list:

```

1 * (wrap-2 '(a (b)))
2
3 ((A) ((B)))
4 * (wrap-2 '(a b))
5
6 ((A) (B))
7 * (wrap-2 (wrap-2 '(a b)))
8
9 (((A)) ((B)))
10 * (wrap-2 (wrap-2 (wrap-2 '(a b))))
11

```

²¹Graham (1996), p. 29, ex. 3.

```

12 | (((A))) (((B)))
13 | *

```

Write two versions of WRAP-2:

1. one using LIST, CAR and CADR
2. the other using CONS, CAR and CADR

Exercise 4.16

Assume you have data that pairs employees' last names with their monthly salaries. E.g. ((SMITH 3000) (JOHNS 2700) (CURRY 4200)) Define a procedure that takes as input employee data and a threshold salary (an integer), and returns in a list the last names of all the employees that earn above the threshold salary. Define two versions, one with, and one without an accumulator.

Exercise 4.17

Using MEMBER and LENGTH, write a function ORDER which gives the order of an item in a list. You can do this by combining LENGTH and MEMBER in a certain way. It should behave as follows:

```
* (order 'a '(a b c))
```

```
1
* (order 'c '(a b c))
```

```
3
* (order 'z '(a b c))
```

```
NIL
```

Exercise 4.18

Define a procedure that computes the sum of a list of numbers; with and without an accumulator. Consider that there might be non-number elements in a list, which you should ignore in your summation.

Exercise 4.19

Define a procedure that returns the largest number in a list of numbers. Do not use the built-in MAX.

☐

Exercise 4.20

Define a procedure that takes a list of integers and returns the *second* largest integer in the list.

☐

Exercise 4.21

Define a procedure that takes a list of integers and an integer n , and returns the n th largest integer in the list.

☐

Exercise 4.22

Define a procedure that gives the last element of a list or gives NIL if the list is empty. Name your procedure LASTT in order not to clash with LISP's built-in LAST.

☐

Exercise 4.23

Define a procedure MULTI-MEMBER that checks if its first argument occurs more than once in the second.

☐

Exercise 4.24

Define a recursive member procedure that checks whether a given item is found in the given list. The item is not required to be a top-most element. Some sample interactions are as follows:

```
* (rec-mem 'a '(b a c))
```

```
t
```

```
* (rec-mem 'a '(b (z a k) c))
```

```
t
```

```
* (rec-mem 'a '(b (z (a x) k) c))
```

```
t
```

☐

Exercise 4.25 (*)

Define a procedure LEVEL, that takes an element X and a list LST, and returns the level of depth that X is found in LST. If X is not a member, your procedure will return NIL. Top level counts as 0, every level of nesting adds 1 to the depth. Sample interaction:

```
* (level 'a '(b a c))
0
* (level 'a '(b (z a k) c))
1
* (level 'a '(b (z (a x) k) c))
2
```

Exercise 4.26 (*)

Define a procedure that converts a binary number (given as a list of 0s and 1s) to decimal, without checking the length of the input.

Exercise 4.27 (*)

Define a procedure ENUMERATE that enumerates a list of items. Numeration starts with 0. Define two versions, one with, and one without an accumulator.

```
1 CL-USER> (enumerate '(A B C))
2 ((0 A) (1 B) (2 C))
3 CL-USER> (enumerate NIL)
4 NIL
5 CL-USER>
```

Exercise 4.28 (*)

Given a possibly nested list of symbols one and only one of which will be the symbol X, compute the steps of CARs and CDRs required to get X from the list. For instance, the input ((a (z x d)) (c s d)) must yield the result (CAR CDR CAR CDR CAR).

□

Exercise 4.29

Define a procedure NESTEDP that takes a list and returns T if at least one of its elements is a list, and returns NIL otherwise.²²

□

Exercise 4.30

Define a recursive function FLATTEN, which takes a possibly nested list and returns a version where all nesting is eliminated. E.g. ((1 (2) 3) 4 (((5) 6) 7)) should be returned as (1 2 3 4 5 6 7).

□

Exercise 4.31

Define a procedure SPLIT that takes an integer n and a list, and returns a list of two lists such that the first has the first n elements of the input list, and the second has the rest of the elements of the input list. Do NOT use LENGTH.

□

□

Exercise 4.32

Define a procedure SPLIT-TWO that splits a list of numbers into two equal length lists. If the original list has an odd length, there will be a middle element. Split this middle element between the two halves; half of it goes to the end of the first list, half of it goes to the beginning of the second list.

□

□

Exercise 4.33

Define a procedure SPLIT that splits a list into two. If the length is odd, let one of the halves be one item longer than the other. (You can use length, if you like.)

```
CL-USER> (split '(a b c d e f g h i j k l))
((A B C D E F) (G H I J K L))
CL-USER>
```

□

□

Exercise 4.34 (*)

Write a program named RANGE, that takes a non-negative integer N as argument and returns a list of non-negative integers that are less than N in increasing order. Here

²²Graham 1996, p. 30 ex. 7.

is a sample interaction with the first four non-negative integers, your solution must work for all non-negative integers:

```

1 CL-USER> (range 0)
2 NIL
3 CL-USER> (range 1)
4 (0)
5 CL-USER> (range 2)
6 (0 1)
7 CL-USER> (range 3)
8 (0 1 2)

```

- (a) Solve the problem without using an accumulator;
- (b) Solve the problem using an accumulator.

Exercise 4.35 (*)

Write a program that takes a sequence, a start index, an end index and returns the sub-sequence from start to (and including) end. Indices start from 0.

Exercise 4.36 (*)

Write a program that takes two parameters count and max, and returns a list of count random integers, all less than max.

Exercise 4.37

The built-in REVERSE reverses a list. Define your own version of reverse.

Exercise 4.38

In Ex 4.37 you defined a list reversing procedure. Now alter that definition so that it not only reverses the order of the top-level elements in the list but also reverses any members which are themselves lists.

```

* (reverse0 '(a (b c (x d)) k))
(K ((D X) C B) A)

```

Exercise 4.39

Define a procedure HOW-MANY? that counts the top-level occurrences of an item in a list.

```

(how-many? 'a '(a b r a c a d a b r a))
5

```

Exercise 4.40

Define a recursive procedure D-HOW-MANY? that counts all – not only top-level – occurrences of an item in a list.

For instance (D-HOW-MANY? 'A '((A B) (C (A X)) A)) should return 3.

Exercise 4.41

Define a three argument procedure REMOVE-NTH, which removes every *n*th occurrence of an item from a list.

Exercise 4.42

A given set *A* is a **subset** of another set *B* if and only if all the members of *A* are also a member of *B*. Two sets are **equivalent**, if and only if they are subsets of each other. For this problem you will represent sets via lists.

- (a) Define a procedure SUBSETP that takes two list arguments and decides whether the first is a subset of the second.
- (b) Define a procedure EQUIP that takes two list arguments and decides whether the two are equivalent.
- (c) Define a procedure IDENP that takes two list arguments and decides whether the two have the same elements in the same order – do not directly compare the lists with EQUALP, you are required to do a element by element comparison.

Exercise 4.43

Define a procedure REMOVE2 that takes an element and a list; and returns a list where all the occurrences of the element are removed from the list.

Exercise 4.44 (*)

Given a sequence of 0s and 1s, return the number of 0s that are preceded by a 0. Here is a sample interaction:

```

1 CL-USER> (zeros '(0))
2 0
3 CL-USER> (zeros '(0 0))
4 1
5 CL-USER> (zeros '(1 0 1))
6 0
7 CL-USER> (zeros '(1 0 0 0 1 0))
8 2

```

Exercise 4.45

Define a procedure REMAFTER that takes an element, a list and a pivot element; and returns a list where all the occurrences of the element that are preceded by the pivot element are removed from the list.

Exercise 4.46

The mean of n numbers is computed by dividing their sum by n . A running mean is a mean that gets updated as we encounter more numbers. Observe the following input-output sequences:

```

* (run-mean '(3 5 7 9))
(3 4 5 6)

```

The first element 3 is the mean of the list (3), the second element 4 is the mean of (3 5), and so on. Implement RUN-MEAN by using DOTIMES and NTH.

Exercise 4.47

A chain in a sequence of numbers is such that each number in the chain is either equal to or greater than the one before it. For instance, 2 5 9 12 17 21 is a chain, but not 2 5 9 17 12 21, because the 17 12 sub-sequence breaks the chain. Define a recursive procedure that finds and returns the longest chain in a sequence of

numbers. If there are more than one sequences with the highest length, return the one you encountered first. Here are some sample interactions:

```

* (longest-chain '(14 3 8 27 25 12 19 3 1))
(3 8 27)
* (longest-chain '(14 3 8 27 25 12 19 34 42 1))
(12 19 34 42)
* (longest-chain '(14 3 8 27 25 12 19 34 1))
(3 8 27)

```

Exercise 4.48 (*)

A maximal chain m in a sequence of integers I is a chain defined in the sense of Exercise 4.47, such that there is no chain k in I such that m is a subsequence of k .

Define a procedure which takes a sequence of integers and returns the maximal chain with the largest sum. If you detect maximal chains with equal sums, return the one you encountered first.

Exercise 4.49 (*)

Define a procedure which takes a sequence of integers and returns the chain – not necessarily maximal – with the largest sum. If you detect maximal chains with equal sums, return the one you encountered first.

Exercise 4.50

See the PAIRLISTS in lecture notes. Define a procedure that “pairs” an arbitrary number of lists. Here is a sample interaction:

```

* (pairlists '((a b) (=) (1 2) (+) (3 9)))
((A = 1 + 3) (B = 2 - 9))

```

Exercise 4.51

Define a procedure SEARCH-POS that takes a list as search item, another list as a search list and returns the list of positions that the search item is found in the search list. Positioning starts with 0. A sample interaction:

```
* (search-pos '(a b) '(a b c d a b a b))
(6 4 0)
* (search-pos '(a a) '(a a a a b a b))
(2 1 0)
```

Exercise 4.52

Define a procedure LAST2 that takes a list and returns the last element of the list. Of course, don't use LAST. One way could be to keep a counter, so that you can compare this to the length of the list to recognize whether you are close enough to the end of the list.

Exercise 4.53

Define an iterative procedure CHOP-LAST, which removes the final element of the given list – its like CDR from the back. You are NOT allowed to make (REVERSE (CDR (REVERSE LST))). Nothing to be done for an empty list, just return it as it is; but a single element list gets “nilled”.

Exercise 4.54

Define a procedure that checks whether a given list of symbols is a palindrome. Use CAR and your solution to Ex. 4.22.

Exercise 4.55

Define your own version of NTH (don't use NTHCDR).

Exercise 4.56

Define a procedure UNIQ that takes a list and removes all the repeated elements in the list keeping only the first occurrence. For instance:

```
* (uniq '(a b r a c a d a b r a))
(A B R C D)
```

Don't use REMOVE (built-in or in-house), you may use MEMBER.

Exercise 4.57

Solve Ex 4.56 by keeping the last occurrence rather than the first.

Exercise 4.58

Define a procedure REMLAST which removes the last occurrence of an item from a list. Do not use MEMBER or REVERSE. ☐

Exercise 4.59 (*)

☐ Define a procedure FINDLAST which returns the index of the last occurrence of an item in a list. Do not use MEMBER or REVERSE. ☐

Exercise 4.60

Define a procedure REMOVEX that takes an element and a list; and returns a list where all the occurrences of the element that are preceded by the symbol X are removed from the list. ☐

Exercise 4.61

Define a function ROTATE-LEFT that takes a list and moves the first element to the end of the list. For instance, (ROTATE-LEFT '(1 2 3)) should give (2 3 1), (ROTATE-LEFT '(1 2)) should give (2 1), etc. Apart from DEFUN, you are allowed to use LET, LIST, APPEND, CAR, DOLIST, SETF and IF. No other function is available for use. ☐

Exercise 4.62

☐ Define a recursive procedure SUBSTITUTE, with 3 arguments, say old new exp such that every occurrence of old at the top-level of exp is replaced by new. By “top-level” we mean the function should not check embedded levels in lists. E.g. (substitute 'x 'k '(x (x y) z)) should return (k (x y) z). ☐

Exercise 4.63

☐ Define a procedure MATCHES that takes two lists, a pattern and a text, and returns the count of the occurrences of the pattern in the text. You need to be careful about overlapping matches. For instance, (A C A) has 3 occurrences in (A C A C A T G C A C A T G C). You are not allowed to use procedures like SUBSEQ to take portions of the text for comparison; your solution must go through the text element by element. ☐

Exercise 4.64

☐ Define a procedure SHUFFLE that takes a list and returns a random permutation of

the list. A random permutation of a list is one of all the possible orderings of the elements of the list. You can follow any strategy you like – recursive or iterative. You might find two built-ins especially useful: RANDOM takes an integer and gives a random number from 0 to one less than the given integer; NTH takes an integer and a list, returning the element at the position of the given integer – remember that positions are counted starting from 0.

Exercise 4.65

Modify SUBSTITUTE to D-SUBS (for “deep substitute”), so that it does the replacement for *all* occurrences of old, no matter how deeply embedded.

Exercise 4.66

Define a recursive procedure that counts the non-nil atoms in a list. For instance, an input like ((a b) c) should return 3, (a ((b (c) d))) should return 4, and so on. Remember that the built-in ATOM returns NIL for all lists except NIL; NULL returns T only for NIL; ENDP is like NULL, except that it gives an error if its input happens to be something other than a list. Your function should use a counter/accumulator – it will be a two argument function.

Exercise 4.67

Define a procedure BRING-TO-FRONT (or BFT for short), that takes an item and a list and returns a version where all the occurrences of the item in the given list are brought to the front of the list.

For instance, (bring-to-front 'a '(a b r a c a d a b r a)) would return (A A A A B R C D B R);

and (bring-to-front 'b '(a b r a c a d a b r a)) would return (B B A R A C A D A R A).

You are NOT allowed to count the occurrences of the item in the given list or use REMOVE.

Exercise 4.68

Define a procedure that groups the elements in a list putting consecutive occurrences of items in lists. For instance, (group '(a a b c c c d d e)) should give ((A A) (B) (C C C) (D D) (E)). Note that you should NOT bring together non-consecutive repetitions; a call like (group '(a b b c b b c)) should return ((A) (B B) (C) (B B) (C)).

Exercise 4.69

Define a version of Exercise 4.33 without using LENGTH – here we go again!

Exercise 4.70 (*)

Define a recursive procedure SUMMARIZE, that takes a list and returns a list of pairs whose car is an element in the list and cadr is the number of times the element occurs in the list; (summarize '(a b r a c a d a b r a)) should give ((a 5) (b 2) (r 2) (c 1) (d 1)).

Exercise 4.71

A growing difference sequence is a recursive sequence where each non-initial term in the sequence is greater than the one before it by a difference that steadily grows with the terms. For instance 1, 4, 8, 13, 26, ... is such a sequence where the second term is obtained by adding 3 to the first, third term is obtained by adding 4 to the second, fourth term is obtained by adding 5 to the third, and so on. In tabular form:

index	term	difference
1	1	3
2	4	4
3	8	5
4	13	6
5	19	7
6	26	8
7	34	9
⋮	⋮	⋮

Our sequences will always start with 1. How the difference starts and grows may change from sequence to sequence. For instance the difference in the following sequence starts with 2 and grows as the square of the previous difference.

index	term	difference
1	1	2
2	3	4
3	7	16
4	23	256
5	279	65536
⋮	⋮	⋮

Define a procedure GDS that generates a growing difference sequence where the length of the sequence, the initial value of the difference and how difference grows will be given as parameters. An example output for the first 7 terms in the first example above would be ((1 1) (2 4) (3 8) (4 13) (5 19) (6 26) (7 34)).

□

Exercise 4.72

As you have observed, the recursive solution to the computation of n th Fibonacci number is quite inefficient, as you compute the same Fibonacci numbers multiple times. Such algorithms can be made efficient by using a technique called *memoization*. The basic idea in memoization is to store the result of some computations in a table, so that when the function is called with some arguments already seen, the result is looked up from the table instead of executing the function again.

Your task in this exercise is to make the recursive Fibonacci solution by using memoization. You are required the results computed so far in a *hash table*. Hash tables are dictionaries that keep *key,value* pairs. In your case the keys will be integers and the value corresponding to a certain key n will be the n th Fibonacci number. In order to learn how hash tables are constructed and managed, please refer to the relevant chapter of one of the books listed on the course website.

You will change your recursive Fibonacci solution in such a way that when called with a certain integer, you will first check whether you have computed this Fibonacci number before by looking at your table, and enter into recursion only in case you do not have the number in the table.

Your procedure will be used exactly as the original one, namely it should be a single argument procedure that takes an integer and return the corresponding Fibonacci number.

□

Exercise 4.73

Define a procedure PERMUTE that gives the permutation of a sequence – all the sequences with the same elements in different orders. Assume all the elements in the sequence will be distinct.

□

Exercise 4.74

Define a procedure that takes a list and turns it into a binary search tree. A binary search tree is a binary tree such that for each node in the tree, all the items in its

left sub-tree is less than or equal to the item on that node, and all the items on its right sub-tree are greater than the item on that node. To makes things a little easier you may assume that every node has exactly two sub-trees, which are possibly NIL. You can represent trees in LISP as lists of three elements; where the first element is the parent node, the second element is the left child and the third element is the right child.

□

Exercise 4.75 (*)

Write a program that computes the subsequence with the largest sum in a sequence of integers.

□

5 More on symbols

1. Symbols are more complicated than they first appear to be:

Name
Value Binding
Function Binding
Package Binding

2. To set the Value Binding for a symbol, say K:

```
(setf k (random 10))
```

3. Note that SETF also does not obey the rule of evaluation.
4. SETF and LET establish the value binding of a symbol.
5. DEFUN establishes the function binding of a symbol.
6. A symbol gets evaluated to its value binding, unless it appears as the first element of an unquoted list, in which case it gets evaluated to its function-binding.
7. If you want to access the function binding of a symbol elsewhere, you need to prefix the symbol with #'. More on these rules below.
8. Study the following interaction:

```
* (defvar k 8)
K
* (defun k (x) (* x x))
K
* (symbol-name 'k)
"K"
* (symbol-value 'k)
8
* (symbol-function 'k)
#<FUNCTION K>
* (k k)
64
```

6 Higher order procedures

1. Assume you have a list of integers that you would want to turn into a list of their, say, factorials in a single stroke. And further assume that you would like to have a more general tool, which does the same trick not only with factorial but any unary function you provide to it, e.g. cube, square root, etc. What you need is a function that takes a function and a list as arguments, apply the function one by one to the elements of the list while storing the results in another list. Let us call this function MAPP – note the double ‘P’ not to clash with the built-in function MAP.
- 1.1. This is a task that would be straightforwardly implemented with recursion. Assume MAPP is given a function f and some list. If the list is empty, then its MAPP should be empty; if the list is non-empty the MAPP of it is simply the value obtained by applying f to the CAR of the list consed with the value obtained by calling MAPP with f and the rest of the list.
- 1.2. Here is a definition that attempts to achieve this:

```
1 (defun mapp (func lst) ;; WRONG!
2   (if (endp lst)
3       nil
4       (cons (func (car lst))
5             (mapp func (cdr lst)))))
```

- 1.3. The problem with the above definition is that it expects LISP to bind the function provided by the parameter `func` to the `func` that occurs in the function definition. LISP is designed *not* to do this;²³ when you call this function, say with `(mapp factorial '(1 2 3 4))`, or `(mapp 'factorial '(1 2 3 4))`, the `func` in the definition will not get replaced by the parameter you provided for the argument named `func`. Such replacements are done only with non-initial elements of lists – even not for all such elements, see 1.7. below.
- 1.4. What we want is achievable with the functions `FUNCALL` or `APPLY`.
- 1.5. `FUNCALL` wants its first argument to be something that would *evaluate* to:
- a symbol with a function binding; or
 - a function.
- 1.6. The rest of its arguments are treated as arguments of the function provided via the first argument; the function is applied to its arguments and the value is returned.

1.6.1. Assuming the definition of `FACTORIAL` is loaded,

```
(funcall factorial 8)
```

would lead to an error. The reason is that before getting fed into `FUNCALL` the argument `FACTORIAL` gets evaluated. Remember the rule of evaluation, which says that if a symbol is encountered at a non-initial position in a list, it gets evaluated to its value-binding. In this case LISP cannot find anything in the value-binding. The above specification of `FUNCALL` says that the first argument should be something that would *evaluate* to a symbol with a function binding. Therefore the correct form is:

```
(funcall 'factorial 8)
```

This way `FUNCALL` gets a symbol – that's what `'FACTORIAL` gets evaluated to – with a function-binding. This function is retrieved and applied to the remaining arguments – we have only one in the present case.

1.6.2. You can use the built-in procedures as follows:

²³A dialect of LISP, called Scheme, does this.

```
(funcall '+ 8 7 29)
(funcall 'member 'a '(z c a t))
```

- 1.6.3. The specification of `FUNCALL` in 1.5. has a second clause, which says that one can also provide an argument that evaluates to a function. Given a symbol, you can access its function-binding in two ways:

```
(function factorial)
(symbol-function 'factorial)
```

note the quote in the second form. The first form is the frequent one and like the `QUOTE` function, it has an abbreviated form:

```
#'factorial
```

Therefore you can directly send a function as an argument to `FUNCALL` as,

```
* (funcall #' + 8 7 29)
* (funcall #'factorial 9)
```

- 1.7. Now you might think that with the below code we could get what we want, for instance with
- ```
(mapp factorial '(1 2 3 4))
```
- we get `(1 2 6 24)`.

```
1 (defun mapp (func lst) ; STILL WRONG!
2 (if (endp lst)
3 nil
4 (cons (funcall (function func) (car lst))
5 (mapp func (cdr lst)))))
```

but again `FUNCTION` – `QUOTE` is no different – prevents the argument `FUNC` from getting bound to the parameter provided to the `MAPP`.

The correct code is:

```
1 (defun mapp (func lst)
2 (if (endp lst)
3 nil
4 (cons (funcall func (car lst))
5 (mapp func (cdr lst)))))
```

and you can call the function in two ways, both are fine:

```
(mapp 'factorial '(1 2 3 4))
(mapp #'factorial '(1 2 3 4))
```

- 1.8. **APPLY.** Another higher order procedure similar to FUNCALL is APPLY. The only difference is that APPLY takes the arguments in a list, rather than one by one.<sup>24</sup>

```
1 * (apply #'+ '(1 2 3 5))
2 11
```

For the exercises in this section you may find it helpful to define some simple procedures that you may use to test your solutions. Example procedures that will be used in describing the tasks are:

```
1 (defun f (x) (expt x 2))
2 (defun g (x) (expt x 3))
3 (defun h (x) (log x))
```

### Exercise 6.1

Define a procedure VALS that takes a list of one argument procedures and an argument, and returns the values obtained by applying the procedures to the argument in the given order.

```
* (vals '(evenp log zerop) 8)
(T 2.0794415 NIL)
```

### Exercise 6.2

Define a procedure PAIRVALS that takes a list of one argument procedures and an argument, and returns the list of dotted pairs where each procedure is paired with the value obtained by applying it to the argument.

```
* (pairvals '(f g h) 8)
((F . 64) (G . 512) (H . 2.0794415))
```

### Exercise 6.3

Define a procedure MAXPAIR that takes a list of dotted pairs and returns the maximum pair where the comparison is done on the basis of the second components of pairs.

```
* (maxpair '((A . 2) (B . 8) (C . 4)))
(B . 8)
```

### Exercise 6.4

Define a procedure that takes a list of predicate symbols (e.g. CONSP, NUMBERP etc.) and an object, and returns the list of predicates that the object satisfies. Here is a sample interaction:

```
(foo '(consp listp numberp) '(a)) ==> (CONSP LISTP)
```

### Exercise 6.5

Define a procedure that takes a list of predicate symbols (e.g. CONSP, NUMBERP etc.) and a list of objects, collects and returns all the objects that answer yes to at least one predicate in the predicate list.

### Exercise 6.6

Define a procedure that takes a list of one argument numerical procedures (define your own and/or use the built-ins you know) and a number, and returns the name of the procedure that yields the maximum value when applied to the number argument.

### Exercise 6.7 (\*)

Take a list and a procedure as input and return the list of indices of all the elements that the procedure returns a non-nil value.

<sup>24</sup>Actually, APPLY requires only the final argument to be a list, e.g. (APPLY #' + 1 2 '(3 5)) would return 11 as expected –  $\LaTeX$  puts the second hash sign in this footnote, please ignore.

```

1 CL-USER> (foo '(0 1 1 0 0 1 0) #'zerop)
2 (0 3 4 6)

```

## 7 Applicative programming

1. **Global variables.** In most applications, data is read from a file, entered by the user, or provided by a stream over a network. We will come to these topics, but for now, we will assume that data is stored in a **global** variable in our program. One way to declare and assign a global variable is DEFPARAMETER. For instance, let us assume we have a set of student number and grade pairs:<sup>25</sup>

```

1 (defparameter *grades*
2 '((e842222 86) (e850421 98) (e790059 79) (
3 e170139 45)
4 (e917272 0) (e989199 75) (e877076 96) (
5 e511096 83)
6 (e386463 91) (e337777 90) (e861067 54) (
 e801835 70)
 (e493198 85) (e352336 82) (e243952 91) (
 e595538 47)
 (e304901 0) (e548145 70)))

```

- 1.1. What makes a global variable global is that you can access the variable from within any function definition you have in the same file.
- 1.2. The asterisk characters \* around the word “grades” have no special meaning for LISP. It is a convention among LISP programmers to name global variables as such; thereby you can recognize that a variable is global only by looking at its name.
2. Let us first define a procedure that gives the letter grade corresponding to the numerical value. You can easily do this by COND:

```

1 (defun letter (grade)
2 (cond ((> grade 89) 'AA)
3 ((> grade 84) 'BA)
4 ((> grade 79) 'BB)
5 ((> grade 74) 'CB)

```

<sup>25</sup>Student numbers and grades are randomly generated.

```

6 ((> grade 69) 'CC)
7 ((> grade 64) 'DC)
8 ((> grade 59) 'DD)
9 ((> grade 54) 'FD)
10 (t 'FF)))

```

Now, we will pair each student with his/her letter grade instead of the his/her numerical grade. First, a procedure that does this for a single student

```

1 (defun insert-letter (grade-entry)
2 (let ((letter (letter-grade (cadr grade-entry)))
3 (student (car grade-entry)))
4 (cons student (list letter))))

```

Test this for a single student. Now we can perform this operation on the entire list of grades by a recursive procedure like this:

```

1 (defun list-letter-grades (grades-list)
2 (if grades-list
3 (cons
4 (insert-letter (car grades-list))
5 (list-letter-grades (cdr grades-list))))

```

3. **MAPCAR.** LISP has a built-in called MAPCAR that does what our MAPP does and a little more (see Ex. 7.12).

MAPCAR provides a much shorter way to perform the letter insertion:

```

1 (mapcar #'insert-letter *grades*)

```

giving the same output as the recursive code above, namely:

```

1 ((e842222 BA) (e850421 AA) (e790059 CB) (e170139
 FF)
2 (e917272 FF) (e989199 CB) (e877076 AA) (e511096
 BB)
3 (e386463 AA) (e337777 AA) (e861067 FF) (e801835
 CC)

```

```

4 (e493198 BA) (e352336 BB) (e243952 AA) (e595538
 FF)
5 (e304901 FF) (e548145 CC))

```

4. **LAMBDA.** You can define anonymous (= without a name) procedures with LAMBDA. An anonymous procedure is useful in cases where you need to define a procedure locally without giving it a name. Assume you want to map a list of numbers to their cubes. Without LAMBDA you need to first define a procedure,

```

1 (defun cube (x)
2 (expt x 3))

```

and then,

```

1 (mapcar #'cube '(1 2 3 4 5))

```

to get the cubes.

You can also define the cube procedure without giving it a name like,

```

1 (lambda (x) (expt x 3))

```

You can just take this as equivalent to the name CUBE, the name and the procedure definition are one and the same thing. Therefore you can cube a number by,

```

1 ((lambda (x) (expt x 3)) 8)

```

or you can use this in MAPCAR just like you did with CUBE:

```

1 (mapcar #'(lambda (x) (expt x 3)) '(1 2 3 4 5))

```

- 4.1. As another example, you can quickly pair students with PASSED or FAILED:

```

1 (mapcar
2 #'(lambda (x)
3 (cons (car x)

```

```

4 (list (if (>= (cadr x) 60) 'passed '
5 failed))))
grades)

```

5. **REDUCE.** Another widely used applicative programming construct is REDUCE. It takes a function with two arguments and a list; then it reduces the entire list to a single value, by applying the function first to the first two elements, then to the result of this application and the third element, then the result of this application and the fourth element, and so on until it reaches the end of the list. For instance, the following function calls will give you the sum and the mean of the grades, respectively. For instance you can sum a list of numbers by,

```
1 (reduce #'+ '(1 2 3 4 5))
```

Likewise we can compute the sum of all the grades in our grade list. Doing

```
1 (reduce #'+ *grades*)
```

will not work however; we need to add the CADDRs of the elements in `*grades*`. We can do this by first mapping the grades list to numerical grades by MAPCAR and run REDUCE on the result of this mapping:

```
1 (reduce #'+ (mapcar #'cadr *grades*))
```

Of course, the same sum can be obtained by

```
1 (apply #'+ (mapcar #'cadr *grades*))
```

Here is another use of REDUCE, this time working with LAMBDA, guess what it is doing:

```

1 (reduce
2 #'(lambda (x y) (if (> x y) x y))
3 (mapcar #'cadr *grades*))

```

6. **REMOVE-IF.** Assume we want to compute the mean of our grades. Usually we would not want to include the 0 grades in computing the mean, especially if we know that these are coming from people who did not participate in the exam. A useful pair of list filtering functions are REMOVE-IF and REMOVE-IF-NOT. To filter out zero grades, just do:

```
1 (remove-if #'zerop (mapcar #'cadr *grades*))
```

If we want to have a function that computes the mean of the grades, with first filtering the zero values, we might have the following:

```

1 (defun class-mean (grades-list)
2 (float (/
3 (reduce #'+ (remove-if #'zerop
4 grades-list))
5 (length (remove-if #'zerop
6 grades-list)))))

```

The code is inefficient as we compute the very same thing twice. We can improve this with LET:

```

1 (defun class-mean (grades-list)
2 (let ((real-grades (remove-if #'zerop
3 grades-list)))
4 (float (/
5 (reduce #'+ real-grades)
6 (length real-grades)))))

```

In our running example, you will need to call this procedure with `(mapcar #'cadr *grades*)` as the argument.

7. **Example: Collatz sequence.** A Collatz sequence is obtained by starting with an integer  $n$ ; if  $n$  is odd, add  $3n + 1$  to the sequence, if  $n$  is even add  $n/2$  to the sequence. If you obtain 1 stop, otherwise go on as before with the lastly added integer. The Collatz Conjecture states that no matter which integer you start the sequence, you are guaranteed to reach 1 and stop after a finite number of iterations. Let us write a function that computes the Collatz sequence for a given integer.



```

1 (defun collatz-generate (n)
2 (if (= n 1)
3 '(1)
4 (cons n (collatz-generate (if (evenp n)
5

```

```

6

```

- 7.1. Let us define Collatz (sequence) length of an integer to be the number of steps needed to reach 1 from that integer. This is one less than the length of Collatz sequence. So,

```

1 (defun collatz-length (n)
2 (- (length (collatz-generate n)) 1))

```

- 7.2. Knowing how numbers are correlated with their Collatz length would be interesting; does the length grow as the number grows, for instance? Or is

there a fluctuating pattern? To do this let us first find a way of generating a sequence of integers within a given range; after this it would be easy to MAPCAR it to what we want to investigate. We already wrote a function for generating ranges; this time we will write a more sophisticated one. We will use keyword arguments in doing that. First the code, then we will look at it in detail. (/

```

1 (defun ranger (&key (start 0) (end 9) (step 1) (
2 acc nil))
3 (cond ((>= start end) (cons start acc))
4 (t (ranger :acc (cons end acc)
5 :start start
6 :end (- end

```

step)))  
n  
this range function generates a range including its start and end points. Keyword arguments allow you to refer to the parameters by names – don't forget the ':' before the keywords – so that you do not have to remember the order of the parameters, as you should for optional parameters.<sup>26</sup>

- 7.3. Now we have enough machinery to list the Collatz lengths of the first one million integers:

```

1 (mapcar #'collatz-length (ranger :start 1 :end
2 1000000))

```

- 7.4. Check the maximum Collatz length in this range:

```

1 (apply #'max
2 (mapcar #'collatz-length (ranger :start 1
3 :end 1000000)))

```

- 7.5. MAX breaks down for 1,000,000 range – it should respond 350 for 100,000. We define our own maximum function, which operates on lists:

<sup>26</sup>The function has a flaw; it may not work as expected for some ranges with step different than 1, can you see why? Any ideas to fix it?

```

1 (defun maxx (lst &optional (max nil))
2 (cond ((endp lst) max)
3 ((null max) (maxx (cdr lst) (car
4 lst)))
5 (t (maxx (cdr lst) (if (> (car lst)
6) max)

```

7.6. Now we can check the maximum Collatz length in a range of one million:

```

1 (maxx (mapcar #'collatz-length
2 (ranger :start 1 :end 1000000)))

```

7.7. We can observe how the maximum Collatz length changes with the size of the range. Here is how to do it with LAMBDA:

```

1 (mapcar
2 #'(lambda (range)
3 (maxx (mapcar #'collatz-length
4 (ranger :start 1 :end
5 range))))
6 '(10 100 1000 10000 100000 1000000))

```

giving (19 118 178 261 350 524).

7.8. It may be hard to count 0's in specifying various sizes of ranges – it is easy to err. Let us handle that task with mapcar as well.

```

1 (mapcar #'(lambda (x) (expt 10 x)) '(1 2 3 4 5 6))

```

Now we can have

```

1 (mapcar #'(lambda (range)
2 (
3 car
4 (
5 maxx (mapcar #'collatz-length
6 (ranger
7 :start
8 1
9 :end
10 range)
11))
12))
13 '(10 100 1000 10000 100000 1000000))

```

7.9. We have gained some knowledge on Collatz sequences, but we still do not know about individual numbers. We can pair numbers with their Collatz lengths:

```

1 (mapcar #'(lambda (x) (list x (collatz-length x)))
2 (ranger :start 1 :end 1000000))

```

7.10. Let us find the number with the maximum Collatz length. MAXX on its own is not helpful here; it just finds the maximum number in a list of numbers. What we need is a way to find the pair(s) with the maximum second element. One way is to write a function similar to MAXX. Let us do this. But let us do this in a way that will have a general use. We will parametrize MAXX in such a way that, the caller/user of the function will decide where MAXX should look for items to compare. In the above version it looks at top most elements, by checking the CAR of the list in every recursion. Here is our new, more “customizable” MAXX.

```

1 (defun maxx (lst &key
2 (max nil)
3 (hook #'(lambda (x) x)))
4 (cond ((endp lst) max)
5 ((null max) (maxx (cdr lst)
6 :max (car lst)
7 :hook hook))
8 (t (maxx
9 (cdr lst)
10 :max (if (> (funcall hook (car lst))
11 (funcall hook max))
12 (car lst)
13 max)
14 :hook hook))))

```

7.11. With our new MAXX in our hands we can now find the number with the largest Collatz length in a given range, say 1000.

```

1 (maxx (mapcar #'(lambda (x)
2 (list x (
3 collatz-length
4 x)))
5 (ranger :start 1 :end
6 1000)) :hook #'cadr)

```

### Exercise 7.1

Write LAMBDA expressions<sup>27</sup> that

- returns the greatest of two integers.
- given two integers, returns T if one or the other divides the other without remainder.
- given a list of integers, returns the mean.
- given a list of integers, returns the sum of their factorials – use your factorial solution.

□

### Exercise 7.2

Define a procedure PAIR-PROD using MAPCAR and LAMBDA, which takes a list of two element lists of integers and returns a list of products of these pairs. E.g. an input like ((7 8) (1 13) (4 1)) should yield (56 13 4).

□

### Exercise 7.3

Define a procedure that takes two lists as input and returns the list of their pairwise averages. Use only MAPCAR, LAMBDA and arithmetic operations in your definition.

□

### Exercise 7.4

Define your own REMOVE-IF.

□

### Exercise 7.5

Define LENGTH using MAPCAR, LAMBDA, + and APPLY.

□

### Exercise 7.6

Define a procedure that takes an integer n and gives a list of n random single digit

<sup>27</sup>If needed, consult Graham on how LAMBDA works.

numbers. Use the built-in RANDOM, MAKE-LIST, MAPCAR and LAMBDA in your solution. Check the definition of the builtins you are not familiar with from reference books on the website or on the web.

### Exercise 7.7

Define a procedure that takes two lists: a list N of numbers and a list P of symbols with function bindings, i.e. symbols used to define some single argument mathematical procedure with DEFUN. Your procedure should return a list with the same size as N, whose elements are lists consisting of values obtained by applying all the procedures in P to the corresponding element in N. For example, if you provide your procedure with a list of symbols naming square, absolute value and float functions, e.g. (sqr abs float), and the list (1 -2 3), it should return: ((1 1 1.0) (4 2 -2.0) (9 3 3.0)) You are NOT allowed to use any procedure (built-in or user-defined) other than #', DEFUN, MAPCAR, LAMBDA and FUNCALL.

### Exercise 7.8

Define a procedure APPLIER that takes a procedure proc, an input input and a count cnt; and gives the result of applying proc to input cnt times. For instance, (APPLIER #'CDR '(1 2 3) 2) should give (3)

### Exercise 7.9

Define a procedure MOST, which takes a list and a procedure argument, and returns the element in the list that gives the highest score when provided as an argument to the given procedure packed in a list with its score. To get full credit, solve the task WITHOUT using recursion or iteration, you can use MAPCAR, REDUCE and LAMBDA besides other built-ins you would need.

```
1 * (most '(0.3 0.5 0.2) :proc #'(lambda (x) (* 2 (log x))))
2 (0.5 -1.3862944)
```

### Exercise 7.10

The built-in FIND-IF returns the first element in its second argument that returns T for its first argument:

```
* (find-if #'(lambda (x) (> x 3)) '(1 3 9 0 4))
9
```

Define your own version of FIND-IF, which returns the index together with the element. Remember that indexing starts with 0. For instance your procedure should return (2 9) for the above invocation, where 2 is the index of 9.

### Exercise 7.11

Define a procedure REPLACE-IF, which takes three arguments: a list LST, an item ITEM and a function TEST, and replaces every element of LST that passes the TEST with ITEM. You may find using keyword arguments useful (see the lecture notes). Make use of MAPCAR, LAMBDA and FUNCALL in your solution.

### Exercise 7.12

MAPCAR can work on any number of lists; you only need to be careful to provide a function with the correct number of arguments. For instance

```
(mapcar #'(lambda (x y) (+ x y)) '(1 2 3) '(4 5 6))
```

gives (5 7 9). Don't worry if lists are not of equal length, MAPCAR goes as far as the shortest list.

Define procedures that use MAPCAR and LAMBDA and

- zip two lists together – (zip '(a b) '(1 2)) should give ((A 1) (B 2)).
- take three lists: first two will be lists of integers, and the third is a list of functions. Apply the corresponding function to corresponding arguments.

### Exercise 7.13

The way to toss a fair coin in LISP is to do (random 2), which would evaluate to 0 or 1 with a fifty-fifty chance.

Study the following procedure and indicate what the parameters n, f, c and s stand for. In other words, describe what this procedure computes.

```
(defun h (n f &optional (c 0) (s 0))
 (if (= c n)
 s
 (h (1+ n) f c s)))
```

4 | `(h n f (+ c (if (= (random 2) f) 1 0)) (+ s 1))))`

### Exercise 7.14

Find the numbers in a given range that have the same Collatz length using the techniques of this section. ☐

### Exercise 7.15 (\*)

Write a program that takes as input a set of numbers and sorts the numbers with respect to their Collatz lengths in descending order. You can use the built-in sort procedure of LISP, please consult the reference books listed on the web-site on how to use the built-in sort. ☐

## 8 Iteration by looping

1. Computing frequently involves repeating an action, each time with different inputs and/or conditions. There are mainly three perspectives on how to do this: (i) iterative, (ii) recursive, (iii) applicative. Which perspective is best mainly depends on the task at hand.
2. Let's take a list and print each element to the screen, no matter what.
3. But first we need to learn how to print stuff to screen; that's what we mean by "saying". Try this:

```
1 (print 'hello)
2 (print 8)
3 (print (* 2 4))
```

- 3.1. You'll see everything printed twice to screen. Why is that?
- 3.2. A list headed by PRINT is evaluated specially. The one and only argument to PRINT gets evaluated and is returned by PRINT. Besides this, PRINT also prints this value to the screen. Every LISP expression returns a value. PRINT not only returns a value, but also does something else – it has a **side effect**. We will talk more on this.
4. Now we are ready to write our function:

```
1 (defun printer (lst)
2 (dolist (x lst 'done)
3 (print x)))
```

5. DOLIST is an example of a **block structure**. Its job is to run for as many times as there are elements in LST. Runs are called **iterations**. In each iteration, the variable X holds the next element in LST. The symbol 'done is what will be returned when all the elements in the list are iterated over. The rest of the DOLIST list, namely its CDDR, is a possibly empty sequence of expressions, that are evaluated in order in each iteration of the DOLIST.

- 5.1. Observe that we see each element only once on the screen, nothing is repeated. The reason is that DOLIST does not care about values returned by the expressions in its body; the value it returns is always the third element in its first argument (= the list where you name your iteration variable). In the body of a DOLIST only side-effects count, anything that doesn't have a side effect has no place in the body of a DOLIST.
- 5.2. For instance, imagine you wrote the code below to double a list, by adding each element to the end of the list in order:

```
1 (defun no-fun (lst)
2 (dolist (x lst 'done)
3 (append lst (list x))))
```

All this does is to iterate through the list; evaluate the APPEND form in each iteration, and finally evaluate 'DONE and return its value, which is the symbol DONE. The list we sent to the function stays totally intact, nothing added, nothing removed. The reason is that APPEND has no side effect, it just returns a value: the newly formed list obtained by bringing together two other lists. Therefore nothing happens from the perspective of DOLIST, it doesn't "see" these returned values.

6. Now we go one step further and try to achieve the task of computing the length of a list. So far, what we are doing is to simply iterate and wait for something to happen in each iteration. In the present task, while iterating, we need to keep track of how many elements we have seen so far. If we can do that, we can return that number when we reach the end of the list as the computed length of the list. "Keeping track of something" means storing its value somewhere that we can look up and update the value when we need. Such places are called **variables**. What we need here is to first create a variable that has the initial value of 0; then we will **increment** the variable by one in each iteration; and then we will return the final state of the variable.
7. Creating a variable is done by a LET construct and changing the state of the variable is done by SETF. Let's go over an example, type the following to top-level:

```
1 (let ((x 1)) (print x) (setf x 4) (print x))
```

- 7.1. LET consists of a list of variable declarations and a number of expressions that constitutes its **body**. The list of variable declarations is a list consisting of a number of variable declarations – as many as you like – where each declaration itself is a list of two elements: a variable name and an expression whose *value* will be stored in the variable just named. In our present case, we have only one such declaration, a very simple one. After this declarations list, comes the body of LET. The body can have as many expressions as you like – here we have three. LET evaluates each expression in its body one by one, and returns the value of the expression it evaluated last. In this case, the three expressions we put in the body of LET all have side-effects: first 1 is printed, then X is made to hold 4 instead of 1; finally 4, which is the value of X at that point, is printed. But you see an extra 4 as well. That's the value returned by the LET clause itself – remember that LET returns the value of the last expression in its body and top-level, also called REPL, reads an expression, evaluates it and prints the value. Therefore the first 4 you see is printed by PRINT, the second 4 you see is printed by the top-level.
- 7.2. Now save the expression above to a file, say let.lisp, and load the file at the top-level by doing:

```
1 (load "let.lisp")
```

Now you do not see the second 4, but a T instead. Can you see why? The reason is this: the top-level prints the value of the top-most expression it evaluated. In this case the top-most expression is a LOAD expression – which is, by the way, just another LISP list, standing for a function with a side-effect; its side effect is to load the file whose name is given to it. As every other LISP expression, LOAD as well returns a value: if everything goes fine with loading the file, it returns T. And it is this T that you see instead of the second 4.

8. Now we can write our function that computes the length of a given list:

```
1 (defun length2 (lst)
```

```

2 (let ((counter 0))
3 (dolist (x lst counter)
4 (setf counter (+ 1 counter)))))

```

Let us have a closer look at what's going on here:

- 8.1. First, you see a strange warning message when you load the program. SBCL warns you that you have something named X in your DOLIST, which you do not use anywhere else. This is a style warning; something that is aimed to alert the programmer that there *may* be something wrong, but doesn't have to be. In our case there is nothing wrong; we need to iterate over a list, but we are not interested in the elements; all we care to know is how many of them there are. So, ignore the warning.<sup>28</sup>
- 8.2. Second, there is no quote on COUNTER in the DOLIST variable specification, we want DOLIST to return the *value* of the symbol, not the symbol itself, as we did with 'DONE.
- 8.3. Third, observe how we update the value of the variable COUNTER. SETF is again a special form, it does not obey the rule of evaluation, it has its own rule. It first evaluates its second argument; then stores the value obtained in its first argument; and finally *returns* the value stored. Again, like PRINT, it has both a side-effect (= change the value stored in a variable) and a return value (= the value itself).<sup>29</sup>
9. Similarly we can write a function that sums the numbers in a list:

```

1 (defun summer (lst)
2 (let ((sum 0))
3 (dolist (x lst sum)
4 (setf sum (+ sum x)))))

```

10. Or, take a list of numbers and return another list that contains only the even ones in the original list:

<sup>28</sup>There are ways to “muffle” (=make silent) such warnings; but for now let them stay, sometimes they are helpful.

<sup>29</sup>SETF is actually capable of much more, but it's more than enough for now.

```

1 (defun get-evens (lst)
2 (let ((store nil))
3 (dolist (k lst (reverse store))
4 (if (evenp k)
5 (setf store (cons k store)))))

```

We SETF only on the condition that the current iterated item is even; and we omit the final argument of IF, where NIL is returned when the test fails. This does no harm, because DOLIST does not care about return values anyway. Finally, observe that we do not return the RESULT itself, but its reverse as the value of DOLIST; otherwise we would have obtained the even numbers in the original list in the reverse order of their appearance.

11. So far we kept counters and stores that we conditionally increment or add elements along the iteration. Some problems require keeping a **flag**. A flag is a variable that holds a value that allows you to make decisions, usually boolean values like T and NIL.
- 11.1. Take the task of removing every odd occurrence of a symbol from a list – remove the first, third, fifth etc.

```

1 (defun remove-odd (elm lst)
2 "remove odd occurrences of elm from lst"
3 (let ((remove? t)
4 (store nil))
5 (dolist (a lst (reverse store))
6 (if (equal a elm)
7 (if remove?
8 (setf remove? nil)
9 (progn
10 (setf store (cons a store))
11 (setf remove? t)))
12 (setf store (cons a store)))))

```



We keep a flag called REMOVE?, which keeps track of whether we have seen an even or an odd number of ELMs so far. When REMOVE? is T it means we have seen an even number of ELMs; therefore we start with T – zero is an even number. When REMOVE? is F, it means that we need to delete the next ELM we encounter. We first check whether the current item is ELM, and if not, we simply cons the current symbol to STORE. If the current symbol is ELM, we need to decide whether to take it into STORE or not. If our flag REMOVE? is T, all we need to do is to change the status of our flag – we could also have done (setf remove? (not remove?)); not consing the current element to STORE “deletes” it. You encounter a new construct, PROGN, in the failure clause of the internal IF. When the current item is equal to ELM and REMOVE? is NIL, we need to do two things: cons the current element to STORE and switch REMOVE? to T. As you will remember, IF is a three argument function, a test, an expression to be evaluated when the test succeeds, and an expression to be evaluated when the test fails. Therefore, there is room for only one expression for the failure case. But we have two SETFs to be evaluated. To solve this problem, we group the two expressions in a PROGN block. PROGN is a list that can have as many elements you like; what it does is to evaluate these elements one by one and return the value of the last one as the value of PROGN.

11.2. Here is a slightly simplified version of the same program. As an exercise, trace the execution of the program with pen and paper on a sample input.

```

1 (defun remove-odd (elm lst)
2 "remove odd occurrences of elm from lst"
3 (let ((remove? nil)
4 (store nil))
5 (dolist (a lst (reverse store))
6 (if (equal a elm)
7 (progn
8 (setf remove? (not remove?))
9 (if (not remove?)
10 (setf store (cons a store))
11 (setf store (cons a store))))))
12 (setf store (cons a store))))

```

12. In iterative programs incrementing/decrementing a counter and updating a store variable by consing an element are quite common tasks. For this reason, LISP has some shortcuts for these operations.

(incf counter) is equivalent to (setf counter (+ counter 1)).

You can also specify the amount of increment by a second argument to INCF.

(incf counter 3) is equivalent to (setf counter (+ counter 3)).

DECF does the same thing, this time by subtracting instead of adding.

For updates by consing elements,

(push x y) is equivalent to (setf y (cons x y)).<sup>30</sup>

13. Let us now write a function that checks whether a given element is a member of a given list. Here is one way to do it,

```

1 (defun elementp (item lst)
2 (let ((answer nil))
3 (dolist (k lst answer)
4 (if (equal k item)
5 (setf answer t))))

```

So nice. But there is one efficiency issue. Imagine you are given a very long list and the item you are looking for is somewhere close to the front of the list. With the above strategy, you will have to wait until DOLIST finishes iterating through the entire list in order to get the value – T or NIL – you want to know, even the value is settled long before you see the outcome. For such kind of situations, LISP has the construct RETURN. Let us first see it in action:

```

1 (defun elementp (item lst)
2 (dolist (i lst)
3 (if (equal i item)
4 (return t))))

```

First notice that the first argument of DOLIST has two elements rather than three; the third argument, which specifies the return value of DOLIST is not

<sup>30</sup>There is a dual of PUSH as well: POP. We will use and explain it later.

given, and therefore it gets its default value NIL. This means that if DOLIST can reach the end of the list, it will return NIL. The only case that this will not happen is that the equality test of the IF in the body returns T, in which case the DOLIST iteration is aborted and the value T is returned as the value of the entire DOLIST, and thereby the value of the call to ELEMENTP. This is much shorter than the previous code; and it does not have to run till the end of the list, in case it finds the item somewhere before the end.

14. Now we will see another common programming technique. But first we need a problem that requires the use of it. Our task is to decide whether a given list is a sublist of another. In the previous tasks, we were keeping counters and flags; this time we will keep a **window**. A window is a fixed size list that is updated in each iteration. For instance, assume we are asked to see whether a three element list (let's call this the search list) is a sublist of another list (let's call this the mother list). What we need for this problem is a three element window. We will start with an empty window and will update it as we iterate through the mother list. The proper way to update the window is to add elements to the back of the window, while discarding the element at the front – otherwise our window will grow beyond the size of the search list. Apart from updating our window, we will also check whether our window equals to the search list. If we get the equality, we will (RETURN T), otherwise we will go on iterating and updating our window. If no equality is caught until the end of the mother list, we will return NIL.

- 14.1. A critical step in our solution is to create a window of a given size. There is a very useful function MAKE-LIST, which constructs a list of a given length, initially holding NILs.<sup>31</sup>

Here is the code:

```
1 (defun sublistp (search-list mother-list)
2 (let ((window (make-list (length search-list))))
3 (dolist (i mother-list)
4 (setf window (append (cdr window) (list
5 i))))
```

<sup>31</sup>Our program will assume that NIL will not be the element of any search list. There is a way to avoid this shortcoming: namely telling MAKE-LIST to fill the list it constructs with symbols that are different from anything that can be in the input lists. We will see how to do this below.

```
5 (if (equal window search-list)
6 (return t))))
```

15. Another builtin iterative construct is DOTIMES. It's similar to DOLIST; instead of iterating a list, the iterative variable iterates over numbers from 0 up to 1 minus the given iteration parameter – where there was a list in DOLIST, there is a number.

- 15.1. Here is a function definition that takes its first argument to the power of its second argument.<sup>32</sup>

```
1 (defun exponent (base power)
2 (let ((result 1))
3 (dotimes (x power result)
4 (setf result (* base result)))))
```

- 15.2. Here is another example with DOTIMES that computes the factorial of a given number. Factorial of an integer  $n$  is the number  $n \times (n-1) \times (n-2) \times \dots \times 1$ , the factorial of 0 is 1 by definition.

```
1 (defun factorial (n)
2 (let ((result 1))
3 (dotimes (i n result)
4 (setf result (* result (+ i 1))))))
```

In using DOTIMES, you need to bear in mind that the iteration starts with 0 and ends with one minus the given iteration limit.

16. **Iterating on more than one list in parallel.** One drawback of DOLIST and DOTIMES is that they cannot handle more than one list in parallel.

- 16.1. Assume you have two lists: one with student names and the other with grades, where lists are so nicely ordered that names and grades match position-wise. You want to merge these lists into a single list, where each element is

<sup>32</sup> $x$  to the power  $y$ , designated as  $x^y$ , is the number obtained by multiplying  $x$  by itself for  $y$  times.

itself a list of two elements, the first is a name and the second is the corresponding grade. To accomplish this, we will need a way to refer to the elements of a list by their positions. The builtin for this is NTH. It takes a number argument, which is the position, and a list. You should always keep in mind that positions start with 0 in LISP: the first element sits at position 0, the second at 1, and so on.

16.2. Here is the function that solves our name-grade pairing problem (and many similar others):

```
1 (defun pairlists (lst1 lst2)
2 (let ((store nil))
3 (dotimes (i (length lst1) store)
4 (push
5 (list (nth i lst1) (nth i lst2))
6 store))))
```

Notice how we broke down PUSH to increase readability of the code. A sample interaction of the program would look like:

```
* (pairlists '(john mary ted) '(82 74 42))

((TED 42) (MARY 74) (JOHN 82))
```

16.3. There is one thing we need to be careful about while pairing lists with this method; namely we need to decide what happens when the lists to be paired are not of equal length. One possible action to take is to see which list is shorter and use the length of that list with DOTIMES. In this strategy, the excess elements in the longer list will get discarded. Let us do the job of deciding on the smaller length with a separate function. This will make our program easier to understand and test. Also let us write our shorter-length-detector function in a general way, such that it will find the minimum length not only of a pair of lists but any number of lists we provide to it. Here is a way to do it:

```
1 (defun min-length (list-of-lists)
2 (let ((minlen (length (car list-of-lists))))
3 (dolist (x (cdr list-of-lists) minlen)
```

```
4 (let ((len (length x)))
5 (if (< len minlen)
6 (setf minlen len))))))
```

16.4. Now we can update our list pairing function as:

```
1 (defun pairlists2 (lst1 lst2)
2 (let ((store nil))
3 (dotimes (i (min-length (list lst1 lst2))
4 store)
5 (push
6 (list (nth i lst1) (nth i lst2))
7 store))))
```

17. **Changing the way iteration proceeds.** Another drawback of DOLIST and DOTIMES is that how they traverse a list or increment a number is fixed, namely one-by-one from left to right and increasing. And this drawback is not as easy to remedy as the other drawback. We will see how to do it later. But if you can't wait that long, go to Graham (1996) and study how to use DO.

In the exercises of this section you need to use iterative constructs as much as you can.

### Exercise 8.1

Define a procedure APPEND2 that appends two lists. □

### Exercise 8.2

Define an iterative procedure CHOP-LAST, which removes the final element of the given list – its like CDR from the back. You are NOT allowed to make (REVERSE (CDR (REVERSE LST))). Nothing to be done for an empty list, just return it as it is; but a single element list gets “nilled”. □

### Exercise 8.3

Define an iterative procedure UNIQ that takes a list and removes all the repeated elements in the list keeping only the first occurrence. This is the expected behavior:

```
* (uniq '(a b r a c a d a b r a))
(A B R C D)
```

**Exercise 8.4**

Define a procedure that reverses the top-level elements of a list.

**Exercise 8.5**

The mean of  $n$  numbers is computed by dividing their sum by  $n$ . A running mean is a mean that gets updated as we encounter more numbers. Observe the following input-output sequences:

```
* (run-mean '(3 5 7 9))
(3 4 5 6)
```

The first element 3 is the mean of the list (3), the second element 4 is the mean of (3 5), and so on. Implement RUN-MEAN by using DOTIMES and NTH.

**Exercise 8.6**

Define a procedure SEARCH-POS that takes a list as search item, another list as a search list and returns the list of positions that the search item is found in the search list. As usual, positioning starts with 0. Use DOTIMES. A sample interaction:

```
* (search-pos '(a b) '(a b c d a b a b))
(6 4 0)
* (search-pos '(a a) '(a a a a b a b))
(2 1 0)
```

**Exercise 8.7**

Define a procedure that reverses the elements in a list including its sublists as well.

**Exercise 8.8**

Write a procedure LAST-NTH that returns the  $n$ th element from the end of a given list. Do NOT use NTH or ELT; use DOLIST.

**Exercise 8.9**

See the PAIRLISTS in lecture notes. Define a procedure that “pairs” an arbitrary number of lists. Here is a sample interaction:

```
* (pairlists '((a b) (=) (1 2) (+ -) (3 9)))
((A = 1 + 3) (B = 2 - 9))
```

**Exercise 8.10**

Solve Exercise 4.27 using the constructs of this section.

**Exercise 8.11**

Solve Exercise 4.35 using the constructs of this section.

**Exercise 8.12**

Solve Exercise 4.44 using the constructs of this section.

## 9 User interaction

1. **FORMAT** for formatted output to screen, to a file, or a string. The power of it comes from its ability to receive values and insert them to slots marked as ~A in its string argument:

```
1 (let ((x 8) (y 9))
2 (format t "An example of how FORMAT works:~%")
3 (format t "~A plus ~A makes ~A~%" x y (+ x y))
4 (format t "And I love ~A" (+ x y)))
```

will produce the following at the top-level:

```
1 An example of how FORMAT works:
2 8 plus 9 makes 17
3 And I love 17
4 NIL
```

- 1.1. The second element, T, specifies the stream where the output will be sent. T means standard output, the screen by default.
- 1.2. The third element is a string – enclosed by double quotes – that will be the output.
- 1.3. The string element has **format directives**, character sequences starting with ~. The two we will use here are ~A and ~%. The first is a place holder that will be replaced by the value obtained by evaluating the expression following the string element. You can have as many such directives as you like, as long as you have an equal number of expressions following the string element. The other directive, ~% stands for a newline.

2. Here is a basic user interface:

```
1 (defun basic-ui ()
2 (format t "Please enter a number:~%")
3 (let ((input (read)))
4 (if (equal 'q input)
5 (format t "OK, bye!")
```

```
6 (progn
7 (format t "What do you mean by ~A
8 ?~%" input)
9 (basic-ui))))
```

3. .
4. PROGN is new here. Think of PROGN exactly as the cdr of a COND clause whose car is T. All the elements in a PROGN list are evaluated one-by-one, and the final value is returned as the value of PROGN.

### 9.1 Reading spreadsheets

1. First you need to save the spreadsheet in **tab-separated format**. This is usually done by making Save as in your office program and selecting “Comma separated values (.csv)” option, and specifying Tab as the delimiter and double quotes as text quoting method, making sure that cells are quoted – this appears as a checkbox in LibreOffice.
2. After that, you will create a pathname and send it to the following function:

```
1 (defun file-to-lists (path)
2 (labels ((text-to-list (text)
3
```

read-from

conca

string

"

(

"

|   |                                 |                               |               |
|---|---------------------------------|-------------------------------|---------------|
|   |                                 | text                          |               |
|   |                                 | 10                            |               |
|   |                                 | "                             |               |
|   |                                 | )11                           |               |
|   |                                 | "                             |               |
|   |                                 | )                             |               |
|   |                                 | )12                           |               |
|   |                                 | )                             |               |
|   |                                 | 13                            |               |
| 5 | (read-lines (str &optional acc) |                               |               |
| 6 | (let ((                         |                               |               |
|   | line                            |                               |               |
|   | (                               |                               |               |
|   | read-line                       |                               |               |
|   | str                             |                               |               |
|   | nil                             |                               |               |
|   | ,                               |                               |               |
|   | eof)                            |                               |               |
|   | ))                              |                               |               |
| 7 | (                               |                               |               |
|   | if                              |                               |               |
|   | (                               |                               |               |
|   | equal                           |                               |               |
|   | 14                              | (with-open-file (input-stream |               |
|   | line                            |                               | (             |
|   | ,                               |                               | make-pathname |
|   | eof                             |                               | :             |
|   | )                               |                               | name          |
|   | 16                              |                               | path)         |
| 8 | acc                             |                               | :             |
|   |                                 |                               | direction     |
|   |                                 |                               | :             |
| 9 | (                               |                               | input         |
|   | read-lines                      |                               | )             |

17 | `(read-lines input-stream)))`

## References

- Touretzky, D. S. (1990). *COMMON LISP: A Gentle Introduction to Functional Programming*. Benjamin/Cummings Publishing Co., CA.
- Winston, P. H. and Horn, B. K. P. (1984). *LISP, 2nd Edition*. Addison-Wesley, Reading, MA.