

Documento técnico

IMM

Índice

Índice	2
Introduction	2
Description	2
Integration with other systems	3
New features	3
MPoR: generation of cashflows settlement cubes	3
Synthetic netting sets	3
Smoothie (replaces Buddhashand)	3
AWS Cloud Simulation	4
IMM Batch	4
Flag I: Benchmarking	4
Flag III: TRIM	5
Purpose of this document	8
Scripts	8
XKOZ0000S.SH	8
XKOZ0001S.SH	8
XKOZ0002S.SH	9
XKOZ0003S.SH	11
XKOZ0004S.SH	11
XKOZ0005S.SH	11
XKOZ1000S.SH	12

XKOZ1008S.SH	12
XKOZ1009S.SH	12
XKOZ1010S.SH	14
XKOZ1011S.SH	15
XKOZ1013S.SH	17
XKOZ8003S.SH	19
XKOZ9902S.SH	21
XKOZ9907S.SH	23
XKOZ9908S.SH	24
XKOZ9909S.SH	25
XKOZ9910S.SH	27
XKOZ9911S.SH	28
XKOZ2007O.SH	29
XKOZ2008O.SH	30
XKOZ2001O.SH	30
XKOZ2003O.SH	30
XKOZ7003S.SH	30
XKOZ2718S.SH	31
XKOZ2005O.SH	31
XKOZ8205S.SH	32
XKOZ0009S.SH	32
XKOZ0008S.SH	32
XKOZ7001S.SH	32
XKOZ7004S.SH	33
XKOZ7005S.SH	33
Jobstreams Riskflow	33
XKOZ-AUX01-UpdateDatamart	33
SetCurrentDatasetBBVA	33
DeleteDatamartDefinitions	33
LoadDatamartDefinitions	34
LoadDatamartDomains	35
UDSLoaderDomains	36
GenerateUitemplates	36
XKOZ-AUX02-UpdateDomains	1
UpdateDomains	37
XKOZ-AUX03-HistUserBatchData	38
CreateHistDir	38
CopyScenBinFiles	38
CopyScenCeFiles	38
CopySession	39

XKOZ-IMCR-AUX06-MergeCatalog	39
MergeCatalogCubes	40
Stop Riskflow agents	42
XKOZ-IMCR-PRE01-Clean	42
CleanIMCRDirectories	42
XKOZ-IMCR-PRE02-PrepareEnv	43
CreateRFPParamFile	44
CreateDatasetDirectories	47
CopyExportedAIDBData	49
CopyMentorData	51
CopyOtherData	59
CopyTridaData	59
XKOZ-IMCR-PRE05-PrepareBatchEnv	69
CreateBatchDatasetDirectories	69
AddCurrenciesToCollFiles	69
AddSI2ToSSEnvFiles	70
XKOZ-IMCR-PRE06-SetupBatchEnv_Benchmark	70
CheckRTCEData	70
CreateProductsFiles	74
CreateBaselineFiles	76
FilterRTCEData	77
CheckFilterRTCEData	78
Check_SynthethicInst_ExludedDeals	78
CreateBaselineMitigantsFile	79
CreateCounterpartyViewFile	80
UpdateCounterpartyFile	81
XKOZ-IMCR-PRE06-SetupBatchEnv_TRIM	81
CheckRTCEData	81
CreateSlimFXRateCubes	85
CreateFXRatesLookup	88
CreateFXRatesVariablesFile	88
UpdateProductRepresentation	88
CreateProductsFiles	89
CreateExceptionsTridaLookup	89
CreateInitialProfileFile	90
CreateBaselineFiles	91
FilterRTCEData	94
CheckFilterRTCEData	96
Check_SynthethicInst_ExludedDeals	96
CreateBaselineMitigantsFile	97

FixIMMbenchmarkingMentorLookup	97
CreateCounterpartyViewsFile	99
ApplyTemplateToCounterpartyFile	99
XKOZ-IMCR-PRE07-SetupBatchSbxEnv	99
CreateSandboxData	100
XKOZ-IMCR-RPT01-GenerateDatasetReports	101
GenerateReportsDef1	101
XKOZ-IMCR-RPT03-ProcessReports_Benchmark	103
GenerateMergeReport	104
XKOZ-IMCR-RPT03-ProcessReports_TRIM	105
FormatAllExpNodReport	106
FormatEadSaccrReport	106
FormatSaccrEadAttribReport	107
XKOZ-IMCR-RPT09-GenerateEnrichedReport	108
AddTrimAttribTradesAllocationReports	108
CreateUnmodelledReports	109
CreateTradesAllocationUserReports	109
GenerateEnrichedReport	111
XKOZ-IMCR-RTC01-Initialization	113
ResetEtrade	113
InitRTCEDataBase	114
LoadingInstallationData	114
StartingDataServers	114
StartingLith	114
StartingEtradeServer	115
XKOZ-IMCR-RTC02-Load	115
LoadDatasetLookups	115
LoadIMCRStaticData	115
XKOZ-IMCR-RTC03-Dataset	116
ClearLocalWorkspace	117
ClearSharedWorkspace	117
CreatingDataset	117
LoadingCutOffs	117
XKOZ-IMCR-RTC04-Activation	117
StartingEngines	118
PreparingBaseline	118
EvaluatingBaseline	118
ProcessingBackLog	118
ActivatingEngines	118
XKOZ-IMCR-RTC05-LoadSimulationTimes	118

LoadSimulationTimes	118
XKOZ-IMCR-RTC97-StopEngines	120
StoppingEngines	120
XKOZ-IMCR-RTC99-StopServices	121
StopAllRTCEServices	121
XKOZ-IMCR-SBX01-StartServices	121
ResetStateEtrade	121
StartEtrade	122
XKOZ-IMCR-SBX03-Dataset	122
ClearLocalWorkspace	122
ClearSharedWorkspace	122
CreatingDataset	123
XKOZ-IMCR-SBX04-Activation	123
StartingEngines	123
PreparingBaseline	124
EvaluatingBaseline	124
ProcessingBackLog	124
ActivatingEngines	124
XKOZ-IMCR-SBX05-StopEngines	125
StoppingEngines	125
XKOZ-IMCR-SBX99-StopServices	126
StopAllServices	126
XKOZ-INI-PRE01-PrepareEnv	126
CreateHNCubesTRIMPrm	126
CreateHSCubesTRIMPrm	128
CreateSessionDateFile	128
CreateSessionPRMFile	129
XKOZ-INI-PRE02-SetupBatch	129
DeleteCubes	130
RemovePointerUDSDataset	130
PointerToUDSDataset	131
RemovePointerScenarioDataset	131
PointerToScenarioDataset	132
XKOZ-RW-D002-Base_Session	132
CreateBaseSession	132
Configure RW Outputs	133
Create RS Base Session	133
XKOZ-RW-D003-All_Portfolios	137
CreateDirectoryAux	137
FunctorFilter	138

AllPortfolios	139
XKOZ-RW-D004-Daily_Session_Benchmark	139
CreateDailySessionExposure	140
Configure RW Outputs	142
Create RS Daily Session Exposure	142
XKOZ-RW-D004-Daily_Session_TRIM	148
CreateDailySessionExposureTRIM	150
Configure RW Outputs	154
RWSessionFile: Riskwatch Base Session	155
BBVA_BuildIMMProductFilterParam	155
Create RS Daily Session TRIM	156
XKOZ-RW-D006-Create_PHS.	159
CreateDirectoryHierarchy	160
CreatePHSFiles	161
XKOZ-RW-D007-Exposure_Cube_Benchmark	162
CleanCubeDirs	162
CreateExposureCubeBenchmark	162
Configure RW Outputs	162
BBVA_Create RS MAG Exposure Cube - Benckmark	163
SetPermissionCubes	164
XKOZ-RW-D007-Exposure_Cube_TRIM	164
CleanCubeDirs	165
CleanScenarioSplits	167
GenerateScenariosAdv	167
SetPermissionScenarios	168
CreateMAGExposureCube-TRIM	169
Configure RW Outputs	169
BBVA_Create RS MAG Exposure Cube - TRIM	171
SetPermissionLogs	172
SetPermissionCubes	172
XKOZ-RW-D008-MergeScenarioCube	172
MergeScenarioCube	173
XKOZ-RW-D009-MergeScenarioCube_parallel	175
MergeScenarioCube_parallel	175
XKOZ-UDS-P001-Load_AIDB_Multiple	177
DeleteAIDBDatasets	177
CreateUDSDataset	177
UDSLoader-MDA	178
UDSLoader-Updater	183
UDS Loader-MDA_1	184

UDS_Loader_LE	186
UDS_Loader-TRIDA_SIM	186
UDSLoader-TRIDA_NYC	194
UDSFunctor-ProcessUnresolvedXRefs	199
UpdateStats	199
XKOZ-UDS-P002-ExportAidbDatasetData	199
ExportBaselineTradesPosNoSDealFile	199
ExportBaselineTradesPosSDealOPFile	200
ExportBaselineTradesPosConsumosFile	201
ContactExportPositionFiles	202
ExportBaselineTradeInstNoSDealFile	203
ExportBaselineTradesInstSDealOpFile	206
ExportBaselineTradesInstConsumosFile	208
ContactExportInstrumentFiles	210
ExportBreakClauseData	210
ExportSynthMaturityDateData	211
ExportSynthBreakClauseData	213
AddBreakClauseToInstrumentFile	214
ExportBaselineStructureDealStratFile	215
ExportBaselineStructuredDealStratN2File	217
ConcatStrategiesFile	219
ExportBaselineStructuredDealSDealFile	220
ExportCreditProcessData	221

Cod. Versio	Descripción	Fecha	Equipo
001	Creación del documento	14/03/2022	NFQ - IT Riesgos
002	Added Introduction and Jobstreams Risfkow section	28/06/2022	SSN&C
003	Se añade el detalle de los Scripts de los controles técnicos: - XKOZ1011S.SH - XKOZ8003S.SH - XKOZ9907S.SH (Modificado) - XKOZ9908S.SH - XKOZ9909S.SH - XKOZ9910S.SH - XKOZ9911S.SH	12/12/2022	NFQ - IT Riesgos

--	--	--	--

Introduction


Description

CCR IMM is a regulatory capital calculation that replaces the standard method (SACCR) as long as you have approval from the Central Bank

It has a monthly-quarterly regulatory frequency, with weekly and monthly execution implemented

Allows you to model part of the portfolio as simulated (IMM) and another non-simulated (SACCR)

Integration with other systems

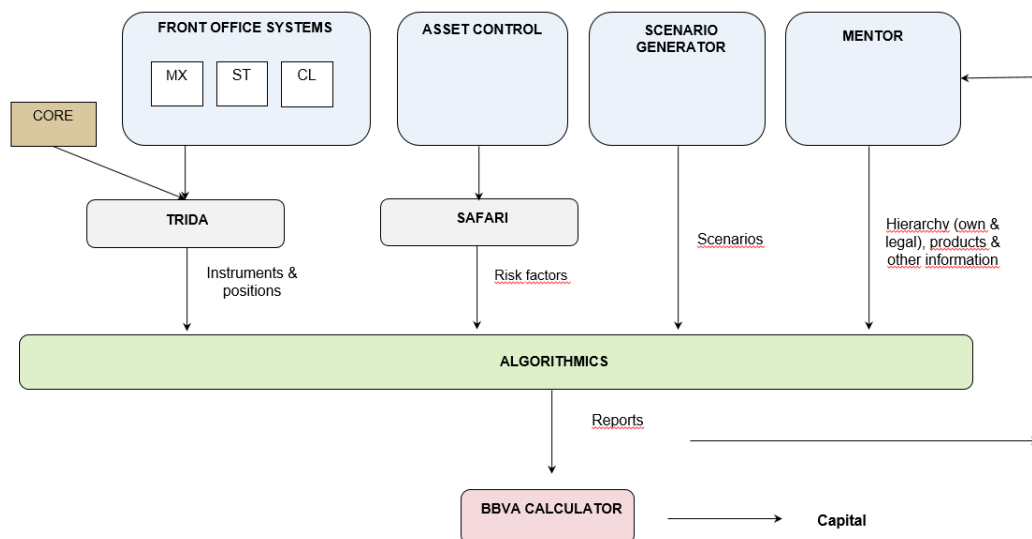

New features

MPoR: generation of cashflows settlement cubes

RiskWatch generates now an optimized cube with simulated cashflow profiles per instrument.

New RW settlement processor and instrument attributes required for the above

Synthetic netting sets

A Synthetic Netting Set (SNS) allows you to add both modeled (simulated / IMM) and unmodeled (SACCR) operations on the same node

Smoothie (replaces Buddhashand)

Smoothie is a new extract tool which is meant to eventually replace Buddha's Hand.

It uses Kotlin script files, with a .kts extension, instead of the XML configuration files used by Buddha's Hand.

Smoothie scripts are dynamically compiled and processing is stream-based and parallelized, which results in faster processing and reduced memory requirements when compared to running Buddha's Hand scripts.

AWS Cloud Simulation

IMM Batch

The batch execution is divided into the following flags:

Flag I: Benchmarking

Flag II: SACCR (pending deplanning)

Flag III: SNS

The functionality of each flag as well as the reports that each one generates are described below.

For more detail of the execution flow of the same see [Ejecucion IMM](#)

Flag I: Benchmarking

In this flag, the MtM calculation of all simulated operations will be performed.

A Theo/Values report will be generated and sent to Mentor so that they can be compared with Front's MtM.

The MtM obtained with the execution of this flag is compared with Front in an in-house SYSTEM of BBVA and the result of the carve-out is sent back to Algorithmics.

General Processes:

- Operational load at AIDB
- Generation of base and daily session
- Cube simulation (base scenario only in t=0)
- Aggregation in IMCR using Mentor inputs

Reports:

\$XKOZ_DATOUT/reports/

XKOZ_THEO-Value_[YYYY]-[MM]-[DD]_IMM.csv

\$XKOZ_DATOUT/reports/imcr/

XKOZ_Benchmark-[YYYYMMDD]_TradesAllocation_Benchmark_IMM.csv

XKOZ_Benchmark-[YYYYMMDD]_TradesAllocationStructuredDeals_Benchmark_IMM.csv

XKOZ_Benchmark-[YYYYMMDD]_TheoValue_Benchmark_IMM.csv

XKOZ_Benchmark_SC-[YYYYMMDD]_TheoValue_Benchmark_IMM.csv

More detail about reports definition can be found in [Recuento Reports CCR Algo.xlsx](#)

Flag III: TRIM

In this flag, the calculation of exposures necessary for the calculation of regulatory capital is carried out.

It runs automatically after flag II until cube generation. Once at this point, user action is necessary (benchmarking)

For this calculation, the normal historical scenario (HN) and historical stress (HS) are used.

Processes

- Enriched updated daily session generation (Trades Allocation)
- Simulation of MtM cubes and settlement
- Aggregation in IMCR

Reports:

\$XKOZ_DATOUT/reports/

XKOZ_TRIM_HN-[YYYYMMDD]_Benchmarking_not_found.csv
 XKOZ_TRIM_HN-[YYYYMMDD]_EAD_SACCR_TRIM_IMM.csv
 XKOZ_TRIM_HN-[YYYYMMDD]_Enriched_TRIM_IMM.csv
 XKOZ_TRIM_HN-[YYYYMMDD]_Exposure_AllNodes_TRIM_IMM.csv
 XKOZ_TRIM_HN-[YYYYMMDD]_SACCR_EAD_ATTRIBUTION_TRIM_IMM.csv
 XKOZ_TRIM_HN-[YYYYMMDD]_TradesAllocationStructuredDeals_TRIM_IMM.csv
 XKOZ_TRIM_HN-[YYYYMMDD]_TradesAllocation_TRIM_IMM.csv

XKOZ_TRIM_HS-[YYYYMMDD]_Benchmarking_not_found.csv
 XKOZ_TRIM_HS-[YYYYMMDD]_EAD_SACCR_TRIM_IMM.csv
 XKOZ_TRIM_HS-[YYYYMMDD]_Enriched_TRIM_IMM.csv

XKOZ_TRIM_HS-[YYYYMMDD]_Exposure_AllNodes_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_SACCR_EAD_ATTRIBUTION_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_TradesAllocationStructuredDeals_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_TradesAllocation_TRIM_IMM.csv

\$XKOZ_DATOUT/reports/imcr

XKOZ_TRIM_HN-[YYYYMMDD]_CPY_EAD_SACCR_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_EAD_SACCR_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_Exposure_AllNodes_SACCR_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_Exposure_AllNodes_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_FinalReport_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_Mean_Positions_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_SACCR_EAD_ATTRIBUTION_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_TimeSteps_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_TradesAllocationStructuredDeals_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_TradesAllocation_TRIM_IMM.csv
XKOZ_TRIM_HN-[YYYYMMDD]_Trades_SIMULATION_FAILURE_TRIM_IMM.csv
XKOZ_TRIM_HN_SC-[YYYYMMDD]_Mean_Positions_TRIM_IMM.csv

XKOZ_TRIM_HS-[YYYYMMDD]_CPY_EAD_SACCR_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_EAD_SACCR_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_Exposure_AllNodes_SACCR_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_Exposure_AllNodes_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_FinalReport_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_Mean_Positions_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_SACCR_EAD_ATTRIBUTION_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_TimeSteps_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_TradesAllocationStructuredDeals_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_TradesAllocation_TRIM_IMM.csv
XKOZ_TRIM_HS-[YYYYMMDD]_Trades_SIMULATION_FAILURE_TRIM_IMM.csv
XKOZ_TRIM_HS_SC-[YYYYMMDD]_Mean_Positions_TRIM_IMM.csv

More detail about reports definition can be found in [Recuento Reports CCR Algo.xlsx](#)

Purpose of this document

This document will define the technical implementation of each of the parts that have been developed for IMM:

- Scripts
- Riskflow Jobstreams

Scripts

XKOZ0000S.SH

(nfq)

XKOZ0001S.SH

This script will start AlgoSecurity services.

Params

Param Jobs Param	Parameter	Value	Description
XKOZ0001S_ES_01	XKOZ_PARAM1	10	Maximum number of times to check that AlgoService has been started before returning an error

Logic

- Check if AlgoSecurity is running

- If it's not running:
 - Start AlgoSecurity services
 - Sleep 60 seconds
 - Ping Algosecurity services
- Run previous step as many times as XKOZ_PARAM1
- At the end of all iterations, if AlgoSecurity is not started return error.

XKOZ0002S.SH

This script will stop all AlgoOne services.

Params

Param Jobs Param	Parameter	Value	Description
XKOZ9999C_PPNN	XKOZ_PARAM1	NA	NA

Logic

- Check if AlgoSecurity is running. If not kill all user AlgoOne processes
- Check if UDS is running and if so, stop UDS services
- Check if Riskflow is running and if so, stop Riskflow services
- Check if AlgowebApps is running and if so, stop AlgowebApps services
- Check if AlgoSecurity is running and if so, stop AlgoSecurity services
- Finally kill all AlgoOnes orphan processes in case they exist

XKOZ0003S.SH

This script will start or stop UDS services according to the parameter received

Params

Param Jobs Param	Parameter	Value	Description
XKOZ0003S_ES_01	XKOZ_PARAM1	Start	Start service flag

XKOZ0003S_ES_02	XKOZ_PARAM1	Stop	Stop service flag
-----------------	-------------	------	-------------------

Logic

- Check if UDS is running and stop if so
- Execute \$UDS_HOME/bin/mdc ReleaseGlobalLock
- Start UDS service if XKOZ_PARAM1 equal to Start.

XKOZ0004S.SH

This script will start or stop Riskflow services according to the parameter received

Params

Param Jobs Param	Parameter	Value	Description
XKOZ0004S_ES_01	XKOZ_PARAM1	Start	Start service flag
XKOZ0004S_ES_02	XKOZ_PARAM1	Stop	Stop service flag

Logic

- Check if Riskflow is running and stop if so
- Delete Riskflow lock files if they exist
- Delete Riskflow temp files
- Check and update if necessary hostgroupfile.riskflow.xml file
- Start Riskflow service if XKOZ_PARAM1 equal to Start.

XKOZ0005S.SH

This script will start or stop AlgoWebApps services according to the parameter received

Params

Param Jobs Param	Parameter	Value	Description
XKOZ0005S_ES_01	XKOZ_PARAM1	Start	Start service flag

XKOZ0005S_ES_02	XKOZ_PARAM1	Stop	Stop service flag
-----------------	-------------	------	-------------------

Logic

- Check if AlgoWebApps is running and stop if so
- Start AlgoWebApps service if XKOZ_PARAM1 equal to Start.

XKOZ1000S.SH

This script will run the Riskflow stream received as parameter.

Logic

- Execute \$RISKFLOW_HOME/bin/runStream XKOZ_PARAM1
- if XKOZ_PARAM1 contains at the end "#max_retries=X" run previous step as many times as max_retries indicates in case the execution fails.

XKOZ1008S.SH

This script will delete files and folders using a configuration file

Params

Param Jobs Param	Parameter	Value	Description
XKOZ2008S_ES_01	XKOZ_PARAM1	\$XKOZ_CFG/XKOZ_Clean_Batch_Directories.cfg	List of objects to delete

Logic

- Delete all folders and files contained in XKOZ_PARAM1 cfg file

XKOZ1009S.SH

This script will extract .tar.gz files

Params

Param Jobs Param	Parameter	Value	Description
XKOZ1009S_ES_01	XKOZ_PARAM1	\${XKOZ_CFG}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_mag.tar.gz	File to extract
	XKOZ_PARAM2	\$ALGO_TOP/inputs/mag	Folder
	XKOZ_PARAM3	instances	output path
	XKOZ_PARAM4	\$XKOZ_CFG/XKOZ_Export_mag_tar.cfg	Cfg file
	XKOZ_PARAM45	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_mag.\${XKOZ_FPROC}.\${XKOZ_PROFILE_FHSYS}.tar.gz	Backup
XKOZ1009S_ES_02	XKOZ_PARAM1	\${XKOZ_CFG}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_riskflow.tar.gz	File to extract
	XKOZ_PARAM2	\$ALGO_TOP/inputs	Folder
	XKOZ_PARAM3	riskflow	output path
	XKOZ_PARAM14	\$XKOZ_CFG/XKOZ_Export_RF_tar.cfg	Cfg file
	XKOZ_PARAM5	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_riskflow.\${XKOZ_FPROC}.\${XKOZ_PROFILE_FHSYS}.tar.gz	Backup
XKOZ1009S_ES_03	XKOZ_PARAM1	\${XKOZ_CFG}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_riskflow.tar.gz	File to extract
	XKOZ_PARAM2	\$ALGO_TOP/inputs	Folder
	XKOZ_PARAM3	riskflow	output path

Logic

- Extract \$XKOZ_PARAM1 file to \$XKOZ_PARAM3 output path, only extract the folder \$XKOZ_PARAM2.
- If \$XKOZ_PARAM4 (cfg_export_file) is defined and \$XKOZ_PARAM5 (output_export_file) are received, perform a prior tar.gz backup

XKOZ1010S.SH

This script will compress files in a .tar.gz file

Params

Param Jobs Param	Parameter	Value	Description
XKOZ1010S_ES_01	XKOZ_PARAM1	\$XKOZ_CFG/XKOZ_Export_mag_tar.cfg	Cfg file
	XKOZ_PARAM2	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_mag_\${XKOZ_FPROC}.tar.gz	Compressed file
XKOZ1010S_ES_03	XKOZ_PARAM1	\$XKOZ_CFG/XKOZ_Export_RF_tar.cfg	Cfg file
	XKOZ_PARAM2	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_riskflow_\${XKOZ_FPROC}.tar.gz	Compressed file
XKOZ1010S_ES_04	XKOZ_PARAM1	\$XKOZ_CFG/XKOZ_ExportBatchEnvironment.cfg	Cfg file
	XKOZ_PARAM2	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_configuration_\${XKOZ_FPROC}.tar.gz	Compressed file
XKOZ1010S_ES_05	XKOZ_PARAM1	\$XKOZ_CFG/XKOZ_ExportBatchLog.cfg	Cfg file
	XKOZ_PARAM2	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_logs_\${XKOZ_FPROC}.tar.gz	Compressed file
XKOZ1010S_ES_16	XKOZ_PARAM1	\$XKOZ_CFG/XKOZ_ExportBatchInputs.cfg	Cfg file
	XKOZ_PARAM2	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_inputs_\${XKOZ_FPROC}.tar.gz	Compressed file
XKOZ1010S_ES_17	XKOZ_PARAM1	\$XKOZ_CFG/XKOZ_ExportLibArtifactory.cfg	Cfg file
	XKOZ_PARAM2	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_libArtifactory_\${XKOZ_FPROC}.tar.gz	Compressed file

XKOZ1010S_ES_22	XKOZ_PARAM1	\$XKOZ_CFG/XKOZ_ExportBatchOutputs.cfg	Cfg file
	XKOZ_PARAM2	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}\${XKOZ_SUFIJO_FPROC}_outputs_\${XKOZ_FPROC}.tar.gz	Compressed file

Logic

- Compresses the list contained in the file \$XKOZ_PARAM1 in the output tar.gz \$XKOZ_PARAM2

XKOZ1011S.SH

Script que se encarga de leer los logs de la ruta de los cubos y generar un fichero .csv con las estadísticas de la carga.

Argumentos de entrada:

- **PARAM1:** Ruta de entrada en la que se encuentran los archivos de cada posible fuente (BenchMark, HN_TRIM OnPremise, HN_TRIM AWS, HS_TRIM OnPremise y HS_TRIM AWS).
- **PARAM2:** Ruta de salida en la que se generarán los archivos con las estadísticas de carga.
- **PARAM3:** Máscara.

Lógica del Script:

En caso de no estar informado el argumento de entrada o en caso de que no exista el fichero de configuración, detener la ejecución del script alertando del error.

En caso de no haber errores:

1. Se recogen los parámetros de entrada en las variables **input_directory**, **output_directory** y **mascara**.
2. Se declara la variable **perl_xops**, a la que se le asigna la ruta en la que se encuentra el archivo .pl que se ejecutará más adelante.

3. Se recorren todos los logs de los jobstreams que concuerden con el **input_directory**:
 - a. Se recoge en las siguientes variables **dir_base**, **cube_name** y **cube_dir** los valores de la ruta de los cubos, el nombre del cubo y el nombre del directorio en el que están los cubos respectivamente. También se le da a la variable **fich_salida** el valor de la ruta del archivo de salida.
 - b. Se da valor a la variable **Command** y se procede a ejecutarla, ya que es la encargada de arrancar el archivo .pl.
 - i. El archivo .pl tiene como objetivo extraer los logs de error asociados a los cubos. Para ello procede de la siguiente manera:
 1. En primer lugar se recogen en variables los parámetros de entrada (**dir_base**, **mascara** y **fich_salida**).
 2. Se recorren todos los ficheros .err que contengan la máscara introducida como parámetro.
 - a. Se obtienen las líneas que tienen errores y se da ese valor a la variable **lista_errores**, la que se tratará haciendo un split con los campos que se pintarán en el archivo .csv.
 - c. Se le asigna a la variable **all_files** el valor de **fich_salida** de cada línea que se está recorriendo.
4. Se ejecuta **Command** una última vez, comprobando que devuelva contenido.
5. Se imprime todo el contenido de **all_files** en el archivo .csv que se requería y se comprueba si tiene contenido y, si tiene contenido, está todo bien y se borran los archivos que se han generado previamente en el archivo .pl.

XKOZ1013S.SH

This script will export and Load AIDB filters definition in UDS dataset

Params

Param Jobs Param	Parameter	Value	Description
XKOZ1013S_ES_01	XKOZ_PARAM1	Import	Action
	XKOZ_PARAM2	\${XKOZ_CFG}/\${XKOZ_CFGUSER_APLIDato}_IDM_filters_data\${XKOZ_SUFIO_FPROC}.csv	Data file
	XKOZ_PARAM3	\${XKOZ_CFG}/\${XKOZ_CFGUSER_APLIDato}_IDM_filters_header\${XKOZ_SUFIO_FPROC}.csv	Header file
	XKOZ_PARAM4	BBVA	UDS Dataset
XKOZ1013S_ES_02	XKOZ_PARAM1	Export	Action
	XKOZ_PARAM2	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}_IDM_filters_data_BBVA_\${XKOZ_SUFIO_FPROC}.\${XKOZ_FPROC}.\${XKOZ_PROFILE_FHSYS}.csv	Data file
	XKOZ_PARAM3	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}_IDM_filters_header_BBVA_\${XKOZ_SUFIO_FPROC}.\${X	Header file

		KOZ_FPROC}.\${XKOZ_PR OFILE_FHSYS}.csv	
	XKOZ_PARAM4	BBVA	UDS Dataset
XKOZ1013S_ES_03	XKOZ_PARAM1	Export	Action
	XKOZ_PARAM2	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}_ID M_filters_data.\${XKOZ_SUF IJO_FPROC}.\${XKOZ_FPR OC}.\${XKOZ_PROFILE_FH SYS}.csv	Data file
	XKOZ_PARAM3	\${XKOZ_DATOLD}/\${XKOZ_CFGUSER_APLIDato}_ID M_filters_header\${XKOZ_S UFIJO_FPROC}.\${XKOZ_F PROC}.\${XKOZ_PROFILE_F HSYS}.csv	Header file
	XKOZ_PARAM4	BBVA	UDS Dataset
XKOZ1013S_ES_99	XKOZ_PARAM1	Export	Action
	XKOZ_PARAM2	\${XKOZ_CFG}/\${XKOZ_CF GUSER_APLIDato}_IDM_filt ers_data\${XKOZ_SUFIJO_F PROC}.csv	Data file
	XKOZ_PARAM3	\${XKOZ_CFG}/\${XKOZ_CF GUSER_APLIDato}_IDM_filt ers_header\${XKOZ_SUFIJO _FPROC}.csv	Header file
	XKOZ_PARAM4	BBVA	UDS Dataset

XKOZ8003S.SH

Script que se encarga de leer los logs de la ruta \$ALGO_TOP/outputs/shared/uds y genera un informe en el que se compara la carga actual de la AIDB con la anterior.

Argumentos de entrada:

- Este Script no tiene argumentos de entrada.

Lógica del script:

1. En primer lugar se declara la variable **SEND_MAIL** = 0 que, de acabar así el script, determinará que todo ha ido bien. También se asigna a distintas variables la ruta y el nombre de los ficheros que se van a crear: **ACTUAL_REPORT** (fichero de la

ejecución actual en el que se realiza el informe con la comparación y el detalle de los nuevos errores), **ACTUAL_FILE_LOG** (fichero de la ejecución actual en el que están el número de OK y FAIL), **ACTUAL_FILE_LOG_ERR** (fichero de la ejecución actual en el que está el detalle de cada FAIL), **FAILS_REPORT** (informe con los archivos, su número de OK y FAIL).

2. Se le asignará a **DIRECTORY_ANT** el valor de la ruta \$XKOZ_LOGS, en la que se comprueba si existe la carpeta *historical_uds_logs*.
 - a. En caso de que no exista, se creará una carpeta llamada *historical_uds_logs* de la que se recogerán los ficheros de ejecuciones previas o, en caso de que no hubiera ningún fichero, se le asignará a la variable **SEND_MAIL** el valor 1.
3. Se recogen los ficheros de la ejecución previa **PREVIOUS_FILE** (fichero de la ejecución anterior en el que están el número de OK y FAIL), **PREVIOUS_FILE_ERR** (fichero de la ejecución anterior en el que está el detalle de cada FAIL) y se comprueba que no estén vacíos.
 - a. En caso de que estén vacíos se le asignará a la variable **SEND_MAIL** el valor 1.
4. Se cuenta el número de 'REC_OK' que se encuentran en los ficheros de la ruta de la AIDB, se pinta en el fichero de informe, del log y se guarda en la variable **OK**. Por otro lado, se cuentan los 'REC_FAIL', se pintan las líneas en el fichero de errores y se guarda el número en la variable **FAIL**. Ambos datos se pintan en el LOG.
5. En caso de que **SEND_MAIL** = 0 se procede de la siguiente manera:
 - a. Se analiza el número de oks y fails del fichero anterior y se almacenan en **OK_PREV** y **FAIL_PREV** respectivamente. Posteriormente se calculan las diferencias de oks y fails entre el archivo actual y el anterior en las variables **CHARGED** y **ERRORS** respectivamente. Se saca el porcentaje de variación y se almacena en las variables **XKOZ_DifferenceOK** y **XKOZ_DifferenceER**.
6. Se pintan los resultados en el fichero del informe **ACTUAL_FILE**, teniendo en cuenta que si **SEND_MAIL** = 0 habrá que pintar los nuevos fallos que sean diferentes a los anteriores, mientras que si **SEND_MAIL** = 1 habrá que pintar todos los fallos. También se pintan en el informe de fallos **FAILS_REPORT**.
7. Se preparan los parámetros que posteriormente se enviarán en la ejecución del script \$XKOZ_SCRT/XKOZ_Sendmail.SH.
 - a. En caso de que **SEND_MAIL** = 1 se manda un Warning.
 - b. En caso de que **SEND_MAIL** = 0 está Correcto.
8. Se copian los ficheros que se acaban de generar a la carpeta de históricos para que sean estos los que se recojan como previos en la ejecución del próximo batch y se ejecuta \$XKOZ_SCRT/XKOZ_Sendmail.SH con el parámetro correspondiente para enviar el correo.

XKOZ9902S.SH

Script que genera los ficheros de fechas temporales. Estos ficheros se crean los días que se debe ejecutar el batch para guardar la fecha de ejecución. Posteriormente, en otro job, se copiarán estas fechas cuando arranque el batch.

Se utiliza este procedimiento para controlar los retrasos en el inicio del batch y que así no se pisen las fechas que utiliza el batch hasta que realmente comienza el mismo.

Las fechas que genera el script son las siguientes:

\$XKOZ_DATPE/XKOZ_TMP_AUX_FDSEM_BATCH_IMM_es.DAT

Día de la semana de la ejecución {Mon, Tue, Wed, Thu, Fri}

\$XKOZ_DATPE/XKOZ_TMP_AUX_FPROC_BATCH_IMM_es.DAT

Día de ejecución (yyyymmdd)

\$XKOZ_DATPE/XKOZ_TMP_AUX_FPROC_BATCH_ANT_IMM_es.DAT

Día natural anterior a la ejecución (yyyymmdd)

\$XKOZ_DATPE/XKOZ_TMP_AUX_FPROC_BATCH_AANT_IMM_es.DAT

2 días naturales previos a la ejecución (yyyymmdd)

Argumentos de entrada:

No aplica.

Lógica del script:

- Se crea la variable **DIA_DE_SEMANA** con la fecha del día de la ejecución y el formato {Mon, Tue, Wed, Thu, Fri}.

- Se crea la variable **FECHA_EJECUCION** con la fecha del día de la ejecución y el formato yyyymmdd.

- Se crea la variable **FECHA_ANTERIOR** con la fecha del día de la ejecución -1 y el formato yyyyymmdd.
- Se crea la variable **DOS_DIAS_PREVIOS** con la fecha del día de la ejecución -2 y el formato yyyyymmdd.
- Se guarda el contenido de la variable **DIA_DE_SEMANA** en el fichero \$XKOZ_DATPE/XKOZ_TMP_AUX_FDSEM_BATCH_IMM_es.DAT.
- Se guarda el contenido de la variable **FECHA_EJECUCION** en el fichero \$XKOZ_DATPE/XKOZ_TMP_AUX_FPROC_BATCH_IMM_es.DAT.
- Se guarda el contenido de la variable **FECHA_ANTERIOR** en el fichero \$XKOZ_DATPE/XKOZ_TMP_AUX_FPROC_BATCH_ANT_IMM_es.DAT.
- Se guarda el contenido de la variable **DOS_DIAS_PREVIOS** en el fichero \$XKOZ_DATPE/XKOZ_TMP_AUX_FPROC_BATCH_AANT_IMM_es.DAT.
- Se dan permisos 775 a todos los ficheros creados.

XKOZ9907S.SH

Script que se encarga de validar que se encuentren todos los ficheros descritos en un cfg.

Argumentos de entrada:

- **PARAM1:** Fichero de configuración en el cual se encontrarán listados todos los ficheros que se quieren controlar.
- **PARAM2:** Fecha de ejecución del batch.

Lógica del script:

En caso de no estar informado el argumento de entrada o en caso de que no exista el fichero de configuración, detener la ejecución del script alertando del error.

En caso de no haber errores:

1. Preguntamos si existe el fichero del informe.
 - I. En caso de no existir, crearemos la cabecera.
2. Recorrer las líneas del fichero de configuración (\$PARAM1):

- I. Guardar el contenido de la línea recuperando el valor de las variables que se guardan dentro del fichero de configuración.
- II. En caso de que el fichero exista, se guarda en el log el detalle de que ese fichero existe.
- III. En caso de que el fichero no exista:
 - a. Se guarda en el log el detalle de que ese fichero no existe.
 - b. Se suma 1 a la variable **CONTADOR**.
 - c. Se incluye el nombre del fichero a la variable de tipo array **FICH_NOENCONTRADOS**.
 - d. Se incluye dentro del informe, el detalle del fichero que falta.
3. En caso de que la variable **CONTADOR** sea 0, no se hace nada. Pero en caso contrario se realiza la siguiente lógica:
 - I. Se recorre la variable **FICH_NOENCONTRADOS**, pintando en el log cada uno de los ficheros que faltan.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ9908S.SH

Script que se encarga de validar que ciertos documentos tengan el número de columnas adecuado.

Argumentos de entrada:

- **PARAM1:** Fichero de configuración con los siguientes datos:
 - **Nombre fichero:** Nombre del fichero que se quiere validar.
 - **Separador:** Delimitador del fichero.
 - **Número de columnas:** Número de columnas que tiene el fichero, en caso de especificar el literal "GET_HEADER", calculará el número de columnas en base a la cabecera (primera línea).
- **PARAM2:** Fecha de ejecución del batch.

*** **IMPORTANTE:** Especificar el número de columnas, obligará a que si en un futuro se amplían las columnas, se tenga que modificar esta configuración. Como contingencia se

podrá parametrizar como “Número de columnas = GET_HEADER” para que asuma como número de columnas, el número de columnas que contenga la primera fila.

Lógica del script:

En caso de no estar informado el argumento de entrada o en caso de que no exista el fichero de configuración, detener la ejecución del script alertando del error.

En caso de no haber errores:

1. Recorrer el fichero de configuración creando las siguientes variables:

- I. **FILES**: Variable de tipo array.
- II. **NUM_COLUMNS**: Variable de tipo array.
- III. **SEPARATORS**: Variable de tipo array.

2. Empezaremos a recorrer la variable **FILES**:

- I. Para cada **FILES[FILE]** preguntaremos si **NUM_COLUMNS[FILE]** es igual a “GET_HEADER”.
 - i. Si se cumple, recuperaremos la primera línea del fichero en la variable **HEAD** y se modifica el valor de la variable **NUM_COLUMNS[FILE]** con el número de columnas real que tiene ese archivo.
 - ii. En este punto, ya tendremos todos los datos preparados correctamente para poder leer cada uno de los ficheros y podremos empezar a recorrer línea a línea la variable **FILES[FILE]**:
 - iii. Asignamos a la variable **ROW** de tipo array los valores extraídos del comando de awk en el que se hace lo siguiente:
 - Se declara la variable **num = NUM_COLUMNS[FILE]** y se separa por **SEPARATORS[FILE]**. Se cuenta el número de columnas en base al separador y teniendo en cuenta la posibilidad de que las columnas vengan determinadas por dobles comillas y, si **num** es distinto del número de campos (NF), se añade el número de la fila en la que encontramos el error a la variable **ROW**.
 - iv. Se recorre la variable **ROW**, pintando una línea en el informe de control con el detalle del error, incluyendo la línea (**LINE**) en la que se encuentra y marcaremos como error la ejecución, para que cuando se terminen de validar todos los ficheros, finalice en error.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ9909S.SH

Script que se encarga de validar que las diferencias de tamaño de los ficheros que recibimos en el batch no superen el umbral establecido para cada fichero.

Argumentos de entrada:

- **PARAM1:** Fichero de configuración con los siguientes datos:
 - **Nombre fichero:** Nombre del fichero que se quiere validar.
 - **Umbral de diferencia:** Máxima diferencia de tamaño admitida entre el fichero actual y el fichero previo.
- **PARAM2:** Fecha de ejecución del batch.

Lógica del script:

En caso de no estar informado el argumento de entrada o en caso de que no exista el fichero de configuración, detener la ejecución del script alertando del error.

En caso de no haber errores:

1. Recorrer el fichero de configuración creando las siguientes variables:
 - I. **ACTUAL_FILE**: Variable de tipo array.
 - II. **DIFFERENCE**: Variable de tipo array.
2. Se van a recorrer cada uno de los ficheros **ACTUAL_FILE** y para cada uno de ellos se va a proceder de la siguiente manera:
 - I. Si el fichero **ACTUAL_FILE[FILE]** existe:
 - i. Almacenamos el valor del nombre del archivo en la variable **NAME** y la ruta del mismo en la variable **DIRECTORY**. A partir de **NAME** se extrae el valor de la variable **BASENAME** que contendrá el nombre del fichero, sin incluir la fecha y la extensión.
 - ii. Con **BASENAME** recuperaremos el fichero más reciente que haya en la ruta y lo guardaremos en la variable **PREVIOUS_FILE**.
 - iii. Si hemos conseguido recuperar **PREVIOUS_FILE**:
 1. Creamos las variables **ACTUAL_FILE_SIZE** y **PREVIOUS_FILE_SIZE**, que contendrán el tamaño de los ficheros a comparar.
 2. Se valida que **PREVIOUS_FILE_SIZE** no sea 0 para que no salte un error
 - a. En caso de que sea 0, se le asigna a **RATIO** un valor cercano a infinito.
 - b. En caso de que no sea 0 guardamos en la variable **RATIO**, la división de estos dos tamaños.
 3. Se comprobará si **RATIO** supera el umbral de diferencia establecido en la variable **DIFFERENCE[FILE]**. En caso de superar este umbral:
 - a. Escribiremos en el fichero del informe indicando que se ha superado el umbral para este fichero y marcaremos como error la ejecución, para que cuando se terminen de validar todos los ficheros, finalice en error.
 - iv. Si no, pintaremos una traza de log indicando que no se ha podido realizar el control porque no existe fichero previo con el que comparar.
 - II. Pintamos una traza de log indicando que no se ha podido realizar el control para este fichero.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ9910S.SH

Script que se encarga de validar aquellos ficheros que llegan vacíos.

Argumentos de entrada:

- **PARAM1:** Fichero de configuración con los siguientes datos:
 - **Nombre fichero:** Nombre del fichero que se quiere validar.
 - **Separador:** TRUE o FALSE en caso de que dicho fichero contenga cabecera o no respectivamente.
- **PARAM2:** Fecha de ejecución del batch.

Lógica del script:

En caso de no estar informado el argumento de entrada o en caso de que no exista el fichero de configuración, detener la ejecución del script alertando del error.

En caso de no haber errores:

1. Recorrer el fichero de configuración creando las siguientes variables:
 - I. **FILES**: Variable de tipo array.
 - II. **HAS_HEADER**: Variable de tipo array.
2. Se recorre la variable **FILES**.
 - I. En caso de que el fichero tenga contenido se pregunta si GET_HEADER==TRUE. En ese caso se comprueba si únicamente es la cabecera contando el número de líneas que tiene el archivo en la variable **LINES**.
 - i. En caso de que **LINES** = 1 se imprime una línea en el fichero de control, indicando el nombre del fichero y el detalle de que está vacío.
 - ii. En caso contrario se imprime una línea en el LOG indicando que está bien.
 - II. En caso contrario, se imprime una línea en el fichero de control, indicando el nombre del fichero y el detalle de que está vacío.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ9911S.SH

Script que se encarga de identificar ciertos caracteres raros que no pueden contener los ficheros de input.

Argumentos de entrada:

- **PARAM1**: Fichero de configuración en el cual se encontrarán listados todos los ficheros que se quieren controlar.

- **PARAM2:** Fecha de ejecución del batch.

Lógica del script:

En caso de no estar informado el argumento de entrada o en caso de que no exista el fichero de configuración, detener la ejecución del script alertando del error.

En caso de no haber errores:

1. Recorrer el fichero de configuración creando las siguientes variables:
 - I. **FILES:** Variable de tipo array con los nombres de ficheros que se quieren validar.
2. Se van a recorrer cada uno de los ficheros introducidos como parámetros **FILE** y para cada uno de ellos se va a proceder de la siguiente manera:
 - I. Se busca la presencia de caracteres raros dentro del fichero mediante el comando grep y se guarda en la variable **CCAR**. Se cuenta el número de líneas y se guarda en la variable **CCARlen**.
 - II. Se comprueba si **CCARlen** es mayor que uno y en caso de que así sea se imprime una línea en el fichero de control, indicando el nombre del fichero y el detalle de que contiene caracteres raros.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ2007O.SH

Script que reemplazará las variables dependientes de entorno que contendrán los XMLs con los datos de producción. Por ejemplo: **__ENTORNO__** → pr.

Argumentos de entrada:

- **PARAM1:** Fichero xml de entrada
- **PARAM2:** Cadena de texto que representa las sustituciones que se deben de realizar en el fichero xml. Tiene formato "clave1=valor1;clave2=valor2;..."
- **PARAM3:** [Opcional] En caso de que sea "EJECUCION_CONCURRENTE", creara marcas temporales en el fichero xml de salida para evitar ejecuciones concurrentes

Lógica del script:

En caso de no estar informado **PARAM1** o **PARAM2** o, en caso de que no exista el fichero que representa **PARAM1**, detener la ejecución del script alertando del error. En caso de no haber errores, realiza reemplazos de cadenas de texto en el fichero **PARAM1** de acuerdo a la cadena de texto **PARAM2**

Además, de forma opcional, se encargará de asignar al nuevo xml valores temporales dependientes del día y hora de ejecución. Con esto se consigue eliminar posibles problemas de concurrencia en caso de que se planifiquen las cadenas de forma muy cercana en el tiempo. Si **PARAM3** es igual a "EJECUCION_CONCURRENTE", crea marcas temporales únicas en el fichero **PARAM1** de acuerdo al momento de ejecución del script.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ2008O.SH

Script que se encarga de realizar una limpieza del sistema de ficheros de acuerdo a la antigüedad de los elementos y al tiempo máximo permitido para cada uno de ellos.

Argumentos de entrada:

- **PARAM1:** Fichero de configuración que especifica los elementos que se deben de eliminar del sistema y su tiempo máximo de retención permitido. El formato del fichero

es: <elemento a borrar>;<maximo de años permitidos>;<máximo de meses permitidos>;<máximo de días permitidos>

- **PARAM2:** Ruta a partir de la cual queremos aplicar la limpieza del sistema

Lógica del script:

Recibe como parámetros un fichero de configuración que especifica los elementos que se deben de eliminar del sistema y su tiempo máximo de retención permitido (**PARAM1**) así como la ruta a partir de la cual queremos aplicar la limpieza del sistema (**PARAM2**).

En caso de no estar informado **PARAM1** o **PARAM2** o, en caso de que no exista el fichero que representa **PARAM1** o el directorio que representa **PARAM2**, detener la ejecución del script alertando del error.

En caso de no existir errores, se lee el fichero de configuración **PARAM1** línea a línea y se procede a eliminar los elementos existentes en **PARAM2** cuya antigüedad haya superado la indicada en la línea del fichero **PARAM1**

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ2001O.SH

Script que borra los directorios de la ruta RP y los crea vacíos para preparar una nueva ejecución

Argumentos de entrada:

- **PARAM1:** Fichero con las rutas a ser limpiadas
- **PARAM2:** Fichero de salida con la estructura necesaria para las ejecuciones On-Demand

Lógica del script:

En caso de no estar informado **PARAM1** o **PARAM2** o, en caso de que no exista el fichero que representa **PARAM1** o el fichero que representa **PARAM2**, detener la ejecución del script alertando del error.

Primero, se lee línea a línea el fichero indicado por **PARAM1** y, para cada línea, realiza una sentencia de borrado en el filesystem del elemento que indique la línea. Posteriormente, lee línea a línea el fichero indicado por **PARAM2** y, para cada línea, crea una carpeta en el sistema que coincide con los contenidos leídos.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ2003O.SH

Script que se encarga de preparar la información necesaria para los procesos OnDemand

Argumentos de entrada:

- **PARAM1**: Fichero de configuración que indica las operaciones a realizar y la forma de actuar ante diferentes circunstancias

Lógica del script:

Si no existe el fichero indicado en **PARAM1** (o si existe pero está vacío), finaliza la ejecución en error.

El proceso que se realiza se basa en la ejecución de las siguientes operaciones:

1. Generar las siguientes fechas:
 - a. /rp/xkoz/batch/es/dat/pe/XKOZ_AUX_FDSEM_BATCH_IMM_es.DAT -->
Fecha del día que se ejecuta el backtesting en base al flag de la web {Mon, Tue, Wed, Thu, Fri}
 - b. /rp/xkoz/batch/es/dat/pe/XKOZ_AUX_FPROC_BATCH_IMM_es.DAT -->
Fecha del día que se ejecuta el backtesting en base al flag de la web (yyyymmdd)

- c. /rp/xkoz/batch/es/dat/pe/XKOZ_AUX_FPROC_BATCH_ANT_IMM_es.DAT --
> Día natural anterior a la fecha de ejecución, en base al flag de la web (yyyymmdd)
 - d. /rp/xkoz/batch/es/dat/pe/XKOZ_AUX_FPROC_BATCH_AANT_IMM_es.DAT -
-> 2 días naturales previos a la fecha ejecución, en base al flag de la web (yyyymmdd)
 - e. /rp/xkoz/batch/es/dat/pe/XKOZ_AUX_FPROC_BATCH_IMM_BT_es.DAT -->
Fecha de hace un año, restando un año a la fecha de la web y recuperando la máxima fecha de ese mes un año atrás en la ruta \$XKOZ_DATOLD/OnDemandData
2. Generar el fichero /rp/xkoz/batch/es/dat/pe/XKOZ_TIPO_PROCESO_ONDEMAND_IMM_es.txt con el contenido del flag de la web
 3. Lanza los comandos parametrizados en el cfg de entrada que se encargarán de recuperar los inputs de una ruta determinada

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ7003S.SH

Ejecuta AWS-Cli to s3 para listar/borrar/subir/bajar ficheros del S3

Argumentos de entrada:

- **PARAM1:** Operación a realizar. Los valores posibles son: [put|get|list|delete|cp_lustre|cp_lustre_logs]
- **PARAM2:** Fichero de configuración
- **PARAM3:** Fichero de configuración

Lógica del script:

El script verifica que **PARAM1**, **PARAM2** y **PARAM3** no estén vacíos y representen ficheros existentes en el caso de **PARAM2** y **PARAM3**.

El script realiza diversas lógicas en función del valor de **PARAM1**. Se indican a continuación:

- **put:** Ejecuta el script **\$XKOZ_SCRT/XKOZ_AWS_BBVA_to_S3.sh**
- **put_product:** Ejecuta el script **\$XKOZ_SCRT/XKOZ_AWS_subir_producto.sh**
- **cp_lustre:** Ejecuta el script **\$XKOZ_SCRT/XKOZ_AWS_Lustre_to_S3_cubes.sh**
- **cp_lustre_logs:** Ejecuta el script **\$XKOZ_SCRT/XKOZ_AWS_Lustre_to_S3_logs.sh**
- **get:** Ejecuta el script **\$XKOZ_SCRT/XKOZ_AWS_S3_to_BBVA.sh**
- **list:** Ejecuta el script **\$XKOZ_SCRT/XKOZ_AWS_BBVA_to_S3.sh**
- **delete:** Ejecuta el script **\$XKOZ_SCRT/XKOZ_AWS_BBVA_to_S3.sh**
- **En cualquier otro caso:** Finaliza la ejecución indicando un error en el valor del parámetro.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ2718S.SH

Mueve escenarios a ruta especificada

Argumentos de entrada:

- **PARAM1:** Ruta origen escenario
- **PARAM2:** Nombre entrada escenario
- **PARAM3:** Ruta destino escenario
- **PARAM4:** Nombre salida escenario
- **PARAM5:** Fichero fechas festivas

Lógica del script:

Comprueba que todos los parámetros del script existan y no sean vacíos. En caso de que alguno no exista, se finaliza en error. Una vez se han comprobado los parámetros del script, se realiza la siguiente secuencia de pasos:

1. Comprueba si el día anterior a la fecha del batch fue festivo. Para ello, se hace uso del fichero de fechas especificado en **PARAM5**. En caso de que fuera festivo, se envía un correo al usuario informando de la situación y se termina el script en error para forzar la revisión manual del festivo.
2. Si el día anterior no es festivo, se comprueba si los escenarios **PARAM1/PARAM2.bin** y **PARAM1/PARAM2.ce** existen. Si no existen, se finaliza en error.
3. Si los escenarios existen, se copian a la ruta **PARAM3** con el nombre indicado en **PARAM4**

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ20050.SH

Script de contingencia para backtesting que valida los ficheros recuperados de hace un año y si falta alguno lo crea vacío.

Argumentos de entrada:

- **PARAMX**: Fichero de configuración que contiene en su interior un listado de ficheros que es necesario comprobar su existencia.

Lógica del script:

Script que recibe "n" ficheros de configuración representados en **PARAM<Numero>**. Para cada uno de los **PARAM<Numero>** se recorre el listado de ficheros que contiene, se verifica si existen y se crean vacíos en caso de que no existan.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ8205S.SH

Envío de mail

Argumentos de entrada:

- **PARAM1**: Clave para el archivo de configuración del mail
- **PARAM2**: Fichero de configuración del mail.

Lógica del script:

Utiliza los parámetros de entrada al script para realizar un envío de correo. **PARAM1** representa una clave que contiene una configuración de email (remitente, destinatario, asunto..) mientras que **PARAM2** representa el fichero donde se va a buscar la clave **PARAM1**. El script comprueba que ambos parámetros existen. Si alguno no existe, se finaliza en error.

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ0009S.SH

Script que sincroniza RiskWatch

Argumentos de entrada:

No hay

Lógica del script:

El script realiza la ejecución de una serie de comandos necesarios para sincronizar RiskWatch. Los comandos a ejecutar son:

1. unset ORACLE_HOME
2. \$UDS_HOME/bin/RWSynchronizer --action All

Para cada uno de los comandos anteriores, se comprueba su estado de finalización y, en caso de error, se finaliza la ejecución del script en error.

XKOZ0008S.SH

Script que actualiza DataMart y Dominions

Argumentos de entrada:

No hay

Lógica del script:

El script realiza la ejecución de una serie de comandos necesarios para actualizar DataMart y Dominions. Los comandos a ejecutar son:

1. find \$ALGO_TOP/inputs/datamart/ -type f -exec rm {} \;
2. find \$ALGO_TOP/inputs/datamart/ -empty -type d -delete
3. cp -r \$XKOZ_CFG/datamart/IMM/es/* \$ALGO_TOP/inputs/datamart/.
4. \$UDS_HOME/bin/dsmgr -o setcurrent --dataset BBVA
5. \$RISKFLOW_HOME/bin/runStream -N XKOZ-AUX01-UpdateDatamart

Para cada uno de los comandos anteriores, se comprueba su estado de finalización y, en caso de error, se finaliza la ejecución del script en error.

XKOZ7001S.SH

Ejecuta AWS-CLI to s3 para levantar (tipoInstanciaEC2 nworkers ncores nthreadsxCore zone) o tirar la flota el Lustre de AWS o shutdown instancias ec2, en en caso que la flota ya este levantada sale un mensaje en \$XKOZ_LOGS/di/XKOZ_AWS_levantar_algo_stack.log que ya existe una flota levanta. Hay que parar para poder levantar otra nueva flota

Argumentos de entrada:

- **PARAM1:** Operación a realizar
- **PARAM2:** tipo de instancia EC2 Amazon aws
- **PARAM3:** numero de instancias workers a levantar en aws, para EEPP es la mitad que PR
- **PARAM4:** Cores a montar por cada instancia EC2
- **PARAM5:** Hilos por core
- **PARAM6:** zona region a b c , actualmente se lanza en Irlanda eu-west-1b o a , no en c pues x2idn no están disponibles en la AZ eu-west-1c

Lógica del script:

En función de la operación especificada en **PARAM1**, se realizan una serie de acciones:

- **levanta_flota_aws:** Ejecuta el script \$XKOZ_SCRT/XKOZ_AWS_levantar_algo_stack.sh
- **tira_flota_aws:** Ejecuta el script \$XKOZ_SCRT/XKOZ_AWS_delete_algo_stack.sh
- **shutdown:** Ejecuta el script \$XKOZ_SCRT/XKOZ_AWS_shutdown.sh
- **Cualquier otro caso:** Avisa de un error, el parámetro no tiene un valor correcto

Para configurar la traducción de los parámetros se requiere configurar el fichero \$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ7004S.SH

Este script encapsula la llamada a "symexec", solo para el consumidor AWS, con los parametros que se obtienen de buscar \$1 en \$XKOZ_xFS_FichTbl_ParametrosJobs

Argumentos de entrada:

- **PARAM1:** Fichero de configuración

Lógica del script:

(pending)

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.

XKOZ7005S.SH

Este script encapsula la llamada a "symexec" consumidor aws/on-premise una sola ejecución por host, con los parámetros que se obtienen de buscar \$1 en \$XKOZ_xFS_FichTbl_ParametrosJobs

Argumentos de entrada:

- **PARAM1:**

Lógica del script:

(pending)

Para configurar la traducción de los parámetros se requiere configurar el fichero **\$XKOZ_DATPE_MPAIS/XKOZ_MPais_TablaParametrosJobs_IMM.TXT** de la siguiente manera:

Argumento	Argumento de entrada con el que se ha ejecutado el script de Unix.
Traducción	Traducción de los parámetros de entrada separados por un espacio en blanco.


Jobstreams Riskflow

XKOZ-AUX01-UpdateDatamart

This stream will update the datamart system

XKOZ-AUX01-UpdateDatamart All changes saved.

<Enter Description Here>

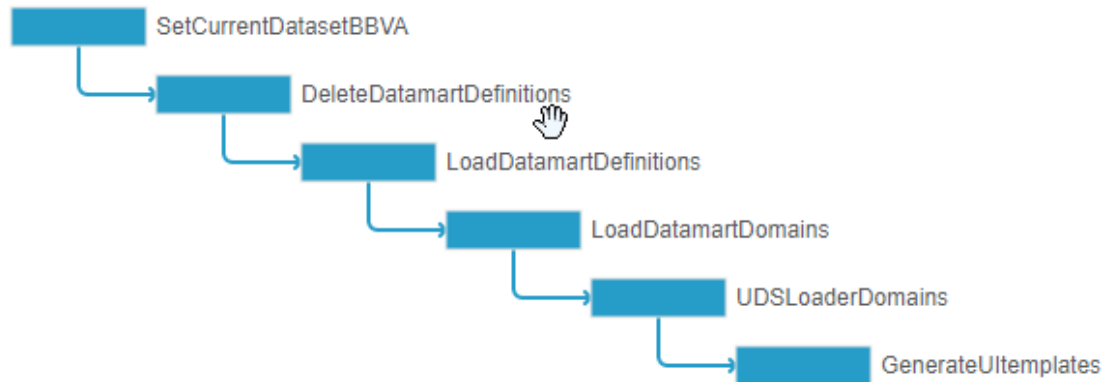

This stream consists of the following jobs:

SetCurrentDatasetBBVA

This operation will set BBVA dataset as current dataset in UDS

Command

```
$UDS_HOME/bin/dsmgr -o setcurrent --dataset BBVA
```

DeleteDatamartDefinitions

This operation will delete Datamart definitions.

Command:

\$XKOZ_SCRT/XKOZ_delete_datamart_definitions.sh

Arguments

None

Logic

This script runs the following steps:

1. Delete any existing data in BBVA dataset running the following commands:

```
$UDS_HOME/bin/udsloader -o batchdelete -FDM_PRODUCTS_CATG  
$UDS_HOME/bin/udsloader -o batchdelete -FDM_MITIGANT_CATG  
$UDS_HOME/bin/udsloader -o batchdelete -FDM_STRUCTURED_DEAL_CATG  
$UDS_HOME/bin/udsloader -o batchdelete -FDM_SECURITY_MASTER_CATG  
$UDS_HOME/bin/udsloader -o batchdelete -FDM_SECURITY_PRICE_CATG  
$UDS_HOME/bin/udsloader -o batchdelete -FDM_INSTRUMENT_CATG  
$UDS_HOME/bin/udsloader -o batchdelete -FDM_CURVE_CATG
```

2. Delete all DataMart product definitions running the following command:

```
$DATAMART_HOME/bin/dmob -o delete --namelist all
```

3. Delete all DataMart modules running the following command:

```
$DATAMART_HOME/bin/dmob -o deletemodule --namelist all
```

LoadDatamartDefinitions

This operation will load all Datamart definitions.

Command:

```
$XKOZ_SCRT/XKOZ_load_datamart_definitions.sh
```

Logic

This script runs the following steps:

```
$DATAMART_HOME/bin/dmob -o load --inputdir $SOLUTION_HOME/solutiondata/datamart/categories
$DATAMART_HOME/bin/dmob -o load --inputdir $SOLUTION_HOME/solutiondata/datamart/modules
$DATAMART_HOME/bin/dmob -o load --inputdir
$SOLUTION_HOME/solutiondata/datamart/saccr_modules
$DATAMART_HOME/bin/dmob -o load --inputdir
$SOLUTION_HOME/solutiondata/datamart/components

$DATAMART_HOME/bin/dmob -o load --inputdir $ALGO_TOP/inputs/userdata/datamart/categories
$DATAMART_HOME/bin/dmob -o load --inputdir $ALGO_TOP/inputs/userdata/datamart/modules
$DATAMART_HOME/bin/dmob -o load --inputdir $ALGO_TOP/inputs/userdata/datamart/mitigants
$DATAMART_HOME/bin/dmob -o load --inputdir $ALGO_TOP/inputs/userdata/datamart/products
```

LoadDatamartDomains

This operation will load Datamart domains with the Datamart Onboarding tool.

Command:

```
$DATAMART_HOME/bin/dmob -o load --inputdir
$ALGO_TOP/inputs/userdata/datamart/domain
```

Arguments

- **inputdir:** The input folder where to load the domains from.

UDSLoaderDomains

This operation will load domains in BBVA dataset

Command:

```
$UDS_HOME/bin/udsloader --ignore_duplicates --loadset 99999 --data_file C --extra_args  
fieldSeparator=comma --operation create
```

Input data

```
$XKOZ_CFG/cfg/udsloader/XKOZ_domains.dir
```

File
\${ALGO_TOP}/inputs/userdata/XKOZ_calendar_domain_IMM.csv

GenerateUITemplates

This operation will generate all .xml UI templates based on the mapping loaded..

Command:

```
-o generateuitemplates -d  
$XKOZ_CFG/IMCRData_template/${XKOZ_CFGUSER_PaisDato}/${XKOZ_CFGUSER_TipoCalc}/common/rtce/uitemplates
```

Arguments:

- **-d:** Output folder where UI templates will be generated.

Output

```
$XKOZ_CFG/IMCRData_template/${XKOZ_CFGUSER_PaisDato}/${XKOZ_CFGUSER_TipoCalc}/common/rtce/uitemplates
```

- DealMitigantCash_sample.xml
- DealMitigantCash_ui.xml

- DealMitigantSecurity_sample.xml
- DealMitigantSecurity_ui.xml
- DefaultSwap_sample.xml
- DefaultSwap_ui.xml
- GenericIMMSACCRTrade_sample.xml
- GenericIMMSACCRTrade_ui.xml
- GenericSACCRTrade_sample.xml
- GenericSACCRTrade_ui.xml
- GenericTrade_sample.xml
- GenericTrade_ui.xml
- NodeMitigantCash_sample.xml
- NodeMitigantCash_ui.xml
- NodeMitigantSecurity_sample.xml
- NodeMitigantSecurity_ui.xml
- StructuredDominantComponent_sample.xml
- StructuredDominantComponent_ui.xml
- StructuredDominantProduct_sample.xml
- StructuredDominantProduct_ui.xml
- StructuredProductGeneric_sample.xml
- StructuredProductGeneric_ui.xml

XKOZ-AUX02-UpdateDomains

This stream will update dataset uds domains.



This stream consists of the following jobs:

UpdateDomains

This operation will load domains in BBVA dataset

Command:

```
$UDS_HOME/bin/udsloader --ignore_duplicates --loadset 99999 --data_file C --extra_args  
fieldSeparator=comma --operation create
```

Input data

\$XKOZ_CFG/cfg/udsloader/XKOZ_domains.dir

File
\${ALGO_TOP}/inputs/userdata/XKOZ_calendar_domain_IMM.csv

XKOZ-AUX03-HistUserBatchData


This stream will historicize user batch data, in this case, rw merged session and scenario files for flag III.



XKOZ-AUX03-HistUserBatchData

<Enter Description Here>

All changes saved.

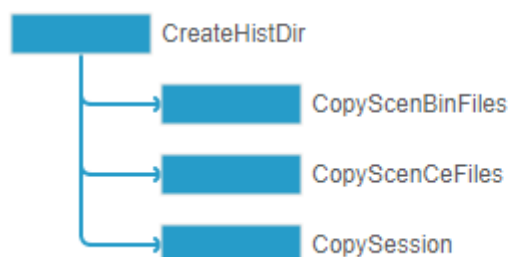

This stream only runs in flag 3 receiving the following parameter file:

- \$XKOZ_CFG/XKOZ_Session_TRIM_IMM.prm

This stream consists of the following jobs:

CreateHistDir

This operation will create a historical folder.

Command

```
mkdir -p $XKOZ_DATOLD/${SESSION_DATE}
```

Arguments

- **SESSION_DATE:** Batch business date.

CopyScenBinFiles

This operation will copy scenario binary files to the historical folder.

Command:

```
cp $XKOZ_DATIN/scenario/${SESSION_DATE}/*.bin  
$XKOZ_DATOLD/${SESSION_DATE}/
```

Arguments

- **SESSION_DATE:** Batch business date.

CopyScenCeFiles

This operation will copy scenario ce files to the historical folder.

Command:

```
cp $XKOZ_DATIN/scenario/${SESSION_DATE}/*.ce  
$XKOZ_DATOLD/${SESSION_DATE}/
```

Arguments

- **SESSION_DATE:** Batch business date.

CopySession

This operation will copy the merged session file to the historical folder.

Arguments

- **s_in_dir:** Session folder. Value: \$XKOZ_DATOUT/sessionfiles
- **s_out_dir:** The session output folder. Value: \$XKOZ_DATOLD/\${SESSION_DATE}
- **s_sess_name:** The RiskWatch daily session prefix passed as argument in **@{RiskWatch Daily Session Prefix}** Value: XKOZ-rw-daily_TRIM_\${XKOZ_CFGUSER_TipoCalc}
- **SESSION_DATE:** Batch business date.

Inputs

- **Session files:**
 - \$XKOZ_DATOUT/sessionfiles/XKOZ-rw-daily_TRIM_\${XKOZ_CFGUSER_TipoCalc}.*
- Scenario files
 - \$XKOZ_DATIN/scenario/\${SESSION_DATE}/*.ce
 - \$XKOZ_DATIN/scenario/\${SESSION_DATE}/bin.ce

Outputs

- **Session files:**
 - \$XKOZ_DATOLD/\${SESSION_DATE}/XKOZ-rw-daily_TRIM_\${XKOZ_CFGUSER_TipoCalc}.*
- Scenario files
 - \$XKOZ_DATIN/\${SESSION_DATE}/*.ce
 - \$XKOZ_DATIN/\${SESSION_DATE}/bin.ce

XKOZ-IMCR-AUX06-MergeCatalog

This stream will create the merged catalog file for IMCR execution.

XKOZ-IMCR-AUX06-MergeCatalog All changes saved.

<Enter Description Here>

 MergeCatalogCubes

 Stop Riskflow agents

This stream could receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_IMM.prm
- Flag 3: \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
- Flag 3: \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm

This stream consists of the following jobs:

MergeCatalogCubes

This operation will create the merged catalog file for IMCR execution.

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_MergeCatalog.pl -f $XKOZ_CFG/{BatchInputFile} -t
@{DatasetTemplate} -o @{MergeCatalogFile}
```

Arguments

- **@{BatchInputFile}**: The batch inputs configuration file where sessions, scenarios and cubes name and path are defined
- **@{DatasetTemplate}**: The dataset template.
- **@{MergeCatalogFile}**: The merge catalog file name to generate .

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{BatchInputFile}: XKOZ_IMCR_InputData_BatchFiles_Benchmark_IMM_es.cfg

@{DatasetTemplate}: Benchmark

@{MergeCatalogFile}:

\$XKOZ_DATIN/IMCRData/dataset/variants/cubes/Benchmark/MergedCube.h5c

Flag 3: TRIM HN:

@{BatchInputFile}:XKOZ_IMCR_InputData_BatchFiles_TRIM_IMM_es.cfg

@{DatasetTemplate}: TRIM_HN

@{MergeCatalogFile}:

\$XKOZ_DATIN/IMCRData/dataset/variants/cubes/TRIM_HN/MergedCube.h5c

Flag 3: TRIM HS:

@{BatchInputFile}: XKOZ_IMCR_InputData_BatchFiles_TRIM_IMM_es.cfg

@{DatasetTemplate}: TRIM_HS

@{MergeCatalogFile}:

\$XKOZ_DATIN/IMCRData/dataset/variants/cubes/TRIM_HS/MergedCube.h5c

Logic

This script runs the following steps:

1. Check if input files exist
2. Read cube list from batch inputs cfg file
3. Create output directory if it does not exist
4. Create merged catalog file

Outputs

According to the flag the following output files would be:

Flag 1: Benchmark

\$XKOZ_DATIN/IMCRData/dataset/variants/cubes/Benchmark/MergedCube.h5c

Flag 3: TRIM

\$XKOZ_DATIN/IMCRData/dataset/variants/cubes/TRIM_HN/MergedCube.h5c

Flag 3: TRIM

\$XKOZ_DATIN/IMCRData/dataset/variants/cubes/TRIM_HS/MergedCube.h5c

Stop Riskflow agents

This operation will stop the running riskflow agents

Command:

\$RISKFLOW_HOME/bin/stop-agents

Arguments

None

XKOZ-IMCR-PRE01-Clean

This stream will clean IMCR folders.

 **XKOZ-IMCR-PRE01-Clean** All changes saved.
<Enter Description Here>

 CleanIMCRDirectories

This stream consists in the following job:

CleanIMCRDirectories

This operation will clean IMCR folders.

Command:

\$XKOZ_FUENTES/XKOZ_CleanDirectories.pl -f
\$XKOZ_CFG/XKOZ_Clean_IMCR_NoLog_Directories.cfg

Logic

This script does the following steps:

1. Validate parameters.
2. For each line in the rules file.
3. Convert the line to a full path line (get env variables values and ~).
4. Create an array of files.
5. Get file name and directory for each file.
6. Validate if is a directory.
7. If contains * verify if it is a directory or file.
8. If it is a single file.


Inputs:

- **IMCR NoLog Directories:**
\$ALGO_TOP/outputs/shared/IMCR/*2*
\$ALGO_TOP/outputs/local/IMCR/*2*

XKOZ-IMCR-PRE02-PrepareEnv

This stream will prepare the environment by creating Riskflow parameter files, dataset directories, copying exported AIDB data, copying other data, copying mentor data and copying Trida data.

XKOZ-IMCR-PRE02-PrepareEnv All changes saved. <Enter Description Here>

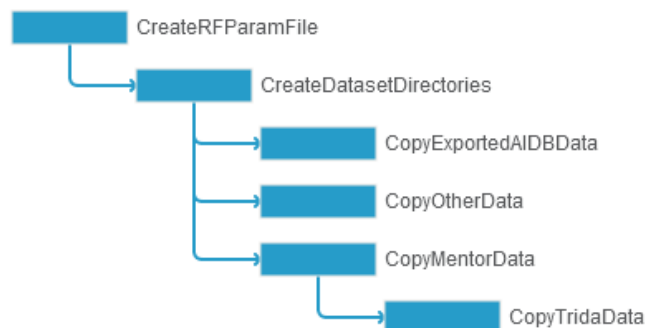

This stream could receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_CFG/XKOZ_Benchmark_IMM.prm
- Flag 2: \$XKOZ_CFG/XKOZ_SACCR_IMM.prm
- Flag 3: \$XKOZ_CFG/XKOZ_TRIM_IMM.prm

This stream consists of the following jobs:

CreateRFPParamFile

This operation will create a Riskflow parameter file

Command

```
$XKOZ_FUENTES/XKOZ_IMCR_CreateRFPParameterFiles.pl -r @{{datasets_rules}} -t
@{{IMCRData_template_path}} -d @{{IMCRData_path}} -y @{{dataset_template}} -b
@{{batch_input_cfg}}
```

Arguments

- **@{{datasets_rules}}**: The dataset rules to be applied.
- **@{{IMCRData_template_path}}**: The full path to the IMCR data template.
- **@{{IMCRData_path}}**: The full path to the IMCR data.
- **@{{dataset_template}}**: The dataset template param file.
- **@{{batch_input_cfg}}**: The batch input files configuration file.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{{datasets_rules}}:

XKOZ_IMCR_Datasets_Benchmark_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.rules

@{{IMCRData_template_path}}:

IMCRData_template/\${XKOZ_CFGUSER_PaisDato}/\${XKOZ_CFGUSER_TipoCalc}/Benchmark

@{{IMCRData_path}}:

\$XKOZ_DATIN/IMCRData

@{{dataset_template}}:

XKOZ_IMCR_Template_Dataset.prm

@{batch_input_cfg}:

XKOZ_IMCR_InputData_BatchFiles_Benchmark_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Flag 2: SACCR

@{datasets_rules}:

XKOZ_IMCR_Datasets_SACCR_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.rules

@{IMCRData_template_path}:

IMCRData_template/\${XKOZ_CFGUSER_PaisDato}/\${XKOZ_CFGUSER_TipoCalc}/SACCR

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

@{dataset_template}: XKOZ_IMCR_Template_Dataset.prm

@{batch_input_cfg}:

XKOZ_IMCR_InputData_BatchFiles_SACCR_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Flag 3: TRIM

@{datasets_rules}:

XKOZ_IMCR_Datasets_TRIM_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.rules

@{IMCRData_template_path}:

IMCRData_template/\${XKOZ_CFGUSER_PaisDato}/\${XKOZ_CFGUSER_TipoCalc}/TRIM

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

@{dataset_template}: XKOZ_IMCR_Template_Dataset.prm

@{batch_input_cfg}:

XKOZ_IMCR_InputData_BatchFiles_TRIM_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Inputs

In addition to arguments command, the script uses also the following input files:

- **Own Entities File definition:**
\$XKOZ_CFG/\${XKOZ_IMCR_OwnEntities}_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.definition
- **Business date file:** \$XKOZ_FFPROC_BATCH

Logic

This script runs the following steps:

1. Define input file
2. Load data reading data file.
3. Load OwnEntities file.
4. Load Dataset Rules files.
5. Read Dataset template file.
6. Create Dataset prm files.

Outputs

According to the flag the following output files would be:

Flag 1: Benchmark

\$XKOZ_DATPE/XKOZ_IMCR_Benchmark_SC_IMM.prm
\$XKOZ_DATPE/XKOZ_IMCR_Benchmark_IMM.prm

Flag 2: SACCR

\$XKOZ_DATPE/XKOZ_IMCR_SACCR_IMM.prm

Flag 3: TRIM

\$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
\$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_SC_IMM.prm
\$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm
\$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_SC_IMM.prm

CreateDatasetDirectories

This operation will create the dataset static data directory (IMCRData/dataset).

Command:

```
$XKOZ_SCRT/XKOZ_IMCR_CreateDatasetDirectories.sh @{{IMCRData_path}}  
@{{IMCRData_template_path}} @{{BatchId}}
```

Arguments:

- **@{{IMCRData_path}}**: Full path to the IMCR static data.

- **@{IMCRData_template_path}**: Full path to the IMCR data template directory.
- **@{BatchId}**: The ID of the batch.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

- **@{IMCRData_path}**: \$XKOZ_DATIN//IMCRData
- **@{IMCRData_template_path}**: IMCRData_template/es/IMM/Benchmark
- **@{BatchId}**: Benchmark

Flag 2: SACCR

- **@{IMCRData_path}**: \$XKOZ_DATIN//IMCRData
- **@{IMCRData_template_path}**: IMCRData_template/es/IMM/TRIM
- **@{BatchId}**: SACCR

Flag 3: TRIM

- **@{IMCRData_path}**: \$XKOZ_DATIN//IMCRData
- **@{IMCRData_template_path}**: IMCRData_template/es/IMM/TRIM
- **@{BatchId}**: The ID of the batch.

Inputs

In addition to arguments command, the script uses also the following input files:

- **Business date file**: \$XKOZ_FFPROC_BATCH

Logic

This job runs the following steps:

- If exists, delete the dataset directory **@{IMCRData_path}/{batch_date}_{@{BatchId}}**
- Create **@{IMCRData_path}/{batch_date}_{@{BatchId}}** directory and its basic structure.
- Copy dataset template directory \$XKOZ_CFG/**@{IMCRData_template_path}** to dataset directory **@{IMCRData_path}/{batch_date}_{@{BatchId}}**
- Change dataset link to the new folder **@{IMCRData_path}/{batch_date}_{@{BatchId}}**

Output

- **@{IMCRData_path}/{batch_date}_@{BatchId}**: Static data IMCR folder for the new business date containing basic structure folder and all the files consider as templates

CopyExportedAIDBData

This Job will copy exported AIDB data to IMCR static data directory

Command:

```
cp $XKOZ_DATIN/aidb_export_data/$SESSION_DATE/*
@{IMCRData_path}/dataset/input_data/aidb_data/
```

Arguments:

\$SESSION_DATE: Business date

@{IMCRData_path}: Full path for IMCR static data folder.

For all batches value will be \$XKOZ_DATIN/IMCRData

Inputs

All files allocated in \$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/

Outputs

All exported aidb data files copied in @{IMCRData_path}/dataset/input_data/aidb_data/

For all flags these files will be:

- XKOZ_Export_BaselineTrades_Inst_consumos.csv
- XKOZ_Export_BaselineTrades_Inst.csv
- XKOZ_Export_BaselineTrades_Inst.csv.old
- XKOZ_Export_BaselineTrades_Inst_NoSDeal.csv
- XKOZ_Export_BaselineTrades_Inst_SDealOp.csv
- XKOZ_Export_BaselineTrades_Pos_consumos.csv
- XKOZ_Export_BaselineTrades_Pos.csv
- XKOZ_Export_BaselineTrades_Pos_NoSDeal.csv
- XKOZ_Export_BaselineTrades_Pos_SDealOp.csv
- XKOZ_Export_BaselineTrades_SDeal.csv
- XKOZ_Export_BreakClause.csv
- XKOZ_Export_Componentes_Estrategias.csv
- XKOZ_Export_Componentes_Estrategias_FULL.csv
- XKOZ_Export_Componentes_Estrategias_Nivel2.csv

- XKOZ_Export_CreditProcessData.csv
- XKOZ_Export_Synth_BreakClause.csv
- XKOZ_Export_Synth_MaturitDate.csv

CopyMentorData

This operation will copy Mentor input data used for running IMCR processes.

Command:

```
$XKOZ_SCRT/XKOZ_CopyFilesSourceFromToDest.sh $XKOZ_CFG/{mentor_input_cfg}
```

Arguments

- **\$XKOZ_CFG/{mentor_input_cfg}**: Cfg file containing input files to be copied as output files

Inputs and outputs

According to the flag `$XKOZ_CFG/{mentor_input_cfg}` and its content could be this arguments could have the following values:

Flag 1: Benchmark

\$XKOZ_CFG/{mentor_input_cfg}:XKOZ_IMCR_InputData_MentorFiles_Benchmark_{\$XKOZ_CFGUSER_TipoCalc}_{\$XKOZ_CFGUSER_PaisDato}.cfg

Input file	Output file
\$XKOZ_MENTOR_INPUT/EEZT_BaselineTrades_CollateralAgreement_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/BaselineTrades_CollateralAgreement.csv
\$XKOZ_MENTOR_INPUT/EEZT_BaselineTrades_MasterAgreement_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/BaselineTrades_MasterAgreement.csv
\$XKOZ_MENTOR_INPUT/EEZT_booksParents_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rtce/replace/organization/BookParents.csv
\$XKOZ_MENTOR_INPUT/EEZT_books_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rtce/replace/organization/Books.csv

\$XKOZ_MENTOR_INPUT/EEZT_branches_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/counterparties/Branches.csv
\$XKOZ_MENTOR_INPUT/EEZT_counterparty_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/counterparties/Counterparty.csv
\$XKOZ_MENTOR_INPUT/EEZT_exclusions_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/counterparties/Exclusions.csv
\$XKOZ_MENTOR_INPUT/EEZT_links_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/counterparties/Links.csv
\$XKOZ_MENTOR_INPUT/EEZT_masterAgreement_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/counterparties/MasterAgreement.csv
\$XKOZ_MENTOR_INPUT/EEZT_Mitigants_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_ files/Mitigants.csv
\$XKOZ_MENTOR_INPUT/EEZT_portfolioHierarchies_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/organization/PortfolioHierarchies.csv
\$XKOZ_MENTOR_INPUT/EEZT_portfolios_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/organization/Portfolios.csv
\$XKOZ_MENTOR_INPUT/EEZT_products_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_ files/Mentor_Products.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMLegacy_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/counterparties/CollateralAgreementLegacy.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMVM_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/counterparties/CollateralAgreementVM.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMI_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/counterparties/CollateralAgreementIM.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMVM_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rte/r eplace/counterparties/CollateralAgreementIMVM.csv
\$XKOZ_MENTOR_INPUT/EEZT_RTCE_IM_SPOT_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_ files/IM_SPOT.csv
\$XKOZ_MENTOR_INPUT/EEZT_IMMproductsK_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/data mart/lookups/L_IMMproductsK.csv

Flag 2: SACCR

\$XKOZ_CFG/@{mentor_input_cfg}:XKOZ_IMCR_InputData_MentorFiles_SACCR_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Input file	Output file
\$XKOZ_MENTOR_INPUT/EEZT_BaselineTrades_CollateralAgreement_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_ files/BaselineTrades_CollateralAgreement.csv

\$XKOZ_MENTOR_INPUT/EEZT_BaselineTrades_MasterAgreement_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/BaselineTrades_MasterAgreement.csv
\$XKOZ_MENTOR_INPUT/EEZT_booksParents_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/organization/BookParents.csv
\$XKOZ_MENTOR_INPUT/EEZT_books_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/organization/Books.csv
\$XKOZ_MENTOR_INPUT/EEZT_branches_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/counterparties/Branches.csv
\$XKOZ_MENTOR_INPUT/EEZT_counterparty_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/counterparties/Counterparty.csv
\$XKOZ_MENTOR_INPUT/EEZT_exclusions_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/counterparties/Exclusions.csv
\$XKOZ_MENTOR_INPUT/EEZT_links_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/counterparties/Links.csv
\$XKOZ_MENTOR_INPUT/EEZT_masterAgreement_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/counterparties/MasterAgreement.csv
\$XKOZ_MENTOR_INPUT/EEZT_Mitigants_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/Mitigants.csv
\$XKOZ_MENTOR_INPUT/EEZT_portfolioHierarchies_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/organization/PortfolioHierarchies.csv
\$XKOZ_MENTOR_INPUT/EEZT_portfolios_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/organization/Portfolios.csv
\$XKOZ_MENTOR_INPUT/EEZT_products_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/Mentor_Products.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMLegacy_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/counterparties/CollateralAgreementLegacy.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMVM_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/counterparties/CollateralAgreementVM.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMI_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/counterparties/CollateralAgreementIM.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMIMVM_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rfce/replace/counterparties/CollateralAgreementIMVM.csv
\$XKOZ_MENTOR_INPUT/EEZT_RTCE_IM_SPOT_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/IM_SPOT.csv
\$XKOZ_MENTOR_INPUT/EEZT_IMMproductsK_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/data mart/lookups/L_IMMproductsK.csv

Flag 3: TRIM

\$XKOZ_CFG/@{mentor_input_cfg}:XKOZ_IMCR_InputData_MentorFiles_TRIM_{\$XKOZ_CFGUSER_TipoCalc}_{\$XKOZ_CFGUSER_PaisDato}.cfg

Input file	Output file
\$XKOZ_MENTOR_INPUT/EEZT_BaselineTrades_CollateralAgreement_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/BaselineTrades_CollateralAgreement.csv
\$XKOZ_MENTOR_INPUT/EEZT_BaselineTrades_MasterAgreement_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/BaselineTrades_MasterAgreement.csv
\$XKOZ_MENTOR_INPUT/EEZT_booksParents_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/organization/BookParents.csv
\$XKOZ_MENTOR_INPUT/EEZT_books_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/organization/Books.csv
\$XKOZ_MENTOR_INPUT/EEZT_branches_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/counterparties/Branches.csv
\$XKOZ_MENTOR_INPUT/EEZT_counterparty_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/counterparties/Counterparty.csv
\$XKOZ_MENTOR_INPUT/EEZT_exclusions_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/counterparties/Exclusions.csv
\$XKOZ_MENTOR_INPUT/EEZT_links_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/counterparties/Links.csv
\$XKOZ_MENTOR_INPUT/EEZT_masterAgreement_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/counterparties/MasterAgreement.csv
\$XKOZ_MENTOR_INPUT/EEZT_Mitigants_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/Mitigants.csv
\$XKOZ_MENTOR_INPUT/EEZT_portfolioHierarchies_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/organization/PortfolioHierarchies.csv
\$XKOZ_MENTOR_INPUT/EEZT_portfolios_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/organization/Portfolios.csv
\$XKOZ_MENTOR_INPUT/EEZT_products_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/Mentor_Products.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMLegacy_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/counterparties/CollateralAgreementLegacy.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMV_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/counterparties/CollateralAgreementVM.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMIM_v{\$XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/replace/counterparties/CollateralAgreementIM.csv
\$XKOZ_MENTOR_INPUT/EEZT_collateralAgreementIMMIM	{\$XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/rctc/

VM_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	replace/counterparties/CollateralAgreementIMVM.csv
\$XKOZ_MENTOR_INPUT/EEZT_RTCE_IM_SPOT_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/IM_SPOT.csv
\$XKOZ_MENTOR_INPUT/EEZT_IMMproductsK_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/data mart/lookups/L_IMMproductsK.csv
\$XKOZ_MENTOR_INPUT/EEZT_IMM_STs_ExceptionsK_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/data mart/lookups/L_IMM_STs_ExceptionsK.csv
\$XKOZ_MENTOR_INPUT/EEZT_IMMbenchmarkingK_v\${XKOZ_CFGUSER_VersAlgo}_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/data mart/lookups/L_IMMbenchmarking_ST.csv
\$XKOZ_MENTOR_INPUT/EEZT_ConsumosManualesIA_##FECHA##.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/mentor/aux_files/ConsumosManualesIA.csv

CopyOtherData

This operation will copy other data needed for running IMCR processes.

Command:

`$XKOZ_SCRT/XKOZ_CopyFilesSourceFromToDest.sh $XKOZ_CFG/@{other_files_cfg}`

Arguments

- **`$XKOZ_CFG/@{other_files_cfg}`**: Cfg file containing input files to be copied as output files

Inputs and outputs

According to the flag `$XKOZ_CFG/@{other_files_cfg}` and its content could be this arguments could have the following values:

Flag 1: Benchmark

`$XKOZ_CFG/@{other_files_cfg}`: `XKOZ_IMCR_InputData_OhterFiles_Benchmark_${XKOZ_CFGUSER_TipoCalc}_${XKOZ_CFGUSER_PaisDato}.cfg`

Input file	Output file
------------	-------------

\$XKOZ_DATIN/uds/dataset/XKOZ_udsloader_FxRates.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/trida/aux_files/XKOZ_udsloader_FxRates.csv
---	---

Flag 2: SACCR

\$XKOZ_CFG/@{other_files_cfg}:XKOZ_IMCR_InputData_OhterFiles_SACCR_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Input file	Output file
\$XKOZ_DATIN/uds/dataset/XKOZ_udsloader_FxRates.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/trida/aux_files/XKOZ_udsloader_FxRates.csv

Flag 3: TRIM

\$XKOZ_CFG/@{other_files_cfg}:XKOZ_IMCR_InputData_OhterFiles_TRIM_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Input file	Output file
\$XKOZ_DATIN/uds/dataset/XKOZ_udsloader_FxRates.csv	\${XKOZ_DATIN}/IMCRData/dataset/input_data/trida/aux_files/XKOZ_udsloader_FxRates.csv
\$XKOZ_DATIN/scenario/dataset/XKOZ_XVA_HistoricoNormal.ce	\${XKOZ_DATIN}/IMCRData/dataset/variants/scenarioSets/TRIM_HN/mcBundleP8/XKOZ_XVA_HistoricoNormal.ce
\$XKOZ_DATIN/scenario/dataset/XKOZ_XVA_HistoricoStress.ce	\${XKOZ_DATIN}/IMCRData/dataset/variants/scenarioSets/TRIM_HS/mcBundleP8/XKOZ_XVA_HistoricoStress.ce

CopyTridaData

This operation will copy Trida input data.

Command:

\$XKOZ_SCRT/XKOZ_CopyFilesSourceFromToDest.sh \$XKOZ_CFG/@{trida_input_cfg}

Arguments

- **\$XKOZ_CFG/@{trida_input_cfg}**: Cfg file containing input files to be copied as output files

Inputs and outputs

According to the flag **\$XKOZ_CFG/@{trida_input_cfg}** and its content could be this arguments could have the following values:

Flag 1: Benchmark

\$XKOZ_CFG/@{trida_input_cfg}:XKOZ_IMCR_InputData_TridaFiles_Benchmark_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Input file	Output file
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_Cutoffs.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/rctce/replac/cutoffs/Cutoffs.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R118.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R118.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_CreditIndex.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/CreditIndex.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_EquityBasket.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/EquityBasket.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_Issuers.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/Issuers.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_PRECCLF.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/PRECCLF.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_PRECUDI.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/PRECUDI.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_PRECUVR.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/PRECUVR.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_PRECVAC.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/PRECVAC.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R02.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R02.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R03.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R03.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R06.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R06.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R09.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R09.csv

\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R13.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R13.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R1B.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R1B.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R1D.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R1D.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R23.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R23.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R25.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R25.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R29.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R29.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R2A.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2A.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R2B.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2B.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R2C.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2C.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R2D.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2D.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R2E.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2E.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R2F.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2F.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R34.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R34.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R44.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R44.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R82.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R82.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R84.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R84.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R87.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R87.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R89.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R89.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R92.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R92.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R36.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R36.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_TDIVSALA.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/TDIVSALA.csv

\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_TUNIDAD.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/TUNIDAD.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_IncludedBooks.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/IncludedBooks.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R148.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R148.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R149.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R149.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_L_Dominant_Product.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/L_Dominant_Product.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_BATCH_In_##FECHA_F1##_SourceSystems.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/rctce/replace/organization/SourceSystems.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_BATCH_In_##FECHA_F1##_SourceSystemsEnvironments.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/rctce/replace/organization/SourceSystemEnvironments.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_ASSIGNMENT.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/ASSIGNMENT_RULE.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R135.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R135.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R136.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R136.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R83.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R83.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_RFRV.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/RFRV.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_CALENDAR.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/CALENDAR_RULE.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R95A.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R95A.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R95B.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R95B.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R95C.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R95C.csv

Flag 2: SACCR

\$XKOZ_CFG/@{trida_input_cfg}:XKOZ_IMCR_InputData_TridaFiles_SACCR_{\$XKOZ_CFGUSER_TipoCalc}_{\$XKOZ_CFGUSER_PaisDato}.cfg

Input file	Output file
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_Cutoffs.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/rctce/replace/cutoffs/Cutoffs.csv

\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R118.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R118.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_CreditIndex.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/CreditIndex.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_EquityBasket.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/EquityBasket.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_Issuers.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/Issuers.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_PRECCLF.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/PRECCLF.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_PRECUDI.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/PRECUDI.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_PRECUVR.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/PRECUVR.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_PRECVAC.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/PRECVAC.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R02.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R02.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R03.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R03.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R06.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R06.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R09.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R09.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R13.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R13.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R1B.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R1B.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R1D.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R1D.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R23.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R23.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R25.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R25.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R29.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R29.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R2A.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2A.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R2B.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2B.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart

1##_R2C.csv	/lookups/R2C.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R2D.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2D.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R2E.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2E.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R2F.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2F.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R34.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R34.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R44.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R44.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R82.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R82.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R84.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R84.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R87.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R87.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R89.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R89.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R92.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R92.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R36.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R36.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_TDIVSALA.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/TDIVSALA.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_TUNIDAD.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/TUNIDAD.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_IncludedBooks.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/IncludedBooks.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R148.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R148.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_R149.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R149.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_L_Dominant_Product.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/L_Dominant_Product.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_BATCH_In_###FECHA_F1##_SourceSystems.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/rfce/replace/organization/SourceSystems.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_BATCH_In_###FECHA_F1##_SourceSystemsEnvironments.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/rfce/replace/organization/SourceSystemEnvironments.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1##_ASSIGNMENT.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/ASSIGNMENT_RULE.csv

\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R135.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R135.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R136.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R136.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R83.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R83.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_RFRV.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/RFRV.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_CALENDAR.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/CALENDAR_RULE.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R95A.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R95A.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R95B.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R95B.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R95C.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R95C.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_CREDIT_#FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacchr/SACCR_CREDIT.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_EQUITY_#FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacchr/SACCR_EQUITY.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_FOREIGN_##FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacchr/SACCR_FOREIGN.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_INTEREST_##FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacchr/SACCR_INTEREST.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_Structured Deals_##FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacchr/SACCR_StructuredDeals.csv

Flag 3: TRIM

\$XKOZ_CFG/@{trida_input_cfg}:XKOZ_IMCR_InputData_TridaFiles_TRIM_{\$XKOZ_CFGUSER_TipoCalc}_{\$XKOZ_CFGUSER_PaisDato}.cfg

Input file	Output file
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_Cutoffs.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/rctce/replacement/cutoffs/Cutoffs.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R118.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R118.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R118.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R118.csv

1##_CreditIndex.csv	/lookups/CreditIndex.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_EquityBasket.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/EquityBasket.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_Issuers.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/Issuers.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_PRECCLF.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/PRECCLF.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_PRECUDI.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/PRECUDI.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_PRECUVR.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/PRECUVR.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_PRECVAC.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/PRECVAC.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R02.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R02.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R03.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R03.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R06.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R06.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R09.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R09.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R13.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R13.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R1B.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R1B.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R1D.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R1D.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R23.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R23.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R25.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R25.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R29.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R29.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R2A.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R2A.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R2B.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R2B.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R2C.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R2C.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F 1##_R2D.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart /lookups/R2D.csv

\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R2E.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2E.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R2F.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R2F.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R34.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R34.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R44.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R44.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R82.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R82.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R84.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R84.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R87.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R87.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R89.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R89.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R92.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R92.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R36.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R36.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_TDIVSALA.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/TDIVSALA.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_TUNIDAD.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/TUNIDAD.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_IncludedBooks.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/IncludedBooks.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R148.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R148.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R149.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R149.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_L_Dominant_Product.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/L_Dominant_Product.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_BATCH_In_###FECHA_F1###_SourceSystems.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/rct/replac/organization/SourceSystems.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_BATCH_In_###FECHA_F1###_SourceSystemsEnvironments.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/rct/replac/organization/SourceSystemEnvironments.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_ASSIGNMENT.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/ASSIGNMENT_RULE.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R135.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R135.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_###FECHA_F1###_R135.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R135.csv

1##_R136.csv	/lookups/R136.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R83.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R83.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_RFRV.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/RFRV.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_CALENDAR.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/CALENDAR_RULE.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R95A.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R95A.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R95B.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R95B.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_RTCE_In_##FECHA_F1##_R95C.csv	\$XKOZ_DATIN/IMCRData/dataset/input_data/trida/datamart/lookups/R95C.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_CREDIT_#FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacccr/SACCR_CREDIT.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_EQUITY_#FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacccr/SACCR_EQUITY.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_FOREIGN_##FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacccr/SACCR_FOREIGN.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_INTEREST_##FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacccr/SACCR_INTEREST.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_Structured Deals_##FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacccr/SACCR_StructuredDeals.csv
\$XKOZ_DATIN/EnviosRTCE/TEPR_SACCR_In_COMMODITIES_##FECHA_F1##.CSV	\$XKOZ_DATIN/IMCRData/dataset/input_data/sacccr/SACCR_COMMODITIES.csv


XKOZ-IMCR-PRE05-PrepareBatchEnv

This stream will prepare the batch environment.

**XKOZ-IMCR-PRE05-PrepareBatchEnv**

All changes saved.

<Enter Description Here>

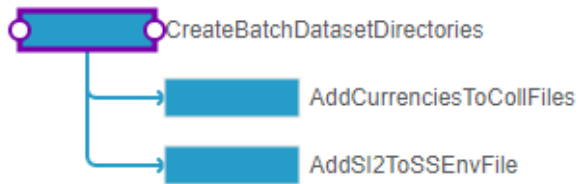

This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_CFG/XKOZ_Benchmark_IMM.prm
- Flag 2: \$XKOZ_CFG/XKOZ_SACCR_IMM.prm
- Flag 3: \$XKOZ_CFG/XKOZ_TRIM_IMM.prm

This stream consists of the following jobs:

CreateBatchDatasetDirectories

This operation will create the batch dataset folders.

Command:

```
$XKOZ_SCRT/XKOZ_IMCR_CreateBatchDirectories.sh @{{batch_input_cfg}}
@{{IMCRData_path}}
```

Arguments

- **@{{IMCRData_path}}**: The IMCR data path.
- **@{{batch_input_cfg}}**: The batch input files configuration file.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}:

\$XKOZ_DATIN/IMCRData

@{batch_input_cfg}:

XKOZ_IMCR_InputData_BatchFiles_Benchmark_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Flag 2: SACCR

@{IMCRData_path}:

\$XKOZ_DATIN/IMCRData

@{batch_input_cfg}:

XKOZ_IMCR_InputData_BatchFiles_SACCR_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Flag 3: TRIM

@{IMCRData_path}:

\$XKOZ_DATIN/IMCRData

@{batch_input_cfg}:

XKOZ_IMCR_InputData_BatchFiles_TRIM_\${XKOZ_CFGUSER_TipoCalc}_\${XKOZ_CFGUSER_PaisDato}.cfg

Logic

This script does the following steps:

1. Copy Mentor input data from **@{IMCRData_path}/dataset/input_data/mentor/** to **@{IMCRData_path}/dataset/**.
2. Copy Trida input data from **@{IMCRData_path}/dataset/input_data/trida/*** to **@{IMCRData_path}/dataset/**.
3. Creating output report directory if not exists.
4. Replace **##LABELS##** in **@{IMCRData_path}//dataset/rtce/datasettemplate** files

Outputs

- fas\$XKOZ_DATOUT/reports/imcr folder
- **@{IMCRData_path}//dataset** folders

AddCurrenciesToCollFiles

This operation will replace __CURRENCIES__ label in collateral agreement files with all currencies found in Currencies.csv.

Arguments:

- **@{IMCRData_path}**: The IMCR data path.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

Flag 2: SACCR

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

Flag 3: TRIM

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

Inputs

\${IMCRDataPath}/dataset/rtce/replace/environment/Currencies.csv

Outputs

\${IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreement*.csv

Logic

This script does the following steps:

1. Get the currencies list from
\${IMCRDataPath}/dataset/rtce/replace/environment/Currencies.csv
2. Replace __CURRENCIES__ in
\${IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreement*.csv with
the list of currencies found

AddSI2ToSSEnvFiles

This operation will add "MUREX,SI2" in SourceSystemEnvironments.csv file in case it exists in Cutoffs.csv file

Arguments:

- **@{IMCRData_path}**: The IMCR data path.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

Flag 2: SACCR

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

Flag 3: TRIM

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

Inputs

\${IMCRDataPath}/dataset/rtce/replace/cutoffs/Cutoffs.csv

Outputs

\${IMCRDataPath}/dataset/rtce/replace/organization/SourceSystemEnvironments.csv

Logic


1. Check if exists "MUREX,SI2," in Cutoffs.csv file
2. If so, check if exists "SI2,SI2,MUREX," in SourceSystemEnvironments.csv file
3. If it does not exist, add it at the end of the file.

XKOZ-IMCR-PRE06-SetupBatchEnv_Benchmark

This stream will configure and prepare all IMCR static data

XKOZ-IMCR-PRE06-SetupBatchEnv_Benchmark All changes saved.

<Enter Description Here>

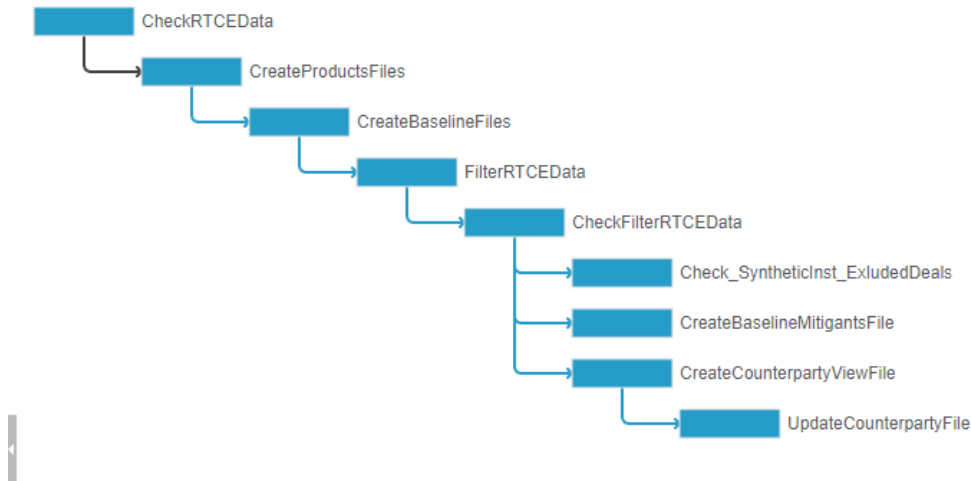

This stream only will be executed in flag I (Benchmark) and will receive the following parameter file:

- \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_IMM.prm

This stream consists of the following jobs:

CheckRTCEData

This operation will run a basic check of consistency of IMCR data. It will print all inconsistent data found.

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_CheckRTCEData.pl -d @{IMCRDataPath}

Arguments

- **@{IMCRData_path}**: The full path to the IMCR data.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

Flag 2: SACCR

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

Flag 3: TRIM

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

Inputs

RTCE files to check:

@{IMCRDataPath}/dataset/rtce/replace/environment/Countries.csv
 @{IMCRDataPath}/dataset/rtce/replace/environment/Locations.csv
 @{IMCRDataPath}/dataset/rtce/replace/environment/Currencies.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/InitialProfiles.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Links.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/MasterAgreement.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Exclusions.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/Books.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/BookParents.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/Portfolios.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/PortfolioHierarchies.csv
 @{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_Inst.csv
 @{IMCRDataPath}/dataset/input_data/profiletrades.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/SourceSystems.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/SourceSystemEnvironments.csv
 @{IMCRDataPath}/dataset/rtce/replace/cutoffs/Cutoffs.csv

Logic

The script runs the following checks:

Counterparty.csv

- Check if Id is duplicated
- Check if Country and UltimateObligorCountry fields exist in Countries.csv file
- Check if Location field exists in Locations.csv file
- Check if DomesticCurrency field exists in Currencies.csv file
- Check if UNKNOWN_CP is defined

Branches.csv

- Check if Id is duplicated
- Check if Country field exists in Countries.csv file
- Check if Location field exists in Locations.csv file
- Check if CounterpartyId field exists in Counterparty.csv file

Links.csv

- Check if Id is duplicated
- Check if CounterpartyId and ParentId fields exist in Counterparty.csv file

MasterAgreement.csv

- Check if Id is duplicated
- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in in Counterparty.csv file
- Check if TerminationCurrency field exists in Currencies.csv file

CollateralAgreementVM.csv, CollateralAgreementLegacy.csv and CollateralAgreementIMVM.csv

- Check if Id is duplicated
- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in in Counterparty.csv file
- Check if MasterAgreementId is in MasterAgreement.csv file

CollateralAgreementIM.csv

- Check if Id is duplicated
- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in Counterparty.csv file
- Check if MasterAgreementId field is in MasterAgreement.csv file
- Check if VMAgreementId field is in CollateralAgreementVM.csv file

Exclusions.csv

- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in Counterparty.csv file
- Check if ContainerId field is in MasterAgreement.csv file

- Check if SubContainerId field is in Collateral*.csv file
- Check Argument field is not empty if Operator field equal to "IN"

Portfolios.csv

- Check if Id is duplicated
- Check if ParentId field is defined previously

BookParents.csv

- Check if PortfolioId field is in Portfolios.csv file
- Check if HierarchyId field is in PortfolioHierarchies.csv file

Books.csv

- Check if Id is duplicated
- Check if BranchId field is in Branches.csv file
- Check if Id field is in BookParents.csv file
- Check if Location field exists in Locations.csv file
- Check if UNKNOWN_BOOK is defined

XKOZ Export BaselineTrades Inst.csv

- Check if CurrencyUNIT field exists in Currencies.csv file

InitialProfile.csv

- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in Counterparty.csv file
- Check if Currency field exists in Currencies.csv file

Cutoffs.csv

- Check if SourceSystemId field exists in SourceSystems.csv file
- Check if SourceSystemId field exists in SourceSystemEnvironments.csv file

CreateProductsFiles

This operation will create all product definition files included in IMCR static data.

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_CreateProductsFiles.pl -p
@{IMCRDataPath}/dataset/aux_files/Mentor_Products.csv -d @{IMCRDataPath} -b
@{BatchId}
```

Arguments

- **@{IMCRDataPath}**: The IMCR data path
- **@{BatchId}**: The batch ID.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

@{BatchId}: Benchmark

Flag 2: SACCR

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

@{BatchId}: SACCR

Flag 3: TRIM

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

@{BatchId}: TRIM

Inputs

- **@{IMCRDataPath}**/dataset/aux_files/Mentor_Products.csv
- **@{IMCRDataPath}**/dataset/datamart/lookups/VariantClassifications.csv
- \$XKOZ_CFG/XKOZ_IMCR_Product_Representations_**@{BatchId}**_IMM.cfg
- \$XKOZ_CFG/XKOZ_IMCR_MitigantsProducts_IMM.cfg

Logic

This script does the following steps:

1. Check parameters received.
2. Read all input files
3. Define all header output files
4. Load rules file (XKOZ_IMCR_Product_Representations_**@{BatchId}**_IMM.cfg) and loop it creating all output files following IMCR data definitions.

Outputs

- @{{IMCRDataPath}}/dataset/rtce/replace/products/Products.csv
- @{{IMCRDataPath}}/dataset/rtce/replace/products/ProductRepresentations.csv
- @{{IMCRDataPath}}/dataset/rtce/replace/products/ProductRepresentationTemplates.csv
- @{{IMCRDataPath}}/dataset/rtce/replace/products/DefaultEngines.csv
- @{{IMCRDataPath}}/dataset/rtce/replace/products/ProductMethodologies.csv

CreateBaselineFiles

This operation will create baseline files.

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_CreateBaselineTradesFile.pl -o @{{BaselinesXmlPath}} -d @{{IMCRDataPath}}
```

Arguments

- @{{BaselinesXmlPath}}: The baselines XML path. Value: \$XKOZ_DATIN/IMCRData/dataset/variants
- @{{IMCRDataPath}}: The IMCR data path. Value: \$XKOZ_DATIN/IMCRData

Inputs:

```
@{{IMCRDataPath}}/dataset/rtce/replace/counterparties/Branches.csv
@{{IMCRDataPath}}/dataset/rtce/replace/counterparties/Counterparty.csv
@{{IMCRDataPath}}/dataset/rtce/replace/organization/Books.csv
@{{IMCRDataPath}}/dataset/datamart/lookups/VariantClassifications.csv
@{{IMCRDataPath}}/dataset/rtce/replace/products/Products.csv
@{{IMCRDataPath}}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv
@{{IMCRDataPath}}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv
@{{IMCRDataPath}}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv
@{{IMCRDataPath}}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv
@{{IMCRDataPath}}/dataset/aux_files/BaselineTrades_CollateralAgreement.csv
@{{IMCRDataPath}}/dataset/aux_files/BaselineTrades_MasterAgreement.csv
@{{IMCRDataPath}}/dataset/input_data/aidb_data/XKOZ_Export_Componentes_Estrategias_FULL.csv
```

@{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_SDeal.csv
 @{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_Pos.csv
 @{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_Inst.csv
 @{IMCRDataPath}/dataset/input_data/profiletrades.csv
 \$XKOZ_CFG/XKOZ_IMCR_Template_BaselineTrades.xml
 \$XKOZ_CFG/XKOZ_IMCR_Template_BaselineStructuredDeals.xml

Outputs:

- @{BaselinesXmlPath}/BaselineTrades.xml
- @{BaselinesXmlPath}/BaselineStructuredDeals.xml
- @{IMCRDataPath}/dataset/datamart/lookups/L_ScalingFactor.csv

FilterRTCEData

This operation will filter the RTCE data.

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_FilterRTCEData.pl -d @{IMCRDataPath}

Arguments

@{IMCRDataPath}: The IMCR data path. Value: \$XKOZ_DATIN/IMCRData

Inputs:

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Links.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/MasterAgreement.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Exclusions.csv

@{IMCRDataPath}/dataset/aux_files/Mitigants.csv
 @{IMCRDataPath}/dataset/aux_files/IM_SPOT.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/InitialProfiles.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/Books.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/BookParents.csv
 @{IMCRDataPath}/dataset/variants/BaselineTrades.xml
 @{IMCRDataPath}/dataset/variants/BaselineStructuredDeals.xml
 @{IMCRDataPath}/dataset/rtce/replace/organization/SourceSystems.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/SourceSystemEnvironments.csv
 @{IMCRDataPath}/dataset/rtce/replace/cutoffs/Cutoffs.csv

Logic

This script does the following steps:

1. Read inputs files and build counterparties list not to filter according:
 - a. OwnEntities cfg file
 - b. InitialProfile.csv file
 - c. BaselineTrades.xml file
2. Filter input files according to the cpy list

Output files (filtered files)

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Links.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/MasterAgreement.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Exclusions.csv


```
@{IMCRDataPath}/dataset/aux_files/Mitigants.csv
@{IMCRDataPath}/dataset/aux_files/IM_SPOT.csv
@{IMCRDataPath}/dataset/rtce/replace/organization/Books.csv
@{IMCRDataPath}/dataset/rtce/replace/organization/BookParents.csv
```

CheckFilterRTCEData

This operation will check the filter of RTCE data running the same logic than CheckRTCEData operation

Check_SynthethicInst_ExludedDeals

This operation will check if the instruments inside L_Variant_ExcludedDeals.csv are "Synthetic Instruments", in that case add _SYN to those instruments

Command:

```
$XKOZ_SCRT/XKOZ_Check_SynthethicInst_ExludedDeals.sh
@{IMCRDataPath}/dataset/datamart/lookups/L_Variant_ExcludedDeals.csv
@{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_Inst.csv
```

Arguments

- **@{IMCRDataPath}**: The IMCR data path. Value: \$XKOZ_DATIN/IMCRData

Inputs:

- Csv input file

Logic:

This script does the following steps:

1. Validate input parameters
2. Validate input files
3. Sort both files with instrument ID
4. Join both files with ID field and add SYN in case it's needed
5. Remove temporary files

Outputs:

- Same input .csv file modified

CreateBaselineMitigantsFile

This operation will create the baseline mitigants files

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_CreateBaselineMitigantsFile.pl -o @{BaselinesXmlPath} -d @{IMCRDataPath}
```

Arguments

- **@{IMCRDataPath}**: The IMCR data path. Value \$XKOZ_DATIN/IMCRData
- **@{BaselinesXmlPath}**: The IMCR data path. Value : \$XKOZ_DATIN/IMCRData/dataset/variants

Inputs:

@{IMCRDataPath}/dataset/aux_files/Mitigants.csv

@{IMCRDataPath}/dataset/aux_files/IM_SPOT.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv

Logic:

This script does the following steps:

1. Read spot initial margin file
2. Read variation margin file
3. Read BaselineMitigant template
4. Read date file
5. Create BaselineMitigants.xml file

Outputs:

@{BaselinesXmlPath}/BaselineMitigants.xml

CreateCounterpartyViewFile

This operation will create the counter party view file

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_CreateCounterpartyViewsFiles.pl -d @{IMCRDataPath}

Arguments

- **@{IMCRDataPath}**: The IMCR data path. Value: \$XKOZ_DATIN/IMCRData

Inputs:

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/MasterAgreement.csv

@{IMCRDataPath}/dataset/rtce/replace/organization/Books.csv

@{IMCRDataPath}/dataset/rtce/replace/products/Products.csv

@{IMCRDataPath}/dataset//variants/BaselineTrades.xml

@{IMCRDataPath}/dataset/rtce/replace/counterparties/InitialProfiles.csv

Logic:

This script does the following steps:

1. Read input files
2. Read limits
3. Create counterpartyViews.csv

Outputs:

@{IMCRDataPath}/dataset/rtce/replace/counterparties/CounterpartyViews.csv

UpdateCounterpartyFile

This operation will update the counterparty file adding “entity_template” in each line

Command:

```
sed -i "s/,/,entity_template,/"  
@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv
```

Arguments

- **@{IMCRDataPath}**: The IMCR data path. Value: \$XKOZ_DATIN/IMCRData/

Inputs:

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv

Logic:

This script does the following steps:

1. Search for “,”
2. Replace it with “,entity_template,”

Outputs:


@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv

XKOZ-IMCR-PRE06-SetupBatchEnv_TRIM

This stream will configure and prepare all IMCR static data

XKOZ-IMCR-PRE06-SetupBatchEnv_TRIM [READ ONLY]

Stream Outputs

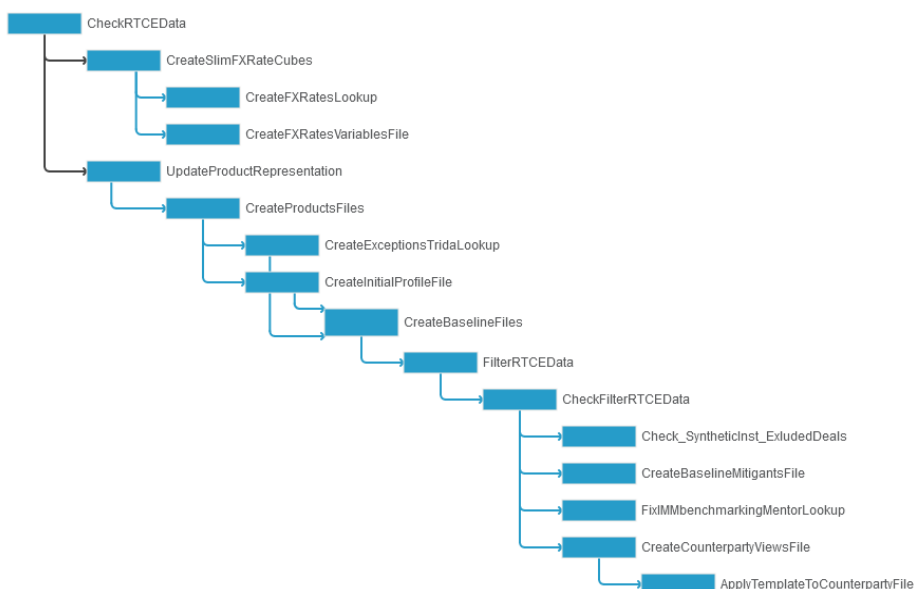

This stream only will be executed in flag III (TRIM) and will receive the following parameter file:

- \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm

This stream consists of the following jobs:

CheckRTCEData

This operation will run a basic check of consistency of IMCR data. It will print all inconsistent data found.

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_CheckRTCEData.pl -d @IMCRDataPath}

Arguments

- @IMCRData_path: The full path to the IMCR data.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

Flag 2: SACCR

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

Flag 3: TRIM

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

Inputs

RTCE files to check:

@{IMCRDataPath}/dataset/rtce/replace/environment/Countries.csv
 @{IMCRDataPath}/dataset/rtce/replace/environment/Locations.csv
 @{IMCRDataPath}/dataset/rtce/replace/environment/Currencies.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/InitialProfiles.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Links.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/MasterAgreement.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/Exclusions.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/Books.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/BookParents.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/Portfolios.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/PortfolioHierarchies.csv
 @{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_Inst.csv
 @{IMCRDataPath}/dataset/input_data/profiletrades.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv
 @{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/SourceSystems.csv
 @{IMCRDataPath}/dataset/rtce/replace/organization/SourceSystemEnvironments.csv
 @{IMCRDataPath}/dataset/rtce/replace/cutoffs/Cutoffs.csv

Logic

The script runs the following checks:

Counterparty.csv

- Check if Id is duplicated
- Check if Country and UltimateObligorCountry fields exist in Countries.csv file
- Check if Location field exists in Locations.csv file
- Check if DomesticCurrency field exists in Currencies.csv file
- Check if UNKNOWN_CP is defined

Branches.csv

- Check if Id is duplicated
- Check if Country field exists in Countries.csv file
- Check if Location field exists in Locations.csv file
- Check if CounterpartyId field exists in Counterparty.csv file

Links.csv

- Check if Id is duplicated
- Check if CounterpartyId and ParentId fields exist in Counterparty.csv file

MasterAgreement.csv

- Check if Id is duplicated
- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in in Counterparty.csv file
- Check if TerminationCurrency field exists in Currencies.csv file

CollateralAgreementVM.csv, CollateralAgreementLegacy.csv and CollateralAgreementIMVM.csv

- Check if Id is duplicated
- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in in Counterparty.csv file
- Check if MasterAgreementId is in MasterAgreement.csv file

CollateralAgreementIM.csv

- Check if Id is duplicated
- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in Counterparty.csv file
- Check if MasterAgreementId field is in MasterAgreement.csv file
- Check if VMAgreementId field is in CollateralAgreementVM.csv file

Exclusions.csv

- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in Counterparty.csv file
- Check if ContainerId field is in MasterAgreement.csv file

- Check if SubContainerId field is in Collateral*.csv file
- Check Argument field is not empty if Operator field equal to "IN"

Portfolios.csv

- Check if Id is duplicated
- Check if ParentId field is defined previously

BookParents.csv

- Check if PortfolioId field is in Portfolios.csv file
- Check if HierarchyId field is in PortfolioHierarchies.csv file

Books.csv

- Check if Id is duplicated
- Check if BranchId field is in Branches.csv file
- Check if Id field is in BookParents.csv file
- Check if Location field exists in Locations.csv file
- Check if UNKNOWN_BOOK is defined

XKOZ Export BaselineTrades Inst.csv

- Check if CurrencyUNIT field exists in Currencies.csv file

InitialProfile.csv

- Check if CounterpartyId and OwnEntityId fields exist in Counterparty.csv file
- Check OwnEntityId field is defined as Own Entity in Counterparty.csv file
- Check if Currency field exists in Currencies.csv file

Cutoffs.csv

- Check if SourceSystemId field exists in SourceSystems.csv file
- Check if SourceSystemId field exists in SourceSystemEnvironments.csv file

CreateSlimFXRateCubes

This operation will create slim FX rate cubes

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_CreateSlimFXRateCubes.pl -d @{{IMCRDataPath}}

Arguments

- **@{IMCRData_path}**: The full path to the IMCR data. Value: \$XKOZ_DATIN/IMCRData

Inputs

\$XKOZ_CFG/XKOZ_IMCR_SlimFXRateCubes_mappings_IMM.txt

\$XKOZ_CFG/XKOZ_IMCR_SlimFXRateCubes_extract_IMM.txt

\$XKOZ_CFG/udsloader/XKOZ_IMCR_SlimFXRateCubes_IMM.dir

\$XKOZ_CFG/udsloader/XKOZ_udsloader_FxRates_header.csv

Logic

The script runs the following steps:

1. Read the properties file
2. Copy files to output directory
3. Export base currency reference
4. Create slim cube
5. Export readable slim cube data

Outputs

@{IMCRData_path}/dataset/variants/spotFxRate/lithextract/XKOZ_IMCR_SlimFXRateCubes_IMM.dir

@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/XKOZ_udsloader_FxRates_header.csv

@{IMCRData_path}/dataset/variants/spotFxRate/lithextract/XKOZ_udsloader_FxRates.csv

@{IMCRData_path}/dataset/variants/spotFxRate/lithextract/fx_base_currency.csv

@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/fxRate.id.bin

@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/fxRate.currency.bin

@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/fxRate.value.bin

@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/fxRate.id.bin.txt

@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/fxRate.value.bin.txt

@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/fxRate.currency.bin.txt

CreateFXRatesLookup

This operation will create FX rates lookup file

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_CreateFXRatesLookup.pl -d @{{IMCRDataPath}}

Arguments

- @{{IMCRData_path}}: The full path to the IMCR data. Value: \$XKOZ_DATIN/IMCRData

Inputs

@{{IMCRData_path}}/dataset/variants/spotFxRate/lithextract/fxRate.currency.bin.txt

@{{IMCRData_path}}/dataset/variants/spotFxRate/lithextract/fxRate.value.bin.txt

@{{IMCRData_path}}/dataset/variants/spotFxRate/lithextract/fx_base_currency.csv

Logic

The script runs the following steps:

1. Read default currency
2. Read currencies names
3. Read currencies values
4. Create L_Rates lookup

Outputs

@{{IMCRData_path}}/dataset/datamart/lookups/L_Rates.csv

CreateFXRatesVariablesFile

This operation will create FX rates variables file

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_CreateFXRatesVariablesFile.pl -d @{{IMCRDataPath}}

Arguments

- @{{IMCRData_path}}: The full path to the IMCR data. Value: \$XKOZ_DATIN/IMCRData

Inputs

```
@{IMCRData_path}/dataset/variants/spotFxRate/lithextract/bundle.xml
@{IMCRData_path}/dataset/variants/spotFxRate/lithextract/fx_base_currency.csv
@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/fxRate.id.bin
@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/fxRate.currency.bin
@{IMCRData_path}/dataset/variants/spotFxRate//lithextract/fxRate.value.bin
```

Logic

The script runs the following steps:

1. Read default currency
2. Ready fx base currency
3. Export FX variables in a temporal file spotFxRateVariant.csv
4. Read spotFxRateVariant.csv file and create Variable.csv completing Asset1, Asset2 fields

Outputs

```
@{IMCRData_path}/dataset/rtce/replace/financialdata/Variables.csv
```

UpdateProductRepresentation

This operation will update the product representation

Command:

```
sed -i "s/,GenericTrade/,GenericSACCRTrade,g"
@{IMCRDataPath}/dataset/aux_files/Mentor_Products.csv
```

Arguments

- **@{IMCRData_path}**: The full path to the IMCR data. Value: \$XKOZ_DATIN/IMCRData

Inputs:

```
@{IMCRData_path}/dataset/aux_files/Mentor_Products.csv
```

Outputs:

@{IMCRData_path}//dataset/aux_files/Mentor_Products.csv

CreateProductsFiles

This operation will create all product definition files included in IMCR static data.

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_CreateProductsFiles.pl -p
@{IMCRDataPath}/dataset/aux_files/Mentor_Products.csv -d @{IMCRDataPath} -b
@{BatchId}
```

Arguments

- **@{IMCRDataPath}**: The IMCR data path
- **@{BatchId}**: The batch ID.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

@{BatchId}: Benchmark

Flag 2: SACCR

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

@{BatchId}: SACCR

Flag 3: TRIM

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

@{BatchId}: TRIM

Inputs

- **@{IMCRDataPath}**/dataset/aux_files/Mentor_Products.csv
- **@{IMCRDataPath}**/dataset/datamart/lookups/VariantClassifications.csv
- \$XKOZ_CFG/XKOZ_IMCR_Product_Representations_**@{BatchId}**_IMM.cfg
- \$XKOZ_CFG/XKOZ_IMCR_MitigantsProducts_IMM.cfg

Logic

This script does the following steps:

5. Check parameters received.
6. Read all input files
7. Define all header output files
8. Load rules file (XKOZ_IMCR_Product_Representations_{BatchId}_IMM.cfg) and loop it creating all output files following IMCR data definitions.

Outputs

- @{{IMCRDataPath}}/dataset/rtce/replace/products/Products.csv
- @{{IMCRDataPath}}/dataset/rtce/replace/products/ProductRepresentations.csv
- @{{IMCRDataPath}}/dataset/rtce/replace/products/ProductRepresentationTemplates.csv
- @{{IMCRDataPath}}/dataset/rtce/replace/products/DefaultEngines.csv
- @{{IMCRDataPath}}/dataset/rtce/replace/products/ProductMethodologies.csv

CreateExceptionsTridaLookup

This operation will create a exclude lookup that excluded deals received in SACCR inputs, marked as IMM product but there are no simulation data for them

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_CreateExceptionTridaLookup.pl -d @{{IMCRDataPath}}

Arguments

- @{{IMCRData_path}}: The full path to the IMCR data. Value: \$XKOZ_DATIN/IMCRData

Inputs

@{{IMCRData_path}}/dataset/input_data/sacc/SACCR_CREDIT.csv
 @{{IMCRData_path}}/dataset/input_data/sacc/SACCR_EQUITY.csv
 @{{IMCRData_path}}/dataset/input_data/sacc/SACCR_FOREIGN.csv
 @{{IMCRData_path}}/dataset/input_data/sacc/SACCR_INTEREST.csv
 @{{IMCRData_path}}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_Inst.csv
 @{{IMCRData_path}}/datase/datamart/lookups/L_IMMproductsK.csv

Logic

This script does the following steps:

1. Read instruments aidb file
2. Read imm product file
3. For each deal in saccr inputs, if product type is IMM and the deal does not exist in instrument file, write it in the exclude lookup.

Outputs

@{IMCRData_path}/dataset//datamart/lookups/L_exceptions_Trida.csv

CreateInitialProfileFile

This operation will create initial profile file

Command:

\$XKOZ_FUENTES/XKOZ_ConsumosManuales.pl -d @{IMCRDataPath}

Arguments

- **@{IMCRData_path}**: The full path to the IMCR data. Value: \$XKOZ_DATIN/IMCRData

Inputs

@{IMCRData_path}/dataset/aux_files/ConsumosManualesIA.csv

@{IMCRData_path}/dataset/rtce/replace/products/Products.csv

@{IMCRData_path}/dataset/rtce/replace/counterparties/Counterparty.csv

@{IMCRData_path}/dataset/rtce/replace/counterparties/MasterAgreement.csv

@{IMCRData_path}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv

@{IMCRData_path}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv

@{IMCRData_path}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv

@{IMCRData_path}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv

Logic

This script does the following steps:

1. Read input files

2. Check consumos manuales file consistency.
3. Read all CVA consumption.
4. Create the IMCR initial profile file

Outputs

@{IMCRData_path}/dataset/rtce/replace/counterparties/InitialProfiles.csv

CreateBaselineFiles

This operation will create baseline files.

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_CreateBaselineTradesFile_IMMSACCR.pl -o  
@{BaselinesXmlPath} -d @{IMCRDataPath}
```

Arguments

- **@{BaselinesXmlPath}**: The baselines XML path. Value: \$XKOZ_DATIN/IMCRData/dataset/variants
- **@{IMCRDataPath}**: The IMCR data path. Value: \$XKOZ_DATIN/IMCRData

Inputs:

```
@{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv  
@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv  
@{IMCRDataPath}/dataset/rtce/replace/organization/Books.csv  
@{IMCRDataPath}/dataset/datamart/lookups/VariantClassifications.csv  
@{IMCRDataPath}/dataset/rtce/replace/products/Products.csv  
@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv  
@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv  
@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv  
@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv  
@{IMCRDataPath}/dataset/aux_files/BaselineTrades_CollateralAgreement.csv  
@{IMCRDataPath}/dataset/aux_files/BaselineTrades_MasterAgreement.csv  
@{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_Componentes_Estrategias_FULL.csv  
@{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_SDeal.csv
```

@{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_Pos.csv
 @{IMCRDataPath}/dataset//input_data/aidb_dataXKOZ_Export_BaselineTrades_Inst.csv
 @{IMCRDataPath}/dataset/input_data/profiletrades.csv
 @{IMCRDataPath}/dataset/input_data/sacccr/SACCR_CREDIT.csv
 @{IMCRDataPath}/dataset/input_data/sacccr/SACCR_EQUITY.csv
 @{IMCRDataPath}/dataset/input_data/sacccr/SACCR_FOREIGN.csv
 @{IMCRDataPath}/dataset/input_data/sacccr/SACCR_INTEREST.csv
 @{IMCRDataPath}/dataset/input_data/sacccr/SACCR_StructuredDeals.csv
 \$XKOZ_CFG/XKOZ_IMCR_Template_BaselineTrades_IMMSACCR.xml
 \$XKOZ_CFG/XKOZ_IMCR_Template_BaselineStructuredDeals.xml
 \$XKOZ_CFG/XKOZ_IMCR_Template_CR_SACCRASSET_BLOCK.xml
 \$XKOZ_CFG/XKOZ_IMCR_Template_EQ_SACCRASSET_BLOCK.xml
 \$XKOZ_CFG/XKOZ_IMCR_Template_FX_SACCRASSET_BLOCK.xml
 \$XKOZ_CFG/XKOZ_IMCR_Template_IR_SACCRASSET_BLOCK.xml

Outputs:

@{BaselinesXmlPath}/BaselineTrades.xml
 @{BaselinesXmlPath}/BaselineStructuredDeals.xml
 @{IMCRDataPath}/dataset/datamart/lookups/L_ScalingFactor.csv

Logic

Before including a deal in the baseline trades files, the script checks the consistency of deals and sd. Some deals are not included for the following reasons:

Discarded conditions

Deals

- Empty instrument maturity date
- SD not exists in SD list

Structured Deals

- SD has not be used to build baselinetrades.xml
- Book is empty or is not defined in Books.csv
- Branch is empty or is not defined in Branchs.csv

Skipped conditions

Deals

- Product not in IMM or SACCR perimeter
- If is a SD and dominant product in benchmark execution was out of

All this skipped and discarded deals can be found in \$ALGO_TOP/log/streams/XKOZ-IMCR-PRE06-SetupBatchEnv_TRIM.XXXX/CreateBaselineFiles logs files

FilterRTCEData

This operation will filter the RTCE data.

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_FilterRTCEData.pl -d @{{IMCRDataPath}}

Arguments

@{{IMCRDataPath}}: The IMCR data path. Value: \$XKOZ_DATIN/IMCRData

Inputs:

@{{IMCRDataPath}}/dataset/rtce/replace/counterparties/Counterparty.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/counterparties/Links.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/counterparties/Branches.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/counterparties/MasterAgreement.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/counterparties/Exclusions.csv
 @{{IMCRDataPath}}/dataset/aux_files/Mitigants.csv
 @{{IMCRDataPath}}/dataset/aux_files/IM_SPOT.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/counterparties/InitialProfiles.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv
 @{{IMCRDataPath}}/dataset/rtce/replace/organization/Books.csv

```
@{IMCRDataPath}/dataset/rtce/replace/organization/BookParents.csv
@{IMCRDataPath}/dataset/variants/BaselineTrades.xml
@{IMCRDataPath}/dataset/variants/BaselineStructuredDeals.xml
@{IMCRDataPath}/dataset/rtce/replace/organization/SourceSystems.csv
@{IMCRDataPath}/dataset/rtce/replace/organization/SourceSystemEnvironments.csv
@{IMCRDataPath}/dataset/rtce/replace/cutoffs/Cutoffs.csv
```

Logic

This script does the following steps:

3. Read inputs files and build counterparties list not to filter according:
 - a. OwnEntities cfg file
 - b. InitialProfile.csv file
 - c. BaselineTrades.xml file
4. Filter input files according to the cpy list

Output files (filtered files)

```
@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv
@{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv
@{IMCRDataPath}/dataset/rtce/replace/counterparties/Links.csv
@{IMCRDataPath}/dataset/rtce/replace/counterparties/MasterAgreement.csv
@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv
@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv
@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv
@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv
@{IMCRDataPath}/dataset/rtce/replace/counterparties/Exclusions.csv
@{IMCRDataPath}/dataset/aux_files/Mitigants.csv
@{IMCRDataPath}/dataset/aux_files/IM_SPOT.csv
@{IMCRDataPath}/dataset/rtce/replace/organization/Books.csv
@{IMCRDataPath}/dataset/rtce/replace/organization/BookParents.csv
```

CheckFilterRTCEData

This operation will check the filter of RTCE data running the same logic than CheckRTCEData operation

Check_SynthethicInst_ExludedDeals

This operation will check if the instruments inside L_Variant_ExcludedDeals.csv are "Synthetic Instruments", in that case add _SYN to those instruments

Command:

```
$XKOZ_SCRT/XKOZ_Check_SynthethicInst_ExludedDeals.sh
@{IMCRDataPath}/dataset/datamart/lookups/L_Variant_ExcludedDeals.csv
@{IMCRDataPath}/dataset/input_data/aidb_data/XKOZ_Export_BaselineTrades_Inst.csv
```

Arguments

- **@{IMCRDataPath}**: The IMCR data path. Value: \$XKOZ_DATIN/IMCRData

Inputs:

- Csv input file

Logic:

This script does the following steps:

6. Validate input parameters
7. Validate input files
8. Sort both files with instrument ID
9. Join both files with ID field and add SYN in case it's needed
10. Remove temporary files

Outputs:

- Same input .csv file modified

CreateBaselineMitigantsFile

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_CreateBaselineMitigantsFile.pl -o @{BaselinesXmlPath} -d @{IMCRDataPath}
```

Arguments

- **@{IMCRDataPath}**: The IMCR data path. Value \$XKOZ_DATIN/IMCRData
- **@{BaselinesXmlPath}**: The IMCR data path. Value : \$XKOZ_DATIN/IMCRData/dataset/variants

Inputs:

@{IMCRDataPath}/dataset/aux_files/Mitigants.csv

@{IMCRDataPath}/dataset/aux_files/IM_SPOT.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementLegacy.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementVM.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIM.csv

@{IMCRDataPath}/dataset/rtce/replace/counterparties/CollateralAgreementIMVM.csv

Logic:

This script does the following steps:

6. Read spot initial margin file
7. Read variation margin file
8. Read BaselineMitigant template
9. Read date file
10. Create BaselineMitigants.xml file

Outputs:

@{BaselinesXmlPath}/BaselineMitigants.xml

FixIMMbenchmarkingMentorLookup

This operation will fix L_IMMbenchmarking_ST.csv received from Mentor adding _SYN in case it's necessary

Command:

```
parseArgs "$@"
```

```
l_file=${s_imcr_data_path}/dataset/datamart/lookups/L_IMMbenchmarking_ST.csv
l_scaling_factor_file=${s_imcr_data_path}/dataset/datamart/lookups/L_ScalingFactor.csv
```

```
l_not_found_file=${XKOZ_DATOUT}/reports/XKOZ_${s_dataset}_Benchmarking_not_found.csv
>$l_not_found_file
```

```
head -1 ${l_file} > ${l_file}.tmp
for i in `cut -d "," -f 2 ${l_file} | sort -u`; do grep $i ${l_scaling_factor_file} | cut -d ',' -f 1; done |
sed 's/^/,/g' | sed '/^,$/d' >> ${l_file}.tmp
```

```
for i in `cut -d "," -f 2 ${l_file} | sort -u`; do
  n_oc=`grep $i ${l_scaling_factor_file} | wc -l`
  echo "$i [$n_oc]"
  if [ $n_oc -eq 0 ]; then
    echo $i >> $l_not_found_file
  fi
done
```

```
cut -d "," -f 1 ${l_file} | sort | uniq | grep -v STRUCTUREDDEALID | sed 's/$/,/g' | sed '/^,$/d'
>> ${l_file}.tmp
mv ${l_file} ${l_file}.orig
mv ${l_file}.tmp ${l_file}
```

Arguments

- **@{IMCRDataPath}**: The IMCR data path. Value \$XKOZ_DATIN/IMCRData
- **@{Dataset}**: IMCR dataset name

Inputs:

```
@{IMCRDataPath}/dataset/datamart/lookups/L_IMMbenchmarking_ST.csv
@{IMCRDataPath}/dataset/datamart/lookups/L_ScalingFactor.csv
```

Outputs:

`${XKOZ_DATOUT}/reports/XKOZ_${s_dataset}_Benchmarking_not_found.csv`

`@{IMCRDataPath}dataset/datamart/lookups/L_IMMbenchmarking_ST.csv`

CreateCounterpartyViewsFile

This operation will create the counter party view file

Command:

`$XKOZ_FUENTES/XKOZ_IMCR_CreateCounterpartyViewsFiles.pl -d @{IMCRDataPath}`

Arguments

- **@{IMCRDataPath}**: The IMCR data path. Value: `$XKOZ_DATIN/IMCRData`

Inputs:

`@{IMCRDataPath}/dataset/rtce/replace/counterparties/Branches.csv`

`@{IMCRDataPath}/dataset/rtce/replace/counterparties/MasterAgreement.csv`

`@{IMCRDataPath}/dataset/rtce/replace/organization/Books.csv`

`@{IMCRDataPath}/dataset/rtce/replace/products/Products.csv`

`@{IMCRDataPath}/dataset/variants/BaselineTrades.xml`

`@{IMCRDataPath}/dataset/rtce/replace/counterparties/InitialProfiles.csv`

Logic:

This script does the following steps:

4. Read input files
5. Read limits
6. Create counterpartyViews.csv

Outputs:

`@{IMCRDataPath}/dataset/rtce/replace/counterparties/CounterpartyViews.csv`

ApplyTemplateToCounterpartyFile

This operation will update the counterparty file adding "entity_template" in each line

Command:

```
sed -i "s/,/,entity_template,/"
@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv
```

Arguments

- **@{IMCRDataPath}**: The IMCR data path. Value: \$XKOZ_DATIN/IMCRData/

Inputs:

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv

Logic:

This script does the following steps:

3. Search for ",",
4. Replace it with ",entity_template,"

Outputs:

@{IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv

XKOZ-IMCR-PRE07-SetupBatchSbxEnv

This stream will setup the batch sbx environment directories

 **XKOZ-IMCR-PRE07-SetupBatchSbxEnv** All changes saved.
<Enter Description Here>

 CreateSandboxData

This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_IMM.prm
- Flag 3:
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm

This stream consists of the following jobs:

CreateSandboxData

This operation will create the sandbox data directory

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_CreateSandboxes.pl -b @{BatchId} -d
@{DatasetTemplate} -r @{DatasetRulesFile} -i @{IMCRDataPath} -f @{BatchInputFile}
```

Arguments

- **@{IMCRData_path}**: The full path to the IMCR data.
- **@{BatchId}**: The ID of the batch.
- **@{DatasetTemplate}**: The dataset template
- **@{DatasetRulesFile}**: The dataset rules file
- **@{BatchInputFile}**: The batch input file

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

@{BatchId}: Benchmark

@{DatasetTemplate}: Benchmark

@{DatasetRulesFile}: XKOZ_IMCR_Datasets_Benchmark_IMM_es.rules

@{BatchInputFile}: XKOZ_IMCR_InputData_BatchFiles_Benchmark_IMM_es.cfg

Flag 3: TRIM

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

@{BatchId}: TRIM.

@{DatasetTemplate}: TRIM

@{DatasetRulesFile}: XKOZ_IMCR_Datasets_TRIM_IMM_es.rules

@{BatchInputFile}: XKOZ_IMCR_InputData_BatchFiles_TRIM_IMM_es.cfg

Inputs

- BatchId
- Dataset
- Rules file
- IMCR data path
- Batch input file

Logic


The script runs the following steps:

1. Load dataset rules files
2. Read counterparties primary dataset
3. Create sandbox directories
4. Create directory and copy data

XKOZ-IMCR-RPT01-GenerateDatasetReports

This stream will generate reports related to a dataset

 **XKOZ-IMCR-RPT01-GenerateDatasetReports** All changes saved.
<Enter Description Here>

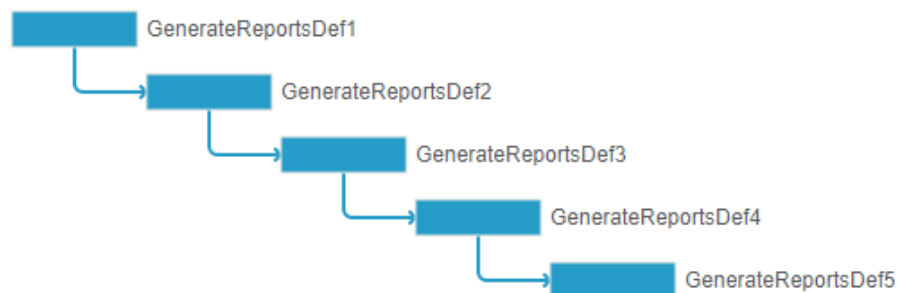

This stream can receive three different parameter files according to the flag that is running:

- Flag 1:
 - \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_IMM.prm
 - XKOZ_DATPE/XKOZ_IMCR_Benchmark_SC_IMM.prm
- Flag 2: \$XKOZ_DATPE/XKOZ_IMCR_SACCR_IMM.prm
- Flag 3:
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_SC_IMM.prm
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_SC_IMM.prm

This stream consists of the following jobs:

GenerateReportsDef1,GenerateReportsDef2,GenerateReportsDef3,GenerateReportsDef4,GenerateReportsDef5.

They are all similars

GenerateReportsDef1

This operation will generate reports

Logic:

According to the report definition configuration file extension, the report will be generate using Smoothie (.kts) or Buddhashand (.xml)

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

XKOZ IMCR Benchmark IMM.prm

Reports definition files:

XKOZ_IMCR_ReportDefinition_ExportTradesRequest_DS_Benchmark_IMM.kts

XKOZ_IMCR_ReportDefinition_ListBaselineResults_Benchmark_IMM.kts

Output reports

\${XKOZ_DATOUT}/reports/imcr/XKOZ_[DATASET_ID]_TradesAllocation_Benchmark_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_[DATASET_ID]_TradesAllocationStructuredDeals_Benchmark_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_[DATASET_ID]_TheoValue_Benchmark_IMM.csv

XKOZ_IMCR_Benchmark_SC_IMM.prm

Reports definition files:

XKOZ_IMCR_ReportDefinition_ListBaselineResults_Benchmark_IMM.kts

Output reports

\${XKOZ_DATOUT}/reports/imcr/XKOZ_[DATASET_ID]_TheoValue_Benchmark_IMM.csv

XKOZ_IMCR_TRIM_HN_IMM.prm y XKOZ_IMCR_TRIM_HS_IMM.prm

Reports definition files:

XKOZ_IMCR_ReportDefinition_ExportTradesRequest_DS_TRIM_IMM.kts

XKOZ_IMCR_ReportDefinition_ListBaselineResults_DS_TRIM_IMM.kts

XKOZ_IMCR_ReportDefinition_StateRequest_DS_TRIM_IMM.kts

XKOZ_IMCR_ReportDefinition_FindTradesRequest_DS_TRIM_IMM.xml

Output reports

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_TradesAllocation_TRIM_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_TradesAllocationStructuredDeals_TRIM_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_Mean_Positions_TRIM_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_Exposure_AllNodes_TRIM_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_TimeSteps_TRIM_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_FinalReport_TRIM_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_EAD_SACCR_TRIM_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_Exposure_AllNodes_SACCR_TRIM_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_CPY_EAD_SACCR_TRIM_IMM.csv

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]_Trades_SIMULATION_FAILURE_TRIM_IMM.csv

XKOZ_IMCR_TRIM_HN_SC_IMM.prm and XKOZ_IMCR_TRIM_HS_SC_IMM.prm

Reports definition files:


XKOZ_IMCR_ReportDefinition_ListBaselineResults_DS_SC_TRIM_IMM.kts

Output reports

\${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_[DATASET_ID]__Mean_Positions_TRIM_IMM.csv

XKOZ-IMCR-RPT03-ProcessReports_Benchmark

This stream will process the reports from benchmark

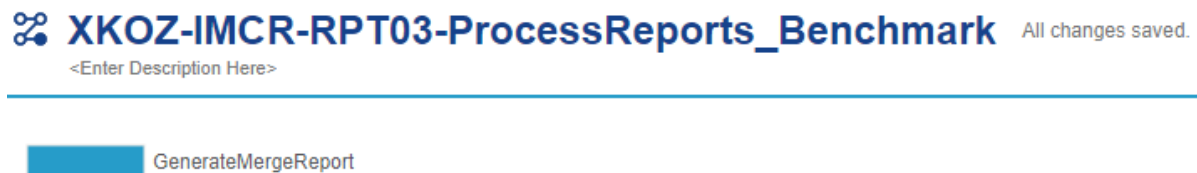

GenerateMergeReport

This operation will merge the reports

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_MergeReports.pl -d $SESSION_DATE -i
@{input_ds_report} -j @{input_ds_sc_report} -t @{trades_alloc_report} -s
@{trades_sd_alloc_report} -o @{output_report}
```

\$XKOZ_CFG/XKOZ_IMCR_GenerateTheoValueReport_Benchmark_IMM.prm

Arguments

- **@{input_ds_report}**: Input ds report.
- **@{input_ds_sc_report}**: Input ds sc report.
- **@{trades_alloc_report}**: Trades allocator report.
- **@{trades_sd_allocs_report}**: Trades sd allocators report.
- **@{output_report}**: Output report.

This arguments could have the following values:

@{input_ds_report}: \$XKOZ_DATOUT/reports/imcr/XKOZ_Benchmark-
__DATE1__TheoValue_Benchmark_\${XKOZ_CFGUSER_TipoCalc}.csv

@{input_ds_sc_report}: \$XKOZ_DATOUT/reports/imcr/XKOZ_Benchmark_SC-
__DATE1__TheoValue_Benchmark_\${XKOZ_CFGUSER_TipoCalc}.csv

@{trades_alloc_report}:

\$XKOZ_DATOUT/reports/imcr/XKOZ_Benchmark-
__DATE1__TradesAllocation_Benchmark_\${XKOZ_CFGUSER_TipoCalc}.csv

@{trades_sd_allocs_report}: \$XKOZ_DATOUT/reports/imcr/XKOZ_Benchmark-
__DATE1__TradesAllocationStructuredDeals_Benchmark_\${XKOZ_CFGUSER_TipoCalc}.csv

@{output_report}: \$XKOZ_DATOUT/reports/XKOZ_THEO-
Value__DATE2__\${XKOZ_CFGUSER_TipoCalc}.csv

Inputs

- Input date
- input dataset report
- input dataset sc report
- trades allocation report
- sd trades allocation report
- output report

Logic

The script runs the following steps:

1. Read input date
2. Read input dataset report path
3. Read input dataset sc report path
4. Read trades allocation report path
5. Read sd trades allocation report path
6. Read output report path
7. Build final path
8. Read product perimeter
9. Read trades allocation
10. Read SD components report
11. Build output report

XKOZ-IMCR-RPT03-ProcessReports_TRIM

This stream will process the reports from TRIM flag

**XKOZ-IMCR-RPT03-ProcessReports_TRIM**

All changes saved.

<Enter Description Here>



FormatAllExpNodReport



FormatEadSaccrReport



FormatSaccrEadAttribReport

This stream runs only in flag III and can receive the following parameter files::

- \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
- \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm

FormatAllExpNodReport

This operation will format Exposure All Nodes reports

Inputs

\$XKOZ_DATOUT/reports/imcr/XKOZ_\${dataset_prefix}_Exposure_AllNodes_\${batch_prefix}_IMM.csv

\$XKOZ_DATOUT/reports/imcr/XKOZ_\${dataset_prefix}_TimeSteps_\${batch_prefix}_IMM.csv

Logic

The script runs the following steps:

1. Copy report from \$XKOZ_DATOUT/report/imcr to \$XKOZ_DATOUT/report
2. Add Time Steps to header
3. Replace EntityId by Entity in header

Outputs

\$XKOZ_DATOUT/reports/XKOZ_\${dataset_prefix}_Exposure_AllNodes_\${batch_prefix}_IMM.csv

FormatEadSaccrReport

This operation will format EAD SACCR report

Command:

```
report_f=XKOZ_${dataset_prefix}_EAD_SACCR_${batch_prefix}_IMM.csv
```

```
cut -d"," -f1,2,3,5- $XKOZ_DATOUT/reports/imcr/${report_f} >  
$XKOZ_DATOUT/reports/${report_f}
```

Inputs

```
$XKOZ_DATOUT/reports/imcr/XKOZ_${dataset_prefix}_SACCR_EAD_ATTRIBUTION_${batch_prefix}_IMM.csv
```

Outputs

```
$XKOZ_DATOUT/reports/XKOZ_${dataset_prefix}_SACCR_EAD_ATTRIBUTION_${batch_prefix}_IMM.csv
```

FormatSaccrEadAttribReport

This operation will format EAD ATTRIBUTION SACCR report

```
$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
```

Command:

```
report_f=XKOZ_${dataset_prefix}_SACCR_EAD_ATTRIBUTION_${batch_prefix}_IMM.csv
```

```
cut -d"," -f1,3- $XKOZ_DATOUT/reports/imcr/${report_f} >  
$XKOZ_DATOUT/reports/${report_f}
```

Inputs


```
$XKOZ_DATOUT/reports/imcr/XKOZ_${dataset_prefix}_SACCR_EAD_ATTRIBUTION_${batch_prefix}_IMM.csv
```

Outputs

\$XKOZ_DATOUT/reports/imcr/XKOZ_\${dataset_prefix}_SACCR_EAD_ATTRIBUTION_\${batch_prefix}_IMM.csv

XKOZ-IMCR-RPT09-GenerateEnrichedReport

This stream will generate enriched report and other reports

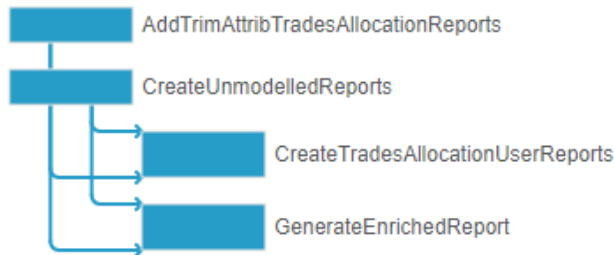

This stream can will run only flag 3 with the following param files:

- \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
- \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm

This stream consists of the following jobs:

AddTrimAttribTradesAllocationReports

This operation will add trim attributes to trades allocation reports

Command:

\$XKOZ_FUENTES/XKOZ_IMCR_AddTrimAttribTradesAllocationReports.pl -d @{{IMCRDataPath}} -s @{{Dataset}}

Inputs

```
@{IMCRData_path}/dataset/datamart/lookups/L_exceptions_Trida.csv
$XKOZ_DATOUT/reports/imcr/XKOZ_"$s_dataset."_Trades_SIMULATION_FAILURE_TRIM_IMM.csv
$XKOZ_DATOUT/reports/imcr/XKOZ_"$s_dataset."_TradesAllocation_TRIM_IMM.csv
$XKOZ_DATOUT/reports/imcr/XKOZ_"$s_dataset."_TradesAllocationStructuredDeals_TRIM_IMM.csv
```

Outputs

```
$XKOZ_DATOUT/reports/temp//XKOZ_"$s_dataset."_TradesAllocation_TRIM_IMM.csv
$XKOZ_DATOUT/reports/temp/XKOZ_"$s_dataset."_TradesAllocationStructuredDeals_TRIM_IMM.csv
```

Logic

Add two columns to Trades Allocation Files:

SimulationFailed: Values from
XKOZ_"\$s_dataset."_Trades_SIMULATION_FAILURE_TRIM_IMM.csv

MissedModelAttrs: Values from
@{IMCRData_path}/dataset/datamart/lookups/L_exceptions_Trida.csv

CreateUnmodelledReports

This operation will create unmodelled reports

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_CreateUnmodelledReports.pl -d @{IMCRDataPath} -s
@{Dataset} -c
$XKOZ_CFG/XKOZ_IMCR_ReportDefinition_Unmodelled_{BatchId}_$XKOZ_CFGUSER
_TipoCalc.rules
```

Inputs

```
@{IMCRDataPath}/dataset/aux_files/ConsumosManualesIA.csv
@{IMCRDataPath}/dataset/rtce/replace/products/Products.csv
${XKOZ_DATOUT}/reports/imcr/XKOZ___DATASET_ID___TimeSteps_TRIM_IMM.csv
```

`${XKOZ_DATOUT}/reports/imcr/XKOZ___DATASET_ID___TradesAllocationStructuredDeals_TRIM_IMM.csv`

`${XKOZ_DATOUT}/reports/imcr/XKOZ___DATASET_SC_ID___Mean_Positions_TRIM_IMM.csv`

Outputs

`${XKOZ_DATOUT}/reports/temp/XKOZ___DATASET_ID___Unmodelled_TradesAllocation_TRIM_IMM.csv`

`${XKOZ_DATOUT}/reports/temp/XKOZ___DATASET_ID___Unmodelled_Values_TRIM_IMM.csv`

`${XKOZ_DATOUT}/reports/temp/XKOZ___DATASET_ID___Unmodelled_TradesAllocationStructuredDeals_TRIM_IMM.csv`

`${XKOZ_DATOUT}/reports/temp/XKOZ___DATASET_ID___Unmodelled_StructuredDeals_Values_TRIM_IMM.csv`

Logic

The script runs the following steps:

1. Read input files
2. Define the headers
3. Read timesteps file
4. Read products file
5. Read SD trades allocation file
6. Create unmodelled trades allocation file
7. Create unmodelled values file
8. Create unmodelled SD files

CreateTradesAllocationUserReports

This operation will create trades allocation user reports

Command:

`$XKOZ_SCRT/XKOZ_IMCR_ProcessReports_All_TradesAllocation.sh ${s_imcr_data_path} ${s_dataset} ${s_batchId}`

Arguments

- **@{IMCRData_path}**: The full path to the IMCR data.
- **@{Dataset}**: Dataset name
- **@{BatchId}**: The batch Identifier

Inputs

```

${IMCRDataPath}/dataset/rtce/replace/counterparties/Counterparty.csv
${XKOZ_DATOUT}/reports/temp/XKOZ_${Dataset}_TradesAllocation_${BatchId}_${XKOZ_CFGUSER_TipoCalc}.csv
${XKOZ_DATOUT}/reports/temp/XKOZ_${Dataset}_Unmodelled_TradesAllocation_${BatchId}_${XKOZ_CFGUSER_TipoCalc}.csv
${XKOZ_DATOUT}/reports/temp/XKOZ_${Dataset}_TradesAllocationStructuredDeals_${BatchId}_${XKOZ_CFGUSER_TipoCalc}.csv

```

Logic

The script runs the following steps:

1. Validate parameters
2. Validate input files
3. Copy into output file “trades allocation” coming from IMCR original
4. Sort file IMCR TradesAllocation
5. Sort file Unmodelled_TradesAllocation
6. Join TradesAllocation IMCR with Unmodelled_TradesAllocation
7. Replace “JURISDICTION” field with “CONSUMO”

Outputs

```

${XKOZ_DATOUT}/reports/XKOZ_${Dataset}_TradesAllocation_${BatchId}_${XKOZ_CFGUSER_TipoCalc}.csv
${XKOZ_DATOUT}/reports/reports//XKOZ_${Dataset}_TradesAllocationStructuredDeals_${BatchId}_${XKOZ_CFGUSER_TipoCalc}.csv

```

GenerateEnrichedReport

This operation will generate enriched reports

Command:

```

$XKOZ_FUENTES/XKOZ_IMCR_GenerateEnrichedReport.pl -d $SESSION_DATE -c
$XKOZ_CFG/XKOZ_IMCR_ReportDefinition_Enriched_@{DatasetTemplate}_${XKOZ_CFGUSER_TipoCalc}.rules

```

Arguments

- **@{DatasetTemplate}**: Template used for the dataset. Values: HN or HS

Inputs

`${XKOZ_DATOUT}/reports/temp/XKOZ_TRIM_HN-
__DATASET_ID__TradesAllocation_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/temp/XKOZ_TRIM_HN-
__DATASET_ID__TradesAllocationStructuredDeals_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_HN-
__DATASET_ID__TimeSteps_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_HN-
__DATASET_ID__Exposure_AllNodes_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_HN-
__DATASET_ID__EAD_SACCR_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_HN-
__DATASET_ID__Mean_Positions_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_HN-
__DATASET_ID__SACCR_EAD_ATTRIBUTION_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/imcr/XKOZ_TRIM_HN_SC-
__DATASET_ID__Mean_Positions_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/temp/XKOZ_TRIM_HN-
__DATASET_ID__Unmodelled_TradesAllocation_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/temp/XKOZ_TRIM_HN-
__DATASET_ID__Unmodelled_TradesAllocationStructuredDeals_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/temp/XKOZ_TRIM_HN-
__DATASET_ID__Unmodelled_Values_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

`${XKOZ_DATOUT}/reports/temp/XKOZ_TRIM_HN-
__DATASET_ID__Unmodelled_StructuredDeals_Values_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

Outputs

`${XKOZ_DATOUT}/reports/XKOZ_TRIM_HN-
__DATASET_ID__Enriched_TRIM_${XKOZ_CFGUSER_TipoCalc}.csv`

Logic

The script runs the following steps:

1. Read parameters
2. Read rules file
3. Read common reports
4. Check the report definition
5. Read unmodelled reports if defined
6. Create enriched data


7. Generate enriched report

XKOZ-IMCR-RTC01-Initialization

This stream will initialize IMCR services

XKOZ-IMCR-RTC01-Initialization All changes saved.

<Enter Description Here>

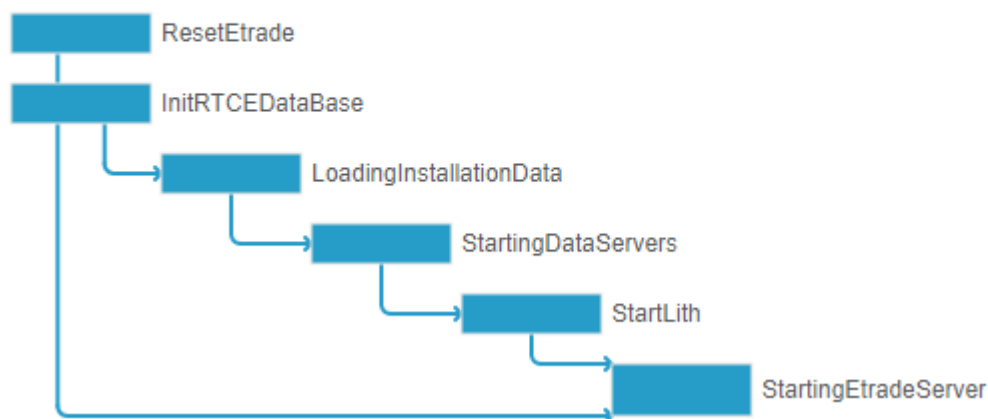

This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_CFG/XKOZ_Benchmark_IMM.prm
- Flag 2: \$XKOZ_CFG/XKOZ_SACCR_IMM.prm
- Flag 3: \$XKOZ_CFG/XKOZ_TRIM_IMM.prm

This stream consists of the following jobs:

ResetEtrade

This operation will reset the Etrade service

Command:

```
{RTCE_INSTANCE}/bin/resetstate.sh --ettrade --noprompt
```

InitRTCEDataBase

This operation will initialize the RTCE data base

Command:

```
$RTCE_BIN/bin/initdatabase.sh $RTCE_BIN/database/oracle.ddl noprompt
```

LoadingInstallationData

This operation will load de installation data

Command:

```
$RTCE_INSTANCE/bin/load.sh --action replace --mode single --type Installation --data  
@{IMCRData_path}/dataset
```

Arguments

- **@{IMCRData_path}**: The full path to the IMCR data.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

Flag 2: SACCR

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

Flag 3: TRIM

@{IMCRData_path}: \$XKOZ_DATIN/IMCRData

StartingDataServers

This operation will start the data servers

Command:

```
${RTCE_INSTANCE}/bin/startdataservers.sh
```

StartingLith

This operation will start lith services

Command:

```
${RTCE_INSTANCE}/bin/utils/start.sh lith rtinstance
```

StartingEtradeServer


This operation will start etrade services

Command:

```
${RTCE_INSTANCE}/bin/startetrade.sh
```

XKOZ-IMCR-RTC02-Load

This stream will load the IMCR static dat

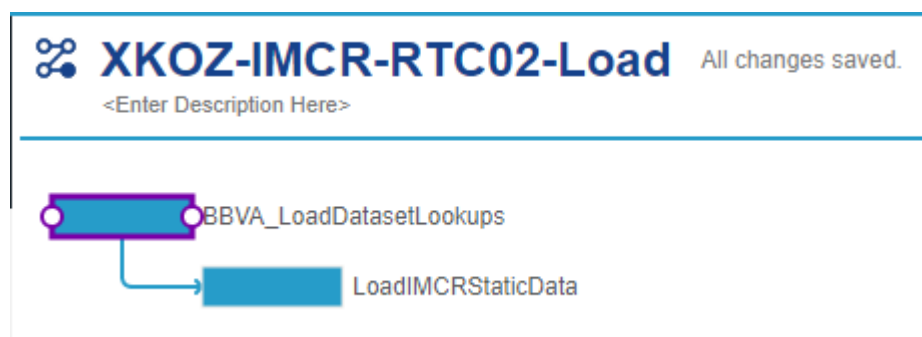

This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_IMM.prm

- Flag 2: \$XKOZ_DATPE/XKOZ_IMCR_SACCR_IMM.prm
- Flag 3: \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm

This stream consists of the following jobs:

LoadDatasetLookups

This operation will load the dataset lookups

Command:

```
$DATAMART_HOME/bin/dmob --dataset $s_dataset -o deletelookupdata --namelist all
```

```
$DATAMART_HOME/bin/dmob --dataset $s_dataset -o loadlookupdata --inputdir  
${XKOZ_DATIN}/IMCRData/dataset/datamart/lookups
```

Inputs

\$s_dataset

Logic

The script runs the following steps:

1. Delete all the lookup data
2. Load the new lookup data from:
 \${XKOZ_DATIN}/IMCRData/dataset/datamart/lookups

LoadIMCRStaticData

This operation will load the static IMCR data

Arguments

- **@{IMCRData_path}**: The full path to the IMCR data.

According to the flag, this arguments could have the following values:

Flag 1: Benchmark

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

Flag 2: SACCR

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

Flag 3: TRIM

@{IMCRData_path}: /unload/de/xkoz/es/dat/in/IMCRData

Inputs

@{IMCRDataPath}/dataset/rtce/replace/aggregates

@{IMCRDataPath}//dataset/rtce/replace/counterparties

@{IMCRDataPath}//dataset/rtce/datasettemplate

@{IMCRDataPath}//dataset/rtce/replace/environment

@{IMCRDataPath}//dataset/rtce/replace/financialdata

@{IMCRDataPath}//dataset/rtce/uitemplates

@{IMCRDataPath}/dataset/rtce/replace/organization

@{IMCRDataPath}//dataset/rtce/replace/products

@{IMCRDataPath}//dataset/rtce/replace/counterpartytemplates

Logic

The script runs the following steps:


1. Check if we have the counterparty template
2. Load the dataset, financial data, environment, organization, products, guitemplates, counterparties, aggregates and dataset templates.

XKOZ-IMCR-RTC03-Dataset

This stream will create the dataset

XKOZ-IMCR-RTC03-Dataset All changes saved.

<Enter Description Here>

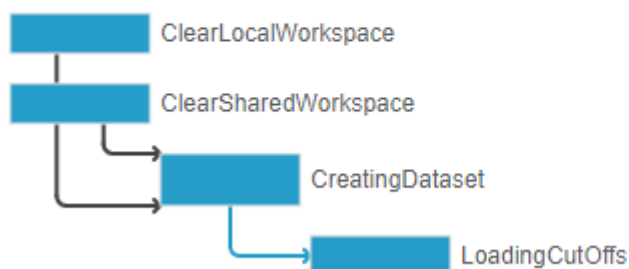

This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_IMM.prm
- Flag 2: \$XKOZ_DATPE/XKOZ_IMCR_SACCR_IMM.prm
- Flag 3:
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm

This stream consists of the following jobs:

ClearLocalWorkspace

This operation will clean the local workspace dataset directory

Command:

```
rm -rf $ALGO_TOP/outputs/local/IMCR/@{Dataset}/*
```

Arguments

- **@{Dataset}**: Dataset name

ClearSharedWorkspace

This operation will clean the shared workspace dataset directory

Command:

```
rm -rf $ALGO_TOP/outputs/shared/IMCR/@{Dataset}/*
```

Arguments

- **@{Dataset}**: Dataset name

CreatingDataset

This operation will create the dataset

Command:

```
${RTCE_INSTANCE}/bin/createdataset.sh --dataset @{Dataset} --template  
@{DatasetTemplate} --basedon @{BaseOnDataset}
```

Arguments

- **@{Dataset}**: Dataset name
- **@{DatasetTemplate}**: The dataset template
- **@{BaseOnDataset}**: Master

LoadingCutOffs

This operation will load the cutoffs in the dataset

Command:

```
$RTCE_INSTANCE//bin/loadcutoffs.sh -s @{Dataset} -d  
@{IMCRDataPath}/dataset/rtce/replace/cutoffs
```


Arguments

- **@{Dataset}**: IMCR dataset
- **@{IMCRDataPath}**: The dataset template

XKOZ-IMCR-RTC04-Activation

This stream will run the activation dataset process

 **XKOZ-IMCR-RTC04-Activation** All changes saved.
<Enter Description Here>

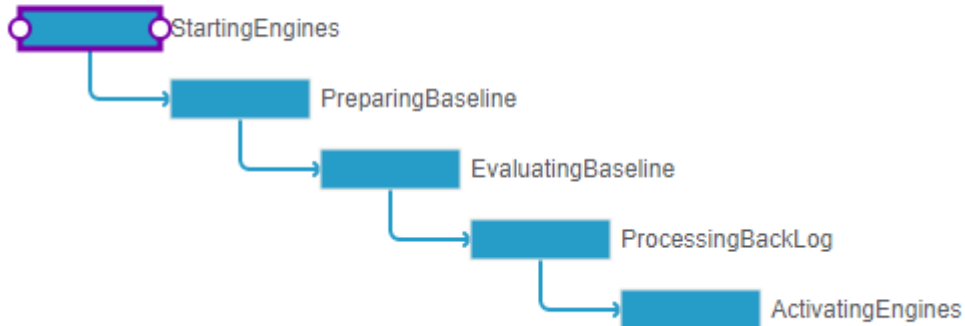

This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_IMM.prm
- Flag 2: \$XKOZ_DATPE/XKOZ_IMCR_SACCR_IMM.prm
- Flag 3:
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm

This stream consists of the following jobs:

StartingEngines

This operation will start the engines

Command:

```
{RTCE_INSTANCE}/bin/startengines.sh --dataset @{Dataset} --processingdate @{Date}
```

Arguments

- **@{Dataset}**: Dataset name
- **@{Date}**: Business date

PreparingBaseline

This operation will run prepare baseline process

Command:

```
${RTCE_INSTANCE}/bin/preparebaseline.sh @{Dataset}
```

Arguments

- **@{Dataset}**: Dataset name

EvaluatingBaseline

This operation will run the evaluate baseline process

Command:

```
${RTCE_INSTANCE}/bin/evaluatebaseline.sh @{Dataset}
```

Arguments

- **@{Dataset}**: Dataset name

ProcessingBackLog

This operation will process the backlog

Command:

```
${RTCE_INSTANCE}/bin/processbacklog.sh @{Dataset}
```

Arguments

- **@{Dataset}**: Dataset name

ActivatingEngines

This operation will activate the engines

Command:

```
${RTCE_INSTANCE}/bin/activateengines.sh @{{Dataset}}
```

Arguments

- **@{{Dataset}}**: Dataset name

XKOZ-IMCR-RTC05-LoadSimulationTimes

This stream will load simulation time series into the dataset



This stream runs in Flag III and can receive two different parameter files:

- \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
- \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm

This stream consists of only one job:

LoadSimulationTimes

This operation will load the simulation times

Command:

```
$XKOZ_SCRT/XKOZ_IMCR_generateSimulationTimesCsv.sh @{{IMCRDataPath}}  
@{{Dataset}} $SESSION_DATE @{{DatasetTemplate}}
```

Arguments

- **@{{IMCRData_path}}**: The full path to the IMCR data.
- **@{{Dataset}}**: Dataset name
- **@{{DatasetTemplate}}**: Template for the dataset

Inputs

- Datapath
- DatasetId
- SessionDate
- DatasetTemplate

Logic

The script runs the following steps:

1. Read input files
2. Generate a temporary file
3. Create output csv
4. Fulfill the output file with: BundleId, SimulationSessionDate, SimulationTimeline, InternalTimes
5. Load simulation times in the dataset
6. Run "loadsimulationtimes.sh"

Outputs

- `${Datapath}/dataset/variants/scenarioSets/${DatasetTemplate}/mcBundleP8/timeseries.csv`

XKOZ-IMCR-RTC97-StopEngines

This stream will stop dataset engines.

XKOZ-IMCR-RTC97-StopEngines All changes saved. <Enter Description Here>

StoppingEngines

This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_IMM.prm
- Flag 2: \$XKOZ_DATPE/XKOZ_IMCR_SACCR_IMM.prm
- Flag 3:
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_IMM.prm
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_IMM.prm

This stream consists of only one job:

StoppingEngines

This operation will stop engines

Command:

```
${RTCE_INSTANCE}/bin/stopengines.sh @Dataset
```

Arguments


- **@Dataset**: Dataset name

XKOZ-IMCR-RTC99-StopServices

This stream will stop IMCR services

XKOZ-IMCR-RTC99-StopServices All changes saved.

<Enter Description Here>



This stream has no arguments.

This stream consists of only one job:

StopAllRTCEServices

This operation will stop all the RTCE services

Command:

```
$RTCE_INSTANCE/bin/utls/stopall.sh
```

XKOZ-IMCR-SBX01-StartServices

This stream will start sanbox services

XKOZ-IMCR-SBX01-StartServices All changes saved.

<Enter Description Here>



This stream has no arguments.

This stream consists of the following jobs:

ResetStateEtrade

This operation will reset etrade state

Command:

```
${RTCE_SB_INSTANCE}/bin/resetstate.sh --ettrade --noprompt
```

StartEtrade

This operation will start the etrade service

Command:

```
$RTCE_SB_INSTANCE/bin/startettrade.sh
```

XKOZ-IMCR-SBX03-Dataset

This stream will create the dataset



This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_SC_IMM.prm
- Flag 3:
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_SC_IMM.prm

- \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_SC_IMM.prm

This stream consists of the following jobs:

ClearLocalWorkspace

This operation will clear the local workspace dataset directory

Command:

```
rm -rf $ALGO_TOP/outputs/local/IMCR/@{Dataset}
```

Arguments

- **@{Dataset}**: Dataset name

ClearSharedWorkspace

This operation will clear the shared workspace directories

Command:

```
rm -rf $ALGO_TOP/outputs/shared/IMCR/@{Dataset}
```

Arguments

- **@{Dataset}**: Dataset name

CreatingDataset

This operation will create the dataset

Command:

```
{RTCE_SB_INSTANCE}/bin/createdataset.sh --dataset @{Dataset} --template
@{DatasetTemplate} --basedon @{BaseOnDataset} --tradebaseid MASTER
```

Arguments

- **@{Dataset}**: Dataset name
- **@{DatasetTemplate}**: The dataset template
- **@{BaseOnDataset}**: MASTER

XKOZ-IMCR-SBX04-Activation

This stream will activate the engines



This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_SC_IMM.prm
- Flag 3: \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_SC_IMM.prm

This stream consists of the following jobs:

StartingEngines

This operation will start engines dataset

Command:

```
${RTCE_SB_INSTANCE}/bin/startengines.sh --dataset @{{Dataset}} --processingdate @{{Date}}
```

Arguments

- **@{{Dataset}}**: TDataset name
- **@{{Date}}**: business date

PreparingBaseline

This operation runs prepare baseline process

Command:

```
${RTCE_SB_INSTANCE}/bin/preparebaseline.sh @{{Dataset}}
```

Arguments

- **@{{Dataset}}**: Dataset name.

EvaluatingBaseline

This operation will run evaluate baseline process.

Command:

```
${RTCE_SB_INSTANCE}/bin/evaluatebaseline.sh @{{Dataset}}
```

Arguments

- **@{{Dataset}}**: Dataset name

ProcessingBackLog

This operation will process the backlog

Command:

```
${RTCE_SB_INSTANCE}/bin/processbacklog.sh @{{Dataset}}
```

Arguments

- **@{Dataset}**: Dataset name

ActivatingEngines

This operation will activate the engines dataset

Command:

```
${RTCE_SB_INSTANCE}/bin/activateengines.sh @{Dataset}
```

Arguments

- **@{Dataset}**: Dataset name

XKOZ-IMCR-SBX05-StopEngines

This stream will stop the engines from a sandbox dataset


XKOZ-IMCR-SBX05-StopEngines
All changes saved.

<Enter Description Here>


StoppingEngines

This stream can receive three different parameter files according to the flag that is running:

- Flag 1: \$XKOZ_DATPE/XKOZ_IMCR_Benchmark_SC_IMM.prm
- Flag 3:
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HN_SC_IMM.prm
 - \$XKOZ_DATPE/XKOZ_IMCR_TRIM_HS_SC_IMM.prm

This stream consists of only one job:

StoppingEngines

This operation will stop the engines from a sandbox dataset

Command:

```
${RTCE_SB_INSTANCE}/bin/stopengines.sh @{{Dataset}}
```

Arguments

- **@{{Dataset}}**: Dataset name

XKOZ-IMCR-SBX99-StopServices

This stream will stop all Sandboxes services



This stream has no parameters

This stream consists of only one job:

StopAllServices


This operation will stop all the Sandboxes services

Command:

\$RTCE_SB_INSTANCE/bin/utls/stopall.sh

XKOZ-INI-PRE01-PrepareEnv

This stream will prepare the environment.

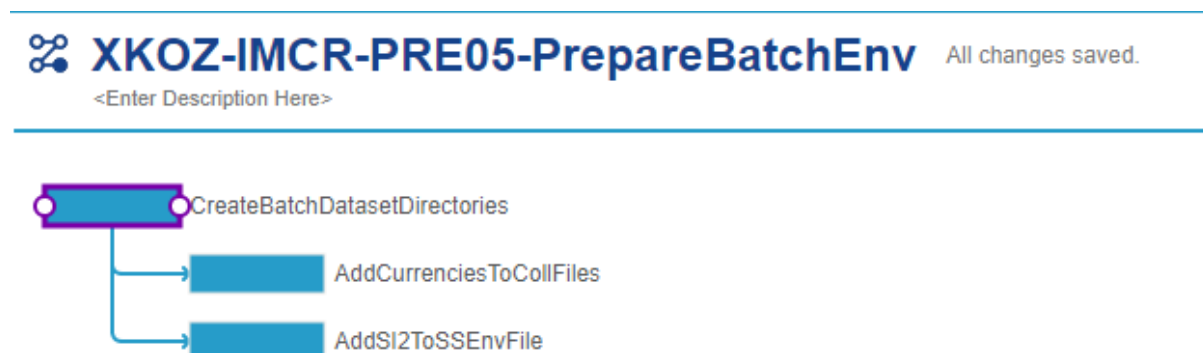

This stream has no arguments and will be run only in Flag 1

This stream consists of the following jobs:

CreateHNCubesTRIMPrm

This operation will create the HN cubes TRIM parameter file

Command:

\$XKOZ_FUENTES/XKOZ_Rules2PRM.pl \$RulesFile \$TemplateFile \$OutputDirectory

Arguments

This job has no arguments

Logic

This script does the following steps:

1. Empty the output directory
2. Run \$XKOZ_FUENTES/XKOZ_Rules2PRM.pl which will do the following steps:
 - a. Load rules file
 - b. Create output file
 - c. Read the template file
 - d. Create the parameter file

Inputs

In addition to arguments command, the script uses also the following input files:

- RulesFile: \$XKOZ_CFG/XKOZ_Cubes_Exposure_TRIM_HN_IMM.rules
- TemplateFile: \$XKOZ_CFG/XKOZ_Exposure_Cube_Template_TRIM_IMM.prm
- OutputDirectory: \$XKOZ_DATPE/XKOZ_Cube_

CreateHSCubesTRIMPrm

This operation is similar to the previous one (CreateHNCubesTRIMPrm) so the steps are the same.

Inputs

In addition to arguments command, the script uses also the following input files:

- RulesFile: \$XKOZ_CFG/XKOZ_Cubes_Exposure_TRIM_HS_IMM.rules
- TemplateFile: \$XKOZ_CFG/XKOZ_Exposure_Cube_Template_TRIM_IMM.prm
- OutputDirectory: \$XKOZ_DATPE/XKOZ_Cube_

CreateSessionDateFile

This operation will create the session date file

Command:

\$XKOZ_SCRT/XKOZ_SessionDatePRM.sh

Inputs

In addition to arguments command, the script uses also the following input files:

- \$XKOZ_DATPE/XKOZ_AUX_FPROC_BATCH_\${XKOZ_CFGUSER_TipoCalc}_\$XKOZ_PARM_PAIS.DAT`
- \$XKOZ_DATPE/XKOZ_AUX_FPROC_BATCH_ANT_\${XKOZ_CFGUSER_TipoCalc}_\$XKOZ_PARM_PAIS.DAT`

Outputs

- SESSION_DATE="\$Date>\$XKOZ_DATPE/XKOZ_SessionDate_\${XKOZ_CFGUSER_TipoCalc}.prm
- SESSION_PREV_DATE="\$DateOld>>\$XKOZ_DATPE/XKOZ_SessionDate_\${XKOZ_CFGUSER_TipoCalc}.prm

CreateSessionPRMFile

This operation will create the session prm file

Command:

```
cp $XKOZ_CFG/XKOZ_Session_TRIM_IMM.prm $XKOZ_DATPE/
```

```
s_date=`cat  
$XKOZ_DATPE/XKOZ_AUX_FPROC_BATCH_IMM_$XKOZ_PARM_PAIS.DAT`
```

```
sed -i "s/ __DATE__ /$s_date/" $XKOZ_DATPE/XKOZ_Session_TRIM_IMM.prm
```

Inputs

- \$XKOZ_CFG/XKOZ_Session_TRIM_IMM.prm

Outputs


- \$XKOZ_DATPE/XKOZ_Session_TRIM_IMM.prm

XKOZ-INI-PRE02-SetupBatch

This stream will setup the batch environment.

XKOZ-INI-PRE02-SetupBatch All changes saved.

<Enter Description Here>

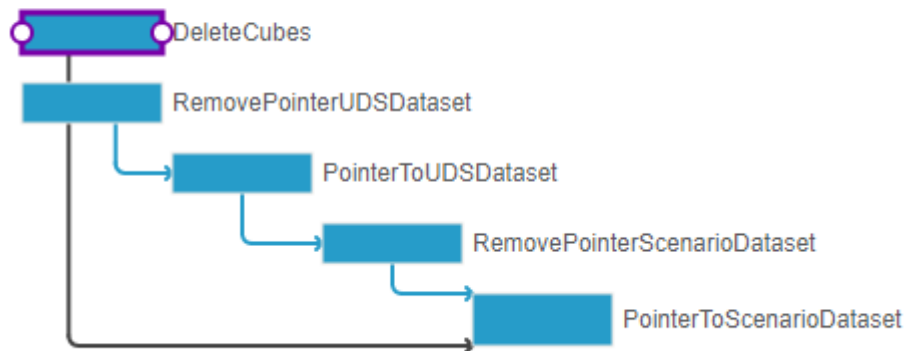

This stream receives one parameter file: \$XKOZ_DATPE/XKOZ_SessionDate_IMM.prm and it's only used for flag 1.

This stream consists of the following jobs:

DeleteCubes

This operation will delete the existing cubes from the previous execution

Command:

```
rm -rf $XKOZ_DATOUT/cubes/*
```

RemovePointerUDSDataset

Command:

```
if [ -L $XKOZ_DATIN/uds/dataset ]; then
    unlink $XKOZ_DATIN/uds/dataset
fi
```

PointerToUDSDataset

This operation will create UDS dataset directory data link

Command:

```
ln -s $XKOZ_DATIN/uds/$SESSION_DATE $XKOZ_DATIN/uds/dataset
```

RemovePointerScenarioDataset

This operation will unlink scenario folder data link

Command:

```
if [ ! -d "$XKOZ_DATIN/scenario/$SESSION_DATE" ]; then
    mkdir -p $XKOZ_DATIN/scenario/$SESSION_DATE
fi
```

```
if [ -L $XKOZ_DATIN/scenario/dataset ]; then
    unlink $XKOZ_DATIN/scenario/dataset
fi
```

PointerToScenarioDataset

This operation will create the scenario folder link

Command:

In -s \$XKOZ_DATIN/uds/\$SESSION_DATE \$XKOZ_DATIN/uds/dataset

XKOZ-RW-D002-Base_Session

This stream will create the base session



This stream will be run only in Flag I receiving the following parameter file:

- Flag 1: \$XKOZ_CFG/XKOZ_Benchmark_IMM.prm

This stream consists of only one job:

CreateBaseSession

This job will create the base session.

Arguments

Dataset Name: Name of the UDS dataset. The value always will be \$SESSION_DATE

RiskWatch Base Session Prefix: Base Session Name. Value = @{RiskWatch Base Session Prefix}

This job is implemented by the following components:



Configure RW Outputs

Auxiliary component used for parameterizing inputs/outputs for operations that included rws executions.

Inputs

RW Output dir: \$XKOZ_DATOUT

RW Session File Prefix: param@RiskWatch Base Session Prefix

RW Stress Named View: \$ALGO_TOP//inputs/XKOZ/cfg/XKOZ_RW_NamedViews_es.scf

Outputs

RWSessionFile: Riskwatch Base Session

Create RS Base Session

Generate Base Session file

Inputs

Riskwatch Base Session: Full path for the base session to be created. Linked from Configure RW Outputs component

Dataset Name: UDS dataset name. Value: param@Dataset Name

UDS Filter: UDS filter used to get aidb data. Value: BBVA_Base_Session

Outputs

Base Session: \$XKOZ_DATOUT/sessionfiles/XKOZ-rw-base_IMM

Logic


- Create new session with \$SESSION_DATE as Session Date

- Link UDS filter
- Save session

UDS filters


BBVA_Base_Session is defined as a “Umbrella Filter” that includes the following filters:

1 BBVA_Tipo_de_Cambio

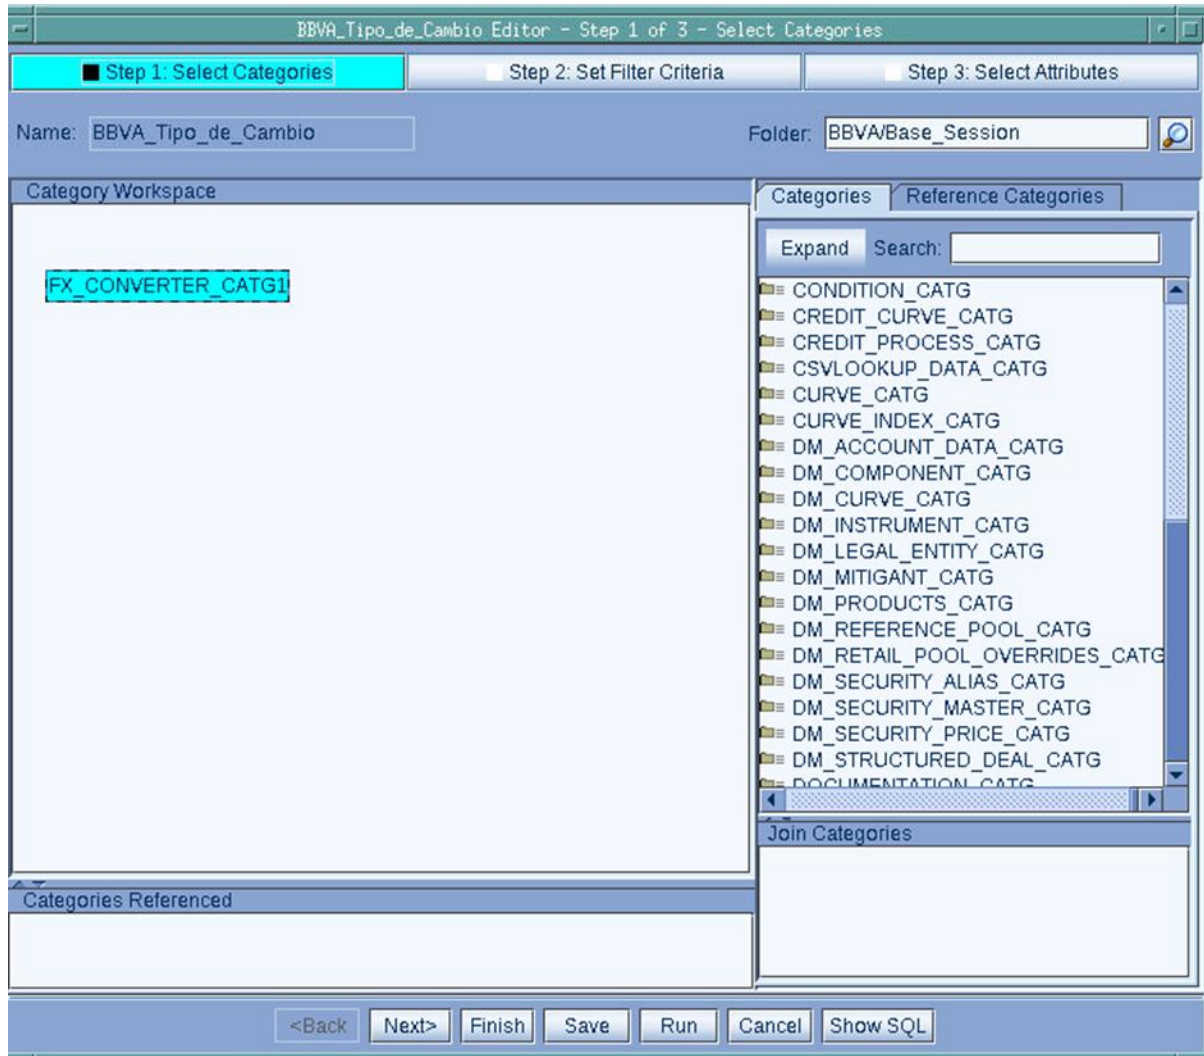


```
SELECT DISTINCT FX_CONVERTER_CATG1.*
FROM FX_CONVERTER_CATG FX_CONVERTER_CATG1
```

2 BBVA_Portfolios

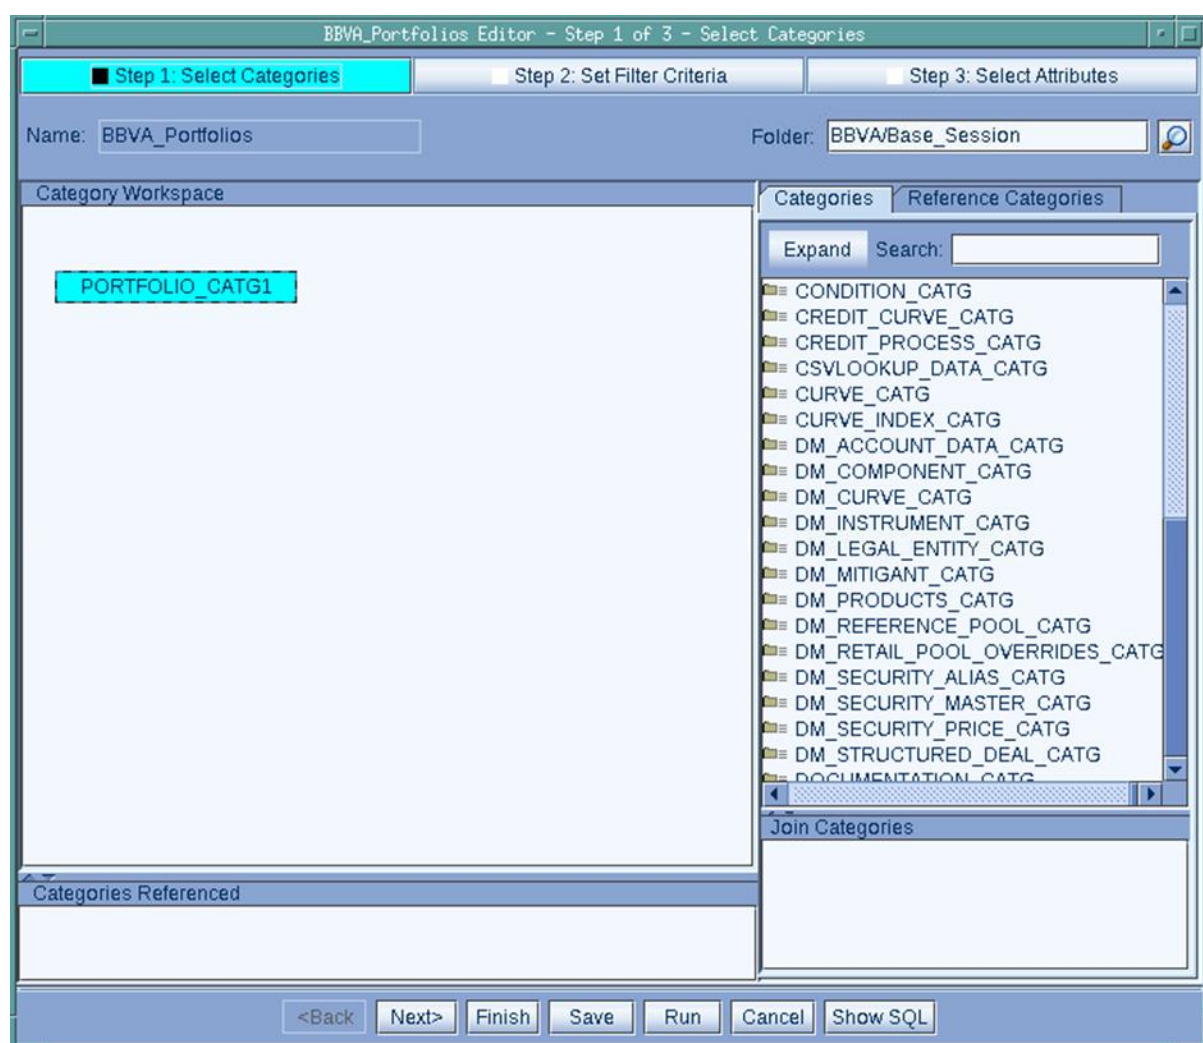


```
SELECT DISTINCT PORTFOLIO_CATG1.*
FROM PORTFOLIO_CATG PORTFOLIO_CATG1
```

3 BBVA_Curve

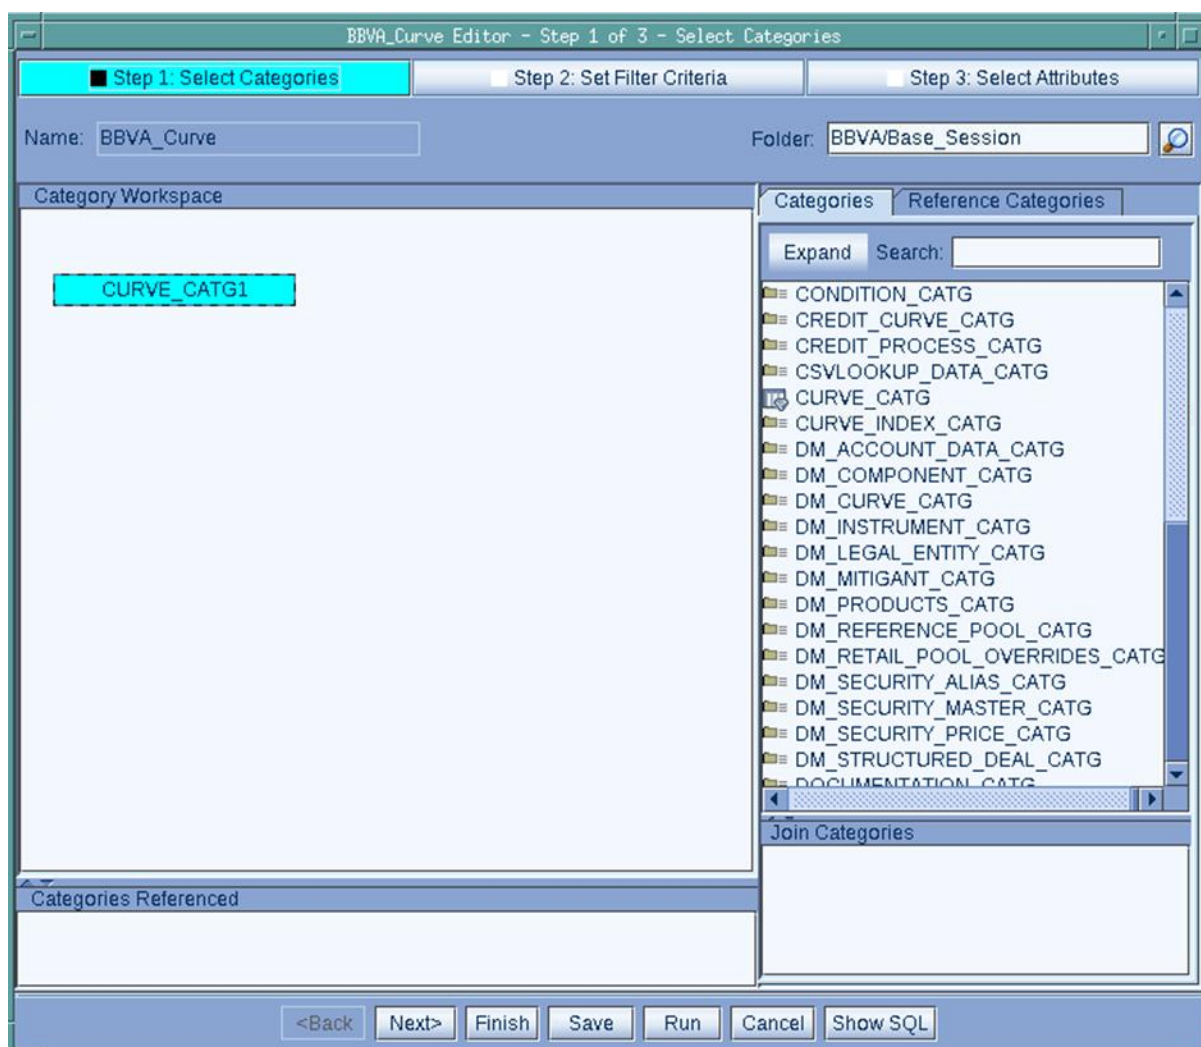


```
SELECT DISTINCT CURVE_CATG1.*
FROM CURVE_CATG CURVE_CATG1
```

4 BBVA_Model

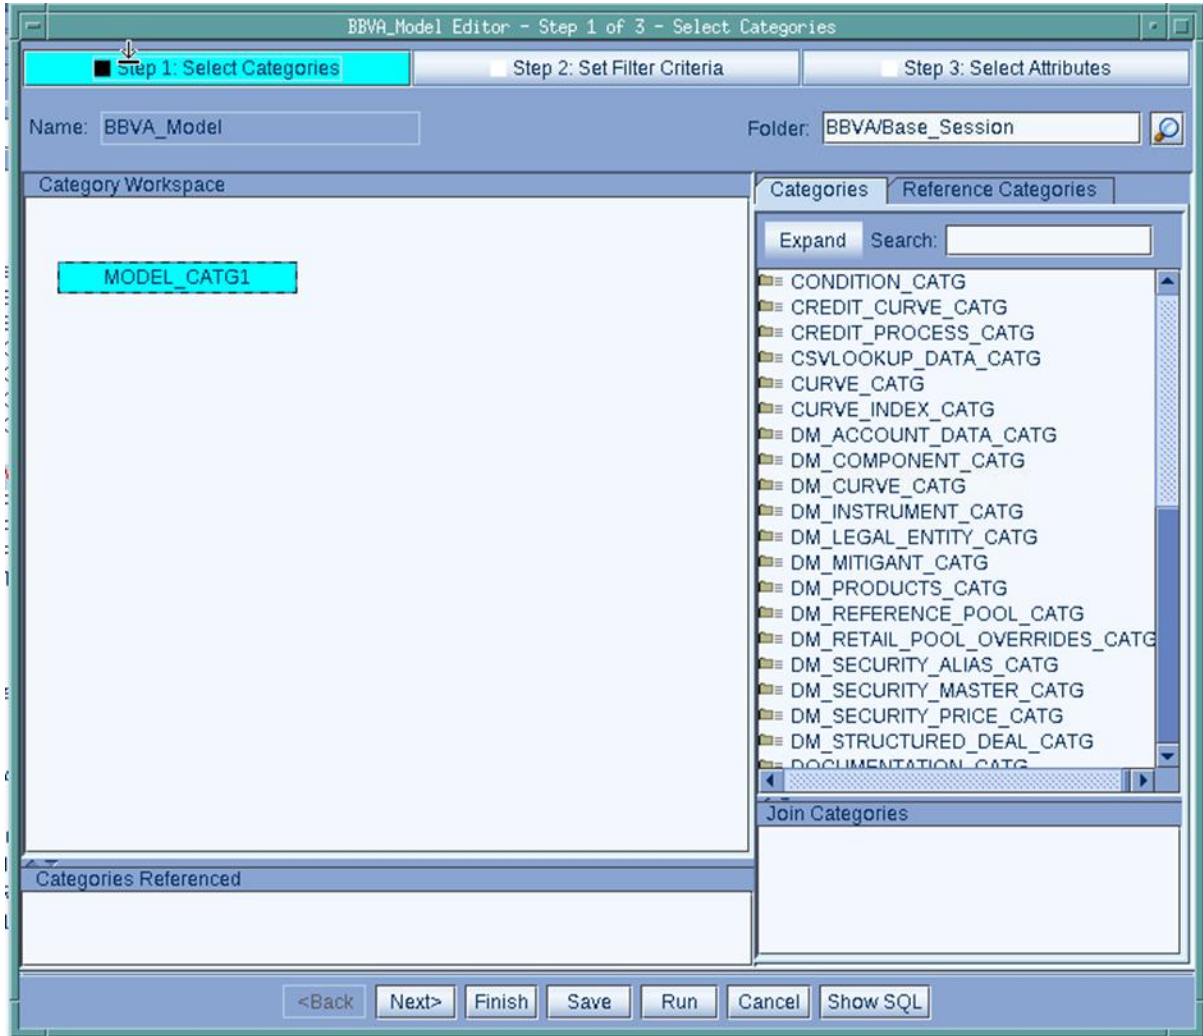


```
SELECT DISTINCT MODEL_CATG1.*
FROM MODEL_CATG MODEL_CATG1
```

5 BBVA_Payment_Procedure

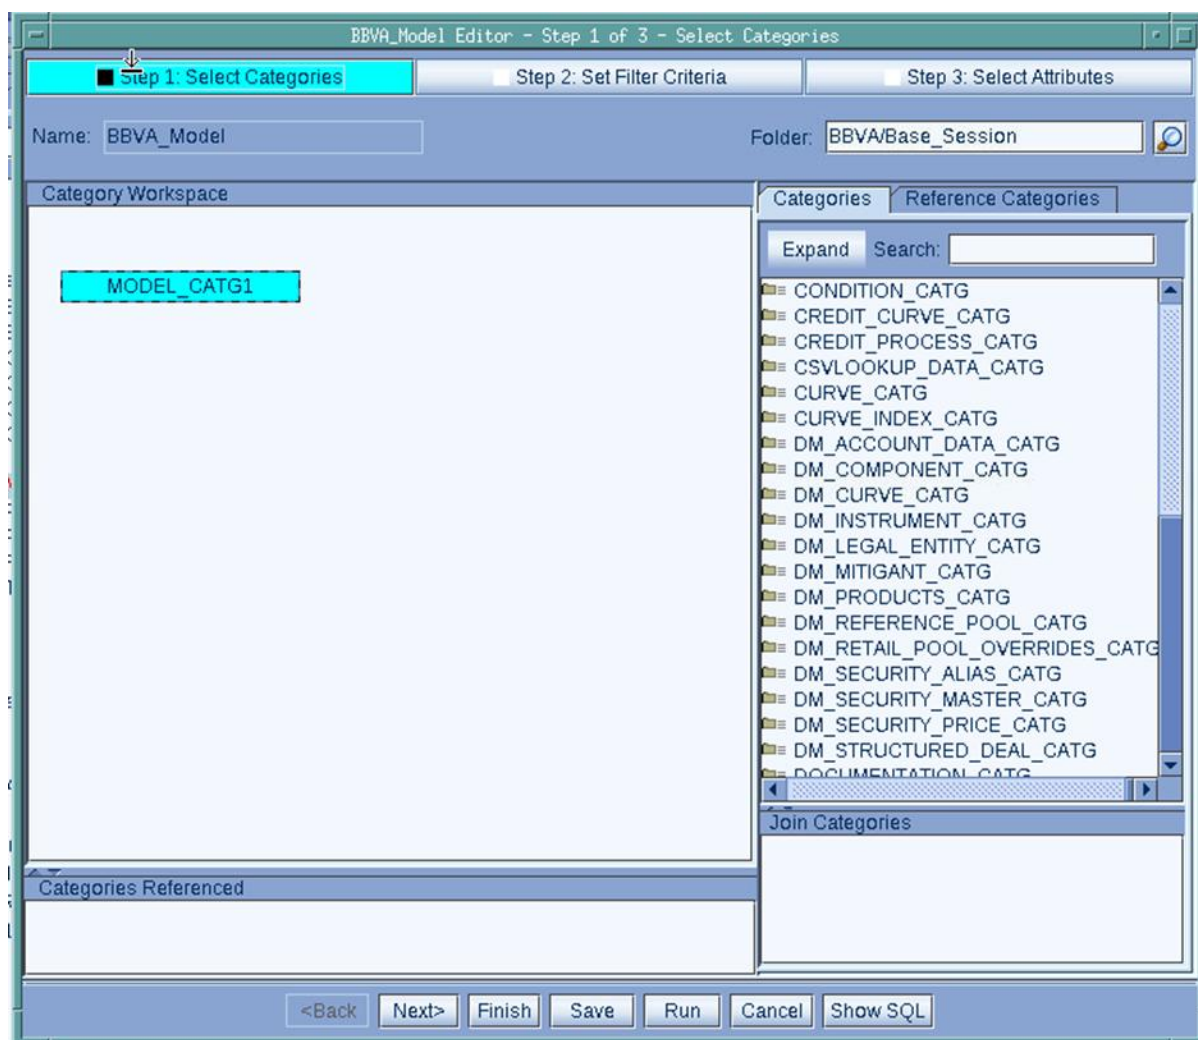


```
SELECT DISTINCT PAYMENT_PROCEDURE_CATG1.*  
FROM PAYMENT_PROCEDURE_CATG PAYMENT_PROCEDURE_CATG1
```

6 BBVA_Credit_Process

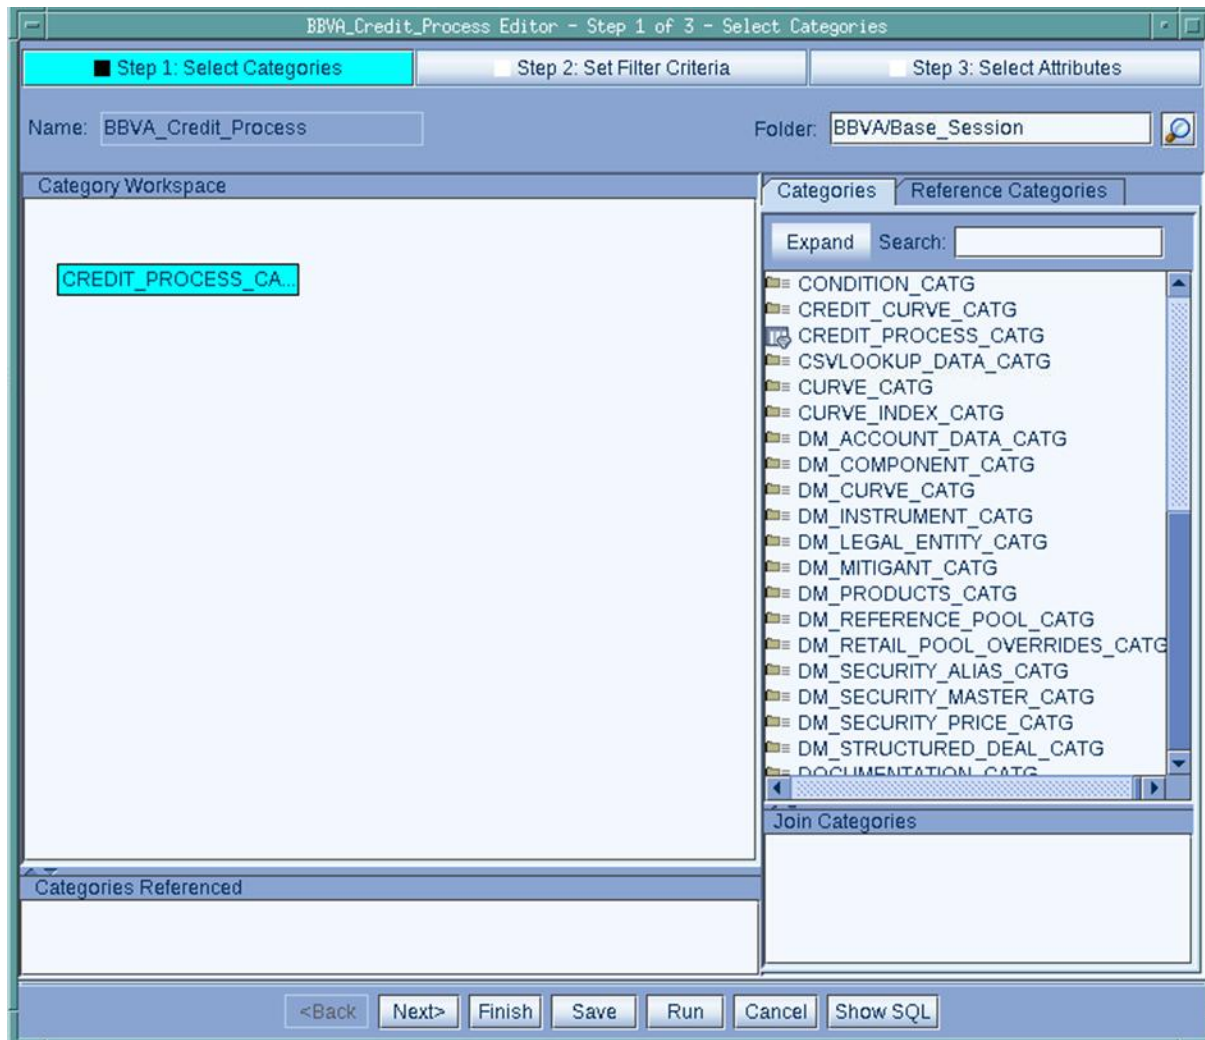


```
SELECT DISTINCT CREDIT_PROCESS_CATG1.*  
FROM CREDIT_PROCESS_CATG CREDIT_PROCESS_CATG1
```

7 BBVA_Curve_Index

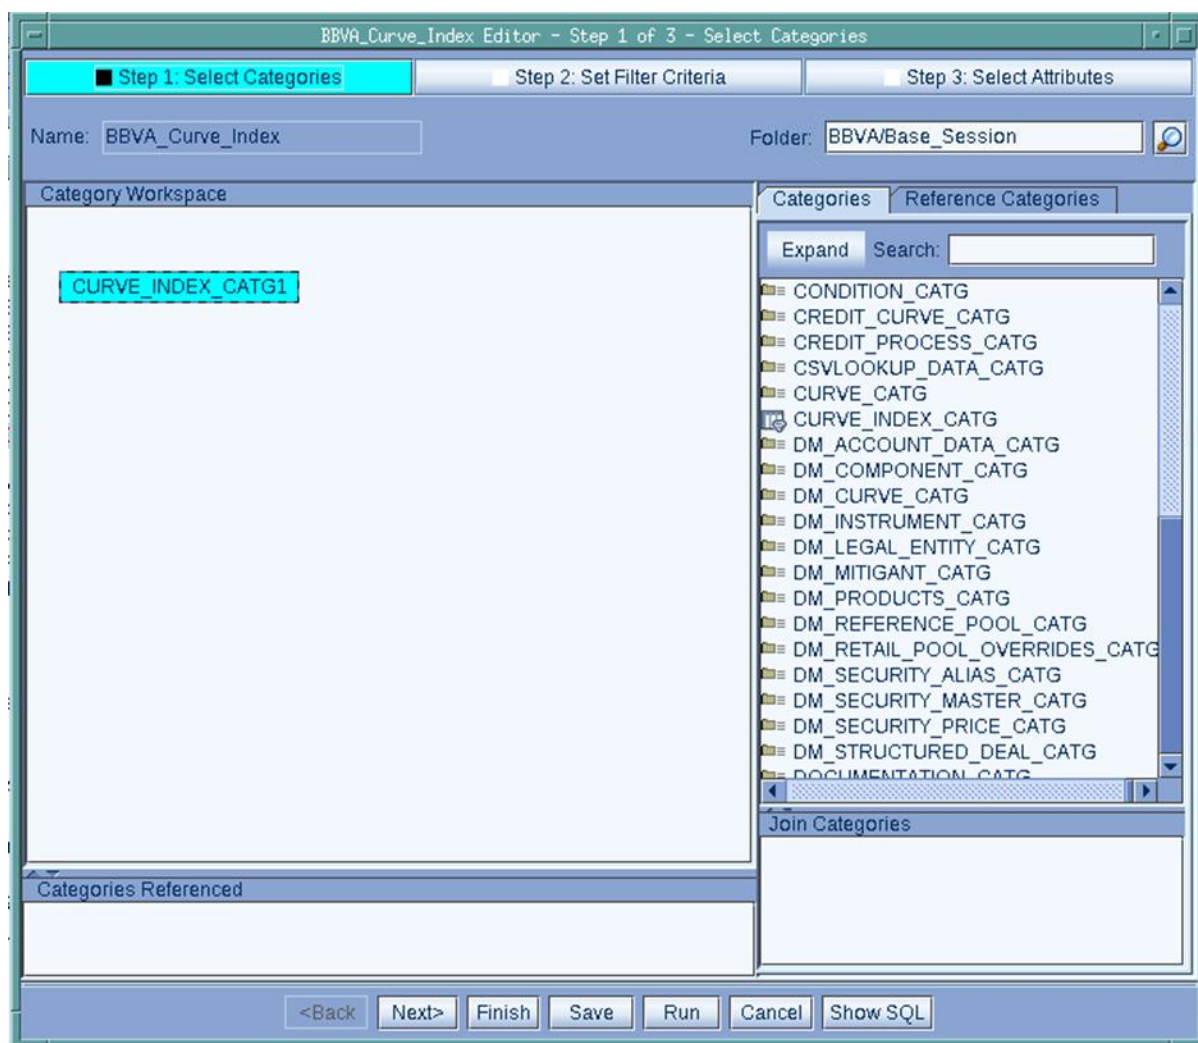


```
SELECT DISTINCT CURVE_INDEX_CATG1.*  
FROM CURVE_INDEX_CATG CURVE_INDEX_CATG1
```

8 BBVA_Credit_Curve

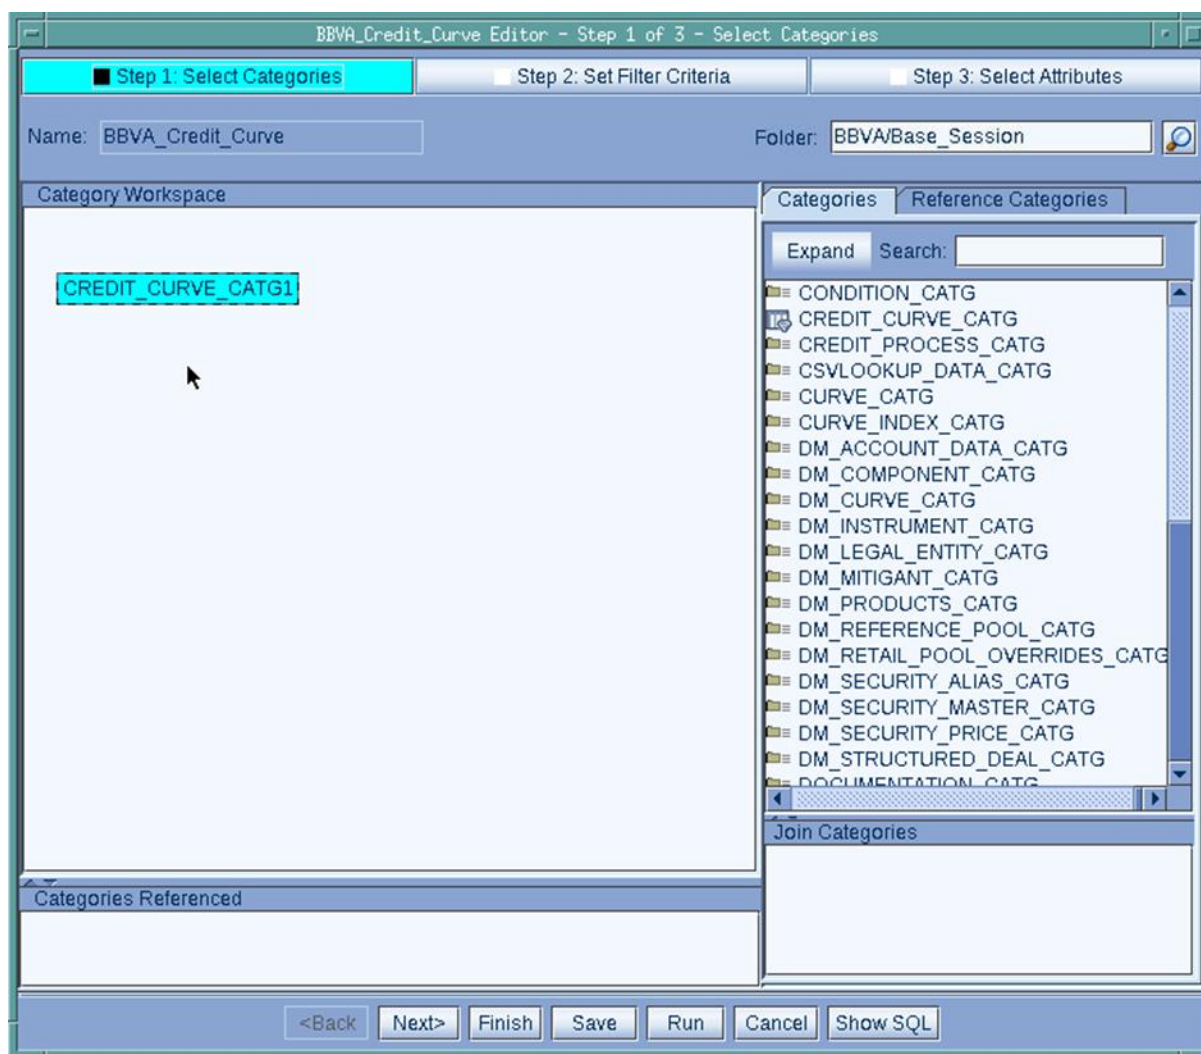

```
SELECT DISTINCT CREDIT_CURVE_CATG1.*  
FROM CREDIT_CURVE_CATG CREDIT_CURVE_CATG1
```

9 BBVA_Instrument

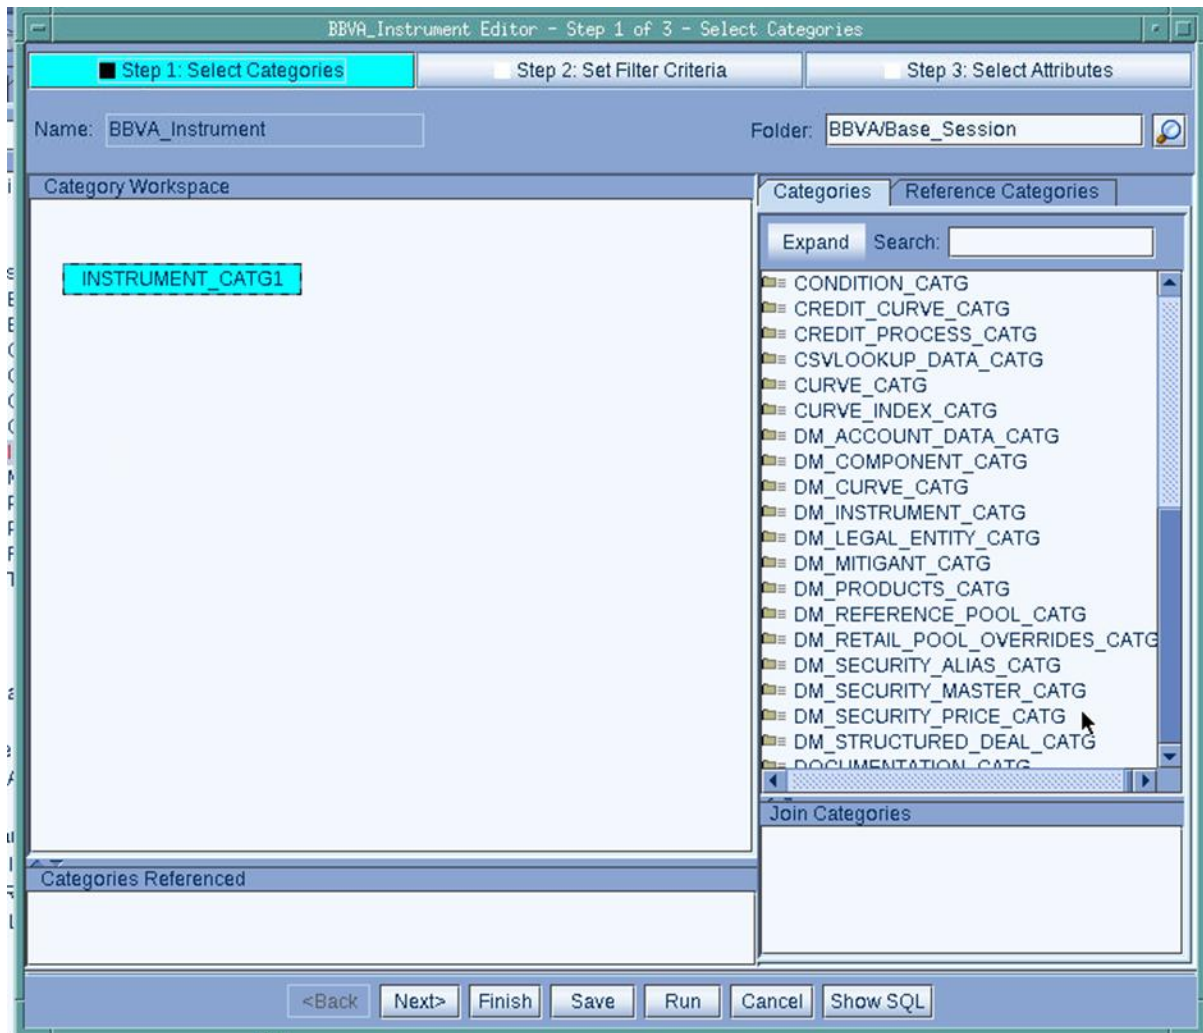


```
SELECT DISTINCT INSTRUMENT_CATG1.*
FROM INSTRUMENT_CATG INSTRUMENT_CATG1
WHERE ((INSTRUMENT_CATG1."TYPE" IN ('Common Stock', 'Market Index', 'Constant Term
Swaption', 'Foreign Exchange') OR (INSTRUMENT_CATG1."TYPE" = 'Zero Coupon Bond' AND
INSTRUMENT_CATG1."LoadSetNB" = 20022)) AND NOT INSTRUMENT_CATG1."IDENTIFIER"
LIKE 'EMMX%')
```

XKOZ-RW-D003-All_Portfolios

This stream will create the portfolios files

XKOZ-RW-D003-All_Portfolios All changes saved. <Enter Description Here>

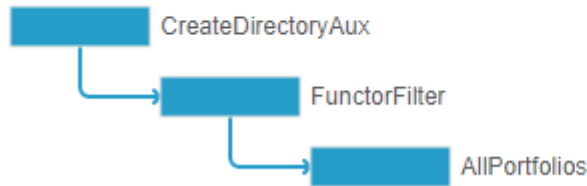

This stream will be run only in Flag I receiving the following parameter file:

- Flag 1: \$XKOZ_CFG/XKOZ_Benchmark_IMM.prm

This stream consists of the following jobs:

CreateDirectoryAux

This operation will create an auxiliary directory in case it does not exist.

Command:

```
mkdir -p $XKOZ_DATOUT/aux/
```

FunctorFilter

This operation will export portfolios data from AIDB

Command:

```
$UDS_HOME/util/Functor $xml_file -o $output_file -f $type --dataset $s_dataset
```

Arguments

xml_file: Filter definition. Value: \$XKOZ_CFG/XKOZ_Functor_All_Portfolios.xml

s_dataset: UDS dataset name. Value: param@Dataset Name

type: Exported file format. Value: csv

output_file: Exported portfolios path


Inputs

\$XKOZ_CFG/XKOZ_Functor_All_Portfolios.xml

```
<functor class="com.algorithmics.ads.api.idl.ExecuteFilter">  
  <FILTERNAME>BBVA_Portfolios_All</FILTERNAME>  
</functor>
```

Referenced UDS filters

BBVA Portfolios All

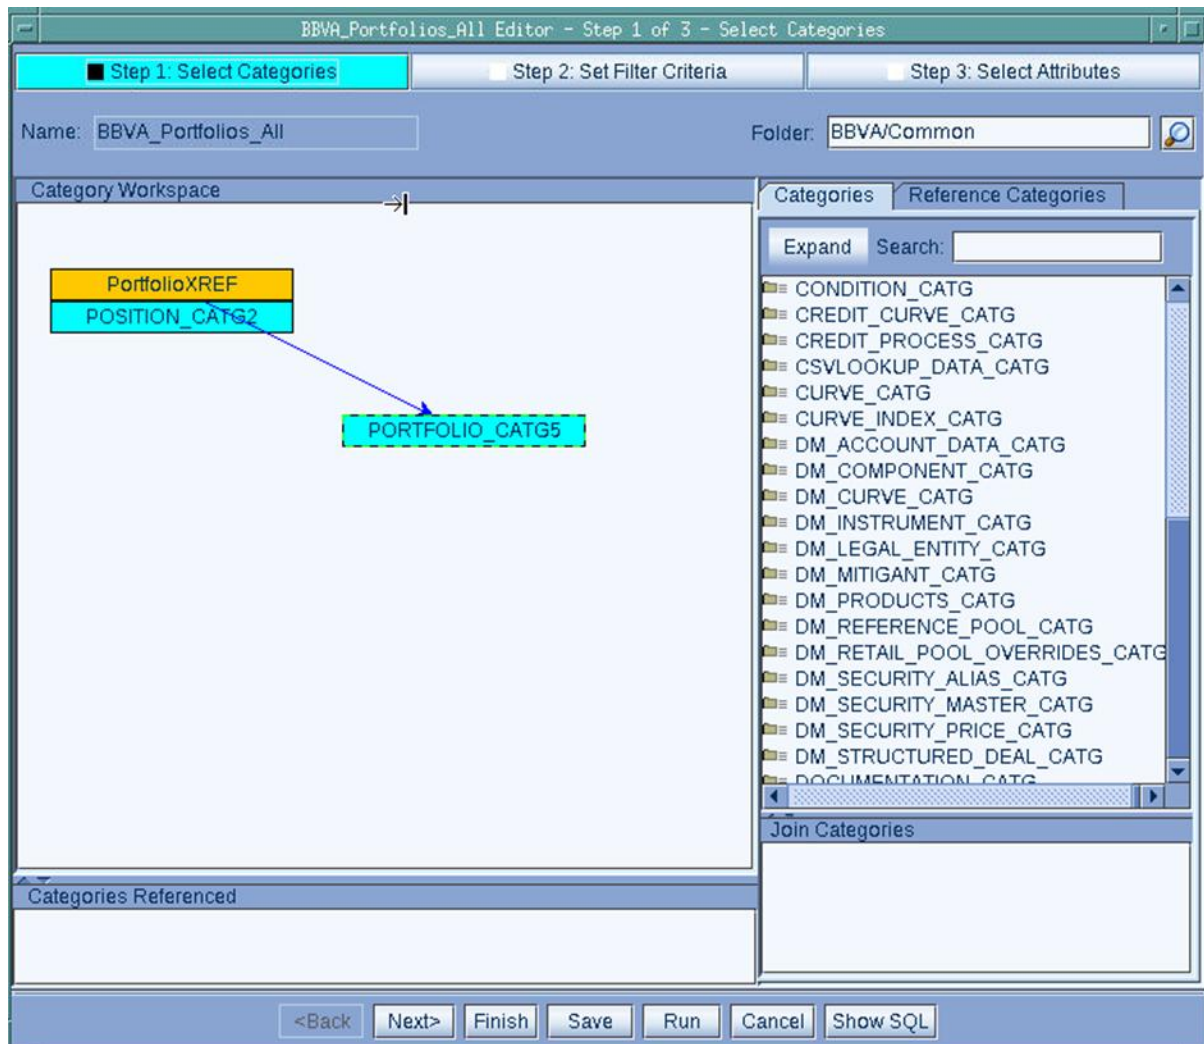

```
FROM POSITION_CATG POSITION_CATG2,PORTFOLIO_CATG PORTFOLIO_CATG5
SELECT DISTINCT PORTFOLIO_CATG5."IDENTIFIER"
WHERE POSITION_CATG2."PortfolioXREF" = PORTFOLIO_CATG5."IDNB"
```

Outputs

\$ALGO_TOP/outputs/XKOZ_Functor_All_Portfolios.csv

AllPortfolios

This operation will create \$XKOZ_DATOUT/aux/XKOZ_AllPortfolios.csv that contains all portfolios data in riskwatch format.

Command:

\$XKOZ_FUENTES/XKOZ_CreateAllPortfoliosFile.pl \$input \$output

Arguments

input: Portfolios file exported from AIDB. Value:

\$ALGO_TOP/outputs/XKOZ_Functor_All_Portfolios.csv

output: \$XKOZ_DATOUT/aux/XKOZ_AllPortfolios.csv: Portfolio data in rw format

Inputs

\$ALGO_TOP/outputs/XKOZ_Functor_All_Portfolios.csv: Portfolios data exported from AIDB

\$XKOZ_CFG/XKOZ_Template_AllPortfolios.csv: Portfolios rw format template

Outputs

\$XKOZ_DATOUT/aux/XKOZ_AllPortfolios.csv: Portfolio data in rw format

XKOZ-RW-D004-Daily_Session_Benchmark

This stream will create the daily session for Benchmark


XKOZ-RW-D004-Daily_Session_Benchmark
All changes saved.

<Enter Description Here>

 CreateDailySessionExposure

This stream runs only in Flag I and receives the following parameter file:

- Flag 1: \$XKOZ_CFG/XKOZ_Benchmark_IMM.prm

This stream consists of the following jobs:

CreateDailySessionExposure

This job will create the daily merged session used by Benchmark cubes.

Arguments

Dataset Name: Name of the UDS dataset. The value always will be \$SESSION_DATE

Instruments and Positions Filter: UDS filter name to extract Instrument and positions.
Value: @{\Instruments and Positions Filter}: BBVA_Cubos_Exposure

RW Output Dir: \$XKOZ_DATOUT

RiskWatch Base Session Prefix: Name of the session to be created. @{\RiskWatch Daily Session Prefix}. Value: XKOZ-rw-daily_Benchmark_{\$XKOZ_CFGUSER_TipoCalc}

RiskWatch CSV File: Portfolios file. Value: \$XKOZ_DATOUT/aux/XKOZ_AllPortfolios.csv

Session File: Session name to be created: {\$XKOZ_DATOUT}/sessionfiles/@{\RiskWatch Base Session Prefix}.scf

UDS Filter: Other filters to export data to include in the daily session: BBVA_Risk_Entity, BBVA_Bonds

This job is implemented by the following components:



Configure RW Outputs

Auxiliary component used for parameterizing inputs/outputs for operations that included rws executions.

Inputs

RW Output dir: \$XKOZ_DATOUT

RW Session File Prefix: param@RiskWatch Base Session Prefix

Outputs

RWSessionFile: Riskwatch Base Session

Create RS Daily Session Exposure

Generate the merged session file

Inputs

Riskwatch Base Session: Full path for the base session to be used. Linked from Configure RW Outputs component

Dataset Name: @{Dataset Name} (See job arguments description)

RiskWatch CSV File: @{RiskWatch CSV File} (See job arguments description)

Session File: @{Session File} (See job arguments description)

UDS Filter: @{UDS Filter} (See job arguments description)

UDS Filter 2: @{Instruments and Positions Filter} (See job arguments description)

Outputs

Base Session: \$XKOZ_DATOUT/sessionfiles/XKOZ-rw-daily_Benchmark_IMM

Logic

- Load base session setting \$SESSION_DATE as Session Date
- Link \$XKOZ_DATOUT/aux/XKOZ_AllPortfolios.csv
- Link UDS filters BBVA_Risk_Entity and BBVA_Bonds
- Link UDS filter BBVA_Cubos_Exposure
- Save session as daily merged session

Referenced UDS filters

BBVA_Risk_Entity

BBVA_Risk_Entity Editor - Step 1 of 3 - Select Categories

Step 1: Select Categories Step 2: Set Filter Criteria Step 3: Select Attributes

Name: BBVA_Risk_Entity Folder: BBVA/Base_Session

Category Workspace

RISK_ENTITY_CATG1

Categories Reference Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG

Join Categories

Categories Referenced

<Back Next> Finish Save Run Cancel Show SQL

```
SELECT DISTINCT RISK_ENTITY_CATG1.*  
FROM RISK_ENTITY_CATG RISK_ENTITY_CATG1
```

BBVA_Bonds

BBVA_Bonds Editor - Step 1 of 3 - Select Categories

Step 1: Select Categories Step 2: Set Filter Criteria Step 3: Select Attributes

Name: BBVA_Bonds Folder: BBVA/Base_Session

Category Workspace

INSTRUMENT_CATG1

Categories Reference Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG


Join Categories

Categories Referenced

<Back Next> Finish Save Run Cancel Show SQL

```
FROM INSTRUMENT_CATG INSTRUMENT_CATG1
SELECT DISTINCT INSTRUMENT_CATG1.*
WHERE INSTRUMENT_CATG1."TYPE" IN ('Floating Rate Note', 'Fixed Rate Bond')
```

BBVA_Cubos_Exposure

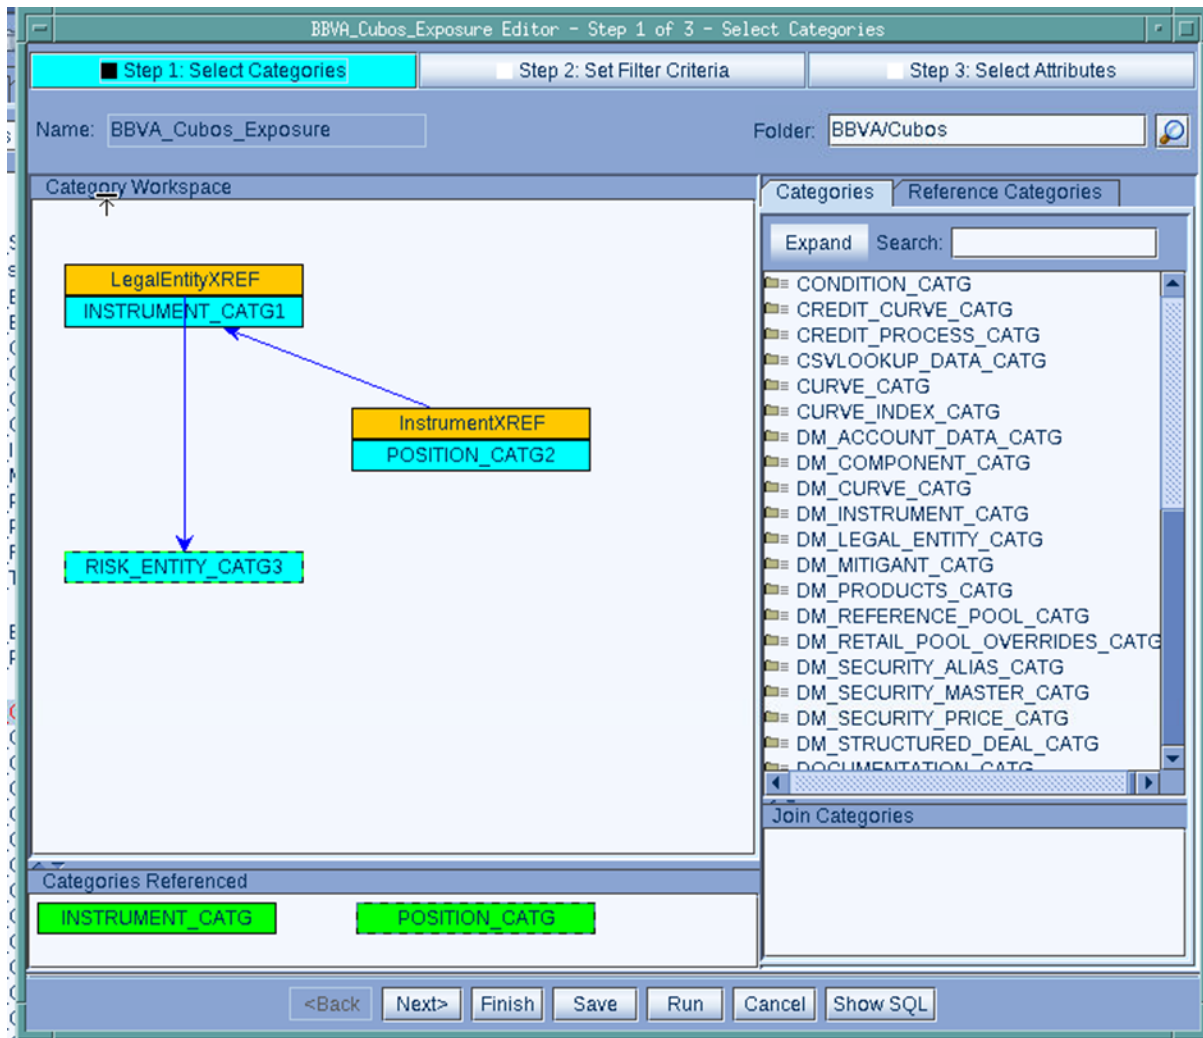

```
SELECT DISTINCT INSTRUMENT_CATG1.*,POSITION_CATG2.*,RISK_ENTITY_CATG3.*
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG POSITION_CATG2,RISK_ENTITY_CATG
RISK_ENTITY_CATG3
WHERE POSITION_CATG2."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND
INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG3."IDNB" AND (INSTRUMENT_CATG1."TYPE" NOT IN
('Cash Instrument', 'Bond Future') AND INSTRUMENT_CATG1."LegalEntityXREF" IS NOT NULL AND
POSITION_CATG2."BookNAME" NOT IN ('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW') AND NOT
INSTRUMENT_CATG1."IDENTIFIER" LIKE 'ST-%' AND RISK_ENTITY_CATG3."CreditStateENUM" != 'DDD' AND
(POSITION_CATG2."UserDefined6NAME" IS NULL OR POSITION_CATG2."UserDefined6NAME" != '1') AND
(RISK_ENTITY_CATG3."UserDefined6NAME" != '1' OR RISK_ENTITY_CATG3."UserDefined6NAME" IS NULL))
```

XKOZ-RW-D004-Daily_Session_TRIM

This stream will create the daily session for TRIM

XKOZ-RW-D004-Daily_Session_TRIM All changes saved. <Enter Description Here>

CreateDailySessionExposureTRIM

This stream runs only in Flag III and receives the following parameter file:

- Flag 3: \$XKOZ_DATPE/XKOZ_Session_TRIM_IMM.prm

This stream consists of the following jobs:

CreateDailySessionExposureTRIM

This job will create the daily merged session used by TRIM cubes.

Arguments

AdjustedMPoR: Adjusted Margin Period of Risk. Value = 16

Dataset Name: Name of the UDS dataset. The value always will be \$SESSION_DATE

IMMproductsFile: Mentor L_IMMproductsK.csv lookup @{IMMproductsK File}.

RW Output Dir: \$XKOZ_DATOUT

RiskWatch Base Session Prefix: Name of the session to be created. @{RiskWatch Daily Session Prefix}. Value: XKOZ-rw-daily_TRIM_{\$XKOZ_CFGUSER_TipoCalc}

RiskWatch CSV File: Portfolios file. Value: \$XKOZ_DATOUT/aux/XKOZ_AllPortfolios.csv


Session File: Session name to be created: {\$XKOZ_DATOUT}/sessionfiles/@{RiskWatch Base Session Prefix}.scf

TradesAllocationFile: Trades allocation file generated in Flag I execution @{Trades Allocation Benchmark File}

Instruments and Positions Filter: UDS filter name to extract Instrument and positions. Value: @{Instruments and Positions Filter}: BBVA_Cubos_Exposure_TRIM

UDS Filter: Other filters to export data to include in the daily session: BBVA_Risk_Entity, BBVA_Bonds

This job is implemented by the following components:

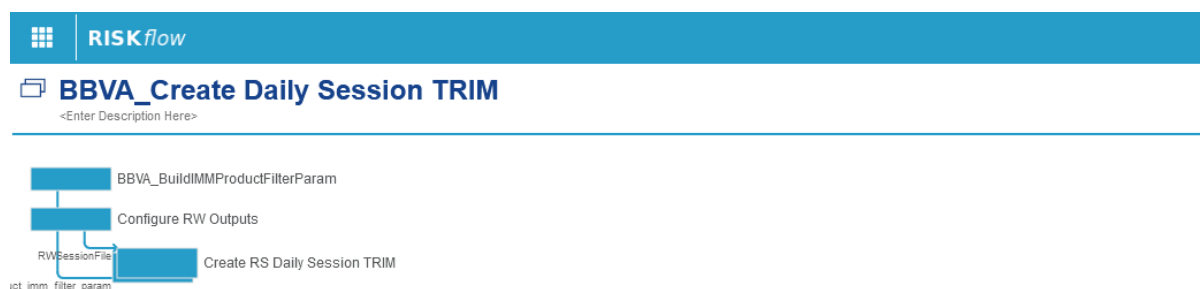

Configure RW Outputs

Auxiliary component used for parameterizing inputs/outputs for operations that included rws executions.

Inputs

RW Output dir: \$XKOZ_DATOUT

RW Session File Prefix: param@RiskWatch Base Session Prefix

Outputs

RWSessionFile: Riskwatch Base Session

BBVA_BuildIMMProductFilterParam

This component builds the “dynamic uds filter parameter” for BBVA_Cubos_Exposure_TRIM UDS filter used in the “Create RS Daily Session TRIM” component.

Input

i_imm_prod_file: Mentor L_IMMproductsK.csv lookup

Output

String containing products included in IMM perimeter. This String will have the following format: " INSTRUMENT_CATG1_ProductTypeRTCENAME="p1,p2,..., pN" " where pX is a productID

Logic

Reads i_imm_prod_file and for each product included in IMM perimeter include it in the "dynamic uds filter parameter"

Create RS Daily Session TRIM

Generate Base Session file

Inputs

AdjustedMPoR: @{AdjustedMPoR} (See job arguments description)

Dataset Name: @{Dataset Name} (See job arguments description)

IMMproductsFile: @{IMMproductsFile} (See job arguments description)

RiskWatch CSV File: @{RiskWatch CSV File} (See job arguments description)

Session File: @{Session File} (See job arguments description)

TradesAllocationFile: @{TradesAllocationFile} (See job arguments description)

UDS Filter: @{UDS Filter} (See job arguments description)

UDS Filter 2: @{Instruments and Positions Filter} (See job arguments description)

UDS Filter Parameters 2: Linked from "BBVA_BuildIMMProductFilterParam"

RiskWatch Base Session: Linked from "Configure RW Outputs"

Outputs


Base Session: \$XKOZ_DATOUT/sessionfiles/XKOZ-rw-daily_TRIM_IMM

Logic

- Load base session setting \$SESSION_DATE as Session Date
- Link \$XKOZ_DATOUT/aux/XKOZ_AllPortfolios.csv
- Link UDS filters BBVA_Risk_Entity and BBVA_Bonds
- Link UDS filter BBVA_Cubos_Exposure_TRIM
- Set TRIM attributes:
 - Set AMPoR attribute to 0 for all instruments with AMPoR attribute different than 0
 - Empty the Break Clause Dates for all instruments
 - Read product file and get all product ids included in IMM perimeter
 - Read trades allocation file generated in Benchmark Flag and only process the dealID allocated to a collateral that is not Mitigant.
 - For these specifics deals, check if it has a IMM product and if so, set AMPoR attribute to @{AdjustedMPoR} (16) in the associated instrument
- Save session as daily merged session

Referenced UDS filters

BBVA_Risk_Entity

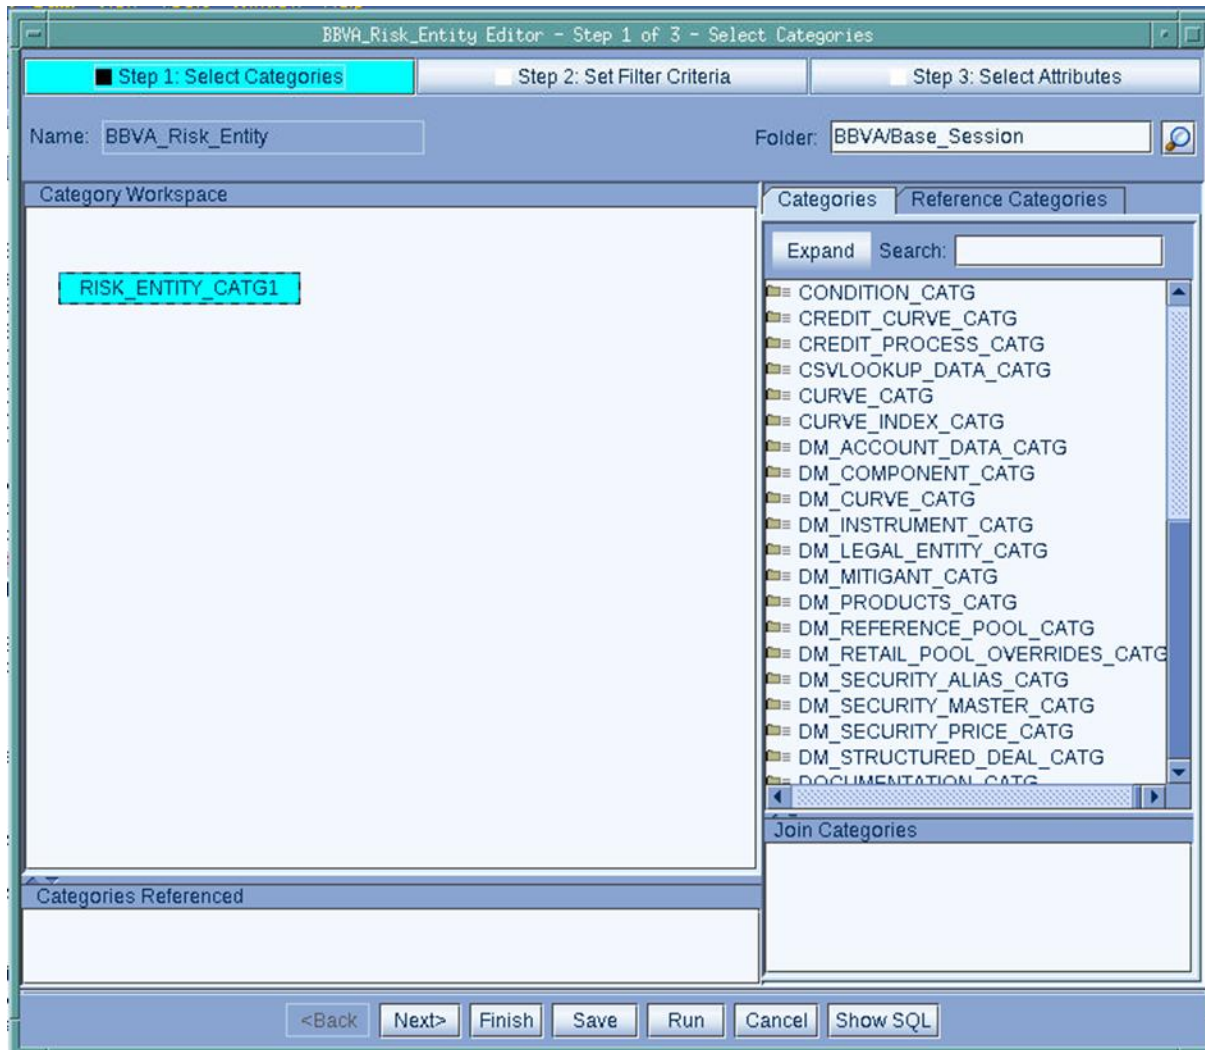

```
SELECT DISTINCT RISK_ENTITY_CATG1.*
FROM RISK_ENTITY_CATG RISK_ENTITY_CATG1
```

BBVA_Bonds

BBVA_Bonds Editor - Step 1 of 3 - Select Categories

Step 1: Select Categories | Step 2: Set Filter Criteria | Step 3: Select Attributes

Name: BBVA_Bonds Folder: BBVA/Base_Session

Category Workspace

INSTRUMENT_CATG1

Categories | Reference Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG

Join Categories

Categories Referenced

<Back Next> Finish Save Run Cancel Show SQL

```
FROM INSTRUMENT_CATG INSTRUMENT_CATG1
SELECT DISTINCT INSTRUMENT_CATG1.*
WHERE INSTRUMENT_CATG1."TYPE" IN ('Floating Rate Note', 'Fixed Rate Bond')
```

BBVA_Cubos_Exposure_TRIM

BBVA_Cubos_Exposure_TRIM Editor - Step 1 of 3 - Select Categories

Step 1: Select Categories Step 2: Set Filter Criteria Step 3: Select Attributes

Name: BBVA_Cubos_Exposure_TRIM Folder: BBVA/Cubos

Category Workspace

```

graph TD
    LegalEntityXREF[LegalEntityXREF] --> INSTRUMENT_CATG1[INSTRUMENT_CATG1]
    INSTRUMENT_CATG1 --> RISK_ENTITY_CATG3[RISK_ENTITY_CATG3]
    InstrumentXREF[InstrumentXREF] --> POSITION_CATG2[POSITION_CATG2]
    
```

Categories Reference Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG

Join Categories

Categories Referenced

INSTRUMENT_CATG POSITION_CATG

<Back Next> Finish Save Run Cancel Show SQL

```

SELECT DISTINCT INSTRUMENT_CATG1.*,POSITION_CATG2.*,RISK_ENTITY_CATG3.*
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG POSITION_CATG2,RISK_ENTITY_CATG
RISK_ENTITY_CATG3
WHERE POSITION_CATG2."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND
INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG3."IDNB" AND (INSTRUMENT_CATG1."TYPE" NOT IN
('Cash Instrument', 'Bond Future') AND INSTRUMENT_CATG1."LegalEntityXREF" IS NOT NULL AND
INSTRUMENT_CATG1."ProductTypeRTCENAME" IN (@INSTRUMENT_CATG1_ProductTypeRTCENAME) AND
POSITION_CATG2."BookNAME" NOT IN ('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW') AND NOT
INSTRUMENT_CATG1."IDENTIFIER" LIKE 'ST-%' AND RISK_ENTITY_CATG3."CreditStateENUM" != 'DDD' AND
(POSITION_CATG2."UserDefined6NAME" IS NULL OR POSITION_CATG2."UserDefined6NAME" != '1') AND
(RISK_ENTITY_CATG3."UserDefined6NAME" != '1' OR RISK_ENTITY_CATG3."UserDefined6NAME" IS NULL))

```

XKOZ-RW-D006-Create_PHS.

This stream will create the PHS files.



This stream runs only in Flag I and receives the following parameter file:

- Flag 1: \$XKOZ_DATPE/XKOZ_Session_TRIM_IMM.prm

This stream consists of the following jobs:

CreateDirectoryHierarchy

This operation will \$XKOZ_DATOUT/hierarchy/ folder

Command:

```
mkdir -p $XKOZ_DATOUT/hierarchy/
```

CreatePHSFiles

This operation will export PHS files form the base session

Arguments

Portfolio: All Portfolios

RiskWatch Base Session: \$XKOZ_DATOUT/sessionfiles/@{RiskWatch Daily Session Prefix}.scf

detectCreditDerivatives: true

exportCashAccounts: true

exportPOD: true

exportRealPortfolios: true
exportVirtualPortfolios: false
includeRootInHierarchyCode: true
outputDir: \$XKOZ_DATOUT/hierarchy/

Inputs

\$XKOZ_DATOUT/sessionfiles/@{RiskWatch Daily Session Prefix}.scf

Outputs

PHS files:

\$XKOZ_DATOUT/hierarchy/hierarchy.csv
\$XKOZ_DATOUT/hierarchy/instrument.csv
\$XKOZ_DATOUT/hierarchy/Master.xml.pod
\$XKOZ_DATOUT/hierarchy/meta_version.csv
\$XKOZ_DATOUT/hierarchy/PHS_Def_Master.csv
\$XKOZ_DATOUT/hierarchy/PHS_Loader_Master.xml
\$XKOZ_DATOUT/hierarchy/portfolio.csv
\$XKOZ_DATOUT/hierarchy/portposref.csv
\$XKOZ_DATOUT/hierarchy/position.csv

Logic


- Load base session
- Set Portfolios In Stress to All Portfolios
- Create PHS files:
 - Set export specifications received as parameter
 - Execute ExportXMLReport

XKOZ-RW-D007-Exposure_Cube_Benchmark

This stream will create the exposure cube benchmark

XKOZ-RW-D007-Exposure_Cube_Benchmark All changes saved.

<Enter Description Here>

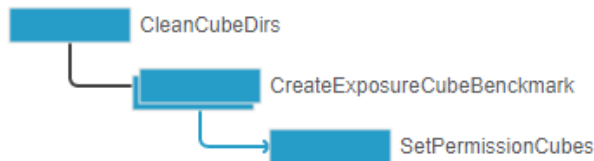

This stream runs only in Flag I and receives the following parameter file

- Flag 1: \$XKOZ_CFG/XKOZ_Benchmark_IMM.prm

This stream consists of the following jobs:

CleanCubeDirs

This operation will clean the cube directories

Command:

```
rm -rf ${XKOZ_DATOUT}/cubes/@{Mark-to-Future Name}
```

Arguments

@{Mark-to-Future-Name}: The mark to future name. Value: Benchmark_\${XKOZ_CFGUSER_TipoCalc}

CreateExposureCubeBenchmark

This job will create Benchmark cubes.

Arguments

Mark-to-Future Name: **@{Mark-to-Future Name}:** Value Benchmark_TRIM

Portfolio: All Portfolios

RW Output Dir: **@{RW Output Dir}:** Cubes output dir. Value \$XKOZ_DATOUT/cubes

RiskWatch Base Session: @{{Session File}}: Daily merged session. Value:
\$XKOZ_DATOUT/sessionfiles/XKOZ-rw-
daily_Benchmark_{{XKOZ_CFGUSER_TipoCalc}}.scf

Scenario Set File: @{{Scenario Set File}}: Value. \$XKOZ_CFG/XKOZ_Base_Scenario.csv

Scenario Set Name: @{{Scenario Set Name}}. Value: Base

This job is implemented by the following components:

Configure RW Outputs

Auxiliary component used for parameterizing inputs/outputs for operations that included rws executions.

Inputs

Data Partition Key Name: @{{Data Partition Key Name}}. Partition scenario number

Data Partition Number: param@Data Partition Number: Partition scenario number

Mark-to-Future Name: param@Mark-to-Future Name. Cube names. Value:
Benchmark_TRIM

RW Output Dir: @{{RW Output Dir}}: Output dir where cubes will be placed. Value:
\$XKOZ_DATOUT/cubes

Scenario Set File: @{{Scenario Set File}}: Value: \$XKOZ_CFG/XKOZ_Base_Scenario.csv

Scenario Set Name: @{{Scenario Set Name}}. Value: Base

RW Output dir: \$XKOZ_DATOUT

Outputs

MtF Cube Path: Full path for the cube

Scenario Set Name: Scenario name for the cube

BBVA Create RS MAG Exposure Cube - Benchmark

This operation will generate cube files.

Inputs

MtF Cube Path: Linked from Configure RW Outputs

Portfolio: @{{Portfolio}}

RiskWatch Base Session: @{RiskWatch Base Session}. Value: Merged Daily session.

Scenario Set File: @{Scenario Set File}

Scenario Set Name: Linked from Configure RW Outputs

Outputs

Cubes files: \${XKOZ_DATOUT}/cubes/Benchmark_TRIM/*

Logic

- Load base daily merged session
- Load Scenario data
 - Scenario Set CSV File List: @{Scenario Set File}
 - Scenario Set Name: @{Scenario Set Name}
- Set Scenario Sets
 - Cross Product: false
 - Scenario Set Name: @{Scenario Set Name}
 - Use Scenario Triggers: true
- Set Portfolios In Stress
 - Portfolio: @{Portfolio}
- Set Simulation Attributes
 - THEO/Instrument Value
- Set Simulator Options
 - Disable Portfolio Calculations: F
 - Enable Settlement: T
 - Optimize Expired Instruments: T
 - Optimize First Time Step: T
 - Optimize Scenario Risk Factors: T
 - Simulate FX Rates: T
- Set Stress Room Options
 - Merge Hierarchies: true
 - Use Trigger Times: true
- Set Simulator Result Options
 - Generator: Mag Cube Double Precision
 - Precision: Double

- Reverse Endian: false
- Save As Session
 - Merge: true
 - Overwrite: true
 - Save Session: false

SetPermissionCubes

This operation will set the cubes permissions

Command:

```
chmod -Rvf 777 ${XKOZ_DATOUT}/cubes/@{Mark-to-Future Name}
```

Arguments

`${XKOZ_DATOUT}/cubes/@{Mark-to-Future Name}/*`. Values


`${XKOZ_DATOUT}/cubes/Benchmark_TRIM/*`

XKOZ-RW-D007-Exposure_Cube_TRIM

This stream will create the exposure cube TRIM

XKOZ-RW-D007-Exposure_Cube_TRIM All changes saved.

<Enter Description Here>

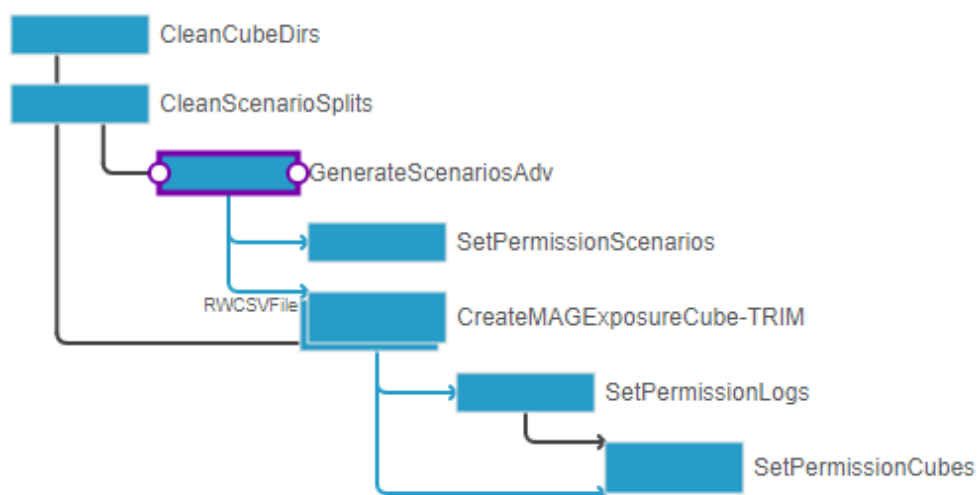

This stream runs in Flag III and can receive one of the following parameter files according to cubes to generate:

- HN Cubes: \$XKOZ_DATPE/XKOZ_Cube_HN_TRIM_IMM.prm
- HS Cubes: \$XKOZ_DATPE/XKOZ_Cube_HS_TRIM_IMM.prm

This stream consists of the following jobs:

CleanCubeDirs

This operation will clean the cube directories.

Command:

```
rm -rf ${XKOZ_DATOUT}/cubes/@{Mark-to-Future Name}
```

Arguments

- **@{Mark-to-Future-Name}**: The mark to future name

According to the cubes type, this arguments could have the following values:

HN cubes: @{{Mark-to-Future-Name}}: HN_TRIM

HS cubes: @{{Mark-to-Future-Name}}: HS_TRIM

CleanScenarioSplits

This operation will clean the scenario splits directory

Command:

```
rm -rf $ALGO_TOP/outputs/shared/dynamic/ase/scenarios/@{{Scenario Set Name}}
```

Arguments

- **@{{Scenario Set Name}}:** The scenario set name

According to the cubes type, this arguments could have the following values:

HN cubes: @{{Scenario Set Name}}: XKOZ_XVA_HistoricoNormal

HS cubes: @{{Mark-to-Future-Name}}: XKOZ_XVA_HistoricoStress

GenerateScenariosAdv

This job will split the scenario file in n partitions according to the parameters received:

Arguments

File Format: Binary

Input CSV Scenario File: @{{Scenario Set File}}. Values:

HS Cubes = \$XKOZ_DATOUT/scenario/dataset/XKOZ_XVA_HistoricoNormal.ce

HS Cubes = \$XKOZ_DATOUT/scenario/dataset/XKOZ_XVA_HistoricoStress.ce

Number of Partitions: @{{Number of Partitions}}. Values: 1000

Inputs

Scenario file:

HS Cubes = \$XKOZ_DATOUT/scenario/dataset/XKOZ_XVA_HistoricoNormal.ce

HS Cubes = \$XKOZ_DATOUT/scenario/dataset/XKOZ_XVA_HistoricoStress.ce

Outputs

Splitted scenario files

HS Cubes = \$ALGO_TOP/outputs/shared/dynamic/ase/scenarios/XKOZ_XVA_HistoricoNormal/*

HS Cubes = \$ALGO_TOP/outputs/shared/dynamic/ase/scenarios/XKOZ_XVA_HistoricoStress/*

SetPermissionScenarios

This operation will set permissions to the splitted scenario files

Command

chmod -Rvf 777 \$ALGO_TOP/outputs/shared/dynamic/ase/scenarios/@{Scenario Set Name}

Arguments

@{Scenario Set Name}: The scenario set name. Values:

HN Cubes = XKOZ_XVA_HistoricoNormal

HS Cubes = XKOZ_XVA_HistoricoStress

CreateMAGExposureCube-TRIM

This job will generate TRIM cubes.

Arguments

Mark-to-Future Name: @{Mark-to-Future Name}. Values

HN Cubes: HN_TRIM

HS Cubes: HS_TRIM

Portfolio: All Portfolios

RW Output Dir: @{RW Output Dir}. Output dir where cubes will be place

RiskWatch Base Session: @{Session File}


Scenario Set File: Linked from GenerateScenariosAdv"

Scenario Set Name: @{Scenario Set Name}

HN Cubes = XKOZ_XVA_HistoricoNormal

HS Cubes = XKOZ_XVA_HistoricoStress

This job is implemented by the following components:

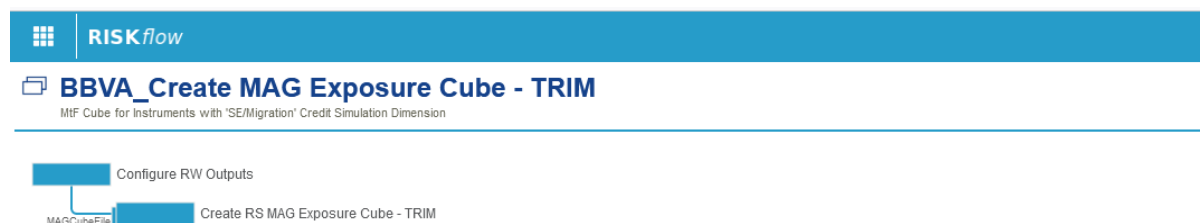

Configure RW Outputs

Auxiliary component used for parameterizing inputs/outputs for operations that included rws executions.

Inputs

Data Partition Key Name: @{Data Partition Key Name}. Partition scenario number

Data Partition Number: param@Data Partition Number: Partition scenario number

Mark-to-Future Name: param@Mark-to-Future Name. Cube names. Values

HN Cubes: HN_TRIM

HS Cubes: HS_TRIM

RW Output Dir: @{RW Output Dir}: Output dir where cubes will be placed. Value: \$XKOZ_DATOUT/cubes

Scenario Set File: @{Scenario Set File}: Values:

HS Cubes = \$XKOZ_DATOUT/scenario/dataset/XKOZ_XVA_HistoricoNormal.ce

HS Cubes = \$XKOZ_DATOUT/scenario/dataset/XKOZ_XVA_HistoricoStress.ce

Scenario Set Name: @{Scenario Set Name}. Values:

HN Cubes = XKOZ_XVA_HistoricoNormal

HS Cubes = XKOZ_XVA_HistoricoStress

RW Output dir: \$XKOZ_DATOUT

Outputs

MtF Cube Path: Full path for the cube

Scenario Set Name: Scenario name for the cube

BBVA Create RS MAG Exposure Cube - TRIM

This operation will generate cube files.

Inputs

MtF Cube Path: Linked from Configure RW Outputs

Portfolio: @{Portfolio}

RiskWatch Base Session: @{RiskWatch Base Session}. Value: Merged Daily session.

Scenario Set File: @{Scenario Set File}

Scenario Set Name: Linked from Configure RW Outputs

Outputs

Cubes files:

HN_Cubes: \${XKOZ_DATOUT}/cubes/HN_TRIM/*

HS Cubes: \${XKOZ_DATOUT}/cubes/HS_TRIM/*

Logic

- Load base daily merged session
- Load Scenario data
 - Scenario Set File: @{Scenario Set File}
 - Scenario Set Name: @{Scenario Set Name}

- Set Scenario Sets
 - Cross Product: false
 - Scenario Set Name: @{Scenario Set Name}
 - Use Scenario Triggers: true
- Set Portfolios In Stress
 - Portfolio: @{Portfolio}
- Set Simulation Attributes
 - THEO/Instrument Value
- Set Simulator Options
 - Disable Portfolio Calculations: T
 - Enable Settlement: T
 - Optimize Expired Instruments: T
 - Optimize First Time Step: T
 - Optimize Scenario Risk Factors: T
 - Simulate FX Rates: T
- Set Stress Room Options
 - Merge Hierarchies: true
 - Settlement Processor: SettlementFlow
 - Use Trigger Times: true
- Set Simulator Result Options
 - Generator: Mag Cube Double Precision
 - Precision: Double
 - Reverse Endian: false
- Save As Session
 - Merge: true
 - Overwrite: true
 - Save Session: false

SetPermissionLogs

This operation will set the cubes permissions

Command:

```
chmod -Rf 777 ${OPERATION_LOG_PATH}/*.out ${OPERATION_LOG_PATH}/*CreateCubes*  
${OPERATION_LOG_PATH}/tmp ${OPERATION_LOG_PATH}/*.err
```

SetPermissionCubes

This operation will set the cubes permissions

Command:

```
chmod -Rvf 777 ${XKOZ_DATOUT}/cubes/@{Mark-to-Future Name}/*
```

Arguments

`${XKOZ_DATOUT}/cubes/@{Mark-to-Future Name}/*`. Values

HN_Cubes: `${XKOZ_DATOUT}/cubes/HN_TRIM/*`

HS Cubes: `${XKOZ_DATOUT}/cubes/HS_TRIM/*`

XKOZ-RW-D008-MergeScenarioCube

This stream will merge all cubes splitted by scenario in a single cube

 **XKOZ-RW-D008-MergeScenarioCube** All changes saved.
<Enter Description Here>

 MergeScenarioCube

This stream runs in Flag III and can receive one of the following parameter files according to cubes to generate:

- HN Cubes: `$XKOZ_DATPE/XKOZ_Cube_HN_TRIM_IMM.prm`
- HS Cubes: `$XKOZ_DATPE/XKOZ_Cube_HS_TRIM_IMM.prm`

This stream consists of the following jobs:

MergeScenarioCube

This operation will merge the scenario cube

Command:

```
$XKOZ_SCRT/XKOZ_CubesExposureMerge.sh $nombre $particiones $bloques  
$flag_deletecubes
```

Arguments

nombre: @{{Mark-to-Future-Name}}: The mark to future name

HN cubes: HN_TRIM

HS cubes:: HS_TRIM

particiones: @{{Number of Partitions}}: Value: 1000

bloques: Number of cubes for intermediate merged files to generate final merged cube. Value 100

flag_deletecubes: Flag to indicate if input cubes have to be deleted after merging them. Value: false

Input

Splitted cubes:

HN_Cubes: \${XKOZ_DATOUT}/cubes/HN_TRIM/*

HS Cubes: \${XKOZ_DATOUT}/cubes/HS_TRIM/*

Output

Merged cube:

HN_Cubes: \${XKOZ_DATOUT}/cubes/HN_TRIM/cubesMerged/*

HS Cubes: \${XKOZ_DATOUT}/cubes/HS_TRIM/cubesMerged/*

Logic

The script runs the following steps:

1. Delete memory folder and output cubesMerge folder if exist
2. Creates cubeMerge folder
3. Creates a list of sorted cubes ordered by scenario.
4. Generate intermediate merged cubes files
5. Merge all intermediate merged cubes in the final one
6. Delete intermediate merged cubes

XKOZ-RW-D009-MergeScenarioCube_parallel

This stream will merge all cubes splitted by scenario in a single cube.

Intermediate merged cubes will be run in parallel



 MergeScenarioCube_parallel

This stream runs in Flag III and can receive one of the following parameter files according to cubes to generate:

- HN Cubes: \$XKOZ_DATPE/XKOZ_Cube_HN_TRIM_IMM.prm
- HS Cubes: \$XKOZ_DATPE/XKOZ_Cube_HS_TRIM_IMM.prm

This stream consists of the following jobs:

MergeScenarioCube_parallel

This operation will merge the scenario parallel cube running intermediate merged cubes in parallel

Command:

```
$XKOZ_SCRT/XKOZ_AWS_MergeCubes.sh $XKOZ_ENTORNO_APLI es xkoz $nombre
$particiones $bloques $flag_deletecubes tmpfs paralelo PlatformSymphony
```

Arguments

nombre: **@{Mark-to-Future-Name}**: The mark to future name

HN cubes: HN_TRIM

HS cubes:: HS_TRIM

particiones: **@{Number of Partitions}**: Value: 1000

bloques: Number of cubes for intermediate merged files to generate final merged cube. Value 100

flag_deletecubes: Flag to indicate if input cubes have to be deleted after merging them. Value: false

Input

Splitted cubes:

HN_Cubes: \${XKOZ_DATOUT}/cubes/HN_TRIM/*

HS Cubes: \${XKOZ_DATOUT}/cubes/HS_TRIM/*

Output

Merged cube:

HN_Cubes: \${XKOZ_DATOUT}/cubes/HN_TRIM/cubesMerged/*

HS Cubes: \${XKOZ_DATOUT}/cubes/HS_TRIM/cubesMerged/*

Logic

The script runs the following steps:

1. Delete memory folder and output cubesMerge folder if exist
2. Creates cubeMerge folder
3. Creates a list of sorted cubes ordered by scenario.
4. Generate intermediate merged cubes files in parallel
5. Merge all intermediate merged cubes in the final one
6. Delete intermediate merged cubes


XKOZ-UDS-P001-Load_AIDB_Multiple

This stream will load input data in AIDB

XKOZ-UDS-P001-Load_AIDB_Multiple All changes saved.

<Enter Description Here>

St

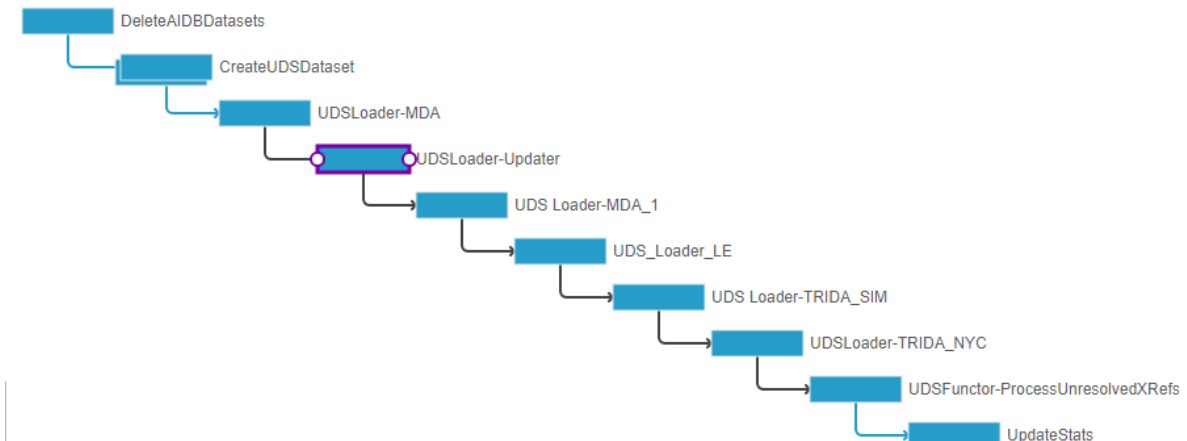

This stream receives the following parameter file:

- Flag 1: \$XKOZ_DATPE/XKOZ_SessionDate_IMM.prm

This stream runs only once for the full batch.

This stream consists of the following job:

DeleteAIDBDatasets

This operation will delete datasets according to the number received

Command:

```
$XKOZ_SCRT/XKOZ_DeleteAIDBDatasets.sh $numberDatasetsToKeep
```

Arguments

numberDatasetsToKeep = 0

Logic

The script runs the following steps:

1. List and sort by name (business date) all UDS dataset
2. Delete the undesired datasets always keeping CORE,IMCR_INIT and BBVA dataset
3. Execute cleanupinstancedata

Inputs

- Number of datasets to keep = 0

CreateUDSDataset

Create UDS dataset called \$SESSION_DATE where all input data will be loaded

Arguments

Dataset Name: \$SESSION_DATE

Business Date: \$SESSION_DATE

Clone: false

Delete Dataset if Already Exists: true

Parent Dataset Name: BBVA

Command

```
$UDS_HOME/bin/dsmgr --operation create --dataset $SESSION_DATE --businessdate  
$SESSION_DATE --parent BBVA --clone false
```

UDSLoader-MDA

Load MDA data into AIDB

Command


```
$UDS_HOME/bin/udsloader --dataset $SESSION_DATE --pipes 10 --data_file
$XKOZ_CFG/udsloader/XKOZ_udsloader_MDA.dir --extra_args defer=true --operation
create
```

Arguments

Dataset Name: \$SESSION_DATE

UDS Loader Data File: \$XKOZ_CFG/udsloader/XKOZ_udsloader_MDA.dir

UDS Loader Operation: create

Number of Output Pipes: 10

Extra Command Line Arguments: defer=true

Input data

\$XKOZ_CFG/udsloader/XKOZ_udsloader_MDA.dir

File	Header
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader_RepoCurve.csv	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_RepoCurve_header.csv
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader_Correlacion_Quanto.csv	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_Correlacion_Quanto_header.csv
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader_MarketCurves.csv	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_MarketCurves_header.csv
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader_Models.csv	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_Models_header.csv
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader_SwapCurves.csv	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_SwapCurves_header.csv
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader_CreditSpreads.csv	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_CreditSpreads_header.csv
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader_BradyBonds.csv	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_BradyBonds_header.csv
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader_FxRates.csv	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_FxRates_header.csv
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader_VolFX.csv	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_VolFX_header.csv
\$(ALGO_TOP)/inputs/userdata/data/XKOZ_udsloader	\$(DIR_FILE_LOCATION)/XKOZ_udsloader_SwapVol

_SwapVols.csv	s_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_VolCF.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_VolCF_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_VolCF_Norm.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_VolCF_Norm_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_VolRV.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_VolRV_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_Index.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_Index_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_Equities.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_Equities_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_VOLTIIE_Bancomer.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_VOLTIIE_Bancomer_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_Commodities.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_Commodities_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SwapCurves_Ganadero.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_SwapCurves_Ganadero_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SwapCurves_Continental.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_SwapCurves_Continental_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_Portafolios.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_Portafolios_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_Historical_Rates.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_Historical_Rates_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_Credit_Static.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_Credit_Static_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_RisklessRiskFactors.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_RisklessRiskFactors_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_MarketDataConstant.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_MarketDataConstant_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_MarketDataConstant_Ganadero.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_MarketDataConstant_Ganadero_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_ProbabilityOfDefaultCurves.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_ProbabilityOfDefaultCurves_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_ProbabilityOfDefaultCurves_PREV.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_ProbabilityOfDefaultCurves_PREV_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_ProbabilityOfDefaultCurves_SENS.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_ProbabilityOfDefaultCurves_SENS_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_IndexCurve.csv	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IndexCurve_header.csv

<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_VolMP.csv</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_VolMP_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_CommodityForwardCurves.csv</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_CommodityForwardCurves_header.csv</code>

Note:

`${ALGO_TOP}/inputs/userdata/data/` points to `$XKOZ_DATIN/uds/dataset`
`${DIR_FILE_LOCATION}` points to `$XKOZ_CFG/udsloader`

UDSLoader-Updater

Update MDA data in AIDB

Command

```
$UDS_HOME/bin/udsloader --dataset $SESSION_DATE --pipes 10 --data_file
$XKOZ_CFG/udsloader/XKOZ_udsloader_updater.dir --batch_size 400 --extra_args
defer=true --operation update
```

Arguments

Dataset Name: `$SESSION_DATE`

UDS Loader Data File: `$XKOZ_CFG/udsloader/XKOZ_udsloader_updater.dir`

UDS Loader Operation: update

Batch Size: 400

Number of Output Pipes: 10

Extra Command Line Arguments: `defer=true`

Input data

`$XKOZ_CFG/udsloader/XKOZ_udsloader_updater.dir`

File	Header
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_Updater_Bancomer.csv</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_Updater_Bancomer_header.csv</code>

Note:

`${ALGO_TOP}/inputs/userdata/data/` points to `$XKOZ_DATIN/uds/dataset`
`${DIR_FILE_LOCATION}` points to `$XKOZ_CFG/udsloader`

UDS Loader-MDA_1

Load MDA_1 data into AIDB

Command

```
$UDS_HOME/bin/udsloader --dataset $SESSION_DATE --pipes 10 --data_file
$XKOZ_CFG/udsloader/XKOZ_udsloader_MDA_1.dir --batch_size 400 --extra_args
defer=true --operation create
```

Arguments

Dataset Name: `$SESSION_DATE`

UDS Loader Data File: `$XKOZ_CFG/udsloader/XKOZ_udsloader_MDA_1.dir`

UDS Loader Operation: create

Batch Size: 400

Number of Output Pipes: 10

Extra Command Line Arguments: `defer=true`

Input data

`$XKOZ_CFG/udsloader/XKOZ_udsloader_MDA_1.dir`

File	Header
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_CorrelationMatrix_TI.csv</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_CorrelationMatrix_TI_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_CorrelationMatrix_RV.csv</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_CorrelationMatrix_RV_header.csv</code>

Note:

`${ALGO_TOP}/inputs/userdata/data/` points to `$XKOZ_DATIN/uds/dataset`
`${DIR_FILE_LOCATION}` points to `$XKOZ_CFG/udsloader`

UDS Loader_LE

Load LegalEntity data into AIDB

Command

```
$UDS_HOME/bin/udsloader --dataset $SESSION_DATE --pipes 10 --data_file
$XKOZ_CFG/udsloader/udsloader/XKOZ_udsloader_TRIDA_LE_KCCR.dir --batch_size 250
--extra_args defer=true --operation create
```

Arguments

Dataset Name: `$SESSION_DATE`

UDS Loader Data File:

`$XKOZ_CFG/udsloader/XKOZ_udsloader_TRIDA_LE_KCCR.dir`

UDS Loader Operation: create

Batch Size: 250

Number of Output Pipes: 10

Extra Command Line Arguments: defer=true

Input data

`$XKOZ_CFG/udsloader/XKOZ_udsloader_TRIDA_LE_KCCR.dir`

File	Header
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_LEGALENTITY_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_LEGALENTITY_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_LEGALENTITY_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_LEGALENTITY_IDEAL_header.csv</code>

Note:

`${ALGO_TOP}/inputs/userdata/data/` points to `$XKOZ_DATIN/uds/dataset`
`${DIR_FILE_LOCATION}` points to `$XKOZ_CFG/udsloader`

UDS Loader-TRIDA_SIM

Load TRIDA SIM data into AIDB

Command

```
$UDS_HOME/bin/udsloader --dataset $SESSION_DATE --pipes 10 --data_file
$XKOZ_CFG/udsloader/XKOZ_udsloader_TRIDA_SIM.dir --batch_size 250 --extra_args
defer=true --operation create
```

Arguments

Dataset Name: `$SESSION_DATE`

UDS Loader Data File: `$XKOZ_CFG/udsloader/XKOZ_udsloader_TRIDA_SIM.dir`

UDS Loader Operation: create

Batch Size: 250

Number of Output Pipes: 10

Extra Command Line Arguments: `defer=true`

Input data

`$XKOZ_CFG/udsloader/XKOZ_udsloader_TRIDA_SIM.dir`

File	Header
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_SWAPFLEG_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPFLEG_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_COMPPRELEG_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_COMPPRELEG_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_CAPFLSCF_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CAPFLSCF_IDEAL_header.csv</code>

\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_DEPOSITS_SCF_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DEPOSITS_SCF_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_DEPOSITS_SCF_COMPPRELEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DEPOSITS_SCF_COMPPRELEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_SWAPTNPLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPTNPLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_SWAPTNFLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPTNFLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_SWAPTION_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPTION_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_FRA_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FRA_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_FRA_COMPPRELEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FRA_COMPPRELEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_BERMUDSPL_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BERMUDSPL_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_BERMUDSFL_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BERMUDSFL_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_BERMUDAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BERMUDAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_SNGLCFLOW_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SNGLCFLOW_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_FORWARDPRIME_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FORWARDPRIME_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_DEPOSITS_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DEPOSITS_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_CREVZERO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CREVZERO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_SWAPMAXMIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPMAXMIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_CMSPLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CMSPLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_CMSFLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CMSFLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_PATHDDRALEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_PATHDDRALEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_SWAPPDRALEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPPDRALEG_IDEAL_header.csv

\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_DRAL_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DRAL_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_CACCRRAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CACCRRAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_CONTINGENTCAP_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CONTINGENTCAP_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_LEONIDASTG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_LEONIDASTG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_LEONIDACAP_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_LEONIDACAP_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_ACCRRANS_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_ACCRRANS_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_HISTRATE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_HISTRATE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_NOTINDX_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_NOTINDX_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_PAYPROC_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_PAYPROC_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_SWAPFLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_SWAPFLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_SWAPPOSTLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_SWAPPOSTLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_SWAPPRELEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_SWAPPRELEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_HIMALCUR_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_HIMALCUR_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_HIMALAYA_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_HIMALAYA_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_ASIBKTUW_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ASIBKTUW_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_UPIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_UPIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_UPOUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_UPOUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_DOWNIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_DOWNIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_DOWNOUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_DOWNOUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_DBLBARR_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_DBLBARR_IDEAL_header.csv

\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_FORWARD_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_FORWARD_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_FUTURE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_FUTURE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_AMERICAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_AMERICAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_AMERICAN_OTC_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_AMERICAN_OTC_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_EUROPEAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_EUROPEAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_EUROPEAN_OTC_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_EUROPEAN_OTC_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_QUANTO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_QUANTO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_ASIBASKET_FLO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ASIBASKET_FLO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_EURBASKET_FLO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_EURBASKET_FLO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_MAXMIN_FLO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_MAXMIN_FLO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_ACCUMULATORM_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ACCUMULATORM_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_SINGLEBARRIERGD2_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_SINGLEBARRIERGD2_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_ASIANUDIG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ASIANUDIG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_EP_ASIANLOOKBACK_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ASIANLOOKBACK_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_ASIAN_OPT_FLO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_ASIAN_OPT_FLO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_DOWNIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_DOWNIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_DOWNOUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_DOWNOUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_UPIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_UPIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_UPOUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_UPOUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_FOR

_SIM_CR_BBV_FX_FORWARD_IDEAL.CSV	WARD_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_EUROPEAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_EUROPEAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_AMERICAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_AMERICAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_DBLEBARR_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_DBLEBARR_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_DBLEBARR_BAR2_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_DBLEBARR_BAR2_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_TREBATE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_TREBATE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_FUTURE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_FUTURE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_FX_ACUMULATOR_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_ACUMULATOR_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_FRATEBON_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FRATEBON_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_NONSTDBOND_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_NONSTDBOND_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_BONDFUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BONDFUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_MMFUTURE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_MMFUTURE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_MMFUTUREIIE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_MMFUTUREIIE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_BONDFRWD_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BONDFRWD_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_NREPO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_NREPO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_FXRF_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FXRF_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_AMERICAN_OTC_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_AMERICAN_OTC_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_AMERICAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_AMERICAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_EUROPEAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_EUROPEAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_EUROPEAN_OTC_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_EUROPEAN_OTC_IDEAL_header.csv

<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_DEFSWAPS_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DEFSWAPS_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_IR_SECLNDFLEG_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SECLNDFLEG_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_SIM_CR_BBV_SYNTHETIC_INSTRUMENT_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_SYNTHETIC_INSTRUMENT_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_Wildcard_CONSUMOS_MANUALES.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_CONSUMOS_MANUALES_WILDCARD_header.csv</code>

Note:

`${ALGO_TOP}/inputs/userdata/data/` points to `$XKOZ_DATIN/uds/dataset`
`${DIR_FILE_LOCATION}` points to `$XKOZ_CFG/udsloader`

UDSLoader-TRIDA_NYC

Load TRIDA NYC data into AIDB

Command

```
$UDS_HOME/bin/udsloader --dataset $SESSION_DATE --pipes 10 --data_file
$XKOZ_CFG/udsloader/XKOZ_udsloader_TRIDA_NYC.dir --batch_size 250 --extra_args
defer=true --operation create
```

Arguments

Dataset Name: `$SESSION_DATE`

UDS Loader Data File: `$XKOZ_CFG/udsloader/XKOZ_udsloader_TRIDA_NYC.dir`

UDS Loader Operation: create

Batch Size: 250

Number of Output Pipes: 10

Extra Command Line Arguments: defer=true

Input data

`$XKOZ_CFG/udsloader/XKOZ_udsloader_TRIDA_NYC.dir`

File	Header
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_SWAPFLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPFLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_COMPPRELEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_COMPPRELEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_CAPFLSCF_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CAPFLSCF_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_DEPOSITS_SCF_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DEPOSITS_SCF_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_DEPOSITS_SCF_COMPPRELEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DEPOSITS_SCF_COMPPRELEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_SWAPTNPLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPTNPLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_SWAPTNFLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPTNFLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_SWAPTION_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWAPTION_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_FRA_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FRA_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_FRA_COMPPRELEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FRA_COMPPRELEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_BERMUDSPL_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BERMUDSPL_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_BERMUDSFL_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BERMUDSFL_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_BERMUDAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BERMUDAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_SNGLCFLOW_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SNGLCFLOW_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_FORWARDPRIME_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FORWARDPRIME_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_DEPOSITS_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DEPOSITS_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_CREVZERO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CREVZERO_IDEAL_header.csv

\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_SWAPMAXMIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWA PMAXMIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_CMSPLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CMS PLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_CMSFLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CMS FLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_PATHDDRALEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_PAT HDDRALEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_SWAPDRALEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SWA PDRALEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_DRAL_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DRA L_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_CACCRRAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CAC CRRAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_CONTINGENTCAP_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_CON TINGENTCAP_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_LEONIDASTG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_LEO NIDASTG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_LEONIDACAP_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_LEO NIDACAP_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_ACCRRANS_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_ACC RRANS_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_HISTRATE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_HIST RATE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_NOTINDX_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_NOT INDX_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_PAYPROC_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_PAY PROC_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_SWAPFLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_SWA PFLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_SWAPPOSTLEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_SWA PPOSTLEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_SWAPPRELEG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_SWA PPRELEG_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_HIMALCUR_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_HIM ALCUR_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_HIMALAYA_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_HIM ALAYA_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ASIB

_NYC_CR_BBV_EP_ASIBKTUW_IDEAL.CSV	KTUW_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_UPOUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_UPOUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_UPIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_UPIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_DOWNOUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_DOWNOUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_DOWNIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_DOWNIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_DBLBARR_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_DBLBARR_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_FORWARD_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_FORWARD_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_FUTURE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_FUTURE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_AMERICAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_AMERICAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_AMERICAN_OTC_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_AMERICAN_OTC_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_EUROPEAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_EUROPEAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_EUROPEAN_OTC_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_EUROPEAN_OTC_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_QUANTO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_QUANTO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_ASIBASKET_FLO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ASIBASKET_FLO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_EURBASKET_FLO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_EURBASKET_FLO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_MAXMIN_FLO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_MAXMIN_FLO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_ACCUMULATORM_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ACCUMULATORM_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_SINGLEBARRIERGD2_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_SINGLEBARRIERGD2_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_ASIANUDIG_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ASIANUDIG_IDEAL_header.csv

\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_EP_ASIANLOOKBACK_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_EP_ASIANLOOKBACK_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_ASIAN_OPT_FLO_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_ASIAN_OPT_FLO_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_DOWNOUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_DOWNOUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_UPOUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_UPOUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_DOWNIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_DOWNIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_UPIN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_UPIN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_FORWARD_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_FORWARD_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_EUROPEAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_EUROPEAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_AMERICAN_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_AMERICAN_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_DBLEBARR_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_DBLEBARR_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_DBLEBARR_BAR2_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_DBLEBARR_BAR2_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_TREBATE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_TREBATE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_FUTURE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_FUTURE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_FX_ACUMULATOR_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_FX_ACUMULATOR_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_FRATEBON_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FRATEBON_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_NONSTDBOND_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_NONSTDBOND_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_BONDFUT_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BONDFUT_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_MMFUTURE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_MMFUTURE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_MMFUTURETIIIE_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_MMFUTURETIIIE_IDEAL_header.csv
\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_BONDFRWD_IDEAL.CSV	\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_BONDFRWD_IDEAL_header.csv

<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_FXRF_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_FXRF_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_AMERICAN_OTC_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_AMERICAN_OTC_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_AMERICAN_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_AMERICAN_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_EUROPEAN_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_EUROPEAN_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_EUROPEAN_OTC_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_EUROPEAN_OTC_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_DEFSWAPS_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_DEFSWAPS_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_IR_SECLNDFLEG_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_IR_SECLNDFLEG_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_SYNTHETIC_INSTRUMENT_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_SYNTHETIC_INSTRUMENT_IDEAL_header.csv</code>
<code>\${ALGO_TOP}/inputs/userdata/data/XKOZ_udsloader_NYC_CR_BBV_SYNTHETIC_STRUCTURE_IDEAL.CSV</code>	<code>\${DIR_FILE_LOCATION}/XKOZ_udsloader_SYNTHETIC_STRUCTURE_IDEAL_header.csv</code>

Note:

`${ALGO_TOP}/inputs/userdata/data/` points to `$XKOZ_DATIN/uds/dataset`
`${DIR_FILE_LOCATION}` points to `$XKOZ_CFG/udsloader`

UDSFuncion-ProcessUnresolvedXRefs

This operation runs an unresolved XREF process.

Command:

```
$UDS_HOME/util/CLFuncion -U xaxkozed --dataset $SESSION_DATE --funcion
com.algorithmics.ads.funcion.idl.ProcessUnresolvedXRefs
```

Arguments:

Dataset Name: \$SESSION_DATE

UpdateStats

This operation will update stats for the dataset

Command:

```
$UDS_HOME/bin/stats --dataset $SESSION_DATE
```

Arguments

dataset: \$SESSION_DATE


XKOZ-UDS-P002-ExportAidbDatasetData

This stream will export AIDB data used for creating the following files:

- \$XKOZ_DATIN/IMCRData/dataset/variants/BaselineTrades.xml
- \$XKOZ_DATIN/IMCRData/dataset/variants/BaselineStructuredDeals.xml

Among other files and processes.

XKOZ-UDS-P002-ExportAidbDatasetData All changes saved. <Enter Description Here>

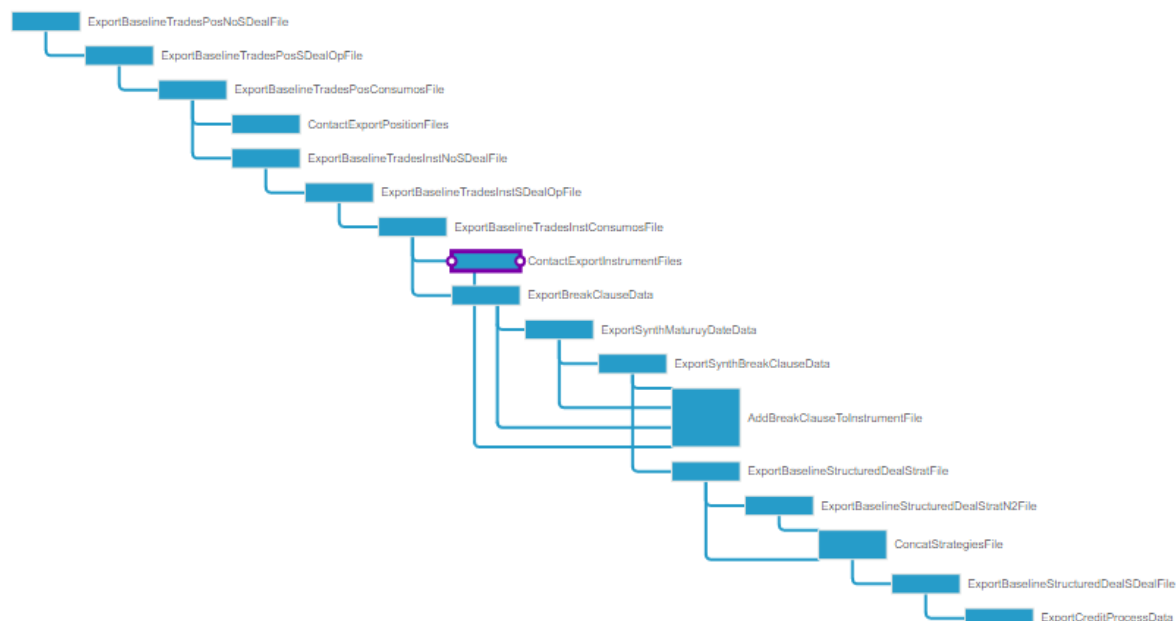

This stream receives the following parameter file:

- Flag 1: \$XKOZ_DATPE/XKOZ_SessionDate_IMM.prm

This stream runs only once for the full batch and all flags execution will use these exported data.

This stream consists of the following jobs:

ExportBaselineTradesPosNoSDealFile

This operation will export no structured deals trades positions from AIDB

Command:

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE
$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Pos_NoSDeal.xml --dataset $SESSION_DATE
```

Input

\$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Pos_NoSDeal.xml

```
<export output="CSV" filename="XKOZ_Export_BaselineTrades_Pos_NoSDeal.csv">  
  <code>  
    <filter name="BBVA_BaselineTrades_Pos_NoSDeal" />  
  </code>  
</export>
```

Referenced UDS Filters

BBVA_BaselineTrades_Pos_NoSDeal

BBVA_BaselineTrades_Pos_NoSDeal Editor - Step 1 of 3 - Select Categories

Step 1: Select Categories Step 2: Set Filter Criteria Step 3: Select Attributes

Name: /A_BaselineTrades_Pos_NoSDeal Folder: BBVA/IMCR

Category Workspace

```

graph TD
    LegalEntityXREF[LegalEntityXREF] --> INSTRUMENT_CATG1[INSTRUMENT_CATG1]
    INSTRUMENT_CATG1 --> RISK_ENTITY_CATG3[RISK_ENTITY_CATG3]
    InstrumentXREF[InstrumentXREF] --> POSITION_CATG2[POSITION_CATG2]
  
```

Categories Reference Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG

Join Categories


Categories Referenced

<Back Next> Finish Save Run Cancel Show SQL

```

SELECT DISTINCT
POSITION_CATG2."IDENTIFIER",POSITION_CATG2."InstrumentXREF",POSITION_CATG2."BookNAME",P
OSITION_CATG2."BranchNAME",POSITION_CATG2."PositionUnitsVAL",POSITION_CATG2."SourceSystem
NAME",POSITION_CATG2."IdentifierRTCENAME",POSITION_CATG2."UserDefined2NAME"
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG
POSITION_CATG2,RISK_ENTITY_CATG RISK_ENTITY_CATG3
WHERE POSITION_CATG2."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND
INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG3."IDNB" AND
((INSTRUMENT_CATG1."TYPE" NOT IN ('Cash Instrument', 'Bond Future', 'Wildcard') AND
INSTRUMENT_CATG1."ProductTypeRTCENAME" NOT IN ('82', '166') AND POSITION_CATG2."BookNAME"
NOT IN ('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW') AND NOT
INSTRUMENT_CATG1."IDENTIFIER" LIKE 'ST-%' AND (POSITION_CATG2."UserDefined6NAME" != '1' OR
POSITION_CATG2."UserDefined6NAME" IS NULL) AND (RISK_ENTITY_CATG3."UserDefined6NAME" != '1'
OR RISK_ENTITY_CATG3."UserDefined6NAME" IS NULL) AND RISK_ENTITY_CATG3."CreditStateENUM"
!= 'DDD') AND NOT POSITION_CATG2."IDNB" IN (filter('BBVA_Sesion_Posiciones_Estrategias','None'))
  
```

BBVA_Sesion_Posiciones_Estrategias

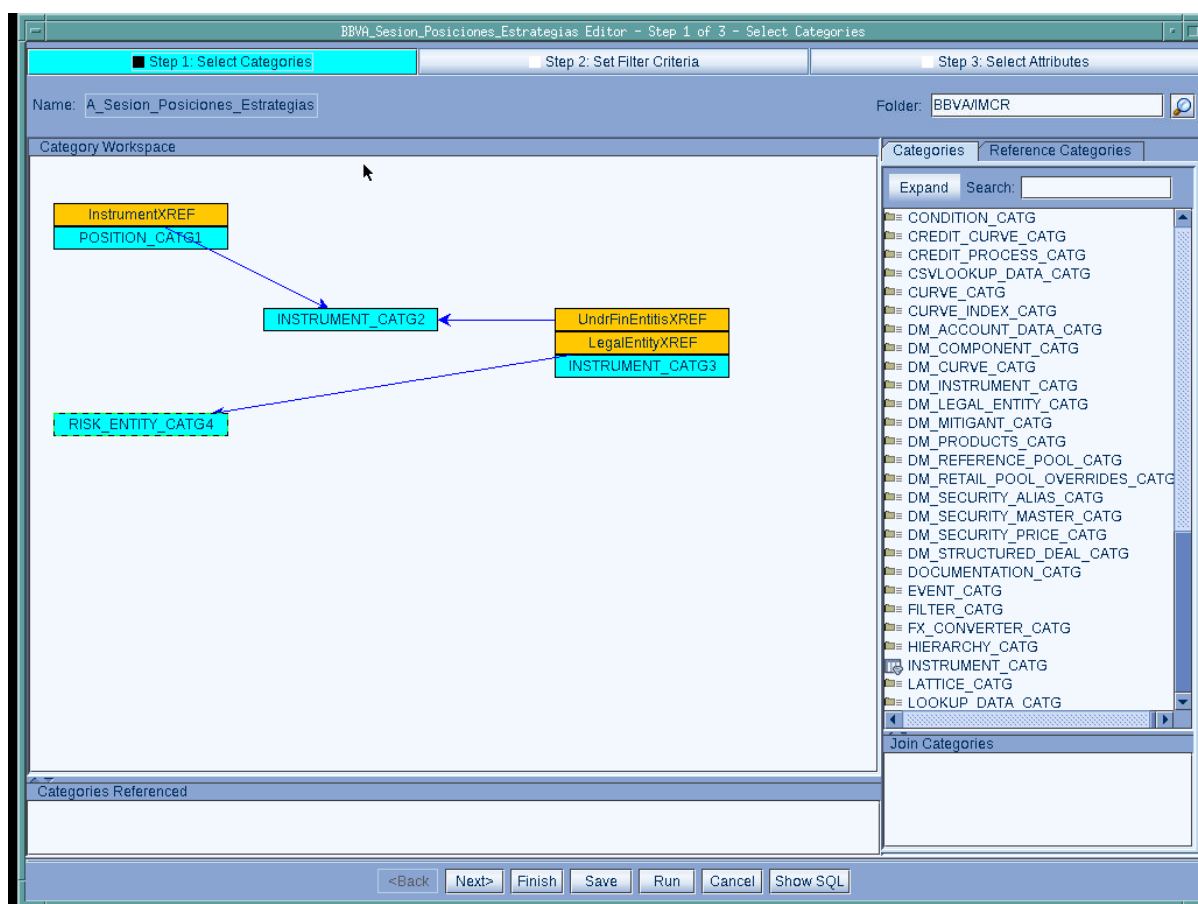

```
SELECT DISTINCT POSITION_CATG1."IDNB"
FROM POSITION_CATG POSITION_CATG1,INSTRUMENT_CATG INSTRUMENT_CATG2,INSTRUMENT_CATG
INSTRUMENT_CATG3,RISK_ENTITY_CATG RISK_ENTITY_CATG4

WHERE POSITION_CATG1."InstrumentXREF" = INSTRUMENT_CATG2."IDNB" AND
INSTRUMENT_CATG3."UndrFinEntitisXREF" = INSTRUMENT_CATG2."IDNB" AND
INSTRUMENT_CATG3."LegalEntityXREF" = RISK_ENTITY_CATG4."IDNB" AND
(RISK_ENTITY_CATG4."CreditStateENUM" != 'DDD' AND (RISK_ENTITY_CATG4."UserDefined6NAME" != '1' OR
RISK_ENTITY_CATG4."UserDefined6NAME" IS NULL))
```

Output

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Pos_N
oSDeal.csv

ExportBaselineTradesPosSDealOPFile

This operation will export structured deal components positions from AIDB

Command:

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE  
$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Pos_SDealOp.xml --dataset $SESSION_DATE
```


Input

\$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Pos_SDealOp.xml

```
<export output="CSV" filename="XKOZ_Export_BaselineTrades_Pos_SDealOp.csv">  
  <code>  
    <filter name="BBVA_BaselineTrades_Pos_SDealOp" />  
  </code>  
</export>
```

Referenced UDS Filters

BBVA_BaselineTrades_Pos_SDealOp

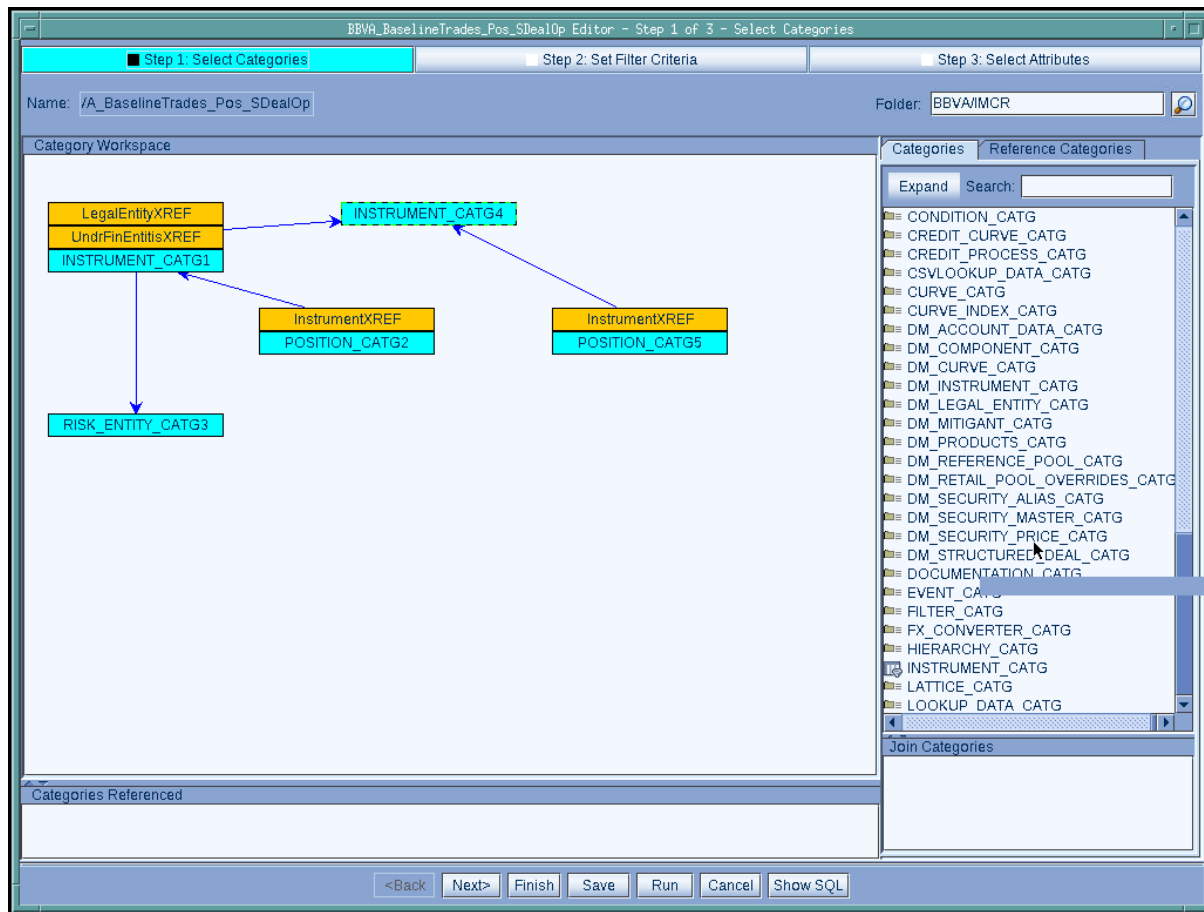

```

SELECT DISTINCT
POSITION_CATG5."IDENTIFIER",POSITION_CATG5."InstrumentXREF",POSITION_CATG5."BookNAME",POSITION_CA
TG5."BranchNAME",POSITION_CATG5."PositionUnitsVAL",POSITION_CATG5."SourceSystemNAME",POSITION_CATG5
."IdentifierRTCEName",POSITION_CATG5."UserDefined2NAME"
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG POSITION_CATG2,RISK_ENTITY_CATG
RISK_ENTITY_CATG3,INSTRUMENT_CATG INSTRUMENT_CATG4,POSITION_CATG POSITION_CATG5
WHERE INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG3."IDNB" AND
INSTRUMENT_CATG1."UndrFinEntitisXREF" = INSTRUMENT_CATG4."IDNB" AND POSITION_CATG2."InstrumentXREF"
= INSTRUMENT_CATG1."IDNB" AND POSITION_CATG5."InstrumentXREF" = INSTRUMENT_CATG4."IDNB" AND
(INSTRUMENT_CATG1."TYPE" NOT IN ('Cash Instrument', 'Bond Future', 'Wildcard') AND
INSTRUMENT_CATG1."LegalEntityXREF" IS NOT NULL AND INSTRUMENT_CATG1."ProductTypeRTCEName" NOT IN
('82', '166') AND POSITION_CATG2."BookNAME" NOT IN ('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW') AND
INSTRUMENT_CATG1."IDENTIFIER" LIKE 'ST-%' AND RISK_ENTITY_CATG3."CreditStateENUM" != 'DDD' AND
(POSITION_CATG2."UserDefined6NAME" IS NULL OR POSITION_CATG2."UserDefined6NAME" != '1') AND
(RISK_ENTITY_CATG3."UserDefined6NAME" != '1' OR RISK_ENTITY_CATG3."UserDefined6NAME" IS NULL))

```

Output

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Pos_S
Deal.csv

ExportBaselineTradesPosConsumosFile

This operation will export consume deals positions from AIDB

Command:

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE  
$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Pos_consumos.xml --dataset $SESSION_DATE
```

Input

\$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Pos_consumos.xml

```
<export output="CSV" filename="XKOZ_Export_BaselineTrades_Pos_consumos.csv">  
  <code>  
    <filter name="BBVA_BaselineTrades_Pos_consumos" />  
  </code>  
</export>
```

Referenced UDS Filters

BBVA_BaselineTrades_Pos_consumos

BBVA_BaselineTrades_Pos_consumos Editor - Step 1 of 3 - Select Categories

Step 1: Select Categories | Step 2: Set Filter Criteria | Step 3: Select Attributes

Name: Folder:

Category Workspace

```

    graph LR
      INSTRUMENT_CATG1[INSTRUMENT_CATG1] --> InstrumentXREF[InstrumentXREF]
      InstrumentXREF --> POSITION_CATG2[POSITION_CATG2]
  
```

Categories | Reference Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG

Join Categories

Categories Referenced

<Back Next> Finish Save Run Cancel Show SQL

```

SELECT DISTINCT
POSITION_CATG2."IDENTIFIER",POSITION_CATG2."InstrumentXREF",POSITION_CATG2."BookNAME",POSITION_CA
TG2."BranchNAME",POSITION_CATG2."PositionUnitsVAL",POSITION_CATG2."SourceSystemNAME",POSITION_CATG2
."IdentifierRTCEName",POSITION_CATG2."UserDefined2NAME"
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG POSITION_CATG2
WHERE POSITION_CATG2."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND ((INSTRUMENT_CATG1."TYPE" =
'Wildcard' AND INSTRUMENT_CATG1."ProductTypeRTCEName" NOT IN ('82', '166') AND
POSITION_CATG2."BookNAME" NOT IN ('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW') AND
(POSITION_CATG2."UserDefined6NAME" != '1' OR POSITION_CATG2."UserDefined6NAME" IS NULL)))
  
```

Output

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Pos_c
onsumos.csv

ContactExportPositionFiles

This operation will merge the exported position files.

Inputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Pos_S
DealOp.csv

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Pos_N
oSDeal.csv

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Pos_c
onsumos.csv

Outputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Pos.cs
v

ExportBaselineTradeInstNoSDealFile

This operation will export no structured deals trades instruments from AIDB

Command

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE
$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Inst_NoSDeal.xml --dataset
$SESSION_DATE
```

Inputs

\$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Inst_NoSDeal.xml

```
<export output="CSV" filename="XKOZ_Export_BaselineTrades_Inst_NoSDeal.csv">
  <code>
    <filter name="BBVA_BaselineTrades_Inst_NoSDeal" />
  </code>
</export>
```

Referenced UDS Filters

BBVA_BaselineTrades_Inst_NoSDeal

BBVA_BaselineTrades_Inst_NoSDeal Editor - Step 1 of 3 - Select Categories

Step 1: Select Categories | Step 2: Set Filter Criteria | Step 3: Select Attributes

Name: VA_BaselineTrades_Inst_NoSDeal Folder: BBVA/IMCR

Category Workspace

```

graph TD
    LegalEntityXREF[LegalEntityXREF] --> INSTRUMENT_CATG1[INSTRUMENT_CATG1]
    INSTRUMENT_CATG1 --> RISK_ENTITY_CATG3[RISK_ENTITY_CATG3]
    INSTRUMENT_CATG1 --> InstrumentXREF[InstrumentXREF]
    InstrumentXREF --> POSITION_CATG2[POSITION_CATG2]
  
```

Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG

Join Categories

Categories Referenced

<Back Next> Finish Save Run Cancel Show SQL


```

SELECT DISTINCT
INSTRUMENT_CATG1."IDENTIFIER",INSTRUMENT_CATG1."TYPE",INSTRUMENT_CATG1."ProductTypeRTCENAME",I
NSTRUMENT_CATG1."MaturityDATE",INSTRUMENT_CATG1."DVPNAME",INSTRUMENT_CATG1."CLSNAME",INSTRU
MENT_CATG1."DVPNotionalVAL",INSTRUMENT_CATG1."DVPNotionalUNIT",INSTRUMENT_CATG1."DVPUnderlyingNA
ME",INSTRUMENT_CATG1."CurrencyUNIT",INSTRUMENT_CATG1."UserDefined2NAME",INSTRUMENT_CATG1."IDNB"
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG POSITION_CATG2,RISK_ENTITY_CATG
RISK_ENTITY_CATG3
WHERE POSITION_CATG2."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND
INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG3."IDNB" AND ((INSTRUMENT_CATG1."TYPE" NOT IN
('Cash Instrument', 'Bond Future', 'Wildcard') AND INSTRUMENT_CATG1."LegalEntityXREF" IS NOT NULL AND
INSTRUMENT_CATG1."ProductTypeRTCENAME" NOT IN ('82', '166') AND POSITION_CATG2."BookNAME" NOT IN
('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW') AND NOT INSTRUMENT_CATG1."IDENTIFIER" LIKE 'ST-%'
AND RISK_ENTITY_CATG3."CreditStateENUM" != 'DDD' AND (POSITION_CATG2."UserDefined6NAME" IS NULL OR
POSITION_CATG2."UserDefined6NAME" != '1') AND (RISK_ENTITY_CATG3."UserDefined6NAME" != '1' OR
RISK_ENTITY_CATG3."UserDefined6NAME" IS NULL)) AND NOT POSITION_CATG2."IDNB" IN

```

```
(filter('BBVA_Sesion_Posiciones_Estrategias','None')))
```

BBVA_Sesion_Posiciones_Estrategias

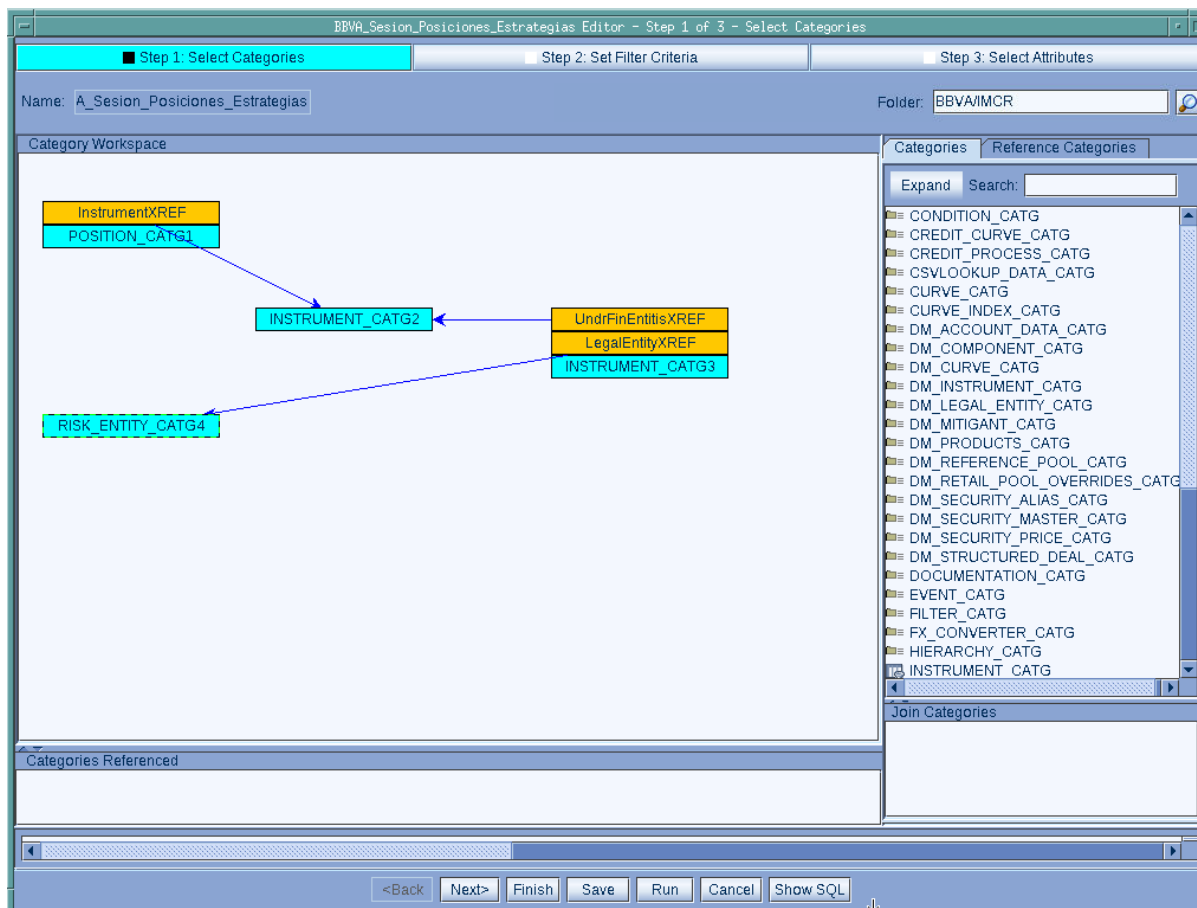

```
SELECT DISTINCT POSITION_CATG1."IDNB"
FROM POSITION_CATG POSITION_CATG1,INSTRUMENT_CATG INSTRUMENT_CATG2,INSTRUMENT_CATG
INSTRUMENT_CATG3,RISK_ENTITY_CATG RISK_ENTITY_CATG4

WHERE POSITION_CATG1."InstrumentXREF" = INSTRUMENT_CATG2."IDNB" AND
INSTRUMENT_CATG3."UndrFinEntitisXREF" = INSTRUMENT_CATG2."IDNB" AND
INSTRUMENT_CATG3."LegalEntityXREF" = RISK_ENTITY_CATG4."IDNB" AND
(RISK_ENTITY_CATG4."CreditStateENUM" != 'DDD' AND (RISK_ENTITY_CATG4."UserDefined6NAME" != '1' OR
RISK_ENTITY_CATG4."UserDefined6NAME" IS NULL))
```

Output

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst_N
oSDeal.csv

ExportBaselineTradesInstSDealOpFile

This operation will export structured deal components instruments from AIDB

Command

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE  
$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Inst_SDealOp.xml --dataset  
$SESSION_DATE
```


Inputs

\$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Inst_SDealOp.xml

```
<export output="CSV" filename="XKOZ_Export_BaselineTrades_Inst_SDealOp.csv">  
  <code>  
    <filter name="BBVA_BaselineTrades_Inst_SDealOp" />  
  </code>  
</export>
```

Referenced UDS Filters

BBVA_BaselineTrades_Inst_SDealOp

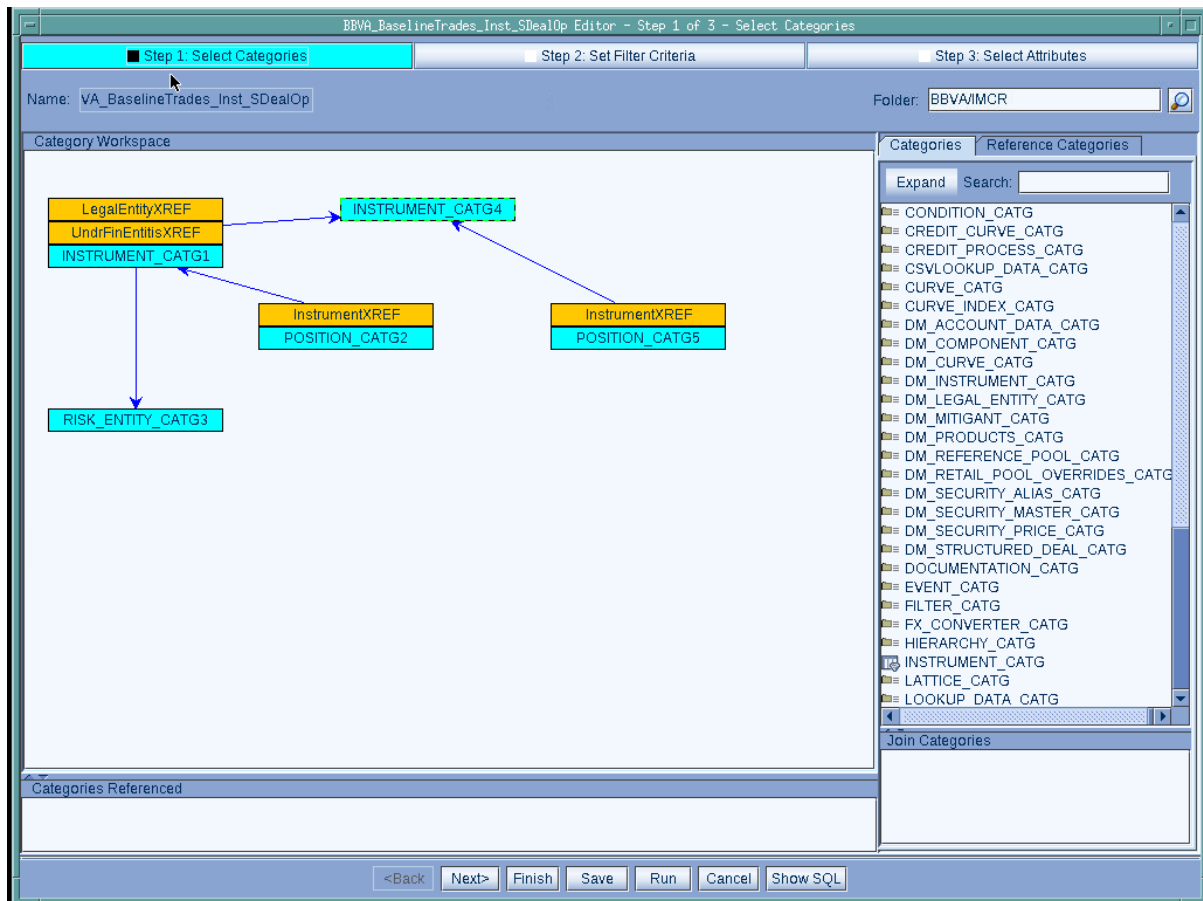

```

SELECT DISTINCT
INSTRUMENT_CATG4."IDENTIFIER",INSTRUMENT_CATG4."TYPE",INSTRUMENT_CATG4."ProductTypeRTCENAME",I
NSTRUMENT_CATG4."MaturityDATE",INSTRUMENT_CATG4."DVPNAME",INSTRUMENT_CATG4."CLSNNAME",INSTRU
MENT_CATG4."DVPNotionalVAL",INSTRUMENT_CATG4."DVPNotionalUNIT",INSTRUMENT_CATG4."DVPUnderlyingNA
ME",INSTRUMENT_CATG4."CurrencyUNIT",INSTRUMENT_CATG4."UserDefined2NAME",INSTRUMENT_CATG4."IDNB"
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG POSITION_CATG2,RISK_ENTITY_CATG
RISK_ENTITY_CATG3,INSTRUMENT_CATG INSTRUMENT_CATG4,POSITION_CATG POSITION_CATG5
WHERE INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG3."IDNB" AND
INSTRUMENT_CATG1."UndrFinEntitisXREF" = INSTRUMENT_CATG4."IDNB" AND POSITION_CATG2."InstrumentXREF"
= INSTRUMENT_CATG1."IDNB" AND POSITION_CATG5."InstrumentXREF" = INSTRUMENT_CATG4."IDNB" AND
(INSTRUMENT_CATG1."TYPE" NOT IN ('Cash Instrument', 'Bond Future', 'Wildcard') AND
INSTRUMENT_CATG1."LegalEntityXREF" IS NOT NULL AND INSTRUMENT_CATG1."ProductTypeRTCENAME" NOT IN
('82', '166') AND POSITION_CATG2."BookNAME" NOT IN ('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW') AND
INSTRUMENT_CATG1."IDENTIFIER" LIKE 'ST-%' AND RISK_ENTITY_CATG3."CreditStateENUM" != 'DDD' AND
(POSITION_CATG2."UserDefined6NAME" IS NULL OR POSITION_CATG2."UserDefined6NAME" != '1') AND
(RISK_ENTITY_CATG3."UserDefined6NAME" != '1' OR RISK_ENTITY_CATG3."UserDefined6NAME" IS NULL))

```

Outputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst_S
DealOp.csv

ExportBaselineTradesInstConsumosFile

This operation will export consume deals instrument from AIDB

Command

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE  
$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Inst_consumos.xml --dataset  
$SESSION_DATE
```

Inputs

\$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_Inst_consumos.xml

```
<export output="CSV" filename="XKOZ_Export_BaselineTrades_Inst_consumos.csv">  
  <code>  
    <filter name="BBVA_BaselineTrades_Inst_consumos" />  
  </code>  
</export>
```

Referenced UDS Filters

BBVA_BaselineTrades_Inst_consumos

BBVA_BaselineTrades_Inst_consumos Editor - Step 1 of 3 - Select Categories

■ Step 1: Select Categories □ Step 2: Set Filter Criteria □ Step 3: Select Attributes

Name: Folder:

Category Workspace

INSTRUMENT_CATG1

InstrumentXREF

POSITION_CATG2

Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG

Join Categories

Categories Referenced

<Back Next> Finish Save Run Cancel Show SQL

```
SELECT DISTINCT
INSTRUMENT_CATG1."IDENTIFIER",INSTRUMENT_CATG1."TYPE",INSTRUMENT_CATG1."ProductTypeRTCENAME",I
NSTRUMENT_CATG1."MaturityDATE",INSTRUMENT_CATG1."DVPNAME",INSTRUMENT_CATG1."CLSNAME",INSTRU
MENT_CATG1."DVPNotionalIVAL",INSTRUMENT_CATG1."DVPNotionalUNIT",INSTRUMENT_CATG1."DVPUnderlyingNA
ME",INSTRUMENT_CATG1."CurrencyUNIT",INSTRUMENT_CATG1."UserDefined2NAME",INSTRUMENT_CATG1."IDNB"
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG POSITION_CATG2
WHERE POSITION_CATG2."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND ((INSTRUMENT_CATG1."TYPE" =
'Wildcard' AND INSTRUMENT_CATG1."ProductTypeRTCENAME" NOT IN ('82', '166') AND
POSITION_CATG2."BookNAME" NOT IN ('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW') AND
(POSITION_CATG2."UserDefined6NAME" IS NULL OR POSITION_CATG2."UserDefined6NAME" != '1')))
```

Outputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst_c
onsumos.csv

ContactExportInstrumentFiles

This operation will merge the exported instrument files.

Inputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst_N
oSDDeal.csv

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst_S
DealOp.csv

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst_c
onsumos.csv

Outputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst.cs
v

ExportBreakClauseData

This operation will export the break clause data

Command:

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE
$XKOZ_CFG/XKOZ_IMCR_Export_BreakClause.xml --dataset $SESSION_DATE
```

Inputs

\$XKOZ_CFG/XKOZ_IMCR_Export_BreakClause.xml

```
<export output="CSV" filename="XKOZ_Export_BreakClause.csv">
  <code>
    <filter name="BBVA_BreakClause" />
  </code>
</export>
```

Referenced UDS Filters

BBVA_BreakClause

BBVA_BreakClause Editor - Step 1 of 3 - Select Categories

Step 1: Select Categories | Step 2: Set Filter Criteria | Step 3: Select Attributes

Name: Folder:

Category Workspace

```

graph TD
    LegalEntityXREF[LegalEntityXREF] --> INSTRUMENT_CATG1[INSTRUMENT_CATG1]
    INSTRUMENT_CATG1 --> RISK_ENTITY_CATG3[RISK_ENTITY_CATG3]
    INSTRUMENT_CATG1 --> InstrumentXREF[InstrumentXREF]
    InstrumentXREF --> POSITION_CATG2[POSITION_CATG2]
  
```

Categories | Reference Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG

Join Categories

Categories Referenced

<Back Next> Finish Save Run Cancel Show SQL

```

SELECT DISTINCT INSTRUMENT_CATG1."IDENTIFIER",INSTRUMENT_CATG1."Break Clause Dates"
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG POSITION_CATG2,RISK_ENTITY_CATG
RISK_ENTITY_CATG3
WHERE POSITION_CATG2."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND
INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG3."IDNB" AND
(INSTRUMENT_CATG1."BreakClauseDATE" IS NOT NULL AND INSTRUMENT_CATG1."LegalEntityXREF" IS NOT NULL
AND INSTRUMENT_CATG1."TYPE" NOT IN ('Cash Instrument', 'Bond Future'))
  
```

Outputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BreakClause.csv

ExportSynthMaturityDateData

This operation will export the synth maturity date

Command:

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE
$XKOZ_CFG/XKOZ_IMCR_Export_Synth_MaturityDate.xml --dataset $SESSION_DATE
```

Inputs

\$XKOZ_CFG/XKOZ_IMCR_Export_Synth_MaturityDate.xml

```
<export output="CSV" filename="XKOZ_Export_Synth_MaturitDate.csv">
  <code>
    <msql>
      SELECT DISTINCT INSTRUMENT_CATG1."IDENTIFIER" as
      IDENTIFIER,INSTRUMENT_CATG1."MaturityDATE" as MaturityDATE,INSTRUMENT_CATG3."IDENTIFIER" as Deal_ID
      FROM INSTRUMENT_CATG INSTRUMENT_CATG1,INSTRUMENT_CATG INSTRUMENT_CATG3
      WHERE INSTRUMENT_CATG3."UndrFinEntitisXREF" = INSTRUMENT_CATG1."IDNB" AND
      (INSTRUMENT_CATG3."TYPE" = 'Synthetic Instrument' AND INSTRUMENT_CATG1."TYPE" IN ('ACRRANS',
      'CACRRAN', 'CONTINCAP', 'CREVZERO', 'Daily Range Accrual Leonidas', 'Daily Range Accrual Leonidas PATHDDRA
      Leg', 'FCACRRAN', 'PATHDCAP', 'PATHDDRA', 'PATHDREV', 'PATHDSTG', 'Swap DRA Leg'))
    </msql>
  </code>
</export>
```

Outputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_Synth_MaturitDate.csv

ExportSynthBreakClauseData

This operation will export the break clause data for Synthetics

Command:

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE
$XKOZ_CFG/XKOZ_IMCR_Export_Synth_BreakClause.xml --dataset $SESSION_DATE
```

Inputs

\$XKOZ_CFG/XKOZ_IMCR_Export_Synth_BreakClause.xml

```
<export output="CSV" filename="XKOZ_Export_Synth_BreakClause.csv">
<code>
<mysql>
    SELECT DISTINCT INSTRUMENT_CATG1."IDENTIFIER",INSTRUMENT_CATG3."Break Clause Dates"
    FROM INSTRUMENT_CATG INSTRUMENT_CATG1,INSTRUMENT_CATG INSTRUMENT_CATG3
    WHERE INSTRUMENT_CATG1."UndrFinEntitisXREF" = INSTRUMENT_CATG3."IDNB"
    AND (INSTRUMENT_CATG1."IDENTIFIER" LIKE '%_SYN' AND (NOT INSTRUMENT_CATG1."NAME"
    LIKE 'ST-%') AND ((INSTRUMENT_CATG1."TYPE" NOT IN ('Cash Instrument', 'Bond Future'))
    AND INSTRUMENT_CATG1."LegalEntityXREF" IS NOT NULL))
</mysql>
</code>
</export>
```

Outputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_Synth_BreakClause.csv

AddBreakClauseToInstrumentFile

This operation will add break clause to the instrument file

Command:

```
$XKOZ_FUENTES/XKOZ_IMCR_AddBreakClause.pl -d
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE
```

Arguments

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE: Exported aidb data files path

Inputs

```
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst.csv
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE/XKOZ_Export_BreakClause.csv
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE/XKOZ_Export_Synth_BreakClause.csv
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE/XKOZ_Export_Synth_MaturitDate.csv
$XKOZ_DATOUT/hierarchy/instrument.csv
$XKOZ_DATOUT/hierarchy/PHS_Def_Master.csv
```

Outputs

```
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst.csv.old
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE/XKOZ_Export_BaselineTrades_Inst.csv
```

Logic

The script runs the following steps:

1. Read PHS_Def_Master.csv file to find out Id and Maturity Date fields position in instrument.csv file
2. Read Maturity Dates from instrument.csv file discarding "1900/01/01" ones.
3. Read Maturity Dates from XKOZ_Export_Synth_MaturitDate.csv
4. Read Break Clause dates from XKOZ_Export_BreakClause.csv and XKOZ_Export_Synth_BreakClause.csv
5. Add Maturity dates and Break Clause dates

ExportBaselineStructureDealStratFile

This operation will export structured deals components from AIDB

Command

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE
$XKOZ_CFG/XKOZ_IMCR_Export_Componentes_Estrategias.xml --dataset
$SESSION_DATE
```


Input

\$XKOZ_CFG/XKOZ_IMCR_Export_Componentes_Estrategias.xml

```
<export output="CSV" filename="XKOZ_Export_Componentes_Estrategias.csv">
  <code>
    <filter name="BBVA_Componentes_Estrategias" />
  </code>
</export>
```

Referenced UDS Filters

BBVA_Componentes_Estrategias

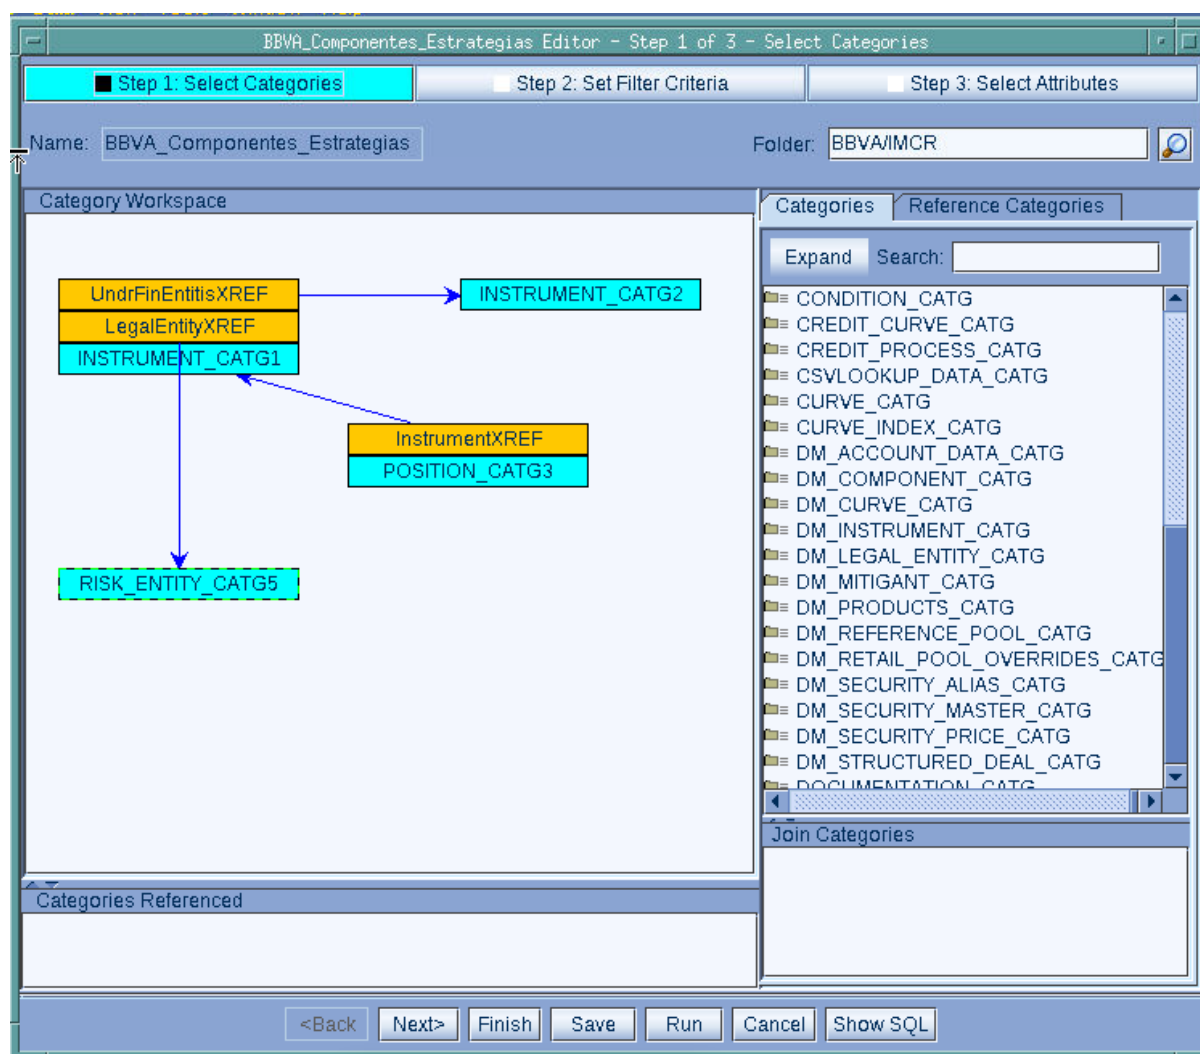

```
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,INSTRUMENT_CATG
INSTRUMENT_CATG2,POSITION_CATG POSITION_CATG3,RISK_ENTITY_CATG RISK_ENTITY_CATG5
SELECT DISTINCT INSTRUMENT_CATG2."IDENTIFIER",INSTRUMENT_CATG2."Deal_ID"
WHERE POSITION_CATG3."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND
INSTRUMENT_CATG1."UndrFinEntitisXREF" = INSTRUMENT_CATG2."IDNB" AND
INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG5."IDNB" AND
((RISK_ENTITY_CATG5."CreditStateENUM" != 'DDD' AND (POSITION_CATG3."UserDefined6NAME" != '1'
OR POSITION_CATG3."UserDefined6NAME" IS NULL) AND (RISK_ENTITY_CATG5."UserDefined6NAME"
!= '1' OR RISK_ENTITY_CATG5."UserDefined6NAME" IS NULL) AND (INSTRUMENT_CATG1."IDENTIFIER"
LIKE 'ST-%' OR INSTRUMENT_CATG1."IDENTIFIER" LIKE 'EU-%' OR
INSTRUMENT_CATG1."IDENTIFIER" LIKE 'SERIE-%' OR INSTRUMENT_CATG1."IDENTIFIER" LIKE
'COLL-%')) AND INSTRUMENT_CATG1."ProductTypeRTCENAME" NOT IN ('82', '166') AND
POSITION_CATG3."BookNAME" NOT IN ('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW'))
```

Output

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_Componentes_Estrategias.csv

ExportBaselineStructuredDealStratN2File

This operation will export structured deals components from AIDB

Command

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE
$XKOZ_CFG/XKOZ_IMCR_Export_Componentes_Estrategias_Nivel2.xml --dataset
$SESSION_DATE
```


Input

\$XKOZ_CFG/XKOZ_IMCR_Export_Componentes_Estrategias_Nivel2.xml

```
<export output="CSV" filename="XKOZ_Export_Componentes_Estrategias_Nivel2.csv">
  <code>
    <filter name="BBVA_Componentes_Estrategias_Nivel2" />
  </code>
</export>
```

Referenced UDS Filters

BBVA_Componentes_Estrategias_Nivel2

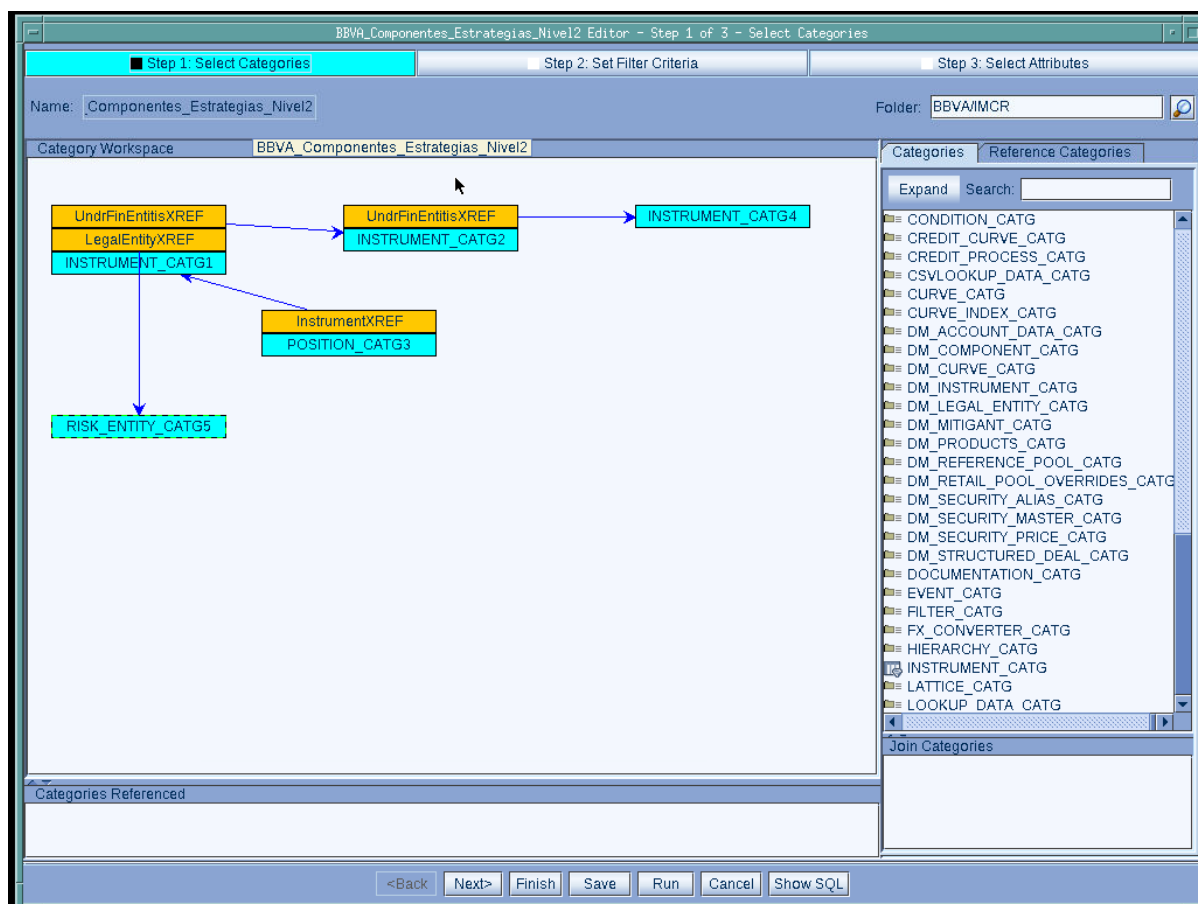

```
SELECT DISTINCT INSTRUMENT_CATG4."IDENTIFIER",INSTRUMENT_CATG4."Deal_ID"
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,INSTRUMENT_CATG
INSTRUMENT_CATG2,POSITION_CATG POSITION_CATG3,INSTRUMENT_CATG
INSTRUMENT_CATG4,RISK_ENTITY_CATG RISK_ENTITY_CATG5
WHERE POSITION_CATG3."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND
INSTRUMENT_CATG1."UndrFinEntitisXREF" = INSTRUMENT_CATG2."IDNB" AND
INSTRUMENT_CATG2."UndrFinEntitisXREF" = INSTRUMENT_CATG4."IDNB" AND
INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG5."IDNB" AND
(((INSTRUMENT_CATG2."TYPE" = 'Synthetic Instrument' AND RISK_ENTITY_CATG5."CreditStateENUM" !=
'DDD' AND (RISK_ENTITY_CATG5."UserDefined6NAME" IS NULL OR
RISK_ENTITY_CATG5."UserDefined6NAME" != '1') AND (POSITION_CATG3."UserDefined6NAME" != '1' OR
POSITION_CATG3."UserDefined6NAME" IS NULL) AND (INSTRUMENT_CATG1."IDENTIFIER" LIKE 'EU-%'
OR INSTRUMENT_CATG1."IDENTIFIER" LIKE 'ST-%' OR INSTRUMENT_CATG1."IDENTIFIER" LIKE
'SERIE-%' OR INSTRUMENT_CATG1."IDENTIFIER" LIKE 'COLL-%')) AND
INSTRUMENT_CATG1."ProductTypeRTCENAME" NOT IN ('82', '166') AND POSITION_CATG3."BookNAME"
NOT IN ('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW'))
```


Output

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_Componentes_Estrategias_Nivel2.csv

ConcatStrategiesFile

This operation will merge the strategies files

Command

```
$XKOZ_SCRT/XKOZ_IMCR_ConcatExportFiles.sh
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE/XKOZ_Export_Componentes_Estrategias.csv
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE/XKOZ_Export_Componentes_Estrategias_Nivel2.csv
$XKOZ_DATIN/aidb_export_data/$SESSION_DATE/XKOZ_Export_Componentes_Estrategias_FULL.csv
```

Inputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_Componentes_Estrategias.csv

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_Componentes_Estrategias_Nivel2.csv

Outputs

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_Componentes_Estrategias_FULL.csv

ExportBaselineStructuredDealSDealFile

This operation will export structured deals from AIDB

Command

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE  
$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_SDeal.xml --dataset $SESSION_DATE
```

Input

```
$XKOZ_CFG/XKOZ_IMCR_Export_BaselineTrades_SDeal.xml
```

```
<export output="CSV" filename="XKOZ_Export_BaselineTrades_SDeal.csv">  
  <code>  
    <filter name="BBVA_BaselineTrades_SDeal" />  
  </code>  
</export>
```

Referenced UDS Filters

BBVA_BaselineTrades_SDeal

BBVA_BaselineTrades_SDeal Editor - Step 1 of 3 - Select Categories

Step 1: Select Categories | Step 2: Set Filter Criteria | Step 3: Select Attributes

Name: BBVA_BaselineTrades_SDeal Folder: BBVA/IMCR

Category Workspace

```

graph TD
    LegalEntityXREF[LegalEntityXREF] --> INSTRUMENT_CATG1[INSTRUMENT_CATG1]
    INSTRUMENT_CATG1 --> RISK_ENTITY_CATG3[RISK_ENTITY_CATG3]
    InstrumentXREF[InstrumentXREF] --> POSITION_CATG2[POSITION_CATG2]
    
```

Categories | Reference Categories

Expand Search:

- CONDITION_CATG
- CREDIT_CURVE_CATG
- CREDIT_PROCESS_CATG
- CSVLOOKUP_DATA_CATG
- CURVE_CATG
- CURVE_INDEX_CATG
- DM_ACCOUNT_DATA_CATG
- DM_COMPONENT_CATG
- DM_CURVE_CATG
- DM_INSTRUMENT_CATG
- DM_LEGAL_ENTITY_CATG
- DM_MITIGANT_CATG
- DM_PRODUCTS_CATG
- DM_REFERENCE_POOL_CATG
- DM_RETAIL_POOL_OVERRIDES_CATG
- DM_SECURITY_ALIAS_CATG
- DM_SECURITY_MASTER_CATG
- DM_SECURITY_PRICE_CATG
- DM_STRUCTURED_DEAL_CATG
- DOCUMENTATION_CATG

Join Categories

Categories Referenced

<Back Next> Finish Save Run Cancel Show SQL

```

SELECT DISTINCT
POSITION_CATG2."IDENTIFIER",POSITION_CATG2."InstrumentXREF",POSITION_CATG2."SourceSystem
NAME",POSITION_CATG2."BookNAME",POSITION_CATG2."BranchNAME",POSITION_CATG2."PositionUni
tsVAL"
FROM INSTRUMENT_CATG INSTRUMENT_CATG1,POSITION_CATG
POSITION_CATG2,RISK_ENTITY_CATG RISK_ENTITY_CATG3
WHERE POSITION_CATG2."InstrumentXREF" = INSTRUMENT_CATG1."IDNB" AND
INSTRUMENT_CATG1."LegalEntityXREF" = RISK_ENTITY_CATG3."IDNB" AND
(INSTRUMENT_CATG1."TYPE" NOT IN ('Bond Future', 'Cash Instrument') AND
INSTRUMENT_CATG1."LegalEntityXREF" IS NOT NULL AND
INSTRUMENT_CATG1."ProductTypeRTCENAME" NOT IN ('82', '166') AND
INSTRUMENT_CATG1."IDENTIFIER" LIKE 'ST-%' AND POSITION_CATG2."BookNAME" NOT IN
('BOOKSG', 'BOOKJP', 'BOOKKR', 'BOOKHK', 'BOOKTW') AND (POSITION_CATG2."UserDefined6NAME" !=
'1' OR POSITION_CATG2."UserDefined6NAME" IS NULL) AND
(RISK_ENTITY_CATG3."UserDefined6NAME" != '1' OR RISK_ENTITY_CATG3."UserDefined6NAME" IS
NULL) AND RISK_ENTITY_CATG3."CreditStateENUM" != 'DDD')

```

Output

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_BaselineTrades_SDeal.csv

ExportCreditProcessData

This operation will export credit process data from AIDB

Command

```
$UDS_HOME/util/Export --outputdir $XKOZ_DATIN/aidb_export_data/$SESSION_DATE
$XKOZ_CFG/XKOZ_IMCR_Export_CreditProcessData.xml --dataset $SESSION_DATE
```


Input

\$XKOZ_CFG/XKOZ_IMCR_Export_CreditProcessData.xml

```
<export output="CSV" filename="XKOZ_Export_CreditProcessData.csv">
  <code>
    <functor class="com.algorithmics.ads.api.idl.Idl_ExecuteFilter">
      <FILTERNAME>BBVA_CreditProcess_Data</FILTERNAME>
    </functor>
  </code>
</export>
```

Referenced UDS Filters

BBVA_CreditProcess_Data

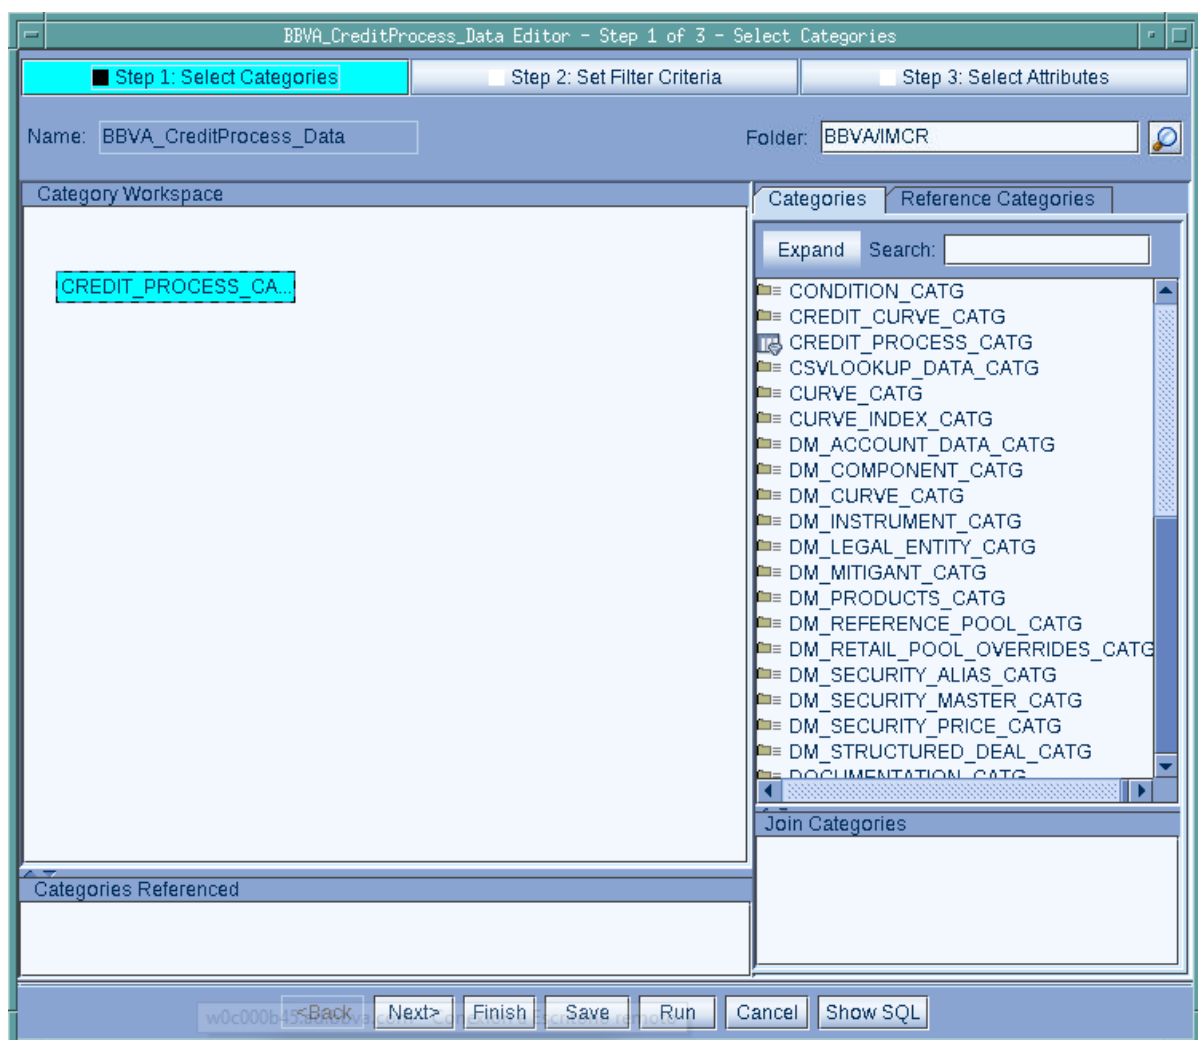

```
SELECT DISTINCT CREDIT_PROCESS_CATG1."IDENTIFIER",CREDIT_PROCESS_CATG1."Recovery
Rate"
FROM CREDIT_PROCESS_CATG CREDIT_PROCESS_CATG1
```

Output

\$XKOZ_DATIN/aidb_export_data/\$SESSION_DATE/XKOZ_Export_CreditProcessData.csv