

92586 Computational Linguistics

Lesson 19b. Long Short-Term Memory Networks

Alberto Barrón-Cedeño

Alma Mater Studiorum-Università di Bologna
a.barron@unibo.it @albarron_

06/05/2021



Previously

- Recurrent neural networks

Table of Contents

Introduction

LSTM

Chapter 9 of Lane et al. (2019)

Introduction

Short effect from the past

The effect of token x_t dilutes significantly as soon as in $t + 2$

Consider the following —fairly plausible— texts. . .


The young woman went to the movies with her friends.

The young woman, having found a free ticket on the ground, went to the movies.

- ▶ In both cases, **went** is the main verb
- ▶ A (Bi)RNN would hardly consider that in the second case
- ▶ We need an architecture able to "remember" the entire input

LSTM

State: the memory of an LSTM

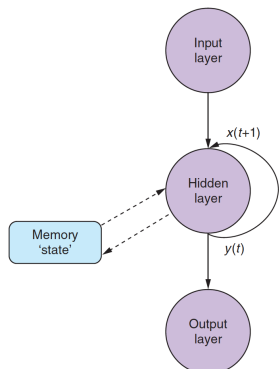


- ▶ The memory state contains attributes
- ▶ The attributes are updated with every instance
- ▶ The *rules* of the state are trained NNs

Now we have two learning objectives:


- ▶ Learn to predict the target labels
- ▶ Learn to identify what has to be remembered

Unrolled LSTM

- ▶ Activation from $t - 1$ plus memory state
- ▶ The memory state sends a vector with the state of each **LSTM cell**, of cardinality `number_of_units`

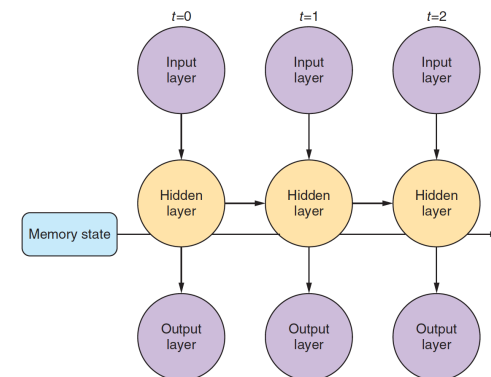


The LSTM cell (layer)

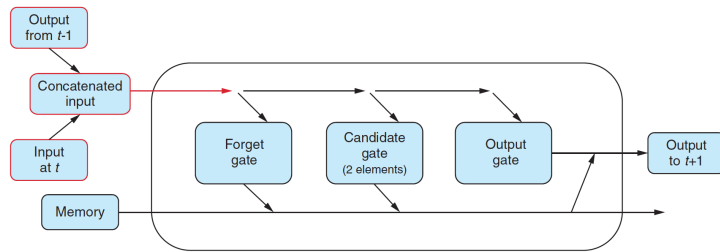

Input: $\text{output}_{t-1} \oplus \text{input}_t$

Gates: An FF layer + an activation function **each**

LSTM Forget Gate

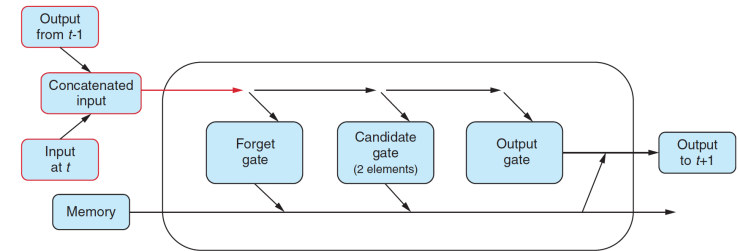

Input:

$[x_{[t,0]}, x_{[t,1]}, \dots, x_{[t,299]}, h_{[t-1,0]}, h_{[t-1,1]}, \dots, h_{[t-1,49]}, 1]$

Forget: How much of the memory should be erased

—forgetting long-term dependencies as new ones arise


$351 * 50 = 17,550$ parameters

Feed-forward NN with sigmoid activation function:
[0, 1]

(Lane et al., 2019, p. 280)


LSTM Forget Gate

Forget is a mask:

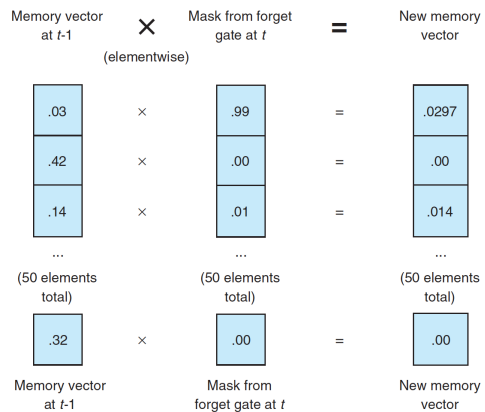

(Lane et al., 2019, p. 282)

LSTM Candidate Gate

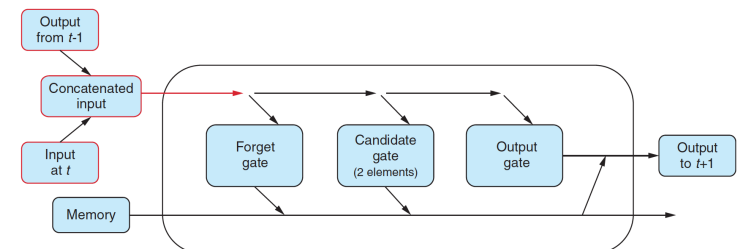


Input:

$[x_{[t,0]}, x_{[t,1]}, \dots, x_{[t,299]}, h_{[t-1,0]}, h_{[t-1,1]}, \dots, h_{[t-1,49]}, 1]$

Candidate: How much to augment the memory —what to remember and where to do it

LSTM Candidate Gate

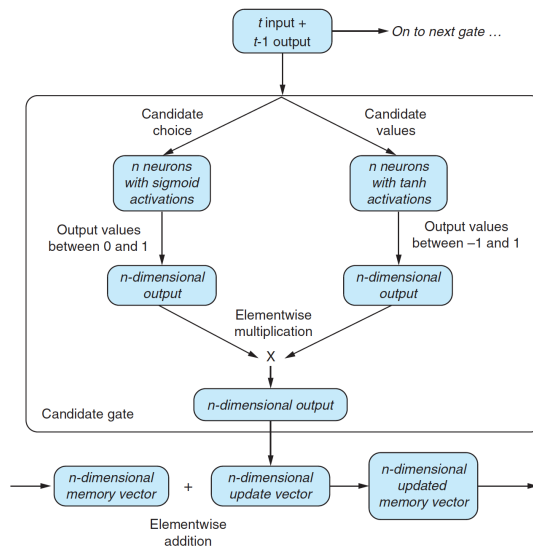


Candidate choice
Which values should be updated (\sim forget)

Candidate values
Computes those new values

(Lane et al., 2019, p. 283)

LSTM Output Gate

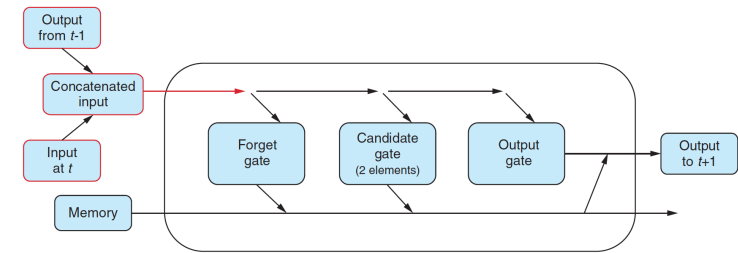


Input:

$[x_{[t,0]}, x_{[t,1]}, \dots, x_{[t,299]}, h_{[t-1,0]}, h_{[t-1,1]}, \dots, h_{[t-1,49]}, 1]$

Output: produces the output vector —both for the actual task and back to the memory

- sigmoid to the input
- tanh to the state

LSTM Output Gate

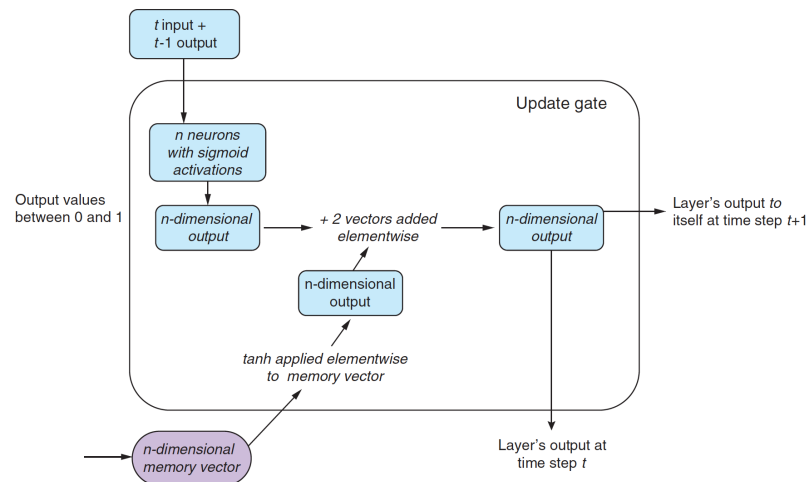

* The figure says "added". It is a product

(Lane et al., 2019, p. 284)

LSTM: Wrapping Up

- The *main* network uses the output of the memory in the same fashion as in a RNN
- The memory *decides* what to keep/feed to the network
- The weights of the memory are also learned by back-propagation

📖 Let us see

LSTM: Result

arch	units	Acc	Acc _{val}
BiRNN	50	0.8156	0.7662
BiRNN	40	0.8244	0.7540
BiRNN	30	0.8259	0.7874
BiRNN	20	0.8072	0.8076
BiRNN	10	0.8007	0.8016
BiRNN	5	0.7973	0.8006
BiRNN	1	0.7070	0.7822
LSTM	50	0.7121	0.8678

References

Lane, H., C. Howard, and H. Hapkem
2019. *Natural Language Processing in Action*. Shelter Island,
NY: Manning Publication Co.