



Aggregating with `group_by()` and `summarize()`

Each row in `student_df` represents a student, but what if we wanted to understand how each grade performs?

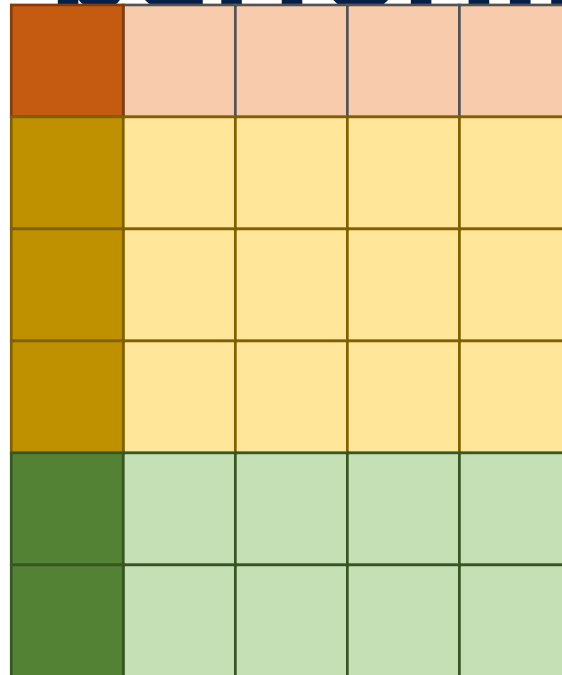

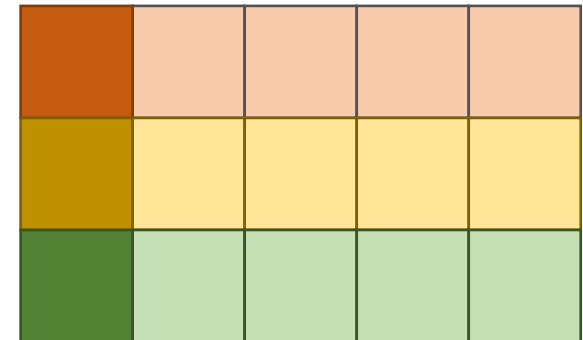

Let's dissect some code...

"Summarize each grade level by number of students and average post assessment score."

```
1 student_df %>%  
2   group_by(Grade) %>%  
3   summarize(  
4     Students = n(),  
5     Average_Post_Assessment_Score = mean(Post.Assessment.Score)  
6   )
```

Let's dissect some code...

"Summarize each grade level by number of students and average post assessment score."

```
1 student_df %>%  
2   group_by(Grade) %>%  
3   summarize(  
4     Students = n(),  
5     Average_Post_Assessment_Score = mean(Post.Assessment.Score)  
6   )
```

group_by()

Specify how you want your data to be grouped (what will each **row** represent)

Let's dissect some code...

"Summarize each grade level by number of students and average post assessment score."

```
1 student_df %>%  
2   group_by(Grade) %>%  
3   summarize(  
4     Students = n(),  
5     Average_Post_Assessment_Score = mean(Post.Assessment.Score)  
6   )
```


summarize()

Specify how you want your data to be grouped (what will each **column** represent)

At first glance, `summarize()` might seem similar to `mutate()`, but...


`mutate()`

Returns same number of rows

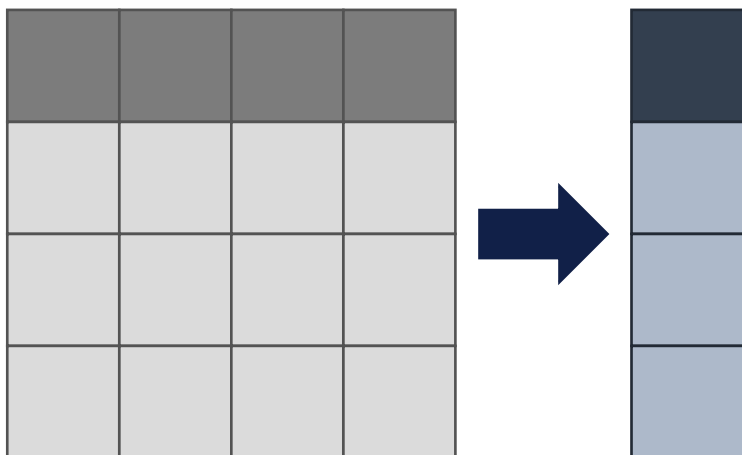

`summarize()`

Returns one row for each group

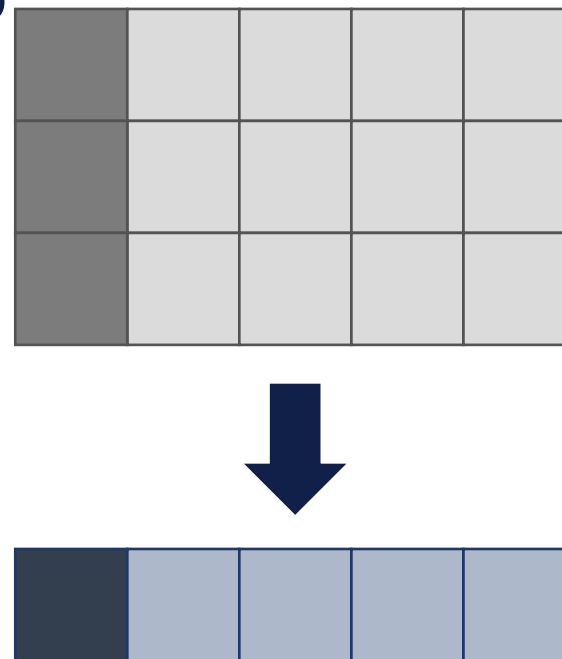

Demo

`summarize()` and
`group_by()`

Summarize each grade level.

Knowledge Check

Summarize



PolleEv.com/
albertlee033

True or False:

You can use `summarize()` and `mutate()` interchangeably.

Knowledge Check

Summarize




PolleEv.com/
albertlee033

True or False:

You can use `summarize()` and `mutate()` interchangeably.


`mutate()`

Applies calculation across columns

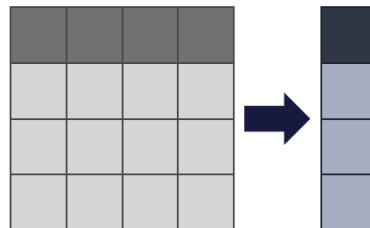

`summarize()`

Applies calculation across rows





University of California
San Francisco