


Concatenate

What if you had multiple files of the same format?

You can **concatenate** (combine) them!

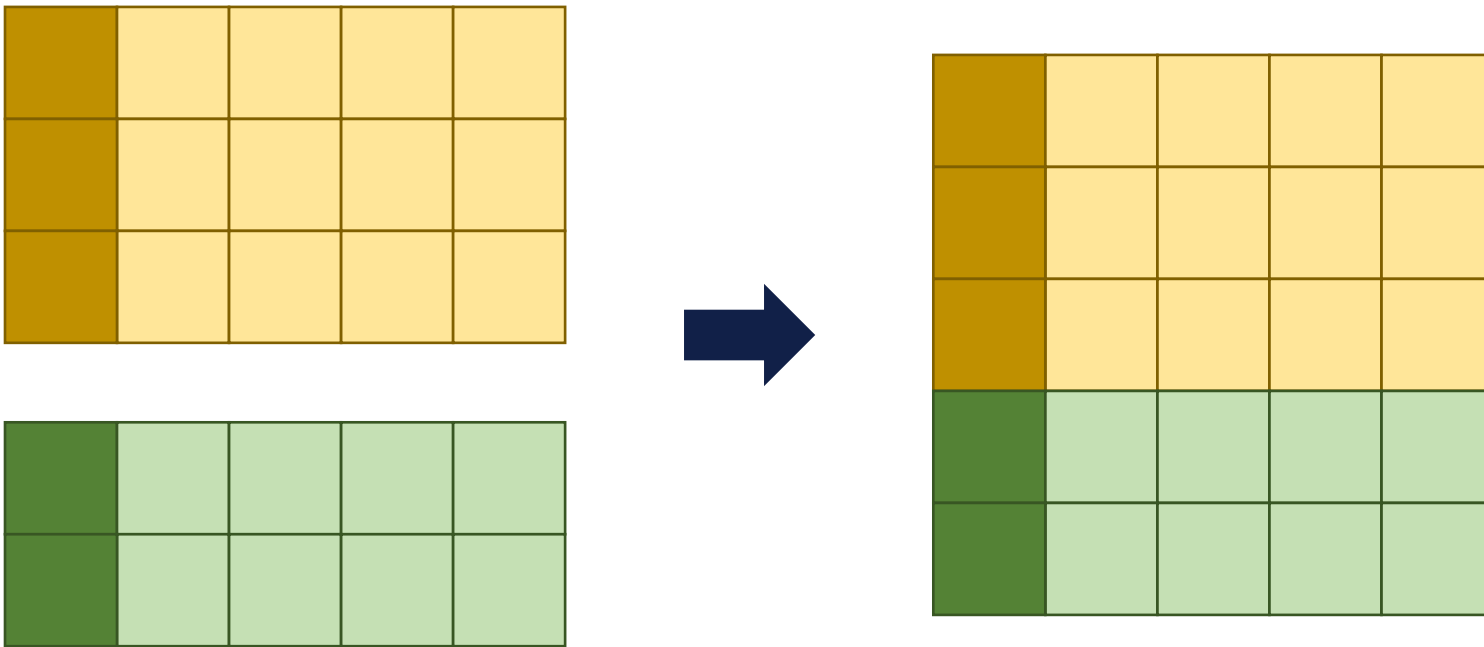

Let's dissect some code...

"Concatenate the rows of data from student_df_1 with the data in students_df_2."

```
1 student_df <- student_df_1 %>%  
2   bind_rows(students_df_2)
```

Let's dissect some code...

"Concatenate the rows of data from student_df_1 with the data in students_df_2."

```
1 student_df <- student_df_1 %>%  
2   bind_rows(students_df_2)
```

bind_rows()

Specify tibbles to combine (must have the same columns!)

Demo

`bind_rows()`

Combine two tibbles

Knowledge Check

Concatenate



PollEv.com/
albertlee033

True or False:

You should use `bind_rows()` to combine tibbles with different columns.

Knowledge Check

Concatenate



PollEv.com/
albertlee033

True or False:

You should use `bind_rows()` to combine tibbles with different columns.

Must have the same columns!



University of California
San Francisco