



ALMA MATER STUDIORUM
UNIVERSITÀ DI BOLOGNA

LLM Benchmark project Report

Professors:

Michele Lombardi

Allegra De Filippo

Students:

Simone Migliaccio (matr.:
0001159303)

Simone Spezia (matr.:
0001167605)

Alberto Varini (matr.:
0001189363)

Contents

1	Introduction	2
2	General Structure	2
2.1	analysis	2
2.2	archive	2
2.3	Benchmark Framework structure	2
2.4	results	4
3	PDDL Problems Classification	4
3.1	Difficulty Classification	4
3.1.1	Instances scores	4
3.1.2	Domain scores	5
3.1.3	Results obtained	5
3.2	Reasoning Classification	6
3.3	Problems chosen	7
4	LLMs Models Implemented	9
4.1	Hardware platform	9
4.1.1	notes on nvidia API	10
4.2	Release time	10
4.3	Models chosen	10
5	Benchmark output Parsing and Output Structure	10
6	Output Validation Using VAL	10
7	LLMs Reasoning Capabilities Evaluation	10
7.1	Pipeline and Data flow	10
7.1.1	Pipeline Generic description	10
7.2	Metrics scientific foundation	11
7.3	Metric Families	11
7.3.1	Planning Efficiency	11
7.3.2	Execution and Reasoning	11
7.3.3	Grounding and Discriminatory	11
7.3.4	PS (Composite Planning Score)	11
7.4	Cross-Domain and Cross-LLM comparison	11
8	Conclusions	11

1 Introduction

The main goal of this project is to provide a general benchmark to evaluate different LLMs performances under different types of planning domains to better understand in advance what are the planning capabilities of a given LLM. In the following sections the main features of this projects are going to be shown.

Also a quick PDDL starting guide has been created to better gain the necessary knowledge about PDDL this specific language used to define planning problems.

2 General Structure

The root folder contains various sub folders, specifically:

- analysis
- archive
- Benchmark Framework
- results

2.1 analysis

This folder is used to gather all the datas useful for the production fo the report and the slides, contains the summary of the raw scores for the PDDL domains and the jupiter notebooks and the report.

2.2 archive

This folder contains all the material given us by the professor, specifically papers, a list of PDDL planning domains, two github repos given us as a reference and last a Quick PDDL guide written by us to help understand better the language.

2.3 Benchmark Framework structure

The folder Benchmark Framework is the core of all the work we've done. The main goal of this framework was to provide a easy to use and general testing platform to be employed when evaluating the performances of a LLM is needed, The following pages are going to be used to show the folders and the structure of the framework:

```

LLM Benchmark/
├── docs/
├── evaluators/
├── Leonardo script/
├── models/
├── outputs/
├── prompts/
├── protocols/
├── reporting/
├── runner/
├── scripts/
├── slurm logs/
├── tasks/
├── tests/
├── utils/
├── advanced planning evaluation.py
├── clear outputs.py
├── run benchmark.py
└── setup.md

```

docs Contains a single file for the model preparation which is useful because the benchmark can run on a local PC or on an HPC system such as Leonardo. The important operational rule is that GPU benchmark jobs should not download large model weights. Prepare Hugging Face models first, then run benchmarks from local files.

evaluators Provides tools for to understand, validate and measure the capabilities of LLMs to solve planning problems

Leonardo script Contains specific scripts to launch and manage jobs on Leonardo HPC.

models Manages the communication with various LLMs, using "adapters" which creates a common interface for different backends like NVIDIA API.

outputs folder containing all the output from the LLMs, divided in 3 sub folders *raw*, *parsed*, *scored* to better separate respectively the raw output from the model, PDDL extracted and structured plans and validation and metrics results.

prompts contains text files each one used to explain to the LLM the rules of the domain and how to manage the problem in order to solve it.

protocols defines different strategies for test execution, for example direct plan (which is one shot) or iterative repair.

reporting contains scripts for creation of the plots used in the reports.

runner contains scripts useful to launch a single test or the whole suite.

scripts contains scripts for the computation of the numerical score assigned to each domain.

slurm logs Used to gather information for debug when the benchmark runs on Leonardo HPC

tasks PDDL problems and related instances selected for the runs, the instances are divided in 3 categories *easy*, *medium*, *hard*.

tests Used to run tests in preparation for the real run of the benchmark.

utils contains executable for the validator to be used during the run of benchmark framework

advanced planning evaluation.py it reads benchmark artifacts from the output folder and writes a model-centric JSON report in the folder results.

clear outputs is used to empty a folder during Leonardo tests

run benchmark is the file that runs the whole sequence of tests

The framework and its structure is organized in this way in order to allow the user to change fundamental parameters such as the numbers of iterations easily and effectively and then run the benchmark again with the modified parameters.

2.4 results

3 PDDL Problems Classification

The first thing to do since we wanted a trustable benchmark and since a lot of PDDL models were already provided as reference material was to classify the problems using a numerical difficulty score. We used a numerical score because it is intuitively understandable by anyone who will ever want to compare the performance of LLMs using these models. Another classification implemented consists into separating problems in different categories based on the type of reasoning they request. To compute the scores the code can be found in the file `score_domains_complexity.py`

3.1 Difficulty Classification

3.1.1 Instances scores

The complexity of a single problem instance is calculated using a weighted logarithmic combination of four key metrics. The use of the logarithm prevents any single feature from dominating the score excessively.

The **Raw Score** is defined as:

$$Raw_score = 0.45 \cdot \log(1 + A) + 0.20 \cdot \log(1 + G) + 0.20 \cdot \log(1 + N) + 0.15 \cdot T \quad (1)$$

Where:

- **A (Actions):** Number of feasible grounded actions. This is estimated by unifying action parameters with objects that satisfy static preconditions in the initial state.
- **G (Goals):** Total number of atomic conditions in the goal state.
- **N (Numeric Score):** A composite value representing numeric complexity:

$$N = E_{num} + 2 \cdot P_{num} + 3 \cdot G_{num} + M \quad (2)$$

where E_{num} are numeric effects, P_{num} numeric preconditions, G_{num} numeric goal conditions, and M is a binary flag for the presence of a metric.

- **T (Topology Score):** Evaluates the spatial/relational complexity based on predicates like *adj* or *connected*:

$$T = \log(1 + Nodes) + \log(1 + Edges) + Density \quad (3)$$

Obviously a different weight could be assigned to each different part of the computation of raw scores depending on the operator that is doing the tests in order to highlight more for example the number of action present in the instances and so on.

Finally, an **Instance Score (0-100)** is calculated by normalizing the raw score relative to the minimum and maximum scores found within the same domain. The results can be found in the folder `domains_complexity`.

Note that also some additional statistics for each domain are computed based on the results obtained from the instances, for example it could be of interest evaluating the mean and the median of the scores obtain form the instances of a single domain.

3.1.2 Domain scores


The overall difficulty of a domain is not just the average of its instances, but a reflection of its total state-space and constraint complexity. The **Domain Difficulty (0-100)** is computed by:

1. Summing the S_{raw} of all instances belonging to the domain to obtain a *Total Raw Score*.
2. Normalizing this total across all tested domains in the benchmark.

This approach ensures that a domain with many complex instances is ranked higher than one with few simple instances, note that obviously the easiest problems gets a domain difficulty equal to 0 (in this case is the "fo-sailing" problem) and the problem with the highest difficulty has domain difficulty equal to 100, (in our case the "settlersnumeric" problem).

3.1.3 Results obtained

In order to obtain a visual representation of the classified problems, we produced heatmaps for both the overall normalized domain scores and the raw scores.

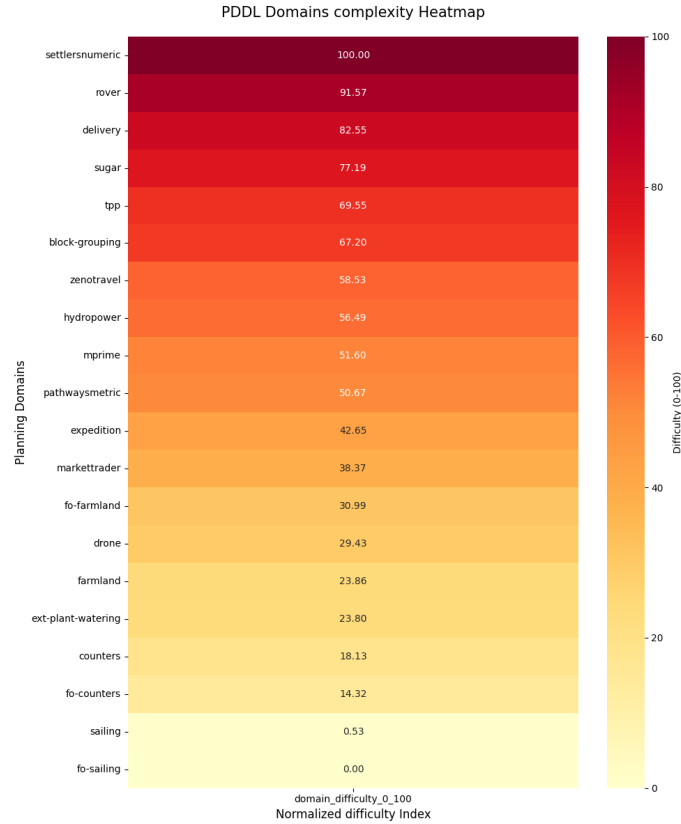



3.2 Reasoning Classification

Here the classification based on the type of reasoning these problems require the LLM to employ is shown. We decided to split the reasoning types into 5 categories:

- **Spatial:** These problems are typically about objects that have to be moved in a 2D (or more dimensional) spaceframe.
- **Numerical Optimization:** These problems require from the LLM an extensive capacity to deal with numerical optimization problems, such as managing complex cost functions and resource constraints.
- **Temporal Planning:** In this kind of problem it is required from the LLM to be able to reach the goal defining an order between objects having timing constraints and relations.
- **Logistic:** In this kind of problems it is required to reach the goal by planning some kind of goods transportation and agents coordination.
- **Logic:** These are abstract puzzles where the state space and actions represent symbolic or mathematical transformations rather than physical interactions. They test the model's ability to reason over purely formal rules without relying on world knowledge.

In the following table the classification of the 20 planning problems is shown, note that in this case all the work have been done by hand and that the problems in the table are ordered form hardest to easiest following the previous difficulty classification. Note also that the evaluation is based on how much the problem belong to the specific domain, for example in the problem "settlersnumeric" there is a dominant Numerical Optimization part hence the problem is going to be classified as a Numerical Optimization problem.

PDDL Problem	Reasoning Category
Settlersnumeric	Numerical Optimization
Rover	Logistic
Delivery	Logistic
Sugar	Numerical Optimization
Tpp	Numerical Optimization
Block-Grouping	Spatial
Zenotravel	Logistic
Hydropower	Temporal Planning
Mprime	Logic
Pathwaysmetric	Numerical Optimization
Expedition	Logistic
Markettrader	Numerical Optimization
Fo-farmland	Numerical Optimization
Drone	Spatial
Farmland	Numerical Optimization
Ext-Plant-Watering	Spatial
Counters	Numerical Optimization
Fo-Counters	Numerical Optimization
Sailing	Spatial
Fo-Sailing	Spatial

Table 1: Reasoning Category Classification Tab

3.3 Problems chosen

In order to chose the correct problem to be solved by LLMs we decided to pick 3 sets composed by 3 problems each. The sets are composed by 3 problems with different reasoning categories and specifically from the categories Numericaal Optimization, Spatial and Logistic. Problems related to Temporal Planning and Logic were not chosen since just one problem for each type was present; we suggest, in order to study the capabilities of LLMs in these domains, to use a PDDL problemns dataset specifically containing these kind of problems.

In order to better understand how we picked the problems the following tables are shown, the elements are ordered with decreasing difficulty.

Numerical Optimization	Spatial	Logistic
Settlersnumeric	Block-Grouping	Rover
Sugar	Drone	Delivery
Tpp	Ext-Plant-Watering	Zenotravel
Pathwaysmetric	Sailing	Expedition
Markettrader	Fo-Sailing	
Fo-farmland		
Farmland		
Counters		
Fo-Counters		


Table 2: Reasoning Categories Selected for Benchmark

In order to obtain a more clear output from the LLM we decided to select two different sets of three problems each and specifically:

- **Hard Set:** composed by *settlersnumeric*, *block-grouping*, *rover*
- **Easy Set:** composed by *fo counters*, *fo sailing*, *expedition*

It is clearly visible that we picked respectively the most three difficult problems and the three easiest ones. This has been done to ensure also in the outputs a visible difference in the metrics when evaluating the outputs.

Additionally it can be seen from the following heatmap that the instances of these domains have increasing difficulty:

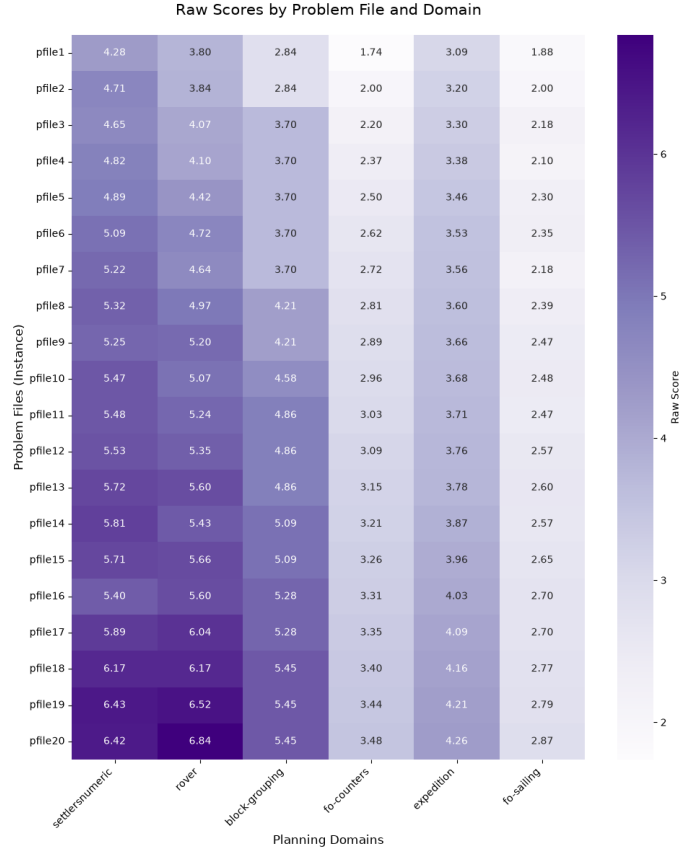

It is clearly visible both the difference in terms of difficulty between the Hard set and the Easy set and the increasing difficulty related to the pfiles; because of this last consideration we applied an additional, partition to divide the pfiles in three different categories and specifically:

- Easy (composed by pfiles from 1 to 4)
- Medium (composed by pfiles from 8 to 11)
- Hard (composed by pfiles from 15 to 18)

Also it is worth noticing that we did not use all the instances available for each selected domain but we decided to choose a small batch (4 instances) of instances representing the easy, medium and hard categories.

4 LLMs Models Implemented

In this section the LLMs models chosen to solve the problems as well as the reason behind aforementioned choice are going to be detailed. The reasons behind the choice of the LLms are basically two:

- The hardware platform available
- The release date of the LLMs

In order to obtain a wider range of outputs 5 LLMs were chosen and downloaded by Huggingface, the specific models and versions used are going to be explored later on.

4.1 Hardware platform

Before listing the LLMs models chosen it is worth saying that we used a cluster from Leonardo HPC by Cineca consisting n

4.1.1 notes on nvidia API

????

4.2 Release time

4.3 Models chosen

5 Benchmark output Parsing and Output Structure

DA RIEMPIRE

6 Output Validation Using VAL

DA RIEMPIRE

7 LLMs Reasoning Capabilities Evaluation

7.1 Pipeline and Data flow

How Raw / Parsed / Scored become one DataFrame , which Classes hold the state the metrics need and why the load → row → aggregate → plot → report stages. This section maps the analysis script `advanced_planning_evaluation_sp.py` onto the rest of the Repo , showing how the three on-disk artifact layers Raw / Parsed / Scored. become DataFrames , which data classes exist and why and how the data-manipulation stage hands off to metric computation and visualization.

7.1.1 Pipeline Generic description

Everything funnels into one DataFrame `df_metrics` , which is the single source of truth for every groupby and every plot. we start from the outputs:

- raw : generation text + reasoning text
- parsed : raw.actions + reasonig.actions
- scored : VAL outputs solved , prefix lenght , valid@k informations
- tasks : domain.pddl + pfileN.pddl

the `look_artifact_rows()` takes the data present in Parsed and then joins Raw and Scored data in a single row for each instance , collapsing the retry loop by scanning the attempts back to front keeping the last non empty plan as the representative `_actions` , while preserving the full attempt list `_parsed_attempts` , `_scored_attempts` , `_raw_attempts` as private colums so per-iteration metrics can still be computed downstream. Keeping the grain at instance level leads to every aggregate metric (SR , HR , PS) bein an average over comparable units , while maintaining the iteration structure in the private `_*_attempts` and used as option by the metrics that explicitly need it like (FASR , IWSR , iteration profile , CoTal). For each row is also added Validity and Iteration count taken from the Scored file `Valid = scored["solved"]` , `Iterations = scored["iterations_used"]` , the presence of the CoT is instead taken from `\protocols\protocol.yaml` or instead as a fall-back is looked the presence of reasonig actions or text since we want to compute the Cot alignment metric only for those models that have it available. the function `look_artifact_rows()` for each row the `df_raw` informations:

- Model
- Domain

- Problem
- Difficulty
- Protocol
- Run_id
- Valid
- Length
- Iterations
- Chain_of_Thought
- actions
- _cot_text
- _parsed_attempts
- _scored_attempts
- _raw_attempts
- _file_path
- parsed_file_path

7.2 Metrics scientific foundation

7.3 Metric Families

7.3.1 Planning Efficiency

7.3.2 Execution and Reasoning

7.3.3 Grounding and Discriminatory

7.3.4 PS (Composite Planning Score)

7.4 Cross-Domain and Cross-LLM comparison

8 Conclusions

DA RIEMPIRE