
arXiv forecasts

Predicting daily posts on the arXiv
preprint repository

Roberto Albesiano, Maneesha Ampagouni, Bobby Zhang

Overview

The arXiv is the go-to preprint repository for CS, Math, Physics, and other sciences.



Preprints posted on arXiv



Goal: Predict the number of preprints posted on the arXiv in the upcoming week.

Data collection

The arXiv dataset of preprints is published on Kaggle. Each entry is a preprint.


1. Extract date and category.
2. Fix issue with categories that changed over the years.
3. Create a new dataset of daily totals per category.

Usage stats are not published as a dataset, but can be obtained via the arXiv API.

1. For every date in the totals dataset, connect to the API and request usage.
 2. Sum the daily connections (given as hourly usage).
 3. Create a new dataset of daily connections.
-


Usage stats

Aiming for the day with fewest posts is not necessarily the best strategy if connections depend on the day of the week or on the number of posts.

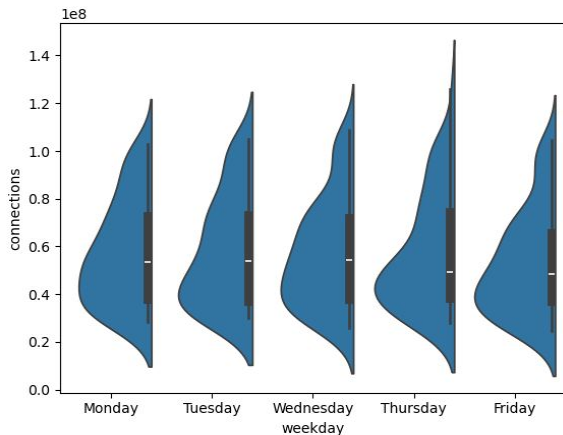

F-test
p-value ~70%


$r = 0.0095$
p-value ~86%

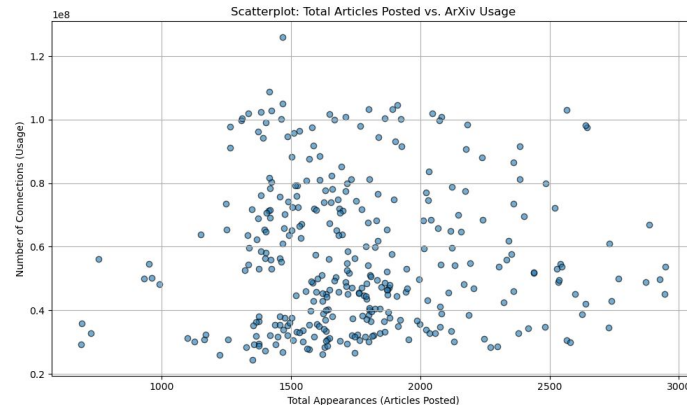

Best strategy: Assume usage is constant, and aim for the day with fewest posts.


Model selection

We examine on the autocorrelation and partial autocorrelation.

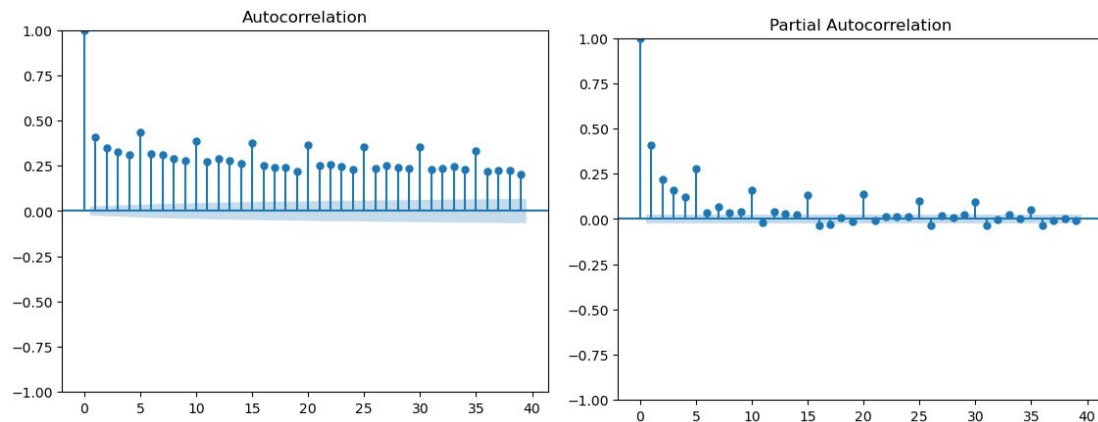

We find that the time series has the following features:


- Weekly seasonality
- Global trend

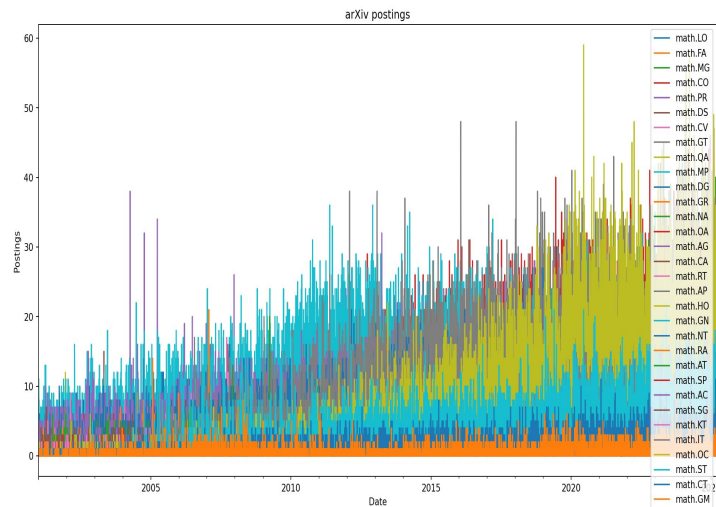

Postings from “math.XX” categories

Model training and testing

We prepare a 5-fold validation as follows:

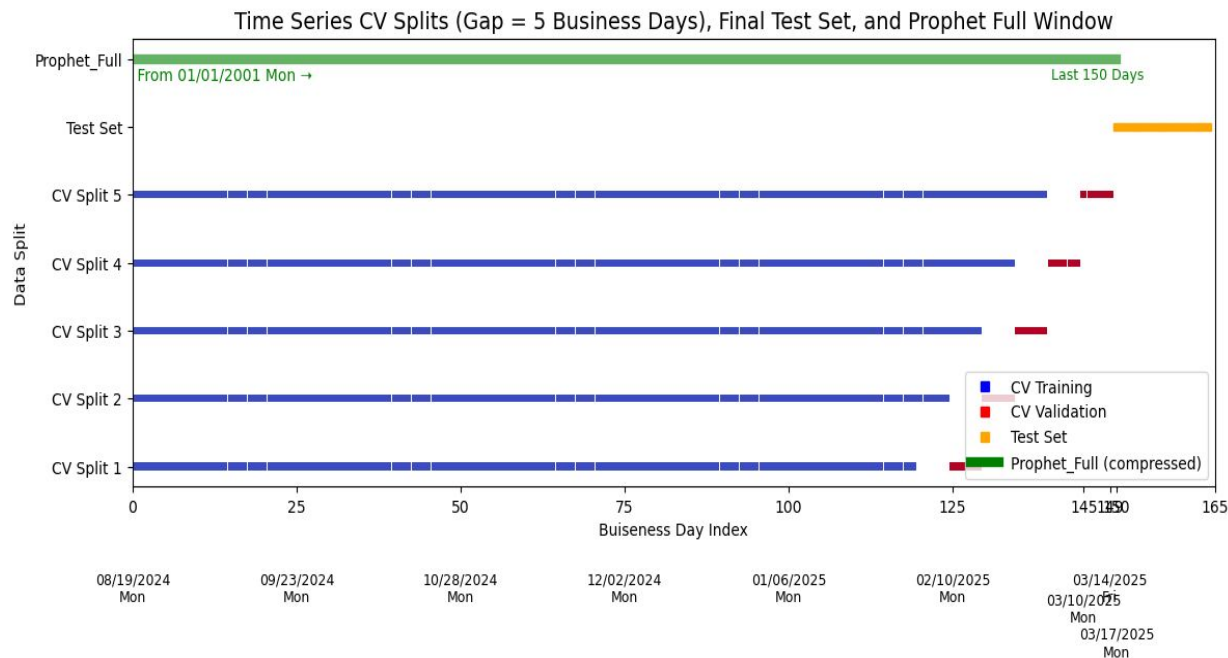

Model training and testing

Model	Used?	Comments
Dummy	✓	Predict the mean of the given window (150 days)
Weekday Linear Regression	✓	Linearly regress in the days of the week (as categorical feature)
Exponential Smoothing (NCV)	✓	Manual EST structures , manual smoothing parameters (α , β , γ)
Exponential Smoothing (CV)	✓	Manual EST structures, auto-optimized smoothing parameters (α , β , γ)
Auto-SARIMA	✗	Abandoned due to excessive runtime
Manual-SARIMA	✓	Fixed order (0, 0, 0), manual seasonal order selection (P, D, Q, s=5)
Facebook Prophet	✓	Standard training
Facebook Prophet (Full)	✓	Trained on the entire dataset (from 01/01/2001)

Model comparison

Model	Mean RMSE	Std Dev	Min RMSE	Max RMSE
SARIMA_CV	1.39	0.94	0.00	5.14
EST_CV	1.47	0.97	0.27	4.98
Dummy	1.53	1.01	0.20	5.38
Prophet	1.53	0.96	0.28	5.11
Prophet_Full	1.53	0.96	0.28	5.11
EST_NCV	1.60	1.17	0.27	8.20
Weekday_Linear	2.35	1.70	0.44	7.88

- Use **SARIMA_CV** as our baseline forecasting model for its robust and consistent performance.
 - Keep **EST_CV** as a strong alternative with faster training and competitive accuracy.
 - Use **Prophet** (and **Prophet_Full**) cautiously — it performs reasonably in some categories but still shows variability.
 - Use **Dummy** as a fallback baseline, especially for stationary or low-variance series.
 - Avoid **EST_NCV** unless optimization is infeasible — its fixed parameters limit performance.
 - Avoid **Weekday_Linear**, as it consistently ranks last and performs poorly across nearly all categories.
-

Future directions

1. ***Improve Performance for Challenging Categories:*** Some categories exhibit poor forecasting performance across all models. Future work can focus on developing category-specific models to improve accuracy in these harder cases.
 2. ***Long-Term Forecasting and Strategic Planning:*** Extend the framework to support long-term visibility forecasting. This could help researchers explore adjacent fields by identifying categories projected to receive more attention over time.
 3. ***Interactive Web Application:*** Build a user-friendly web app that leverages these forecasting models to assist researchers in selecting optimal submission dates and viewing category-level predictions, enhancing accessibility and practical impact.
-