

Parte 1
Encendemos Apache.



Creamos la carpeta app01 en la carpeta htdocs de xampp y dentro de ella un documento index.html.

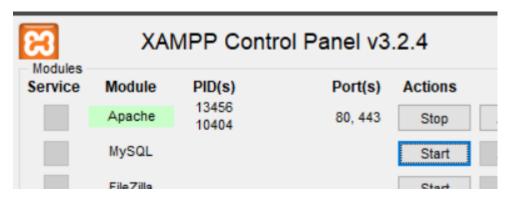

Al cambiarle el nombre al documento index.html, por defecto muestra un índice del contenido de la carpeta con enlaces a los distintos contenidos.

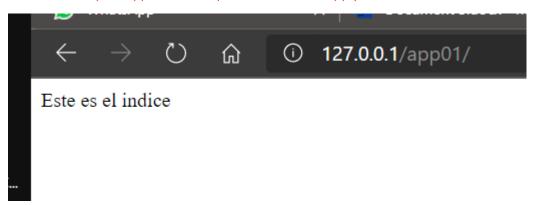

Index of /app01



Apache/2.4.46 (Win64) OpenSSL/1.1.1g PHP/7.4.10 Server at 127.0.0.1 Port 80


Ahora vamos a cambiar la carpeta de configuración de apache llamada httpd-hosts.conf para incluir la configuración de los bloques de hosts virtuales.



Ahora asignaremos el dominio personalizado a la dirección IP local en el archivo hosts de windows.

```
hosts - Notepad
File Edit Format View Help
# Copyright (c) 1993-2009 Microsoft Corp.
# This is a sample HOSTS file used by Microsoft TCP/IP for Windows.
# This file contains the mappings of IP addresses to host names. Each
# entry should be kept on an individual line. The IP address should
# be placed in the first column followed by the corresponding host name
# The IP address and the host name should be separated by at least one
# space.
# Additionally, comments (such as these) may be inserted on individual
# lines or following the machine name denoted by a '#' symbol.
# For example:
#
                       rhino.acme.com
#
      102.54.94.97
                                              # source server
#
       38.25.63.10
                       x.acme.com
                                               # x client host
# localhost name resolution is handled within DNS itself.
       127.0.0.1 localhost
#
       ::1
                       localhost
              localhost
127.0.0.1
127.0.0.1 wordpress.localhost
```

Ahora he encendido tambien el MySQL del xampp y al escribir http://wordpress.localhost/
Accedo sin problema a la página.

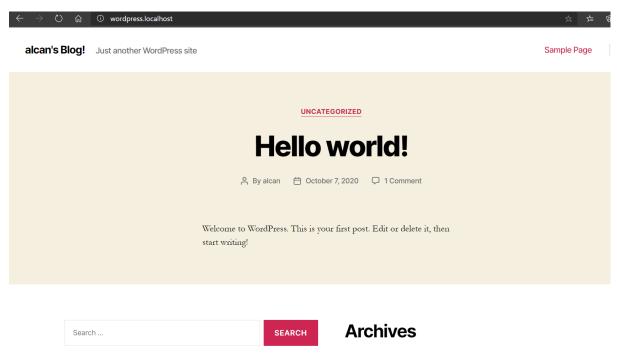

October 2020