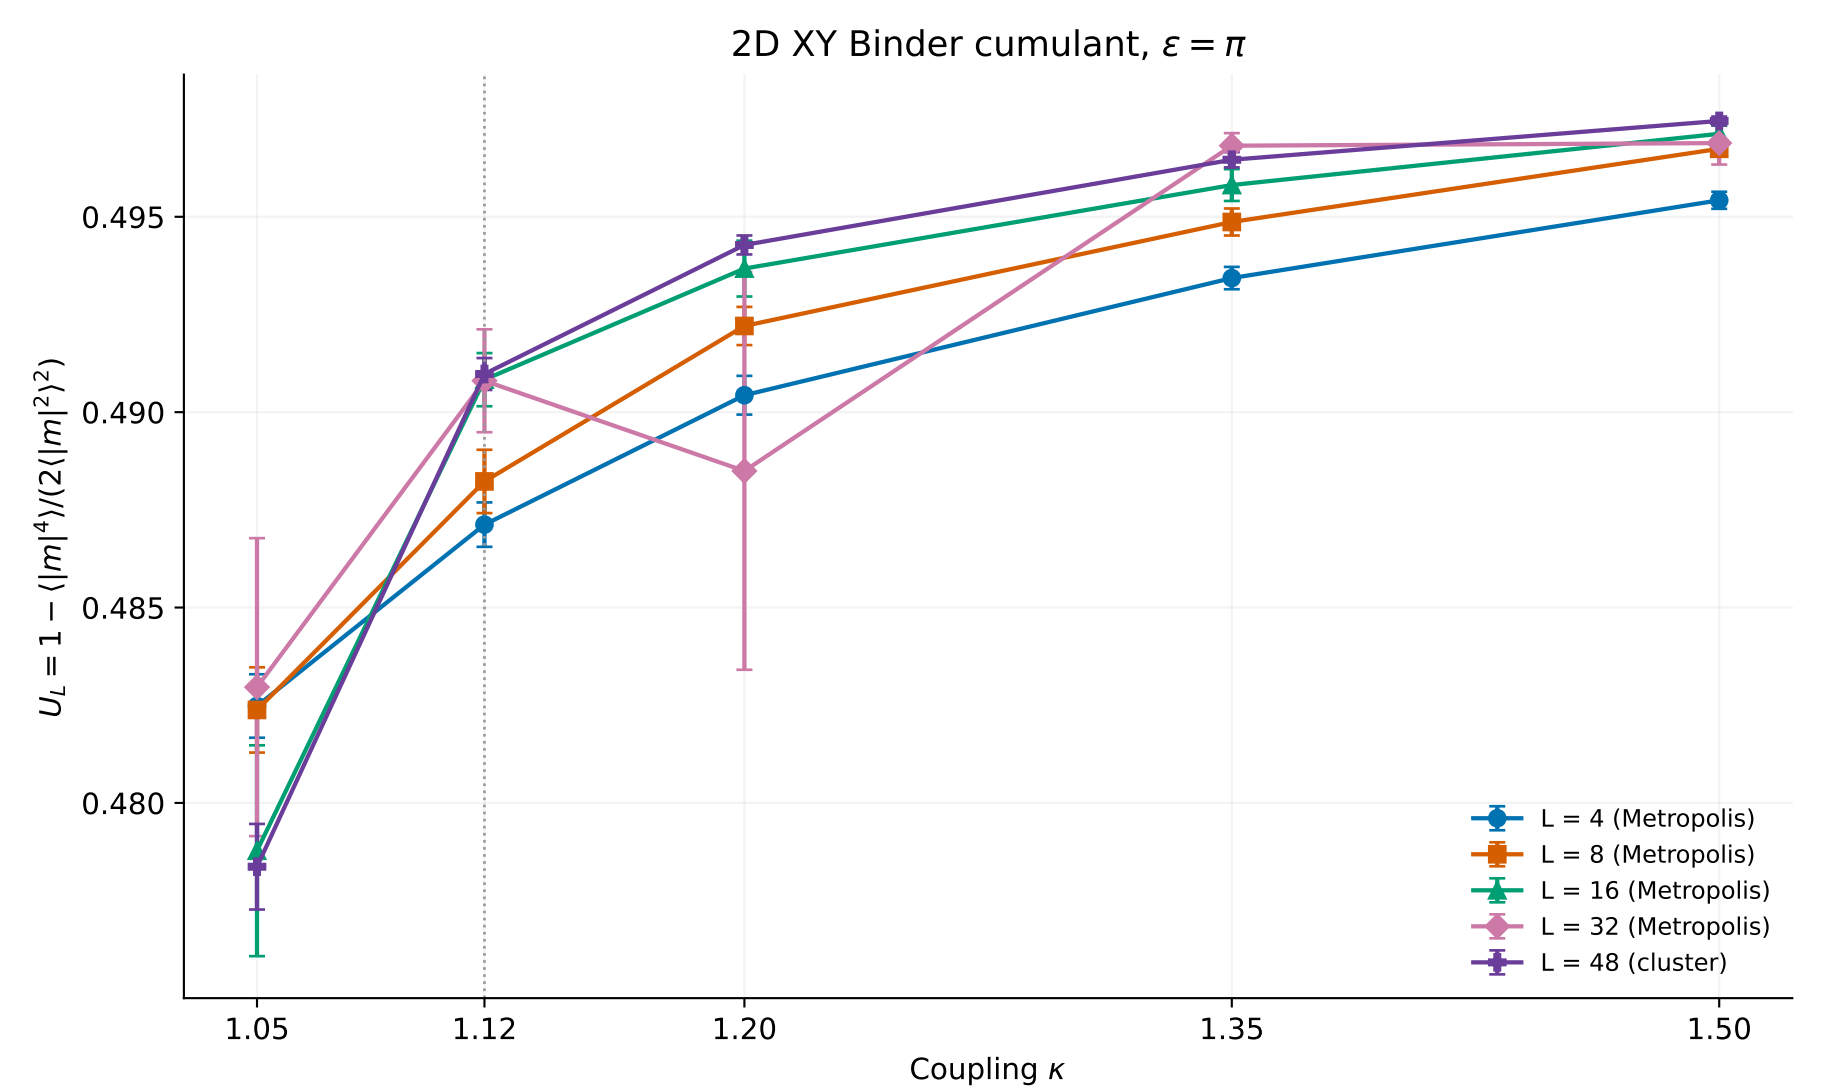

L48: 10,000 cluster cycles, discard 2000; L4–32: existing Metropolis data
Error bars: 1σ joint-block bootstrap; cluster cycles and Metropolis sweeps have different work costs