

Project Akhir

Penyediaan dan Automasi Layanan



Anggota Kelompok

Sabita Khansa Dewi

235150201111025

Alfredo Radhinal Mukhtar

235150201111021

Aldura Armanu Shaufa Imron

235150201111018

Githapati Prabuja Kemala Detha

235150201111053



Pendahuluan



Latar Belakang

Peningkatan pesat dalam pengembangan perangkat lunak modern telah memunculkan kebutuhan krusial akan efisiensi dan keandalan dalam proses deployment serta pengelolaan aplikasi. Pendekatan tradisional yang mengandalkan intervensi manual seringkali rentan terhadap kesalahan, memakan waktu, dan tidak mampu mengakomodasi kebutuhan skalabilitas dan ketersediaan yang dinamis di lingkungan produksi saat ini. Konsep Otomasi dan Penyediaan Layanan menjadi sangat relevan dalam menghadapi tantangan ini, terutama dalam arsitektur cloud-native yang berkembang pesat.

Proyek akhir ini bertujuan untuk menerapkan prinsip-prinsip otomasi dan penyediaan layanan, khususnya dalam konteks deployment aplikasi berbasis web di infrastruktur cloud. Dengan memanfaatkan teknologi kunci seperti Git untuk manajemen versi, Github Actions untuk otomatisasi pipeline CI/CD, AWS sebagai platform cloud yang mencakup Load Balancer dan Autoscaling, serta Prometheus untuk monitoring performa, proyek ini akan mendemonstrasikan bagaimana aplikasi dapat di-deploy secara otomatis, memantau kinerjanya, dan menyesuaikan kapasitasnya secara cerdas.

Rumusan Masalah



Rumusan Masalah

Bagaimana membangun dan mengimplementasikan sistem penyewaan lapangan berbasis Node.js (frontend React Vite) dan Laravel (backend) di infrastruktur cloud AWS, dengan fokus pada otomatisasi deployment, alokasi sumber daya yang otomatis (autoscaling) untuk efisiensi komputasi sambil menjaga performa, serta pemantauan performa aplikasi dan infrastruktur yang komprehensif, guna memastikan skalabilitas, ketersediaan, dan operasional yang stabil?

Tujuan




Tujuan


- Menerapkan konsep otomasi dan penyediaan layanan dalam lingkungan cloud-native dengan teknologi seperti Git, AWS, Load Balancer, Autoscaling, Prometheus, dan Github Actions.
- Mengimplementasikan deployment aplikasi penyewaan lapangan secara otomatis.
- Melakukan monitoring performa aplikasi dan infrastruktur.
- Memastikan aplikasi dapat menyesuaikan kapasitas secara otomatis (Autoscaling) untuk menjaga performa sambil meminimalkan computing capacity.

Desain Solusi

Arsitektur System

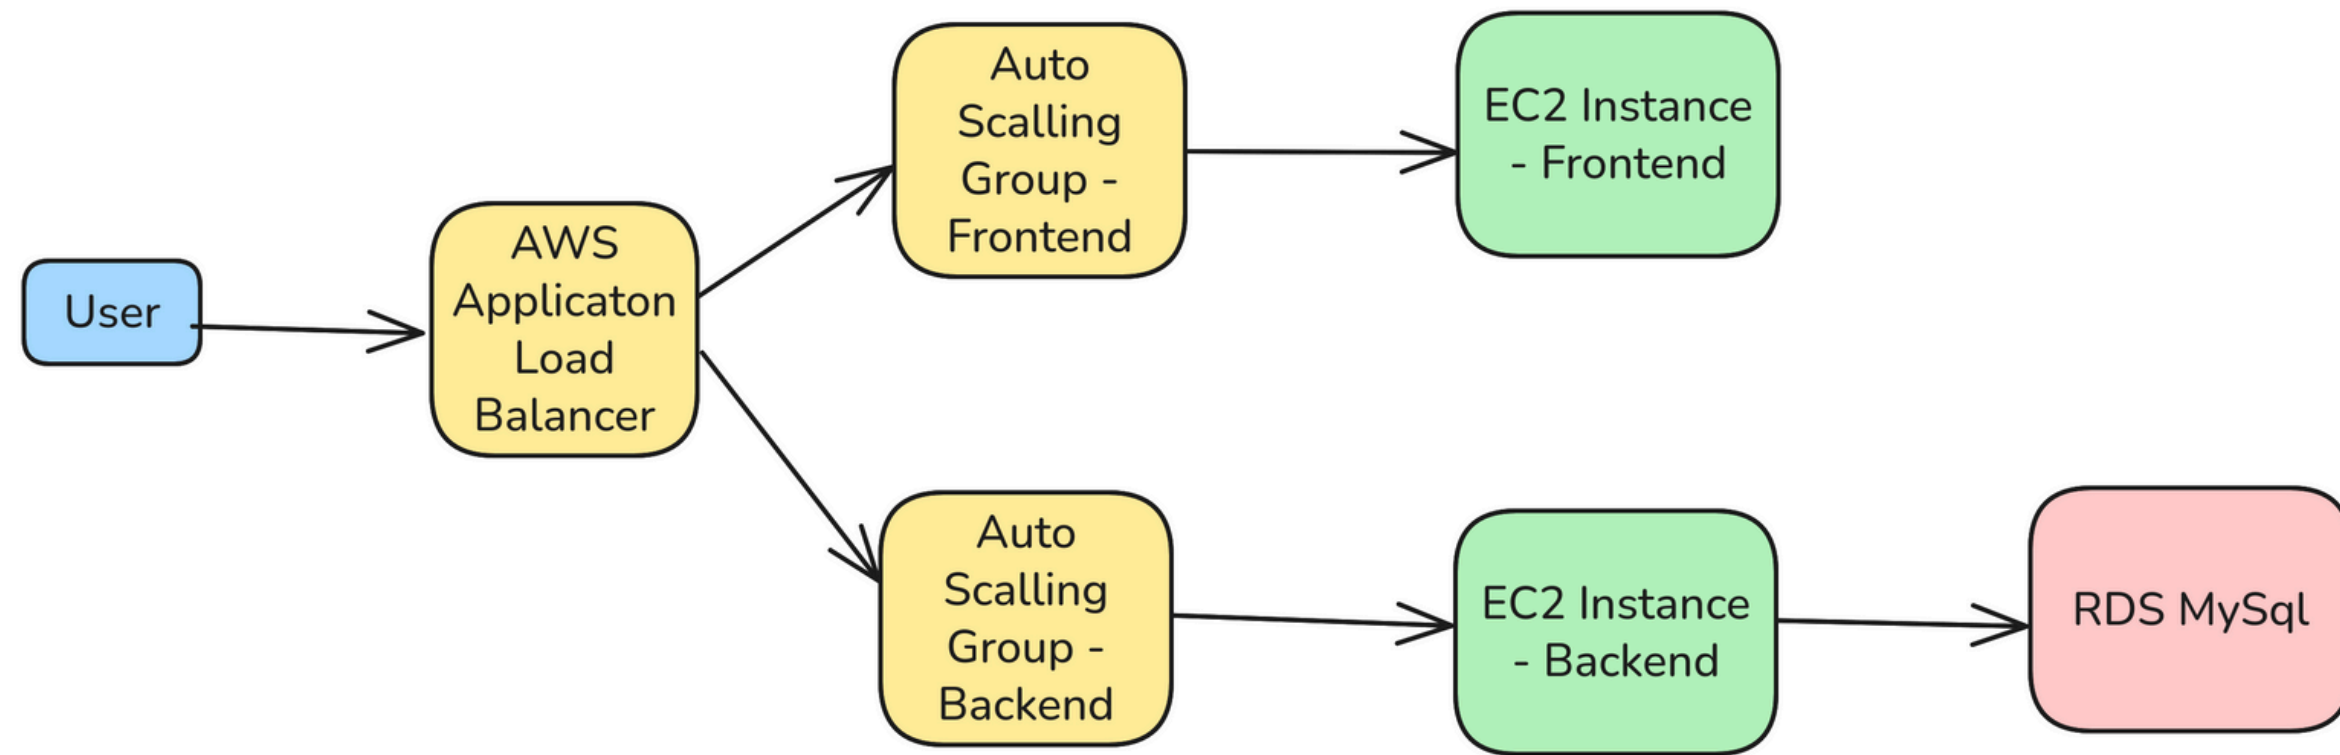

Arsitektur System

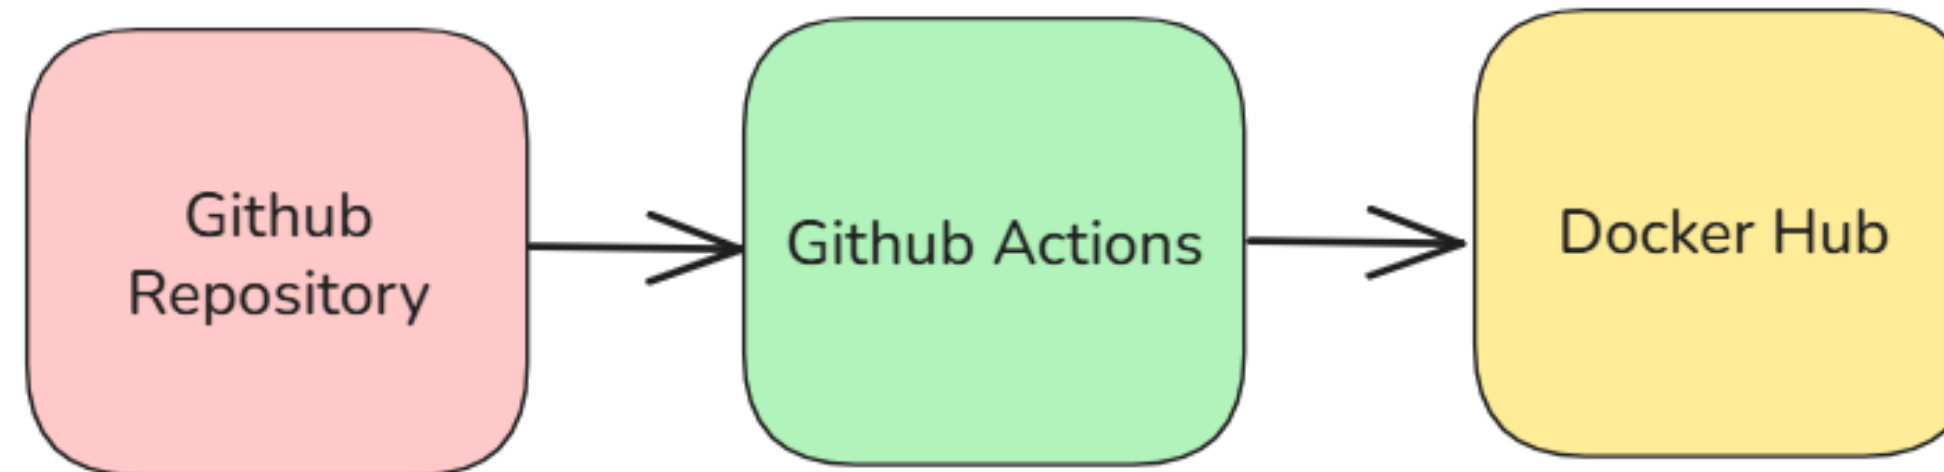



Rencana penggunaan git

- Peran : Sebagai sistem manajemen versi untuk source code frontend dan backend.
- Branchs :
 - Main : Branch utama tempat kode yang sudah diintegrasikan.
 - dev : Branch tempat integrasi kode backend dan frontend sebelum di merge ke Main.
 - dev-frontend : Branch untuk development kode frontend.
 - dev-backend : Branch untuk development kode backend.
- Github Repository : Tempat hosting repository git dan pemicu pipeline github action



Rencana penggunaan Github Actions

- Peran : Orkestrator pipeline CI/CD.
- Fungsi Pipeline Frontend : Menjalankan build image, dan push image docker ke Dockerhub.
- Fungsi Pipeline Backend : Menjalankan build image, dan push image docker ke Dockerhub.



Rencana penggunaan Load Balancer

- Peran : Sebagai titik masuk trafik HTTP/HTTPS aplikasi.
- Pemisahan Trafik :
 - Menerima permintaan API dan mengarahkannya ke target group backend
 - Menerima permintaan aset frontend dan mengarahkannya ke target group frontend.



Rencana penggunaan Autoscalling

- Peran : Mengelola kumpulan instance EC2 Frontend dan Backend
- Frontend :
 - Setiap instance akan menjalankan container docker yang berisi Nginx. Nginx bertugas menyajikan file build dari aplikasi react.
 - Autoscaling: ASG akan secara otomatis menambah (scale out) atau mengurangi (scale in) jumlah instance EC2 frontend berdasarkan metrik beban penggunaan CPU.
- Backend :
 - Setiap instance akan menjalankan container Docker yang berisi Nginx (sebagai reverse proxy) dan PHP-FPM (untuk menjalankan kode Laravel).
 - Autoscaling: Sama seperti frontend, ASG backend akan menskalakan jumlah instance berdasarkan metrik beban penggunaan CPU rata-rata.



Rencana penggunaan RDS & Dockerhub

- RDS for MySql adalah Layanan database MySQL yang dikelola penuh oleh AWS.
- Dockerhub sebagai tempat hosting untuk image docker aplikasi.



Rencana penggunaan Monitoring

- Menggunakan Prometheus untuk Mengumpulkan metrik secara periodik dari berbagai sumber.
- Menggunakan Grafana sebagai visualisasi dashboard untuk metrik yang dikumpulkan oleh Prometheus.

Pembagian Kerja



Pembagian Kerja Anggota Tim

- Aldura Armanu Shaufa Imron : Implementasi Penggunaan Git dan Github Repository, Implementasi Github Actions
- Alfredo Radhinal Mukhtar : Implementasi Monitoring
- Sabita Khansa Dewi : Implementasi Auto Scalling & RDS
- Githapati Prabuja Kemala Detha : implementasi load balancing

Progress



Git

```
Main
* dev
  dev-backend
  dev-frontend
(END)
```

- Karena project ini adalah project akhir mata kuliah PAW dan sudah menerapkan penggunaan branch, yang kita tampilkan hanya branch telah dibuat.

© 2013 Pearson Education, Inc. or its affiliate(s). All rights reserved. Pearson Education, Inc., publishing as Pearson Benjamin Cummings, 101 University Avenue, New York, NY 10017-2423.



Github Actions

```
name: Deploy Laravel + React App

on:
  push:
    branches:
      - dev

jobs:
  build-and-deploy:
    runs-on: ubuntu-latest

    steps:
      - name: Checkout Repository
        uses: actions/checkout@v3

      - name: Set up Docker Buildx
        uses: docker/setup-buildx-action@v3

      - name: Login to Docker Hub
        uses: docker/login-action@v3
        with:
          username: ${ secrets.DOCKER_USERNAME }
          password: ${ secrets.DOCKER_PASSWORD }

      - name: Build and Push Frontend
        uses: docker/build-push-action@v5
        with:
          context: ./frontend
          push: true
          tags: ${ secrets.DOCKER_USERNAME }/my-frontend:latest

      - name: Build and Push Backend
        uses: docker/build-push-action@v5
        with:
          context: ./backend
          push: true
          tags: ${ secrets.DOCKER_USERNAME }/my-backend:latest
```

- Membuat image dari push ke branch dev, karena masih tahap development untuk beberapa konfigurasi.

DockerHub

Repositories

All repositories within the **alduraimron** namespace.

Q

Search by repository name

All content

▼

Create a repository

Name	Last Pushed ↑	Contains	Visibility	Scout
alduraimron/my-backend	about 1 hour ago	IMAGE	Public	Inactive
alduraimron/my-frontend	about 1 hour ago	IMAGE	Public	Inactive

- Dockerhub berisi image Docker dari aplikasi backend dan frontend di branch dev untuk masa development ini.

RDS

Create database [Info](#)

Choose a database creation method

☒ Standard create
You set all of the configuration options, including ones for availability, security, backups, and maintenance.

☐ Easy create
Use recommended best-practice configurations. Some configuration options can be changed after the database is created.

Engine options

Engine type [Info](#)

☐ Aurora (MySQL Compatible) 	☐ Aurora (PostgreSQL Compatible) 	☒ MySQL 
☐ PostgreSQL 	☐ MariaDB 	☐ Oracle 
☐ Microsoft SQL Server 	☐ IBM Db2 	

Edition

☒ MySQL Community

- Membuat RDS engine dengan MySQL.

RDS

Aurora and RDS

Dashboard

Databases

Query editor

Performance insights

Snapshots

Exports in Amazon S3

Automated backups

Reserved Instances

Proxies

Subnet groups

Parameter groups

Option groups

Custom engine versions

Zero-ETL integrations

Events

Event subscriptions

Recommendations

Certificate update

seport-mysql-db

Summary

DB identifier

seport-mysql-db

CPU

4.45%

Status

Backing-up

Class

db.t4g.micro

Role

Instance

Current activity

0 Connections

Engine

MySQL Community

Region & AZ

us-east-1d

Recommendations

Connectivity & security

Monitoring

Logs & events

Configuration

Zero-ETL integrations

Maintenance & backups

Data migrations - new

Tags

Recommendations

Connectivity & security

Endpoint & port

Endpoint

seport-mysql-db.c5lk8ecg4cxp.us-east-1.rds.amazonaws.com

Port

3306

Networking

Availability Zone

us-east-1d

VPC

vpc-0ad862e3b1199e1c3

Subnet group

default-vpc-0ad862e3b1199e1c3

Subnets

subnet-04d8f13decf5b89f6
subnet-0d15ff6a9ab66621d
subnet-0c6c8b51739b81aa4
subnet-060aeb471bb3ebd35
subnet-007fe8e9d4d6ad1a5
subnet-0f56042b118f75ea7

Network type

IPv4

Security

VPC security groups

rds-sg (sg-04f4188be11efd699)

Active

Publicly accessible

No

Certificate authority

rds-ca-rsa2048-g1

Certificate authority date

May 26, 2061, 06:34 (UTC+07:00)

DB instance certificate expiration date

June 02, 2026, 23:32 (UTC+07:00)

Connected compute resources (0)

Filter by compute resources

Resource Identifier

Resource type

Availability Zone

VPC security group

Compute resource security group

Connected proxy

No connected compute resources

No connected compute resources that were created automatically to display.

Set up EC2 connection

Set up Lambda connection

Proxies (0)

Create proxy

- Hasil pembuatan RDS.

ALB


Load balancer type

Compare and select load balancer type

A complete feature-by-feature comparison along with detailed highlights is also available. [Learn more](#)

Load balancer types


Application Load Balancer [Info](#)

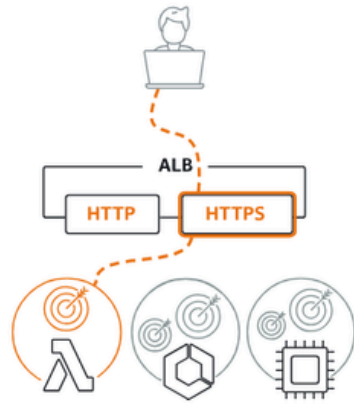

Choose an Application Load Balancer when you need a flexible feature set for your applications with HTTP and HTTPS traffic. Operating at the request level, Application Load Balancers provide advanced routing and visibility features targeted at application architectures, including microservices and containers.

Create

Network Load Balancer [Info](#)

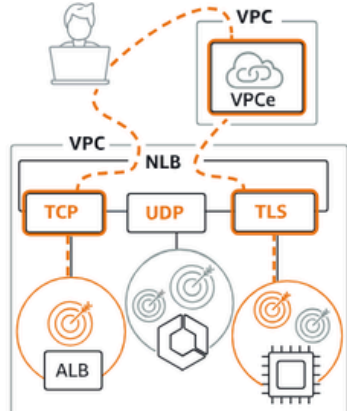

Choose a Network Load Balancer when you need ultra-high performance, TLS offloading at scale, centralized certificate deployment, support for UDP, and static IP addresses for your applications. Operating at the connection level, Network Load Balancers are capable of handling millions of requests per second securely while maintaining ultra-low latencies.

Create

Gateway Load Balancer [Info](#)



Choose a Gateway Load Balancer when you need to deploy and manage a fleet of third-party virtual appliances that support GENEVE. These appliances enable you to improve security, compliance, and policy controls.

Create

► Classic Load Balancer - previous generation

Close

- Membuat load balancer dengan tipe Application Load Balancer
- berfungsi untuk aplikasi HTTP dan HTTPS

ALB

Successfully created load balancer: seport-alb
It might take a few minutes for your load balancer to fully set up and route traffic. Targets will also take a few minutes to complete the registration process and pass initial health checks.

Application Load Balancers now support public IPv4 IP Address Management (IPAM)
You can get started with this feature by configuring IP pools in the Network mapping section.

Edit IP pools

seport-alb

Actions

Details

Load balancer type Application	Status Provisioning	VPC vpc-0ad862e3b1199e1c3	Load balancer IP address type IPv4
Scheme Internet-facing	Hosted zone Z35SXDOTRQ7X7K	Availability Zones subnet-0f56042b118f75ea7 us-east-1b (use1-az4) subnet-060aeb471bb3ebd35 us-east-1c (use1-az6) subnet-007fe8e9d4d6ad1a5 us-east-1a (use1-az2)	Date created June 2, 2025, 23:48 (UTC+07:00)
Load balancer ARN arn:aws:elasticloadbalancing:us-east-1:851725534385:loadbalancer/app/seport-alb/0145f853bff4f74e		DNS name Info seport-alb-469424020.us-east-1.elb.amazonaws.com (A Record)	

Listeners and rules

Network mapping

Resource map

Security

Monitoring

Integrations

Attributes

Capacity

Tags

Listeners and rules (1) [Info](#)

Manage rules

Manage listener

Add listener

A listener checks for connection requests on its configured protocol and port. Traffic received by the listener is routed according to the default action and any additional rules.

Filter listeners

< 1 > [Settings](#)

☐	Protocol:Port	Default action	Rules	ARN	Security policy	Default SSL/TLS certificate	mTLS	Trust store
☐	HTTP:80	Forward to target group tg-seport-frontend: 1 (100%) - Target group stickiness: Off	1 rule	ARN	Not applicable	Not applicable	Not applicable	Not applicable

- Hasil pembuatan ALB.

ALB

Listener rules (2) [Info](#)

[Rule limits](#) [Actions](#) [Add rule](#)

Traffic received by the listener is routed according to the default action and any additional rules. Rules are evaluated in priority order from the lowest value to the highest value.

☐	Name tag	Priority ▲	Conditions (If)	Actions (Then)	Actions
☐	-	1	Path Pattern is /api/*	Forward to target group tg-seport-backend: 1 (100%) - Target group stickiness: Off	Edit Delete
☐	Default	Last (default)	If no other rule applies	Forward to target group tg-seport-frontend: 1 (100%) - Target group stickiness: Off	Edit Delete

- path pattern /api/* akan diarahkan ke target group backend dan yang lainnya akan diarahkan ke target group frontend.

Target group

- Target Group untuk front-end.
- Nantinya instance frontend akan di assign ke target group ini.

Target group name

tg-seport-frontend

A maximum of 32 alphanumeric characters including hyphens are allowed, but the name must not begin or end with a hyphen.

Protocol : Port

Choose a protocol for your target group that corresponds to the Load Balancer type that will route traffic to it. Some protocols now include anomaly detection for the targets and you can set mitigation options once your target group is created. This choice cannot be changed after creation

HTTP

80

1-65535

IP address type

Only targets with the indicated IP address type can be registered to this target group.

☒ IPv4

Each instance has a default network interface (eth0) that is assigned the primary private IPv4 address. The instance's primary private IPv4 address is the one that will be applied to the target.

☐ IPv6

Each instance you register must have an assigned primary IPv6 address. This is configured on the instance's default network interface (eth0). [Learn more](#)

VPC

Select the VPC with the instances that you want to include in the target group. Only VPCs that support the IP address type selected above are available in this list.

-

vpc-0ad862e3b1199e1c3

IPv4 VPC CIDR: 172.31.0.0/16

Protocol version

☒ HTTP1

Send requests to targets using HTTP/1.1. Supported when the request protocol is HTTP/1.1 or HTTP/2.

☐ HTTP2

Send requests to targets using HTTP/2. Supported when the request protocol is HTTP/2 or gRPC, but gRPC-specific features are not available.

☐ gRPC

Send requests to targets using gRPC. Supported when the request protocol is gRPC.

Health checks

The associated load balancer periodically sends requests, per the settings below, to the registered targets to test their status.

Health check protocol

HTTP

Health check path

Use the default path of "/" to perform health checks on the root, or specify a custom path if preferred.

/

Up to 1024 characters allowed.

► Advanced health check settings

Attributes

ⓘ

Certain default attributes will be applied to your target group. You can view and edit them after creating the target group.

► Target optional

Target group

✔ Successfully created the target group: **tg-seport-backend**. Anomaly detection is automatically applied to all registered targets. Results can be viewed in the **Targets** tab.

tg-seport-backend

Actions ▾

Details

arn:aws:elasticloadbalancing:us-east-1:851725534385:targetgroup/tg-seport-backend/7654d49c32bec734

Target type
Instance

IP address type
IPv4

Protocol : Port
HTTP: 80

Load balancer
[None associated](#)

Protocol version
HTTP1

VPC
[vpc-0ad862e3b1199e1c3](#)

0
Total targets

✔ 0
Healthy

0 Anomalous

⊗ 0
Unhealthy

⊖ 0
Unused

⌚ 0
Initial

⌚ 0
Draining

Targets

Monitoring

Health checks

Attributes

Tags

Registered targets (0) [Info](#)

[Anomaly mitigation: Not applicable](#) [Refresh](#) [Deregister](#) [Register targets](#)

Target groups route requests to individual registered targets using the protocol and port number specified. Health checks are performed on all registered targets according to the target group's health check settings. Anomaly detection is automatically applied to HTTP/HTTPS target groups with at least 3 healthy targets.

Instance ID

Name

Port

Zone

Health status

Health status details

Administrative o...

Override details

Launch time

No registered targets

You have not registered targets to this group yet

[Register targets](#)

- Target Group untuk backend.
- Nantinya instance backend akan di assign ke target group ini.

Template Frontend

EC2 > Launch templates > Create launch template

A prod webserver for myapp

Max 255 chars

Auto Scaling guidance

Info

Select this if you intend to use this template with EC2 Auto Scaling

☒ Provide guidance to help me set up a template that I can use with EC2 Auto Scaling

Template tags

Source template

Launch template contents

Specify the details of your launch template below. Leaving a field blank will result in the field not being included in the launch template.

▼ Application and OS Images (Amazon Machine Image) - required

Info

An AMI is a template that contains the software configuration (operating system, application server, and applications) required to launch your instance. Search or Browse for AMIs if you don't see what you are looking for below

Q Search our full catalog including 1000s of application and OS images

Recents

Quick Start

Amazon Linux

aws

macOS

Mac

Ubuntu

ubuntu

Windows

Microsoft

Red Hat

Red Hat

SUSE Linux

SUSE

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Ubuntu Server 22.04 LTS (HVM), SSD Volume Type

Free tier eligible

ami-0f9de6e2d2f067fca (64-bit (x86)) / ami-0967e555761d839e (64-bit (Arm))

Virtualization: hvm ENA enabled: true Root device type: ebs

Description

Ubuntu Server 22.04 LTS (HVM),EBS General Purpose (SSD) Volume Type. Support available from Canonical (http://www.ubuntu.com/cloud/services).

Canonical, Ubuntu, 22.04, amd64 jammy image

Architecture

AMI ID

Publish Date

Username

64-bit (...)

ami-0f9de6e2d2f067fca

2025-03-05

ubuntu

Verified provider

▼ Instance type

Info

Get advice

Advanced

Instance type

t3.small

Family: t3 2 vCPU 2 GiB Memory Current generation: true

On-Demand SUSE base pricing: 0.0518 USD per Hour

On-Demand Linux base pricing: 0.0208 USD per Hour

On-Demand RHEL base pricing: 0.0496 USD per Hour

All generations

Compare instance types

▼ Summary

Software Image (AMI)

Canonical, Ubuntu, 22.04, amd64...read more

ami-0f9de6e2d2f067fca

Virtual server type (instance type)

t3.small

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 10 GiB

Cancel

Create launch template

lt-seport-frontend (lt-0145778c37754febc)

Actions

Delete template

Launch template details

Launch template ID

lt-0145778c37754febc

Launch template name

lt-seport-frontend

Default version

1

Owner

arn:aws:sts::851725534385:assumed-role/voclabs/user4062567=alduralmron@student.u

b.ac.id

Details

Versions

Template tags

Launch template version details

Actions

Delete template version

Version

1 (Default)

Description

-

Date created

2025-06-03T02:08:49.000Z

Created by

arn:aws:sts::851725534385:assumed-role/voclabs/user4062567=alduralmron@student.u

b.ac.id

Instance details

Storage

Resource tags

Network interfaces

Advanced details

AMI ID

ami-0f9de6e2d2f067fca

Instance type

t3.small

Availability Zone

-

Key pair name

vockey

Security groups

-

Security group IDs

sg-07788b55237c9b783

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences



Template Backend

lt-seport-backend (lt-0ff79cb080bbe706f)

ActionsDelete template

Launch template details

Launch template ID lt-0ff79cb080bbe706f	Launch template name lt-seport-backend	Default version 1	Owner arn:aws:sts::851725534385:assumed-role/voclabs/user4062567=alduraimron@student.u b.ac.id
--	---	----------------------	--

Details

Versions

Template tags

Launch template version details

ActionsDelete template version

Version 1 (Default)	Description -	Date created 2025-06-03T03:29:17.000Z	Created by arn:aws:sts::851725534385:assumed-role/voclabs/user4062567=alduraimron@student.u b.ac.id
------------------------	------------------	--	---

Instance details

Storage

Resource tags

Network interfaces

Advanced details

AMI ID ami-0f9de6e2d2f067fca	Instance type t3.medium	Availability Zone -	Key pair name vockey
Security groups -	Security group IDs sg-04478afcdfba7d1d4		

ASG Frontend

Scaling [Info](#)

You can resize your Auto Scaling group manually or automatically to meet changes in demand.

Scaling limits

Set limits on how much your desired capacity can be increased or decreased.

Min desired capacity

1

Equal or less than desired capacity

Max desired capacity

3

Equal or greater than desired capacity

Automatic scaling - optional

Choose whether to use a target tracking policy [Info](#)

You can set up other metric-based scaling policies and scheduled scaling after creating your Auto Scaling group.

☐ **No scaling policies**

Your Auto Scaling group will remain at its initial size and will not dynamically resize to meet demand.

☒ **Target tracking scaling policy**

Choose a CloudWatch metric and target value and let the scaling policy adjust the desired capacity in proportion to the metric's value.

Scaling policy name

Target Tracking Policy

Metric type | [Info](#)

Monitored metric that determines if resource utilization is too low or high. If using EC2 metrics, consider enabling detailed monitoring for better scaling performance.

Average CPU utilization

Target value

60

Instance warmup | [Info](#)

300

 seconds

☐ Disable scale in to create only a scale-out policy

- Membuat auto scaling group dengan ketentuan min capacity 1 dan max capacity 3.
- Target tracking nya berdasarkan rata-rata penggunaan CPU dengan nilai 60%.

ASG Backend

Scaling [Info](#)
You can resize your Auto Scaling group manually or automatically to meet changes in demand.

Scaling limits
Set limits on how much your desired capacity can be increased or decreased.

Min desired capacity

Equal or less than desired capacity

Max desired capacity

Equal or greater than desired capacity

Automatic scaling - optional
Choose whether to use a target tracking policy | [Info](#)
You can set up other metric-based scaling policies and scheduled scaling after creating your Auto Scaling group.

☐ **No scaling policies**
Your Auto Scaling group will remain at its initial size and will not dynamically resize to meet demand.

☒ **Target tracking scaling policy**
Choose a CloudWatch metric and target value and let the scaling policy adjust the desired capacity in proportion to the metric's value.

Scaling policy name

Metric type | [Info](#)
Monitored metric that determines if resource utilization is too low or high. If using EC2 metrics, consider enabling detailed monitoring for better scaling performance.

Target value

Instance warmup | [Info](#)
 seconds


☐ Disable scale in to create only a scale-out policy

- Membuat auto scaling group dengan ketentuan min capacity 2 dan max capacity 4.
- Target tracking nya berdasarkan rata-rata penggunaan CPU dengan nilai 60%.
-

Masalah dan Solusi



Masalah

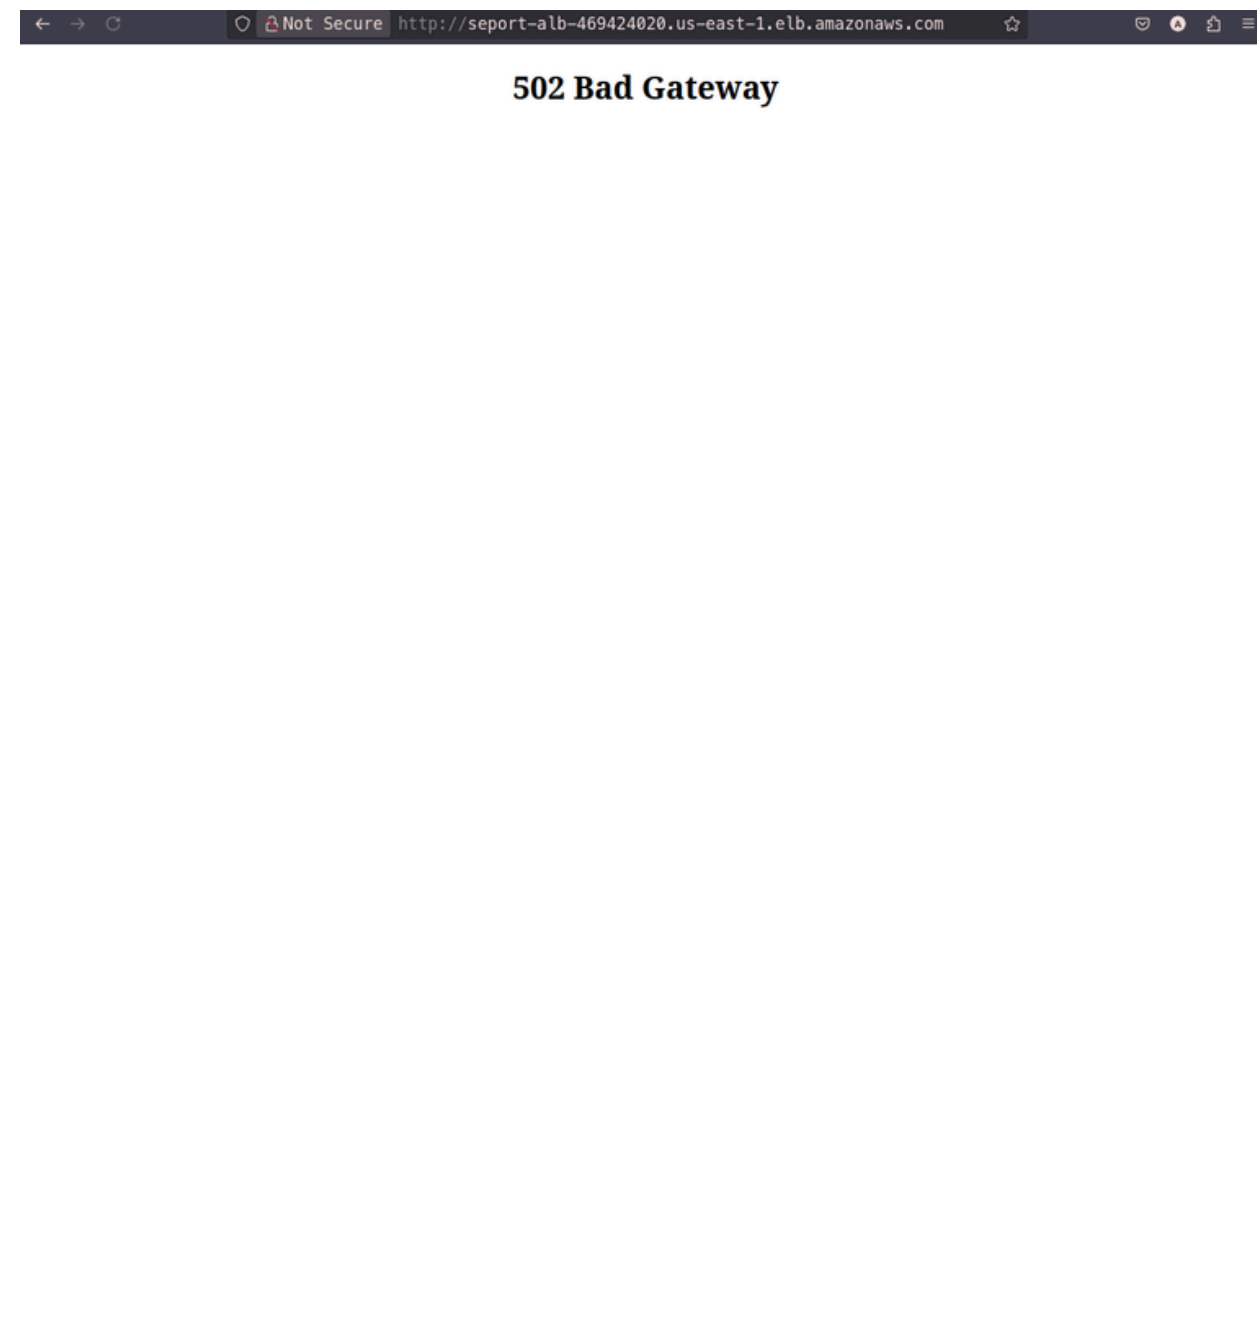

Response	Percentage
Good job	65%
Not a good job	35%

Solusi

User data - optional | [Info](#)

Upload a file with your user data or enter it in the field.

 [Choose file](#)

```
#!/bin/bash
```

```
# Update dan install Docker
```

```
sudo apt update -y
```

```
sudo apt install -y docker.io
```

```
# Mulai dan aktifkan Docker
```

```
sudo systemctl start docker
```

```
sudo systemctl enable docker
```

```
sudo usermod -aG docker $USER
```


```
echo [REDACTED] | sudo docker login --username [REDACTED] --  
password-stdin
```

```
# Pull dan jalankan image Docker backend
```

☐ User data has already been base64 encoded

- Masalahnya terdapat pada user data template, dimana sebelumnya lupa ditambahkan `#!/bin/bash`.
- Tanpa shebang ini EC2 tidak akan tahu bahwa user data adalah shell script. Akibatnya shell script tidak akan dijalankan dan container docker tidak akan tersedia di instance EC2.

Masalah

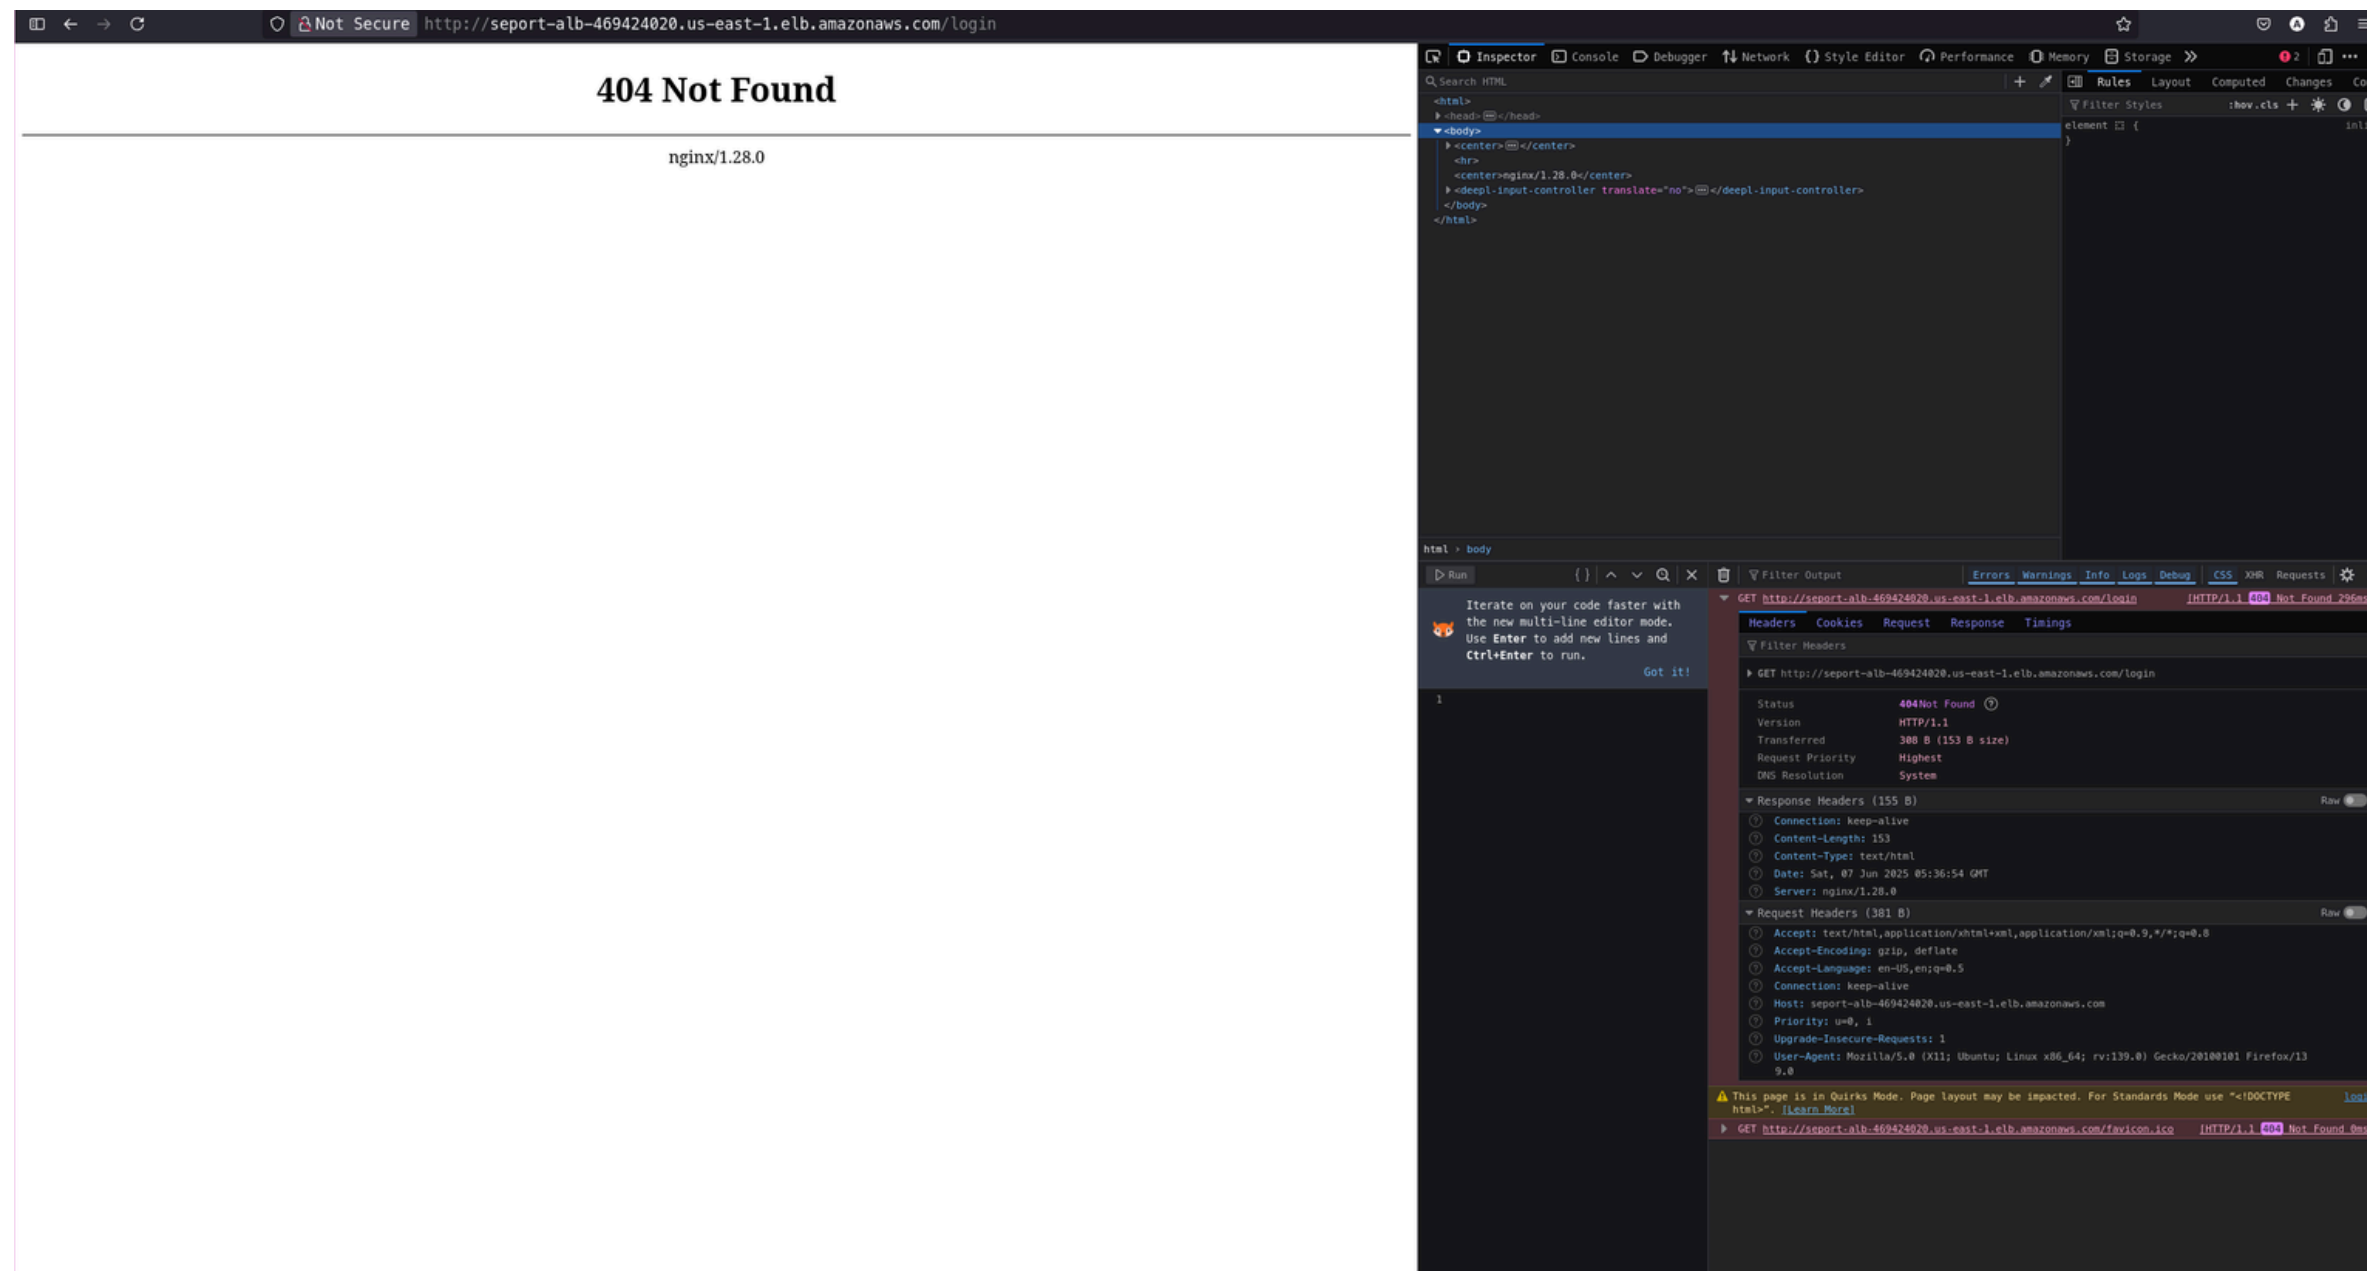

- Error saat halaman selain halaman utama direload akan muncul error.
- Ini diakibatkan karena aplikasi menggunakan react routing tapi konfigurasi nginx tidak mengarahkan semua permintaan ke index.html.

Solusi

```
frontend > ⚙️ nginx.conf
1  server {
2      listen 80;
3      server_name localhost;
4
5      root /usr/share/nginx/html;
6      index index.html;
7
8      location / {
9          try_files $uri /index.html;
10     }
11
12     error_page 404 /index.html;
13 }
14
```

- Dengan menambahkan konfigurasi ini semua permintaan akan diarahkan ke index.html dan nanti react yang mengarahkan sesuai path.

Terima Kasih
