

Compass Rose Tasks Setup and Support Guide

Last Updated: May 21, 2026

Epic | 1979 Milky Way | Verona, WI 53593 | Voice: 608.271.9000 | Fax: 608.271.7237 | www.epic.com | documentation@epic.com

Your Responsibilities for Safe Use

This documentation will help guide you through the available software configuration options so you can decide the right configuration for your organization. Of course, safe and compliant use of the software in any configuration requires you and your users to use good judgment and perform certain responsibilities, including each of the following: enter and read information accurately and completely; be responsible for configuration decisions; ensure compliance with laws and regulations relevant for your organization; confirm the accuracy of critically important medical information (e.g., allergies, medications, results), just as you would with paper records; actively report suspected errors in the software to both Epic and affected personnel; thoroughly test the software to ensure it's accurate before using it; and use the software only according to standards of good medical practice. You also are responsible for training your personnel and other users to perform these responsibilities. Not performing any of these responsibilities may compromise patient safety or your compliance with applicable requirements.

Table of Contents

Compass Rose Tasks Setup and Support Guide	4
Available Epic Resources	6
Target Setup	7
Give Users Access to the Targets Navigator Section	9
Create Compass Rose Targets and Target Templates	10
Checklist Task Setup	14
Give Compass Rose Users Access to the Checklist	15
Create Tasks and Task Templates for Compass Rose	17
Set Up Work Lists for Tasks	20
Set Up Reports for Tasks	20
Set Up Workqueues for Outreach Tasks	21
Optional Task-Related Features	23
Automatically Add Tasks to the Checklist	23
Automatically Remove Tasks from the Checklist	33
Automatically Resolve Compass Rose Tasks and Targets When an Episode Is Resolved	34
Automatically Complete Compass Rose Tasks and Targets Based on Documentation	34
Let Users Add Checklist Tasks to Decisions	42

Compass Rose Tasks Setup and Support Guide

Compass Rose provides several tools in Epic for users to track what needs to be done each day to stay on top of their cases. As described in the [Targets, Tasks, and Care Plans: What to Use and When](#) document, these tools have common elements that make them well suited to tracking patient care and program outcomes across many workflows.

How to Use This Document

This guide describes how to set up the following types of Compass Rose tools:

- Targets
- Checklist tasks

For each of these tools, the guide includes instructions on how to set up users' workspaces to work with these tools and how to build the tools themselves. The [Set Up Work Lists for Tasks](#) topic describes how to set up reports or workqueues to show one or more of these tools so users have a centralized work list of their assigned tasks.

Each section in the guide for how to build a specific type of tool includes only the essentials. For more information about optional features, such as how to automatically assign tasks based on patient events, refer to the [Optional Task-Related Features](#) topic.

Which Type of Tool Do You Need?

This guide assumes you have a working knowledge of the differences between the tools and when you might want to use them. For more information, refer to the [Targets, Tasks, and Care Plans: What to Use and When](#) document.

The following table offers a quick reminder about when each type of tool is best:

Use Case	Recommended Tool
Users need to contact the patient at regular intervals.	Outreach tasks
Users need to track program-level milestones and outcomes.	Targets
Users need to keep track of day-to-day tasks related to the patient's care. Users need a reminder to review a patient's care on a regular basis.	Checklist tasks

For Outreach tasks, refer to the [Compass Rose Outreach Setup and Support Guide](#).

Terminology

Because Compass Rose is a combination of what used to be the EpicCare Social Care and Healthy Planet Advanced Care Management modules, you might see references to "social care" activities or workflows throughout this guide. You might also see references to "Coordinated Care Management" because Compass Rose used to be known as Coordinated Care Management. Know that all of these references mean the same thing as Compass Rose.

Available Epic Resources

The following guides describe features that can be used in conjunction with Compass Rose tasks:

- [Compass Rose Programs Setup and Support Guide](#). This guide describes how to create the programs that you can use with each type of Compass Rose task.
- [Care Planning Activity Setup and Support Guide](#). This guide contains setup instructions for the Care Planning activity, where users can document the interventions, goals, and tasks that are a part of a patient's care plan.
- [Health Maintenance Setup and Support Guide](#). This guide contains setup for Health Maintenance, which you might use in conjunction with Compass Rose tasks to track patients' care.
- [Social Drivers of Health Setup and Support Guide](#). This guide describes how your organization can collect and present social drivers of health data in Epic, which social workers can refer to as part of evaluating a client's needs.
- [Community Resource Directory Setup and Support Guide](#). This guide includes the necessary setup for social workers to outsource services to community providers.
- [Healthy Planet Link Setup and Support Guide](#). This guide contains setup instructions for providing care management tools to community organizations in your network through Healthy Planet Link.

Target Setup


Use Case

If you have a need to track program-level milestones and outcomes, use Targets. For example, funding for your programs might require that users complete an initial evaluation of the patient's needs within seven days of program enrollment. Targets are a great way to keep track of such regulatory requirements.

Target and Target template records define program-level requirements for Compass Rose episodes, as well as the due dates for these milestones to be completed. From the Targets navigator section, users can review a program's Targets, document when a Target was completed, and document Target outcomes.

Targets		
High Risk Care Management		
Add targets + Add		Show: ☒ Completed
Targets	Due	Outcome
🕒 Upcoming		
Add relevant Care Plans within 7 days of program enrollment	11/3/2020 (6 days)	✓ Mark Complete ✕
Assess chronic diseases within 7 days of program enrollment	11/3/2020 (6 days)	✓ Mark Complete ✕
Complete Initial Assessment within 7 days of program enrollment	11/3/2020 (6 days)	✓ Mark Complete ✕
Coordinate community resources needed by patient at enrollment within 14 days	11/10/2020 (13 days)	✓ Mark Complete ✕
Complete Specialty Plan of Care within 14 days of program enrollment	11/10/2020 (13 days)	✓ Mark Complete ✕
Refer patient to other programs as needed within 1 month of program enrollment	11/27/2020	✓ Mark Complete ✕
Avoid Hospital Admission/ED Visit for First 6 Months	4/27/2021	✓ Mark Complete ✕
Avoid Hospital Admission/ED Visit for 12 Months	10/27/2021	✓ Mark Complete ✕
✓ Completed		
Follow up with PCP about patient's last visit within 7 days of program enrollment	11/3/2020	Complete
Completed on 10/28/2020 by Care Coordinator Healthy Planet, RN		
Assess Social Determinants of Health within 7 days of program enrollment	11/3/2020	Complete
Completed on 10/28/2020 by Care Coordinator Healthy Planet, RN		

Users can also see the number of completed, upcoming, and overdue Targets from the Programs navigator section.

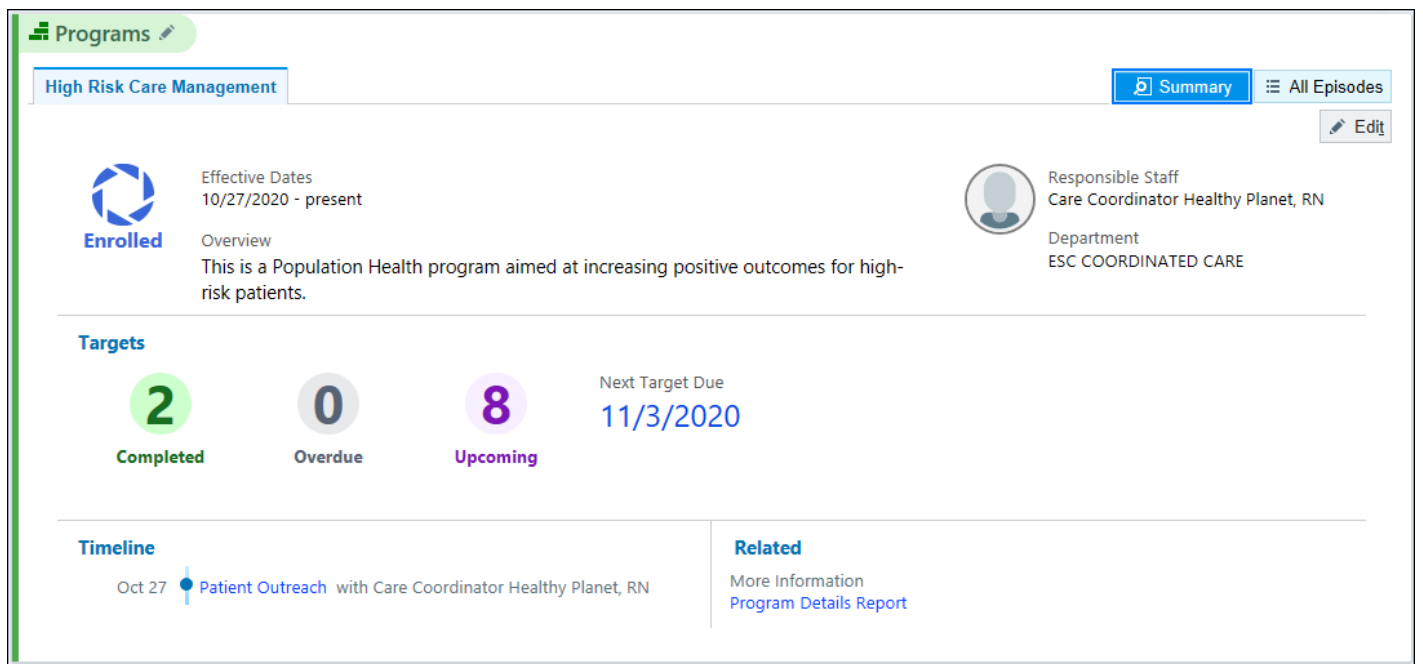

You can report on the completion and outcomes of Targets for your program management metrics. For example, you can see how often care managers successfully complete initial program evaluations on time and potentially reallocate staffing resources to help those who are struggling to meet deadlines.

Targets can be automatically added for each type of program, so users do not have to think about which Targets apply to which program. This also helps ensure program-level consistency as each patient in the same type of program has the same Targets. If needed, users can manually add other Targets to a program from the Targets navigator section.

Unlike other types of tasks, due dates for Targets cannot always be changed by users, which helps ensure that requirements are met in a timely fashion. Instead, if the due dates are driven by other actions in the system, such as the completion of a previous Target or the result of the program being paused the due date will calculate based on the action. Simple due dates like days, weeks, months, or years will allow users to make updates. With additional setup, you can have the completion of specific Targets also complete the associated program.

Because Targets are a type of task, you can set up a task-based Reporting Workbench report to show users all of the Targets for the programs they're responsible for.

CoCM Upcoming Targets for My Cases [1393768] as of Wed 10/28/2020 5:14 PM

[Filters](#)
[Options](#)
[Re-run Report](#)
[Chart](#)
[Appts](#)
[Document on Episode](#)
[Enrollment Enc](#)
[Start Outreach](#)

[Detail](#)
[Summary - My Cases' Targets](#)

Due	Task	Patient Name	Date Added	Created By	Comments
11/03/2020	Complete Initial Assessment within 7 days of program enrollment	Harris, Naomie	10/27/2020	Care Coordinator Healthy Planet, RN	
11/03/2020	Assess chronic diseases within 7 days of program enrollment	Harris, Naomie	10/27/2020	Care Coordinator Healthy Planet, RN	
11/03/2020	Add relevant Care Plans within 7 days of program enrollment	Harris, Naomie	10/27/2020	Care Coordinator Healthy Planet, RN	
11/03/2020	Complete Initial Assessment within 7 days of program enrollment	Makinen, Mindy	10/27/2020	Care Coordinator Healthy Planet, RN	
11/03/2020	Assess chronic diseases within 7 days of program enrollment	Makinen, Mindy	10/27/2020	Care Coordinator Healthy Planet, RN	
11/03/2020	Add relevant Care Plans within 7 days of program enrollment	Makinen, Mindy	10/27/2020	Care Coordinator Healthy Planet, RN	
11/03/2020	Follow up with PCP about patient's last visit within 7 days of program enrollment	Makinen, Mindy	10/27/2020	Care Coordinator Healthy Planet, RN	
11/03/2020	Assess Social Determinants of Health within 7 days of program enrollment	Makinen, Mindy	10/27/2020	Care Coordinator Healthy Planet, RN	
11/10/2020	Complete Specialty Plan of Care within 14 days of program enrollment	Harris, Naomie	10/27/2020	Care Coordinator Healthy Planet, RN	
11/10/2020	Coordinate community resources needed by patient at enrollment within 14 days	Harris, Naomie	10/27/2020	Care Coordinator Healthy Planet, RN	

Follow the steps in the topics below to create Targets and associate them with your Compass Rose episode types. For more information about how to set up Reporting Workbench reports to show targets, refer to the [Set Up Reports for Tasks](#) topic.



We created the following Targets in the Foundation System, which you can use as is or as a model for your own Targets:

- 7650000005-Make contact with client
- 7650000006-Complete initial assessment
- 7650000007-Complete core assessment

Give Users Access to the Targets Navigator Section

Users and administrators need the appropriate security to document Targets and to create the Task and Task template records themselves, respectively. You also need to give users access to the Targets navigator section.

Give Users and Administrators Security for Targets

To view and edit Targets, users need the following EpicCare security points:

- 223-Episode Checklist View
- 224-Episode Checklist Edit

To create and edit Targets and specify default Targets in Compass Rose episode types, administrators need the following security points:

- EpicCare security point 385-Edit Task & Task Templates
- Shared security point 22050-Episodes - Episode Administrator

Give Users Access to the Targets Navigator Section

To give users access to the Targets navigator section:

1. In Hyperspace, access the Navigator Template Editor (search: Navigator Template).
2. Add navigator section 65003-SEC_ESC_Targets, or your copy if you created one, to the appropriate navigator templates. Refer to the [Edit Navigators in Hyperspace](#) topic for detailed instructions on configuring navigator records in the Navigator Template Editor.

Create Compass Rose Targets and Target Templates

Compass Rose Targets are a specific kind of task record created in the Task Editor. You can optionally build Target templates that group a discrete set of Targets that should always be completed for certain Compass Rose episodes. Target templates are also used to automatically add Targets to an episode based on the episode's status.

Create Targets

Before you create Targets, determine whether you need to have a set of Targets that occurs in a series. For example, a Target to conduct an initial evaluation might lead to a Target to develop a plan of care. If you want to have a set of Targets that occurs in a series, create them in reverse order of how they'll appear in the series. For example, create Target 4 before you create Target 3, and so on. This allows you to more easily set up the series of Targets as you create each preceding Target.

Starting in November 2024, you can allow users to discretely track progress on a patient's Targets over time. Tracking Target progress for things such as weight management or avoiding readmission helps care managers see trends based on past progress assessments, and it can drive intervention when things are off track. Users can record two separate assessments: an overall assessment (On Track, Off Track, or Unable to Assess), and a progression assessment (Improving, Worsening, Unchanging, or Not Applicable). For example, a patient who is enrolled in a Transitional Care Management program might have a Target to prevent readmission within 30 days post-discharge. Her PCP sees that her condition is improving and marks on the Target that the patient is On Track and Improving and decides to continue her current rehab regimen.

Complete the following steps to create a Target:

1. In Hyperspace, access the Task Editor (search: Task Editor) and create a task record. Enter an appropriate display name.
2. In the Task Context (I LTR 29) field, enter 2-Checklist.
3. In the Episode class (I LTR 53100) field, enter a Compass Rose episode class, such as 33-Compass Rose Program or 34-Compass Rose Service.
 - Note that Targets can have only one specified episode class. You need to create different sets of Target records for different episode classes.
4. In the Is Compass Rose Target? (I LTR 26000) (May 2024 and earlier: Is Coordinated Care Management Target?) field, enter 1-Yes.
5. If completion of this Target should automatically resolve the episode it's associated with, enter 1-Completion in the Base type (I LTR 24000) field.
6. In the Waiting time type (I LTR 24040) field, enter one of the following:
 - 1-Calendar Days: This setting determines the due date of the Target solely based on the date the episode or Target was originally created. An episode being paused does not delay the Target's due date.

- 2-Waiting Days: This setting accounts for the status of the episode when determining the due date. If an episode is paused, the Target due date appears as the number of days remaining. Unpausing the episode recalculates the due date.

- Note that this option applies only if the Due Date method (I LTR 53101) is set to Days from administrative pathway period start date or Days from completion of Target.

7. In the Due Date fields, specify a time period and the method with which the due date is calculated. For example, to generate a due date of seven days from when the Target is added, enter 7 in the field that contains the calculator (I LTR 53105) and enter Days in the field next to it (I LTR 53101). In this example, if the Target is added manually, the due date is calculated as seven days from today, and if the Target is auto-generated by completing another Target, the due date is calculated as seven days from that Target's completion date.

- If you need specific days, such as weekends or holidays to be excluded from due date calculation, use the Due date adjustment (I LTR 26002) field. Select Do not count excluded days, Due next included day, or Due previous included day. Then, use the Excluded days checkboxes (I LTR 26003) to select the days to be excluded from task due date.

- Note that Holidays are defined by the existence of a Holiday (EHO) record for that date, regardless of department-level activation.



To make it easy to get this content, we've created a Turbocharger package with tasks set up to be due prior to weekends and holidays. If your organization is in the United States and a member of your EpicConnect team has completed the necessary EpicConnect setup, you can download this package from this topic or the Available Packages tab in the Turbocharger activity (search: Turbocharger). For more information about importing these records, refer to [the 248620-Enhance Weekend and Holiday Handling for Tasks](#) topic.

- Starting in August 2024, you can use either the Calendar - Monthly or Calendar - Yearly mnemonics (I LTR 53101) to set a Target's due date to a specific day on a calendar.
 - For example, if you would like the due date of a task to be the last business day of each month, select the Calendar - Monthly due date mnemonic, enter 31 in the Day of month (I LTR 26005) field, set the Due date adjustment (I LTR 26002) to Due previous included day, and set Excluded days (I LTR 26003) to Sunday, Saturday, and Holidays.
 - You could also set a due date to the first or last day of the year by setting Calendar - Yearly in the Due date field, entering January or December in the Month of year (I LTR 26006) field, and 1 or 31 in the Day of month field.
- 8. In the Exclude Weekends and Holidays? (I LTR 26001) field, enter Yes or No depending on whether due date calculation should consider weekends and holidays. Refer to the [Account for Holidays in Your Schedules](#) topic for more information.
 - Note that this field has an effect only if the Due Date method (I LTR 53101) is set to one of the following:
 - Days
 - Days from administrative pathway period start date
 - Days from completion of Target
- 9. If the Target you are creating should have its due date set based on the completion date of another Target, enter that Target in the Initiating Targets (I LTR 24030) field. The Initiating Targets field is available only if

the Due Date method (I LTR 53101) is set to Days from completion of Target. Note that if you use this method, a due date for your Target is set only by completing the initiating Target. Additionally, any changes to the completion date of the initiating Target results in a new due date being set for your Target.

10. In the Completion Encounter Outcomes (I LTR 24005) field, enter the Outcomes (I EPT 18199) that should be available for selection when a user documents that they have completed a Target.
11. Use the Outcome and Target Set table to specify whether the documentation of specific outcomes should generate a new Target.
 - In the Outcome (I LTR 24050) field, enter an outcome (I EPT 18199) that should generate another Target. Note that any outcomes entered in this field also need to be entered in the Completion Encounter Outcomes (I LTR 24005) field.
 - In the Target Set (I LTR 24051) field, enter the Target that should be generated when the corresponding outcome is documented for the Target you are creating.
12. Starting in November 2022, specify what happens to Targets when the episode is resolved (closed or declined) in the Auto-Resolve Information section. Note that automatic resolution of Targets can also be configured at the episode type level, as described in the [Automatically Resolve Care Plans, Tasks, and Targets](#) topic. Target-specific configuration always takes priority over episode type configuration. To save time, we recommend doing most of your configuration at the episode type level and configuring individual Targets only when they need to take an action that is different from the overall episode type settings.
 - In the Linked Episode Tracking Status (I LTR 26100) column, specify the tracking statuses that should be considered for automatic resolution.
 - In the Target Auto-Resolve Action (I LTR 26101) column, indicate whether the system should automatically complete or delete Targets for that tracking status. Alternatively, if you want the Target to always remain incomplete, regardless of episode type configuration, specify No Action in this column for each affected tracking status. This is useful if manual verification of the Target is required.
 - In the Target Outcome column, optionally specify the outcome to set on the Target when it is completed. This field is enabled only when the Target Auto-Resolve Action is set to Complete. Note that the outcome must be listed in the Completion Encounter Outcomes (I LTR 24005) field to be selectable here.
13. Starting in November 2024, optionally configure progress assessments for this Target:
 - For Targets with an Episode Class (I LTR 53100) of 30-Specialty Pharmacy, progress assessments are enabled by default.
 - To disable only progression assessments, enter No in the Enable progression assessments? (I LTR 24201) field.
 - To disable all assessments, enter No in the Enable overall assessments? (I LTR 24200) field.
 - For all other Targets, progress assessments are disabled by default.
 - To enable overall assessments, enter Yes in the Enable overall assessments? (I LTR 24200) field.
 - If you enabled overall assessments and want to additionally enable progression assessments, enter Yes in the Enable progression assessments? (I LTR 24201) field.

Create Target Templates

Target templates group multiple Targets that should be documented for the same outcome or episode.

To create a Target template:

1. In Hyperspace, access the Task Template Editor (search: Task Template Editor) and create a template record. Give your record an appropriate display name.
2. In the Template context (I LTT 29) field, enter 2-Checklist.
3. In the Episode class (I LTT 53100) field, enter a Compass Rose episode class, such as 33-Compass Rose Program or 34-Compass Rose Service, depending on which episode class the Target template should be documented in.
 - Just as with individual Targets, Target templates can be used for only one episode class. You need to create different sets of Target template records for different episode classes.
4. Set the Compass Rose template type field to Target.
5. Enter the list of Targets the template should contain in the Task Records (I LTT 800) field.

Specify Target Templates As the Default Target Sets for Compass Rose Episodes

If you want a Target template to be automatically added when the episode is created, specify it as the default Target set as described below.



Targets can't be shared across episode classes. A Target template for episode types with a class of Compass Rose Program can't be specified as the default Target set for an episode type with a class of Compass Rose Service.

Also note that an episode's default Target set is added regardless of whether you specify a different Target template to be automatically added when an episode is created as described in the [Automatically Add Targets and Tasks to Episodes](#) topic.

1. In Hyperspace, access the Episode Type Editor (search: Episode Type Editor) and open a Compass Rose episode type.
2. On the Care Management tab, specify a Target set in the Default Target Set (I HBD 24004) field.

Checklist Task Setup

To help users more easily keep track of tasks related to a patient's plan of care, you can add the Checklist activity to their workspaces. The Checklist activity can be used to:

- Add pre-determined groups of tasks called task templates to a patient's checklist.
- Edit information about these tasks to meet the needs of individual patients.
- Track who is responsible for a task, when that task is due, and when it is complete.
- Associate a task with a patient goal.
- Mark tasks and task groups as favorites (starting in November 2025).
- Follow other users to see colleagues' favorite tasks (starting in November 2025).
- See frequently used tasks (starting in November 2025).

For example, a care manager can use the Checklist activity to help a patient manage anxiety. She can organize the checklist based on the associated goal, keep notes on each task, and choose to show or hide tasks that are completed.


Checklist

Managing Anxiety

Show: ☒ Completed 

	Status	Task Group
Attend yoga 1x per week		
☒ OCT 17 2018 Discuss Exercise Completed by Nurse Jane Quinlan on 10/17/2018	Completed	Exercise Changes
6 week goal complete. Andrew's next goal is 2x/week f... 		
Attend yoga 2x per week		
☐ NOV 20 2018 Discuss Exercise	Not Started	Exercise Changes 
Record medication effects in a diary		
☐ OCT 22 2018 Follow up about side effects	Not Started	Medication Adherence 
Take your medication every day		
☐ OCT 20 2018 Call to confirm prescription pickup	Not Started	Medication Adherence 
☒ OCT 17 2018 Discuss med reminders Completed by Nurse Jane Quinlan on 10/17/2018	Completed	Medication Adherence
Andrew is setting up a notification on his phone to re... 		

We've set up the Checklist activity for care management workflows in the Foundation System. To check it out, log in to the [Foundation Hosted environment](#) as your organization's care manager (CAREMGR or in February 2024 and earlier versions: CAREMANRN).

1. Open a patient outreach encounter.
2. Create an episode in the Programs navigator section.
3. From the sidebar, go to the Checklist tab.
4. Add tasks to the patient's episode, such as Send welcome letter or Send health education.

Give Compass Rose Users Access to the Checklist

To access the Checklist, users need security points and a way to access the Checklist activity.

First, give users the security points to use the Checklist activity. They need the following EpicCare security points to access and edit the Checklist:

- 223-Episode Checklist View, which allows users to view the Checklist associated with an episode.

- 224-Episode Checklist Edit, which allows users to add tasks to a Checklist or mark tasks as complete.

If users have security point 223 but not security point 224, the Checklist appears in a read-only format.

You can add the Checklist to users' workspaces as an activity menu or to the sidebar.

Add the Checklist as an Activity Menu or to the Sidebar

Depending on who will be using the Checklist, you need to use one of the following menu descriptors:

- For care managers and other users who will be using Checklists associated with episodes of the class 29-Care Management, use menu descriptor 23047-HP_ITM_EPISODE_CHECKLIST.
 - If you want users to see only tasks for episodes linked to the current encounter, use menu descriptor 27777-HP_ITM_EPISODE_CHECKLIST_LINKED_ENCOUNTER. For example, a patient might have several episodes within the Care Management class. If different care managers work on each of those episodes, you can use this version of the Checklist to ensure that they see only tasks related to the episodes they work on.
- For care coordinators, social workers, and other users who will be using Checklists associated with episodes of the class 33-Compass Rose Program or 34-Compass Rose Service, use menu descriptor 35033-ESC_ITM_SOCIAL_EPISODE_CHECKLIST.
- For pharmacists who will be using Checklists associated with episodes of the class 30-Specialty Pharmacy, use menu descriptor 23066-SPEC_PHARMACY_ITM_EPISODE_CHECKLIST.

You can use either of the following methods to add the menu:

- If you use a Workflow Engine rule to define a user's workspace, add the menu descriptor for the Checklist to the activity tabs or the sidebar so that users will see it during encounters. This method is easier and more flexible than working with user role and menu records.
 - For more detailed instructions on building a Workflow Engine rule, refer to the [Set Up Activity Tabs, the More Activities Menu, and Sidebar Activities](#) topic.
- You can directly add the Checklist menu to the Hyperspace toolbar for each user's user role:
 - a. In Hyperspace, open the Role Editor and open the user role that you want to configure.
 - b. In the Menu Information table, enter EDUSERTOOLBAR in the Menu to Extend column.
 - c. In the Menu Descriptor field, add one of the following menu descriptors as described above:
 - 23047-HP_ITM_EPISODE_CHECKLIST
 - 23066-SPEC_PHARMACY_ITM_EPISODE_CHECKLIST
 - 27777-HP_ITM_EPISODE_CHECKLIST_LINKED_ENCOUNTER
 - 35033-ESC_ITM_SOCIAL_EPISODE_CHECKLIST
 - d. In the Override? column, enter No.

Add the Checklist to a Navigator

To add the Checklist to a navigator, you need to create a custom navigator section that uses an Epic-released navigator configuration (VCN) for the Checklist:

1. In Clinical Administration, go to Navigators > Navigators (LVN) and create a navigator.
2. In the Descriptor (I LVN 800) field, enter the record name. Make sure the record name and the descriptor are exactly the same.
3. In the Record Type (I LVN 100) field, enter Section.

4. Go to the Section Setup screen.
5. In the Type (I LVN 1065) field, enter Checklist.
6. In the View Path (I LVN 1021) field, enter ~/Views/Clinical/SocialCare/UnifiedChecklist/UnifiedChecklistView.ascx.
7. Go to the Default Configuration screen.
8. In the Default Configuration (I LVN 1070) field, enter 96003-ESC Unified Checklist Navigator Configuration.



You can optionally use a duplicate of this navigator configuration record instead to customize the behavior of the navigator section, such as to control which episode classes it can be used with. For more information, refer to the [Configure Sections](#) topic.

After you create your custom section, follow the instructions in the [Make Navigators and Activities Available to Users](#) topic to add it to users' workspaces.

Create Tasks and Task Templates for Compass Rose

You can create tasks and groups of tasks called task templates. To manually add tasks to the Checklist, users search for tasks by name and see both individual tasks and task templates in the results. If they select a task template, all the tasks in the template are added to the Checklist.

Follow these steps to create a task:

1. In Hyperspace, open the Task Editor and create a new task record.
2. In the Display name (I LTR 100) field, enter the task name as you want it to appear to users.
3. In the Synonyms (I LTR 53130) field, enter related terms for your tasks.
4. In the Task Context (I LTR 29) field, enter Checklist.
5. In the Episode Class (I LTR 53100) field, enter the type of Compass Rose episode the task is used for, such as 33-Compass Rose Program.
6. In the Responsible entity (I LTR 53102) field, enter the entity to which the task is assigned. Note that not all of the options apply to task creation for care management, and the exact entities that you can enter depend on the episode type you defined in step 5. Select one of the following values:
 - Compass Rose Case Team. Enter the role you want to assign the task to in the Responsible role (I LTR 53104) field.
 - This option assigns the task to the most recently added user or pool with the specified role for the patient's case. If multiple users or pools have the same role and one of the members is marked as the primary coordinator, the task is assigned to the primary coordinator. This option uses the case team members saved in the Case Management - Case Team - Team Member (I HSB 18100) and Case Management - Case Team - Relationship (I HSB 18120) items or, if the relevant responsible entity is a pool, the pool saved in the Case Management - Case Team - Pool (I HSB 18120).
 - Responsible Entity of Compass Rose Case Team without a specified Responsible Role first uses the Responsible Staff member that is active on the episode. If the Responsible Staff field is not set or is inactive, the most recently added active member of the Case Team is used. If there is not an active case team member, no task Responsible Entity is set.

- Compass Rose Episode Responsible Staff (Compass Rose Responsible Staff in August 2025 and earlier). If a Responsible Staff member is set and active on the episode, the task's Responsible entity is the Responsible Staff. If the Responsible Staff is no longer active on the episode or there is no Responsible Staff on the episode, no Responsible entity is set.
 - Compass Rose Support and Service Responsible Staff. Available starting in November 2025. This mnemonic only applies to tasks linked to a task template that is configured in the Episode Type Editor to be added by a support and service type. If a responsible user or pool is entered in the support and service type's Responsible Staff (I HSB 64053 and I HSB 64054) field, the task's responsible entity is set to the responsible staff. If no responsible staff is assigned, the responsible entity is left blank. When Support and Service responsible staff is reassigned, responsibility for tasks using this mnemonic is also reassigned unless the responsible entity for the task was manually reassigned previously.
 - Patient Care Team Member. Assigns the task to the most recently added member of the patient's care team that has a particular role. If you select this value, enter the care team role to which the task is assigned in the Responsible role (I LTR 53104) field.
 - Current User. When a care manager adds a task to their checklist manually, the system assigns the task to them. Don't use this option for tasks that you want to be added to the checklist automatically.
 - Episode Care Team Member. Assigns the task to the first member of the patient's episode care team with a certain role. This option shouldn't be used for Compass Rose episodes because case team functionality is used instead of episode care teams.
 - In Basket Pool. If you select this value, enter the In Basket pool to which the task is assigned in the Responsible pool (I LTR 53103) field.
7. In the Due date fields, enter a relative date to use for the default due date for this task. For example, to generate a due date of seven days after the date the task is added to the checklist, enter 7 in the field that contains the calculator (I LTR 53105), and enter Days in the mnemonic field next to it (I LTR 53101). In this example, if the task is added manually, the due date is calculated as seven days from today, and if the task is auto-generated by completing another task, the due date is calculated as seven days from that task's completion date.
- If you need certain days to be excluded from due date calculation, use the method below that corresponds to one of the following methods:
 - You can use Months (Month End) as the mnemonic (I LTR 53101) to specify that a task should be due at the end of the month. Note that this mnemonic works with the field that contains the calculator (I LTR 53105). For example, if you enter 4 in the calculator field, and the task is assigned on January 1st, the default due date is May 31st (the end of the fourth month following the month in which the task was assigned). If you enter 0 in the calculator field or leave it blank, the task is due at the end of the month in which it's assigned.
 - If you use the Month (Month End) mnemonic (I LTR 53101), enter Yes or No in the Exclude Weekends and Holidays? (I LTR 26001) field depending on whether the due date calculation should exclude weekends and holidays. For example, suppose you configure the default due date for the task to be the end of the month that it's assigned, which is a Sunday. If you set this field to Yes, the task is due on the Friday before the end of the month. If you set this field to No or leave it blank, the task is due on that Sunday. For more information about how to specify holidays, refer to the [Account for Holidays in Your Schedules](#) topic.
 - If you need specific days, such as weekends or holidays to be excluded from due date

calculation, use the Due date adjustment (I LTR 26002) field. Select Do not count excluded days, Due next included day, or Due previous included day. Then, use the Excluded days checkboxes (I LTR 26003) to select the days to be excluded from task due dates.

- Note that Holidays are defined by the existence of a Holiday (EHO) record for that date, regardless of department-level activation.
- Note that Days from Support & Service Type Start Date is the only mnemonic that recalculates when the associated "from" date changes. All other mnemonics calculate once when the task is added.



To make it easy to get this content, we've created a Turbocharger package with tasks set up to be due prior to weekends and holidays. If your organization is in the United States and a member of your EpicConnect team has completed the necessary EpicConnect setup, you can download this package from this topic or the Available Packages tab in the Turbocharger activity (search: Turbocharger). For more information about importing these records, refer to [the 248620-Enhance Weekend and Holiday Handling for Tasks](#) topic.

8. Enter No in the Used for Outreach? (I LTR 53230) field.



If you enter Yes in this field, the task is configured as an [Outreach task](#).

9. If you want to limit the outcomes available for selection, in the Allowed Outcomes field, enter the values which should be valid options for the task. If you leave this field blank, then all outcomes will be allowed for the task.
10. Starting in August 2024, you can use Episode context Task context rules in the Task Rule (I LTR 53121) field to create branching logic based on rules. For example, you might want to generate different follow-up tasks based on the outcome of a previous task.
11. If you want users to be able to sort the Checklist activity by task category so similar tasks are grouped together, in the Work List category field, enter a value from the Worklist Category (I LTR 250) category list. If you need to create a new category value to use in this field, refer to the [Modify a Category List's Values](#) topic.
12. Configure other fields in the General Information section as needed.
13. Repeat these steps to create additional tasks as needed.

Follow these steps to create a task template:

1. Open the Task Template Editor and create a task template.
2. In the Template Context (I LTT 29) field, select Checklist.
3. In the Episode Class (I LTT 53100) field, enter the episode type that corresponds to the episode type in the tasks you want to group.
4. In the Task Records (I LTT 800) field, enter the tasks that you want to group.

Set Up Work Lists for Tasks

Compass Rose users can use the following tools as work lists to find and act on the different types of tasks they need to complete:

- Reports built from Reporting Workbench report templates. For more information about setting up reports, refer to the [Create a Report from a Report Template](#) topic. Note that you can quickly build reports based on the following templates using the report models listed in each template's Data Handbook entry:
 - [14039-Find Care Management Tasks](#)
 - [14170-Find Specialty Pharmacy Tasks](#)
 - [17840-Find Episode Tasks](#)
- Starting in August 2025 for outreach tasks, patient monitoring workqueues. Refer to the [Monitor and Follow Up with Patients Using Patient Monitoring Workqueues](#) topic.
- Starting in February 2026 for outreach tasks, program outreach workqueues. Refer to the [Set Up Program Outreach Workqueues](#) topic.

Set Up Reports for Tasks

This section describes additional features that you should add to any Reporting Workbench reports you configure to use as work lists based on the type of task they will be used for. For outreach tasks, refer to the [Set Up Reports for Outreach Tasks](#) topic.

Report Criteria

Most of the report criteria that you might want to use in your reports apply to all types of tasks, such as Episode Type, Task Status, and Due Date. Refer to the Data Handbook entries for the Reporting Workbench templates listed above for the criteria that you can use with each.

There are some criteria specific to Targets that you might want to use to create reports:

- Is Target? Use this criterion to filter the report results to only targets. For example, if you want to track adherence to required program milestones use this criterion to have the report include only targets.



This criterion is a Foundation System record instead of a standard Epic-released record. To see more details about how the criterion is used, log in to the [Foundation Hosted environment](#) as your organization's case manager (CM) and run the Social Care Programs report from the Analytics Catalog.

Follow the instructions in the [Add Criteria to a Report](#) topic to create a networked criterion that uses the Is Compass Rose target? (I LTR 26000) item to recreate the Foundation System criterion for use in your reports.

Report Actions

We recommend that users' reports include the following actions in the report toolbar:

- For checklist tasks:
 - HP_IT_REASSIGN_TASK. This corresponds to the Reassign button that lets users change the responsible user or pool and due date for tasks.

- HP_IT_TASK_ASSIGN_ME. This corresponds to the Assign Me button that lets users set themselves as the responsible user for a task.
- MR_TXP_ITM_RW_EDIT_TASK. This corresponds to the Edit Tasks button, which allows users to edit a task's due date, responsibility, and comments.
- HP_IT_COMPLETE_TASK. This corresponds to the Complete button that lets users complete a checklist task directly from the report.
- MR_ITM_EPISODE_CHECKLIST. This corresponds to the Checklist button that lets users access the full Checklist activity for the episode linked to the task. To launch the Checklist activity from Reporting Workbench, you must have the COCM_EPISODE_CHECKLIST_WEB license, which is included in the standard Compass Rose license. If you're not sure whether you have this license, contact your Epic representative and mention parent SLG 3550868.

For more information about adding actions to reports, refer to the [Define Actions on the Report Viewer Toolbar](#) topic.

Report Columns

Most of the report columns that you need for tasks are included by default in reports created from the Reporting Workbench report templates listed above. We recommend that you also include column 80001-Episode Name to show the name of the associated Compass Rose program so users can quickly see which program a patient is enrolled in.

There is a column specific to Targets that you might want to use to create reports:

- For targets:
 - 93574-Target Outcome for reports that include targets to show the documented outcome.

For more information about adding columns to reports, refer to the [Determine Which Columns Appear in a Report](#) topic.

Report Detail View

We recommend that your reports include a detail view report (I HGR 220) that provides an overview of the patient's episode, such as report 94009-Compass Rose Case Summary. For more information about adding report 94009 as a detail view for Reporting Workbench reports, refer to the [Add a Summary of Compass Rose Episodes to Reports](#) topic.

Radar Dashboards

There are several Epic-released and Foundation System Radar dashboards and dashboard components that might be useful for users, such as the [Upcoming Targets for My Cases](#) dashboard component.

For a complete list of available dashboard content, refer to the [Report Repository](#).

Set Up Workqueues for Outreach Tasks

➔ Starting in August 2025

To set up workqueues for outreach tasks for patients enrolled in remote patient monitoring programs, refer to the [Monitor and Follow Up with Patients Using Patient Monitoring Workqueues](#) topic.

➔ Starting in February 2026

To set up workqueues for outreach tasks for Compass Rose episodes, refer to the [Set Up Program Outreach](#)

[Workqueues](#) topic.

Optional Task-Related Features

This section includes optional features that can be used with one or more types of tasks described in this guide.

Automatically Add Tasks to the Checklist

To save care managers from creating every task manually and to help ensure that they are aware of every task they need to complete, you can automatically add tasks to the checklist for patients' episodes. You can do this from an OurPractice Advisory if you have the HP Task Checklist license, which is included in the standard Healthy Planet license. For example, if a provider diagnoses a diabetic patient with depression, you can have an OurPractice Advisory appear to the patient's care manager and add a task to the checklist for a care management episode to discuss with the patient how to manage both conditions together.

Prerequisites

To enable automatic task configuration through the Event Engine (known as Task Engine in February 2024 and earlier versions), you must have the HP Task Engine license, which is included in the Healthy Planet Advanced Care Management and Compass Rose licenses. If you aren't sure whether you have these licenses, contact your Epic representative and mention parent SLG 3550868.

You can also automatically add the tasks to care management episodes based on internal ADT events if you have the HP Task Engine license. Similarly, starting in August 2023 and in May 2023 with special updates E10504884, E10505091, and E10505246, you can automatically add tasks to episodes based on external ADT events that have occurred outside your organization, as well. For example, you can add a task to the care manager's checklist to give the patient a follow-up call when they are discharged from the hospital or to schedule a 1 on 1 with them when they are admitted.

You can automatically add checklist tasks to Compass Rose episodes when:

- The episode's overall status (I HSB 18010) first becomes active.
- The episode's overall status (I HSB 18010) is changed from Paused to Active.
- Starting in November 2025, the episode's overall status (I HSB 18010) changes from Active to Paused.
- Starting in November 2025, certain tracking status changes that you can specify in the Episode Type (HBD) record occur.

For more information, refer to the [Automatically Add Targets and Tasks Based on the Episode Status](#) topic.

Prerequisites

For care managers to see the tasks that are added, you need to give them access to the Checklist activity. Refer to the [Give Care Managers Access to the Checklist](#) topic for instructions.

Tasks are created automatically using task templates, which group related tasks together. When the system adds tasks to a checklist, the tasks are associated with an episode type to make it easier for users to keep track of the tasks in the context of related encounters or admissions.

To automatically add tasks to the checklist for episodes, you need to create the tasks and add them to a task template. If you already have a task template for an episode type that you want to use, proceed to the [Create Tasks When Patient Events Occur](#) or [Create Tasks from OurPractice Advisories](#) to configure automatic creation. Otherwise, go back to the [Create an Episode Type for Care Management](#) and [Create Tasks and Task Templates for](#)

Automatically Add Tasks and Episodes Based on Patient Events

When certain ADT events occur, the system can automatically add checklist tasks, outreach tasks, and targets to an episode. The tasks are assigned to a person or pool based on the responsible entity in the task template record. Starting in August 2023 and in May 2023 with special updates E10504884, E10505091, and E10505246, the system can also automatically create a Compass Rose program episode if one does not already exist. The encounter that prompted the new program to be created is automatically linked to the episode in this scenario. Also starting in August 2023, if your organization is exchanging clinical data with health plan partners using Payer Platform, you might also see health plan-forwarded event notifications in your workflows. Starting in May 2024, you can configure these tasks and episodes to trigger upon ADT events by searching for the ADT Event Engine in Hyperspace.

Before setting up these automatic events, gather input from care managers, case managers, and your population health or ACO steering committees to determine which tasks and episodes are good candidates for automatic creation and to discuss the conditions when they should be created automatically.

While you are meeting with stakeholders, keep in mind that you need the following information:

- Patient Event. A patient event that results in routine tasks. The following options are supported:
 - Basic Hospital Admission
 - Note that this event applies only when a patient is directly admitted or transferred to the hospital. For example, if the patient is admitted to an outpatient surgical center, only the Basic Hospital Admission event will apply.
 - Inpatient Hospital Admission
 - Note that this event applies in all scenarios when a patient's class is changed to Inpatient.
 - Hospital Discharge
 - Emergency Department Arrival
 - Note that this event applies when a user marks the patient as arrived, regardless of whether the patient is eventually roomed.
 - Emergency Department Dismissal
 - Note that this event applies only when a patient who was marked as arrived leaves the ED but was never roomed. If the patient has been roomed, the Hospital Discharge event applies when they are discharged from the ED.
 - External Hospital Admission (Starting in August 2023 and in May 2023 with special updates E10504884, E10505091, and E10505246)
 - External Hospital Discharge (Starting in August 2023 and in May 2023 with special updates E10504884, E10505091, and E10505246)
 - External Emergency Department Visit (Starting in August 2023 and in May 2023 with special updates E10504884, E10505091, and E10505246)
 - External Emergency Department Visit End (Starting in August 2023 and in May 2023 with special updates E10504884, E10505091, and E10505246)
 - Note that in contrast to the internal events, this event could apply when patients are either dismissed or discharged from the ED.
- Inclusion rule. For internal ADT patient events, this is a rule in the Patient context that the patient must

qualify for the tasks to be created. For external ADT patient events (available starting in August 2023 and in May 2023 with special updates E10504884, E10505091, and E10505246), this is a rule in the Task Engine External Encounter Inclusion context that the patient must qualify for. For example, you can use a rule that checks if patients have a particular primary care physician, are on a certain registry, or have a specific encounter HL7 type.

- **Task Template.** The task template is a group of related tasks that are all added under the same circumstances. You create individual tasks, but need to group them into templates in order to configure them to be added to the checklist automatically. Starting in August 2023 and in May 2023 with special updates E10504884, E10505091, and E10505246, this field is optional if the event is configured to automatically create programs. You might choose to leave this blank if you want to rely on the default tasks configured within the Episode Type Editor instead. Note that in February 2024 and earlier versions, you need to initially enter a task template in this field to access the Task Engine Settings - Automatic Creation screen, but after you set Auto Create? to Yes on that screen, you can return and clear the field.
- **Episode Type.** The created tasks must be linked to a Compass Rose episode type so that they can be tracked. To create a Compass Rose episode type, refer to the [Create Episode Types for Programs and Services](#) topic. Note that if you configure the Event Engine to automatically create episodes based on external events, you should set the Disable external encounter linking? (I HBD 76329) field in the Episode Type Editor to No or leave it blank. Encounters that result in the creation of episodes are always linked to episodes, regardless of how this item is set. However, if it is set to Yes, users can unlink the initial external encounter, but they won't be able to relink it later if desired because the Add External button is not available.
- **External Encounter Lookback Date.** This item configures the number of days to look in the past to consider external events for automatic task and episode creation. This can be set in System Definitions (I LSD 92901). If left blank, the system default is 90 days.
- **In Basket pool that receives automation failure notifications** (starting in November 2025). When automated workflows occasionally fail, such as when a record is locked during processing, the system sends an In Basket notification. Determine your strategy for receiving these notifications by following the steps in the [Receive In Basket Messages When Automation Fails](#) topic.



You can move our Foundation System tasks and task templates into your own system as a starting point. Contact your Epic representative and mention project 196442.



To make it easier for you to get this content, we've created a Turbocharger package for the Task Engine External Encounter Inclusion Rules that can be used to automatically fire tasks for Transitional Care Management patients who have been hospitalized outside of your organization. This package is available for download from May 2023 to August 2024. For information about importing this package, refer to the 191016-[Support Task Creation for External ADT Events](#) topic.

After you have the information you need, create the inclusion rules and task templates. Refer to the [Create a Rule](#) topic for more information on how to create a rule in the rule editor and the [Create Tasks and Task Templates for Compass Rose](#), [Create Outreach Tasks for Compass Rose](#), and [Create Compass Rose Targets and Target Templates](#) topics for information on how to create tasks and task templates.

When your rules and templates are complete, you need to build a mapping table to connect the patient events,

rules, task templates, and the episode type used by your care managers. Starting in May 2024, you can do this in the ADT Event Engine activity in Hyperspace. In February 2024 and earlier versions, you can use the Task Engine settings screen. The first screen of the mapping table has columns for patient event, inclusion rule, task template, and episode type. The second screen of the mapping table automatically pulls in the same patient event from the first screen, and then has additional fields for auto create, department, pool, and cancellation tasks. For each line in the mapping table, the tasks associated with the task template specified in the task template column are created and added when the patient event occurs and the inclusion rule is true.



You can configure the mapping table in the Build Wizard. Open the Build Wizard (Search: Build Wizard) and search for feature 170090-Create Care Management Tasks and Episodes Automatically (application: Social Care, starting in August 2024: Compass Rose). Click Start if you're setting up automatic task creation for the first time. If you previously set up automatic task creation for some ADT events and want to add to or modify your existing mapping, click Start Over to pull in the values that are currently specified in System Definitions.

Fill out the relevant fields in each row of the mapping table. When you are finished, click Ready to Build. The system creates a content management ticket for Data Courier.

Starting in May 2024, you can use ADT Event Engine admin activity. We recommend using the admin activity because starting in May 2025, the Build Wizard is no longer available.

November 2018 - Social Care

Create Care Management Tasks and Episodes Automatically

Care management tasks and episodes can be automatically created based on patient events. Choose which events trigger which tasks and episodes.

Select patient events which should automatically create care management tasks or Compass Rose episodes:
Enter patient events that should automatically add care management tasks or create Compass Rose episodes. Map an event to a patient inclusion rule, task template, and episode type. Optionally turn on automatic episode creation for the patient event and map the department, pool, and cancellation task template to the event. Note that patient events can create care management tasks only if you're licensed for Grand Central. Created tasks are linked to an episode of the selected episode type. Click the Start Over button to ensure that the latest system configuration is shown.

Patient Event	Inclusion Rule	Task Template	Episode Type	Auto Create?	Department	Pool	Cancellation Tasks
Hospital Admission	FAILED TCM NO READMISSION FO...	HP TCM CHECKLIST TASKS - FAILE...	HP Transitional Care Management ...				
External Hospital Admission	FAILED TCM NO READMISSION FO...	HP TCM CHECKLIST TASKS - FAILE...	HP Transitional Care Management ...				
Hospital Admission	PATIENT HAS 30-DAY INPATIENT R...	HP TCM CHECKLIST TASKS - FAILE...	HP Transitional Care Management ...				
External Hospital Admission	PATIENT HAS 30-DAY INPATIENT R...	HP TCM CHECKLIST TASKS - FAILE...	HP Transitional Care Management ...				
Hospital Discharge	TCM AUTO-ENROLL ELIGIBILITY CR...		HP Transitional Care Management ...	Yes	ESC COORDINATED CARE [101501...		HP TCM CHECKLIST TASKS - RE-EV...
External Hospital Discharge	TCM AUTO-ENROLL ELIGIBILITY CR...		HP Transitional Care Management ...	Yes	ESC COORDINATED CARE [101501...		HP TCM CHECKLIST TASKS - RE-EV...

After the task creation mapping table is complete, you can maintain it in the Build Wizard by editing it as needed. You can also access and edit the mapping table in Text. (Starting in May 2024, the mapping table in Text is no longer available. Starting in May 2025, the Build Wizard also is no longer available. We recommend using the ADT Event Engine admin activity in Hyperspace.)

1. Starting in May 2024, in Hyperspace, go to the ADT Event Engine admin activity (search: ADT Event Engine).
2. In February 2024 and earlier versions, in Clinical Administration, go to Management Options > Edit System Definitions > Decision Support, Pop Management. Go to the Task Engine Settings screen.
3. In February 2024 and earlier versions, add a new line to the table, use the arrow keys to scroll to the bottom and press Enter.
4. In the Patient Event field, specify the ADT event that should cause tasks to be created automatically.
5. In the Inclusion Rule field, enter the rule that defines which patients should have tasks created for them when the ADT event occurs.
6. In the Task Template field, add the task template for the tasks.

7. In the Episode Type field, enter the episode type record you want to add tasks to.
8. In February 2024 and earlier versions, in the mapping table, page down to the Task Engine Settings - Automatic Creation screen. The event from step 4 auto-populates the Patient Event field on this screen. The line number for the event matches the line number from the previous screen.
9. In the Auto Create? field, specify whether an episode should be created automatically if one does not already exist.
10. In the Department field, enter the department that automatically created episodes should be assigned to.
11. (Optional) In the Pool field, enter the pool that automatically created episodes should be assigned to.
12. In the Cancellation Tasks field, enter the checklist task template that should be added if an event that created an episode later gets canceled. We recommend that you include a checklist task in this task template that suggests that the responsible staff re-evaluate the patient to determine whether they still qualify for the episode.
13. Repeat steps 3 - 12 for each of the ADT events that should result in task or episode creation.

Remember to also specify an In Basket pool to receive automation failure notifications by following the steps in the [Receive In Basket Messages When Automation Fails](#) topic.

Add Compass Rose Tasks from OurPractice Advisories

You can set up an OurPractice Advisory to prompt users to add a task template to the Checklist, add Targets, or add outreach tasks. When the OurPractice Advisory is triggered, the system checks whether the patient has an active episode of the type that matches the type of episode the tasks are used in. For example, if you configure an OurPractice Advisory to add tasks related to diabetes care, the system checks whether the patient has a care management episode. If the patient has an active episode, the task template is added to the Checklist. The type of episode for the tasks appears in parentheses after the task template name on the OurPractice Advisory warning message.

i This feature is helpful for adding tasks as part of a user documenting in a patient's chart. If you're interested in always adding a certain set of tasks when an episode is first created, refer to the [Automatically Add Targets and Tasks Based on the Episode Status](#) topic.

To add tasks or Targets for episodes from an OurPractice Advisory, you need to create the tasks and add them to a task template. Refer to the [Create Tasks and Task Templates for Compass Rose](#) topic.

Then, follow the instructions in the [Build a Basic OurPractice Advisory](#) topic to create criteria and base records for your advisory. When you create the base record, configure the following fields on the Follow-up Actions form:

- Task Template (I LGL 700). Enter the task template that contains the tasks you want to automatically add when the advisory criteria are met.
- Action (I LGL 698). Indicate whether the tasks should be added every time the OurPractice Advisory is applied or only when there is no existing active task from the same source record already on the checklist.

- Frequency (I LGL 702). Enter how often tasks are added each time the advisory criteria are met. For example, you can indicate whether the system should automatically add the tasks each time, or whether tasks are added only when a user manually selects them from the advisory message.
- Episode Type (I LGL 704). Enter the Compass Rose episode type of your task template. Starting in August 2021, enter a value in either this field or the Link to Any Program or Service? field.
- Link to Any Program or Service? (I LGL 696). Indicate whether to link Checklist tasks created from the OurPractice Advisory to active programs, active services, or neither. When users manually select tasks from the advisory message, they choose whether to link the tasks to each active program or service that has the episode class of the program or service listed in the task template (I LTT 53100). Note that the episode class in the task template also affects whether the tasks can be linked to programs or services. Task templates with an episode type of 33-Compass Rose Program can be linked only to programs, templates with an episode type of 34-Compass Rose Service can be linked only to services, and templates with an episode type of 29-Care/Case Management can be linked to either.

Automatically Add Targets and Tasks Based on the Episode Status

There might be a discrete set of Targets and Checklist tasks that should always be completed for certain Compass Rose episodes. To help streamline users' workflows, you can automatically add these Targets and Checklist tasks when:

- The episode is created.
- The episode's overall status (I HSB 18010) first becomes Active.
- The episode's overall status (I HSB 18010) changes from Paused to Active.
- Starting in November 2025, the episode's overall status (I HSB 18010) changes from Active to Paused.
- Starting in November 2025, certain tracking status changes that you specify in the Episode Type (HBD) record occur.

For example, suppose you have a program to help address a patient's housing insecurity:

- For every patient, the case manager needs to complete a program assessment, an initial evaluation, and a service plan. Additionally, the case manager needs to periodically contact the patient to check on their status. These Targets and tasks need to happen with every housing insecurity episode regardless of whether the patient's circumstances improve or deteriorate, so you can automatically add them when the episode is created.
- If it's determined that the patient requires assistance, the case manager needs to complete an employment assistance evaluation, set up a meeting with a housing resource, and schedule regular patient outreaches to ensure they are receiving adequate care. You can have these Targets and tasks automatically added to the episode when it becomes Active.
- If a patient's housing needs are temporarily met outside of the program, such as a friend offering to let the patient stay with them for a month, the episode becomes Paused. When the patient's housing needs resume, the case manager needs to reconnect the patient with the resource they used when the program was last active. You can have this task automatically added to the episode when it goes from Paused to Active.

You can also use this feature to automatically add Outreach tasks. To automatically add Targets and tasks to episodes, you need to:

- Create the individual Targets and tasks.
- Group the Targets and tasks into templates.

- Configure episode types to add the templates.

Create the Individual Targets and Tasks

First, you need to create the individual Targets, Checklist tasks, and Outreach tasks that you want to automatically add.

- To create Targets, follow the instructions in the [Create Compass Rose Targets and Target Templates](#) topic.
- To create Checklist tasks, follow the instructions in the [Create Tasks and Task Templates for Compass Rose](#) topic.
- To create Outreach tasks, follow the instructions in the [Create Outreach Tasks for Compass Rose](#) topic.



Make sure to enter the appropriate episode class when you create your Targets and tasks. You can add Targets and tasks to an episode only if the episode classes match. For example, if you create Targets with an episode class of 33-Compass Rose Program, you can't automatically add those targets to an episode of class 34-Compass Rose Service.

You can use this feature with the following episode class:

- 29-Care/Case Management
- 30-Specialty Pharmacy
- 33-Compass Rose Program
- 34-Compass Rose Service
- 38-Home Infusion
- Custom episode classes

Create the Target and Task Templates

You need to group the Targets and tasks you created into templates so they can be automatically added to episodes. Note that you need to create a template even if you created only one Target or task.

To create templates:

1. In Hyperspace, access the Task Template Editor (search: Task Template Editor) and create a template record. Give your record an appropriate display name.
2. In the Template context (I LTT 29) field, enter 2-Checklist.
3. In the Episode type (I LTT 53100) field, enter the appropriate episode type.
4. In the Compass Rose template type field, select whether you're creating a template for Checklist tasks, Targets, or Outreach tasks.
5. In the Task Records (I LTT 800) field, enter the list of Targets or tasks the template should contain.
6. Repeat these steps as needed to create additional templates for Targets or tasks.

Configure Episode Types

After you create templates for Targets and tasks, configure the episode type to specify when to automatically add those templates. By default, you can automatically add templates when:

- The episode is created.
- The episode's overall status (I HSB 18010) first becomes Active.

- The episode's overall status (I HSB 18010) changes from Paused to Active.
- Starting in November 2025, the episode's overall status (I HSB 18010) changes from Active to Paused.

Starting in November 2025, you can customize which episode status changes cause a template to automatically be added by using custom events. To define a status change you can use to automatically add templates:

1. Create a custom category for your event:
 - a. In Hyperspace, open Category List Maintenance.
 - b. Enter HBD as the database and 76345-Episode Defaults Status Events- as the item.
 - c. Click Add New Category.
 - d. Create a new category outside of the release range (up to 1,000) and name it appropriately for your status change.
2. Define the status change for your event:
 - a. In Text, follow the path Management Options > Edit System Definitions > Specialties, Other Modules > Social Care.
 - b. On the Compass Rose Episode Status Update Automation screen, in the Event (I LSD 79350) field, enter your event. In the Prior Tracking Status (I LSD 79351) field, enter the initial status of the episode. If you want to automatically add a target or task template whenever an episode reaches a certain status, regardless of what the previous status was, leave the Prior Tracking Status field blank. Then, in the Subsequent Tracking Status (I LSD 79353) field, enter the status the episode changes to when the template is automatically added.



Starting in November 2025, you can use the Build Wizard in Hyperspace to configure automation for the addition of task and target templates triggered by custom events across multiple episode types at once. The Build Wizard also creates custom events as needed based on statuses you specify. To get started, open the Build Wizard and search for feature 72043–Automate Task Creation When a Compass Rose Episode’s Status is Updated (application: Compass Rose).

Configure the Compass Rose Episode Defaults table:

1. In the Event (I HBD 76345) field, enter the event that must occur for the template to be automatically added.
2. In the Default Template (I HBD 76346) field, enter the Target template or task template that should be added when the specified event occurs.



Note that if you specify a Target template to add when an episode is created, and you also specified a default Target set (I HBD 24004) for the episode as described in the [Create Compass Rose Targets and Target Templates](#) topic, the default Target set is added instead of the target template.

3. Repeat these steps as needed for additional events and templates.



Note that if you add both the On Episode Creation and When Episode First Becomes Active events, and the Default Creation Status (I HBD 76325) for the episode is Active, then the specified templates for both of these events are added when the episode is created.

Automatically Add a Compass Rose Task When Another Task Is Completed

Sometimes one task shouldn't be completed until another task is completed. For example, support staff might need to send a letter to a patient only after a certain appointment is scheduled. Similarly, sometimes a task should be performed more than once, such as a task to complete a certain assessment, but the Checklist should include only one listing of the task at a time to prevent confusion.

For these scenarios, you can indicate within a task that a task or task template should be added to the Checklist when the task is complete.

Considerations

If you have a generic task and you want that task to be added again when it's completed, note that the Allow Duplicates? (I LTR 53123) field needs to be set to Yes for users to have multiple incomplete instances of that task available at the same time. For example, you might have a task for social workers that has a generic name because social workers edit the name depending on the actual task they need to complete. If a social worker adds the generic task twice and then completes one of the tasks, the generic task isn't automatically added again unless the Allow Duplicates? field is set to Yes.

1. In Hyperspace, open your task in the Task Editor (search: Task Editor).
2. In the Task To Add (I LTR 53122) field, enter tasks that should be added when the task is complete. If you want to re-add this task when it is complete, enter this task in the field.
3. In the Task Template to Add (I LTR 53127) field, enter task templates that should be added when the task is complete.
4. In the Copy forward comment? (I LTR 53112) field, indicate whether the tasks that are added have the same comments as the completed task. For example, this might be useful if you re-add the same task when it's complete and assign it to same user or pool who was responsible for the previous instance of the task.
5. Click Accept.

Base Recurring Checklist Task Due Date on Due Date of Previous Task

➡ Starting in November 2023

★ August 2023 by SU E10607489

★ May 2023 by SU E10513739

Many clinicians have tasks that recur at regular intervals, like labs and preventative care appointments. In August 2023 and earlier versions, you might have configured recurring tasks that base the subsequent due date on the day the previous task was completed, which can result in the tasks getting off-schedule if a task is completed early. Starting in November 2023, in August 2023 with special update E10607489, and in May 2023 with special update E10513739, you can configure parent and child checklist tasks so that, when the parent task is completed, the system automatically sets the subsequent due date for the child task at a specific interval based on the due date of the completed task. There are two options available to specify this kind of relative due date for the recurring task in the Task Editor:

- 30-Days from parent task due date
- 31-Months from parent task due date

Parent task in this case refers to any task that adds another task to the checklist upon completion. The original parent task in the example below is the Evaluation Lab Panel, but after the first child task, Quarterly Lab Panel, is completed, it becomes the parent task if it is configured to add itself again upon completion. When configuring tasks in this way, the parent task is always the task that immediately precedes the current task in the chain.

For example, a transplant clinic might want to take labs every three months after a transplant patient's initial evaluation. In this example, you could configure the tasks as follows:

- Parent Task: Evaluation Lab Panel, which is automatically added to the checklist when an episode is created. The due date is automatically set to 30 days from the start of the episode. The task is automatically completed when the designated lab results are final, and the child task is specified in the Task to Add field.
- Child Task: Quarterly Lab Panel, which is automatically added to the checklist when the Evaluation Lab Panel task is completed. The due date is set to three months from parent task due date. The child task is automatically completed when the designated lab results are final within the specified lookback window. To keep a quarterly recurrence, the same task is specified in the Task to Add field.

To configure a task to using these relative due date options:

1. In Hyperspace, open the Task Editor (search: Task Editor).
2. Open the task record you want to edit.
3. Update the Due date fields to specify when the next due date should be generated. This field is comprised of two unlabeled fields:
 - a. In the field that contains the calculator, enter the number of days or months after the parent task's due date that the child task's due date should be set for.
 - b. In the field next to it, enter either Days from parent task due date or Months from parent task due date, depending on the amount of time that should pass before the next task is due.

Automatically Add Tasks and Targets When Support and Service Types Are Documented

Save time and clicks for care managers by automatically adding checklist and outreach tasks (starting in November 2022, or May 2022 with special updates E10223725, E10221156, and C10221156-HSWeb) and targets when they select a support and service type for a program. For example, if a care manager adds a support and service type of Asthma Management for a patient in a pediatric disease management program, targets, such as Complete Initial Asthma Assessment and Complete a Second Home Visit, automatically appear.

For more information, refer to the [Automatically Add Tasks and Targets Based on Support and Services](#) topic.

Automatically Reassign Incomplete Checklist and Outreach Tasks When an Episode's Responsible Staff Changes

The system can automatically reassign incomplete checklist and outreach tasks when an episode's responsible staff changes. By default, a prompt appears that asks users whether they want to reassign tasks.

Reassign Tasks?

Susanna Päivä Koskinen, MSW was previously marked as responsible staff. Would you like to reassign all of their incomplete checklist tasks and outreaches to Fiona Faraday, RN?

Reassign All
Don't Reassign
Cancel

If you prefer to always or never reassign tasks automatically, you can configure this in the Episode Type Editor. Refer to the [Attach Multiple Users to a Program Using Case Teams](#) topic for more information.

Automatically Remove Tasks from the Checklist

Starting in August 2024

To save care managers from removing every task manually, you can automatically remove tasks from the checklist. You can do this from an OurPractice Advisory if you have the HP Task Checklist license, which is included in the standard Healthy Planet license.

Prerequisites

For care managers to see the tasks that are removed, you need to give them access to the Checklist activity. Refer to the [Give Care Managers Access to the Checklist](#) topic for instructions.

To automatically remove tasks from the checklist for episodes, you need to have tasks that are added to a task template. If a task is already completed, it is not removed. If the task template has multiple tasks added, all tasks that were added for the patient are removed.

You can set up an OurPractice Advisory to prompt users to remove a task template from the Checklist, remove Targets, or remove outreach tasks. When the OurPractice Advisory is triggered, the system checks whether the patient has an active episode and the associated tasks. If the patient has an active episode and the associated tasks, the task template is removed. The type of episode for the tasks appears in parentheses after the task template name on the OurPractice Advisory warning message.

Diabetes Diagnosis Removed from Patient

Remove the following?

Remove
Keep

Diabetes Care Tasks (Care Management)

Defer

Follow the instructions in the [Build a Basic OurPractice Advisory](#) topic to create criteria and base records for your advisory. When you create the base record, configure the following fields on the Follow-up Actions form:

- Task Template (I LGL 700). Enter the task template that contains the tasks you want to automatically remove when the advisory criteria are met.
- Action (I LGL 698). Indicate whether the tasks should be removed.
- Frequency (I LGL 702). Enter how often tasks are removed each time the advisory criteria are met. For example, you can indicate whether the system should automatically remove the tasks each time, or whether tasks are removed only when a user manually selects them from the advisory message.

- Episode Type (I LGL 704). Enter the Compass Rose episode type of your task template.
- Link to Any Program or Service? (I LGL 696). This field is disabled when the Action is set to Remove.

Automatically Resolve Compass Rose Tasks and Targets When an Episode Is Resolved

➔ Starting in August 2019

★ May 2019 by SU E8800008

You can have the system automatically resolve targets and outreach tasks (starting in November 2022) and checklist tasks when the corresponding episode is resolved. For example, if a care manager closes a patient's case management episode because they are unable to make contact with the patient for 60 days, you can have the system automatically delete any of the patient's checklist tasks.

For more information, refer to the [Automatically Resolve Care Plans, Tasks, and Targets](#) topic.



In the Foundation System, some Compass Rose programs automatically delete targets when an episode is declined. To see an example:

1. Log in to the [Foundation Hosted environment](#) as your organization's care manager (CAREMGR or in February 2024 and earlier versions: CAREMANRN).
2. Open an encounter with a patient and select the Enrollment tab.
3. From the Programs section, create an Adult Disease Management program for a patient.
4. Click Accept to add the program's default target set.
5. Still in the Programs section, click Edit to reopen the episode for editing.
6. In the Status field, change the status to Declined and click Accept.
7. Go to the Targets navigator section and observe that all incomplete targets have been deleted.

Automatically Complete Compass Rose Tasks and Targets Based on Documentation

➔ Starting in November 2022

Compass Rose checklist tasks and targets can automatically advance to a status of complete when patients check in for appointments or when they have procedures, scanned documents, letters, immunizations, flowsheets, or signed notes that satisfy the specified criteria. Automatic completion of tasks and targets makes it easier for case managers to keep the checklist up to date and concentrate on outstanding tasks for patients.

If you choose the auto-link option for an auto-completion record, matching documentation is linked to the task or target automatically when documentation is created. The task or target has a status of Started when documentation is created, and it advances to a status of Completed when the documentation is complete.

Episode Tasks

Adult Disease Management

Add tasks

+ Add

Show: ☒ Completed

Letters

☒
APR 29 2022

Send 1 Month Asthma Management Plan to PCP and Referring Provider

Automatically completed by the system on 4/29/2022

Created GEN ASTHMA ACTION PLAN on 4/29/2022

Targets	Due	Outcome
☒ Completed Send the written summary to patient within 14 days of Comprehensive Medication Review Completed on 4/29/2022 by Nurse Care Manager Sent HP TO PATIENT, MTM ENROLLMENT LETTER on 4/29/2022		

If you choose not to auto-link your auto-completion record, matching documentation is suggested below the task or target when documentation is created.

Episode Tasks

Adult Disease Management

Add tasks

+ Add

Show: ☐ Completed

Letters

☐
MAY 26 2022

Send 1 Month Asthma Management Plan to PCP and Referring Provider

Nurse Care Manager

Created GEN ASTHMA ACTION PLAN on 4/29/2022

Use This

Targets	Due
🕒 Upcoming	
Complete first Diabetes Self-Management Education meeting 📅	6/29/2022
🔗 Use This DIABETES PREVENTION CLASS on 5/9/2022 (Scheduled)	

However, the documentation is not linked and the task or target does not advance to a completed status until the user links the documentation and the documentation is complete.

To set up automatic task or target completion, associate your checklist tasks or targets with an automatic completion configuration record that specifies the appointments, procedures, documents, letters, immunizations, or notes that satisfy the task.

Prerequisites

You need EpicCare security point 385-Edit Task & Task Templates to access the Task Editor and the Task Auto-Completion Editor to complete these steps.

Considerations

Before completing the steps below, meet with your case managers and social workers to choose the appointments, documents, letters, notes, immunizations, flowsheets, and procedures that are appropriate for each task and target you want to automatically complete. You also need to decide whether an item can complete more than one task or target, or only one task or target per program. If you want the same piece of documentation to complete both a task and a target, do not mark "require unique documentation" in the configuration record.

Note that all the tasks and targets that you configure to support auto-completion can be completed by scanned documents. This is helpful for supporting lab tests and consults that are completed at locations outside your organization. We also recommend reviewing the setup in the Foundation System. To see the records we've enabled for auto-completion, log in to the [Foundation Hosted environment](#) as your organization's Healthy Planet administrator (HPADM).

- Review all the available auto-completion records in the Foundation System by opening the Task Auto-Completion Editor activity.
- See whether a specific task or target is enabled for auto-completion by opening the task or target in the Task Editor (search: Task Editor) and reviewing the Auto-completion configuration (I LTR 53110) field.

To help you with your checklist task and target decisions, use the [Compass Rose Checklist Auto-Completion Evaluation spreadsheet template](#). You can export your checklist tasks or targets using import specification LTR,1000-TEMPLATE - TASK RECORD and then follow the instructions on the introduction tab of the spreadsheet to add your tasks and record the decisions you make about each task.

Name tasks and targets in a way that makes it clear to users what is needed to automatically complete them. For example, a target to be completed by a note shows a note icon in the Targets navigator section, but the icon does not tell the user what type of note needs to be signed for the task to be completed.

Starting in February 2024, the documentation to automatically complete a task or target can be limited to the episode in which the task or target is added for all auto-completion types except for immunizations and procedures. For example, with same episode configuration, when a task is set up to automatically be completed when a progress note is signed, it is completed only if the note is written on an encounter linked to the episode. When making decisions about which piece of documentation should complete a task or target, make sure to consider whether it should complete a task or target across episodes. If it should only complete a task or target for the same episode, set the Documentation from same episode? field in the auto-completion record to Yes.

If you have any reports based on Reporting Workbench report template [17840-Find Episode Tasks](#), you might want them to find tasks that have the status of Started in addition to the statuses your reports are currently searching for to count as incomplete.

Configuring Task and Target Auto-Completion

You can use three different Build Wizard features to configure checklist tasks to be automatically completed.

Use Build Wizard feature 72021-Compass Rose Task and Target Auto-Completion to configure any type of task.



Use the Build Wizard in Hyperspace to set up auto-completion. To get started, open the Build Wizard (search: Build Wizard) and search for feature 72021-Compass Rose Task and Target Auto-Completion (application: Compass Rose).

Starting in February 2024, you can also use Build Wizard feature 472012-Immunization Task Autocompletion to configure immunization tasks for automatic completion.



Use the Build Wizard in Hyperspace to set up immunization auto-completion. To get started, open the Build Wizard (search: Build Wizard) and search for feature 472012-Immunization Task Autocompletion (application: Compass Rose).

Starting in August 2024, you can also use Build Wizard feature 472018-Autocompletion of Checklist Tasks using Flowsheet Documentation to configure flowsheet tasks for automatic completion.



Use the Build Wizard in Hyperspace to set up flowsheet auto-completion. To get started, open the Build Wizard (search: Build Wizard) and search for feature 472018-Autocompletion of Checklist Tasks using Flowsheet Documentation (application: Compass Rose)

If you want to adjust your build or create records manually, you can either:

- Use import specification LTR,1000-TEMPLATE - TASK RECORD to create an import spreadsheet. Refer to the [Import Data into Chronicles](#) topic for instructions on using standard import specifications.
- Manually configure records in the Task Editor by completing the following steps.
 1. In Hyperspace, access the Task Editor.
 2. Open an existing task or target. Make sure that it is a record with a Task Context of Checklist and an Episode class of 29-Care/Case Management, 30-Specialty Pharmacy, 33-Compass Rose Program, 34-Compass Rose Service, or 38-Home Infusion. Target records have the Is Compass Rose target? (I LTR 26000) field set to 1-Yes. For more information about fields unique to targets, refer to the [Create Compass Rose Targets and Target Templates](#) topic.
 3. Click Create next to the Auto-completion configuration (I LTR 53110) field.
 4. Select the Create tab and enter a name for the new configuration record. Click Accept.
 5. Select a type based on what type of task or target you are working on.
 6. In the Lookback days (I DEF 351) field, enter the number of days before the task was added to the checklist that the system should look for an appointment, note, document, result, flowsheet, or letter. If you do not want past values to count for task or target completion, enter 0.
 7. In the Auto-link? (I DEF 390) field, enter Yes or leave this field blank to enable automatic completion. Enter No to require a user to select the qualifying documentation from a list of suggestions.
 - Documentation that is started but not yet completed updates auto-linked tasks and targets to a status of Started. Started tasks and targets can be automatically unlinked due to updated documentation that no longer qualifies, but completed tasks and targets remain completed and linked to documentation unless the documentation is voided or deleted.
 8. For all types except letters, in the Require unique documentation? (I DEF 387) field:
 - Enter Yes if an appointment, document, note, or result should be able to complete only one task or target per episode.
 - Enter No if an appointment, document, note, or result should be able to complete more than one task or target per episode.
 - Enter No if you want the same piece of documentation to complete both a task and a target.

- Starting in May 2025, we recommend entering No for procedure and labs tasks that you're completing based on lab results, because one order might include lab results that satisfy different tasks.

9. Starting in February 2024, for all items except for immunizations and procedures, in the Documentation from same episode? (I DEF 398) field:

- Enter Yes if an appointment, document, note, flowsheet, or letter should link to and complete only tasks or targets linked to the same episode.
- Enter No if an appointment, document, note, flowsheet, or letter should link to and complete tasks or targets regardless of linked episodes.
 - Tasks and targets that are completed are not reevaluated for matching documentation when reevaluation is triggered in the course of a workflow. This means that if the Documentation from same episode? field is set to Yes, if a user unlinks an encounter from the episode and that encounter contained documentation that completed a task or target, the task or target remains completed.

10. The remaining fields differ based on the type of configuration record you created

Configuration Type	Field Information	Completion Logic
Appointments	List visit types or visit specialties that can complete the associated task. - Only Care Everywhere documents with matching visit specialties will be linked. Visit type is not used to link appointment-based tasks or targets with Care Everywhere documents for external appointments. - You can filter non-patient-facing encounter types so that they do not appear as suggestions for completing tasks. Complete the steps in the Filter Non-Patient-Facing Encounters from Automatic Task Completion section further down in this topic.	The linked task or target is completed when the appointment is checked in.
Documents	List document types that can complete the associated task.	The linked task or target is completed when a scan, other imported media, or e-consent is attached to the linked document. If an e-consent requires a signature, the task or target is completed when the e-consent is signed.
Notes	List note types that can complete the associated task. You can limit the notes by the provider type and provider specialty	The linked task or target is completed

	specified in a user's provider (SER) record: ◦ In the Provider Specialty (I DEF 358) field, enter a specialty from the Provider Specialty (I SER 1051) category list. ◦ In the Provider Type (I DEF 359) field, enter a provider type from the Provider Type (I SER 1040) category list.	when the note is signed or cosigned (if cosign is required).
Procedures & Labs	At least one of the following must be entered: ◦ Procedures (I DEF 365) ◦ Procedure groupers (I DEF 366) ◦ Lab component common name (I DEF 399) (Starting in May 2025) ◦ System lab component mapping (I DEF 404) (Starting in May 2025) Indicate how the system should select a procedure when multiple procedures could complete the associated task by entering one of the following values in the Multiple procedure behavior (I DEF 367) field: ◦ To use the most recently resulted or scheduled procedure, enter 1-Use Most Recent or leave this field blank ◦ To prioritize resulted orders over scheduled and unscheduled orders, enter 2-Prioritized Resulted ◦ To prioritize critical results first, then abnormal results, and then normal results, enter 3-Use Most Critical If there are multiple results with the same result status, the system uses the most recent one. ◦ If you want the system to set a task to Not Started when there are multiple orders, at least one resulted, that can satisfy the task, enter 4-Require Clinical Review. This way, care managers must choose the most appropriate one. Starting in May 2025, if lab component common name or system lab component mapping is used, results that have been mapped using Happy Together can be used to complete tasks or targets. Refer to the Map Results for Happy Together topic for more information. We recommend against building auto-complete tasks for lab-based tasks that should be completed only if the result meets a specific condition, like if the A1C is less than 5.7%.	The linked task or target is completed when the procedure is completed, or when the result is finalized. Starting in May 2025, orders that are linked using common name are not suggested or automatically linked until the result is marked as preliminary or finalized.
Letters	List letter templates and reasons for letters.	The linked task or

	• In the Letter templates (I DEF 360) field, enter one or more templates that letters must be created from to satisfy the task. • In the Reasons for letter (I DEF 361) field, enter one or more reasons a letter must have to satisfy the task. If both fields have values, the system checks letters matching either a template or a reason.	target is completed when the letter is sent.
Immunization (starting in February 2024)	List either a Health Maintenance topic or any immunization records that can complete the associated task. Only one can be used. • In the Immunization Health Maintenance Topic (I DEF 391) field, enter a Health Maintenance topic that must be completed to satisfy the task. • In the Immunization Records (I DEF 369) field, enter one or more immunization records that must be given to satisfy the task. Immunizations administered in-facility, as well as Care Everywhere immunizations, can be used to complete these tasks.	The linked task or target is completed when the Health Maintenance is complete or when the immunization is documented as administered.
Flowsheet (starting in February 2024)	List the flowsheet row that complete the task. • For Task Completion logic (I DEF 411) buttons, select All if the system should require documentation on all rows specified or select Any if only one is sufficient. • In the Flowsheet rows (I DEF 410) field, enter one or more flowsheet rows that satisfy the task. The maximum number of rows allowed is twenty-five. • In the Linked activity (I DEF 413) field, you can choose to enter an activity where users can enter the documentation which satisfies task completion. • In the Flowsheet template (I DEF 412) field, you can choose to enter a flowsheet template which will be available in a pop-up window. • Starting in May 2026, in the Operator (I DEF 417) field and the Value (I DEF 418) fields, you can enter specific flowsheet values that are required to satisfy the task. Row types of Category, Custom List, and String support operators of Equal and Not Equal. Row types of Numeric, Temperature, Date, and Time support operators of Equal, Not Equal, Greater Than, Less Than, and Range. Other row types do not support this behavior. If you enter an activity in the Linked activity field that is not available in a user's encounter, when they click the Flowsheets	The linked task or target is completed when the documentation is filed.

button they will be taken to the Flowsheets activity. If there is a template set in the Flowsheet template field, then that assessment will be open.
--

11. For non-documentation tasks like external lab results or external consults that checklist users should be able to complete with a scanned document, select the Can complete with scanned documents? checkbox. This checkbox does not appear for document-based tasks.
12. If you select the Can complete with scanned documents? checkbox, the Always Show Document Suggestions (I DEF 356) field appears
 - a. If you want document suggestions to appear inline with task type suggestions, enter Yes.
 - b. If you want document suggestions to appear separate from task type suggestions and want coordinators to click Matching documents to see them, enter No.
13. Click Accept.

Edit an Existing Task Auto-Completion Configuration

If you need to change an existing auto-completion configuration, you can do so in the Task Auto-Completion Editor. This activity lets you directly edit auto-completion configuration records created in step 3 above. If you need to replace or remove an auto-completion record from the task or target, use the Task Editor activity as described in the steps above.

Include All Incomplete Statuses in Task Reports

Checklist tasks and targets configured for automatic completion have a status of Started if documentation has been linked to them but not yet completed. If you want reports based on Reporting Workbench report template [17840-Find Episode Tasks](#) or a copy of it to find these Started tasks, add Started as a value in the reports' Task status criterion. For more information about setting up reports, refer to the [Create a Report from a Report Template](#) topic.

Filter Non-Patient-Facing Encounters from Automatic Task Completion

Care Everywhere documents for external appointments can be suggested for completing appointment-based tasks on the checklist. To prevent unusual non-patient-facing appointments from appearing as suggestions for completing tasks, you can add a filter:

1. In Clinical Administration, follow the path: Quality, Reporting Measures > Objective Measures > System Level Setup.
2. Go to the Promoting Interoperability Shared Setup screen.
3. In the "Seen by an EC" Encounter Types That Are Not Office Visits (I HDF 1915) field, enter a list of any non-patient-facing encounter types in use at your organization.

Let Users Add Checklist Tasks to Decisions

When a user creates a [Compass Rose decision](#), there are often several related tasks that need to be completed. For example, if a decision is approved to provide home care services to a patient, someone needs to collect the patient's financial information to determine how the services can be paid for. To help users track these tasks and assign them to the responsible people, users can add tasks to the Checklist activity directly from a decision.

From the Decisions navigator section, users can add any tasks that are available for the program or service episode in which the decision is being documented.

Family Care [26]

Responsible User	Status	Basis for Support	Outcome	Valid Period	Linked Service Episode	Preparers
Susanna Kosk, MSW	Pending	Child Welfare Act, Section 36	Positive decision	6/28/2019 – 9/28/2019		

Checklist Letters Send Letter

Signed decision note required before letters can be sent.

+

After a user adds tasks, a link appears to open the tasks in the Checklist activity. This is helpful, for example, when another user is reviewing the decision and needs to know how many associated tasks still need to be completed.

Checklist

+

0 of 2 tasks completed

From the Checklist activity, users can click a link below the task name to open the related decision.

Checklist

Basic Adult Services

+ Add Show: ☒ Completed

☐	—	Schedule Home Visit Family Care [26] Susanna Kosk, MSW	×
☐	—	Create Financial Commitment Family Care [26] Susanna Kosk, MSW	×

Any tasks that you already created for a given type of Compass Rose episode are available for users to add to decisions in those episodes. You might want to create additional tasks related to decisions. Epic also recommends that you update:

- Decision reports to include information about linked tasks.
- Task reports to include information about linked decisions.

You can also trigger an OurPractice Advisory to automatically add tasks when a decision is created.

Prerequisites

To let users link tasks to decisions, you need the Decision-Linked Tasks license, which is included in the standard Compass Rose license. If you're unsure whether you have this license, contact your Epic representative and mention parent SLG 3550868.

Create Checklist Tasks

Follow the steps in the [Create Tasks and Task Templates for Compass Rose](#) topic to create Checklist tasks that users can link to decisions. Note that for the tasks to be available for users to select, they must have the same episode type (I LTR 53100) as the episode in which the decision is being created.



Although [Targets](#) use the same type of record as Checklist tasks, note that users can't link Targets to decisions.

Update Decision Reports

The default [decision detail report](#), 94000-Social Care Decision Details, includes print group [94036-Social Care Decision Checklist](#) to show information about the tasks that are linked to a decision. This report also appears as the default view (I HGR 220) for reports created from Reporting Workbench report template [73000-Social Care Decisions](#).


If you use a custom decision report, add print group 94036 to it so users can see information about linked tasks. For more information about working with custom reports, refer to the [Defining a Print Group-Based Report](#) topic.

Update Task Reports

Reports created from Reporting Workbench report template [17840-Find Episode Tasks](#) include a column so users can see whether a task is linked to a decision. If you use a copy of this report template, add report column 93640-Task-Linked Decision to it to show the same information. For more information about adding report columns to Reporting Workbench report templates, refer to the [Customizing Reporting Workbench Report Templates](#) topic.

You can also add a button to reports created from a copy of Reporting Workbench report template 17840 so users can open the decision linked to a task from the report results. To add the button:

1. Follow the instructions in the [Copy a Released Template](#) topic to duplicate Reporting Workbench report template 17840. If you already use a copy of report template 17840, skip this step.
 2. With your copy of report template 17840 open for editing, go to the Actions form.
 3. Click Add to Toolbar.
 4. Enter ESC_ITM_SOCIAL_DECISION in the search field.
 5. Click Add to Toolbar.
 6. If you updated an existing copy of the report template, go to the Columns form and verify that your template includes the following report columns, which are needed for the Open Decision button to work. Add the columns if they are missing.
 - 93523-Social Care Enrollment DAT
 - 93642-Decision ID
-

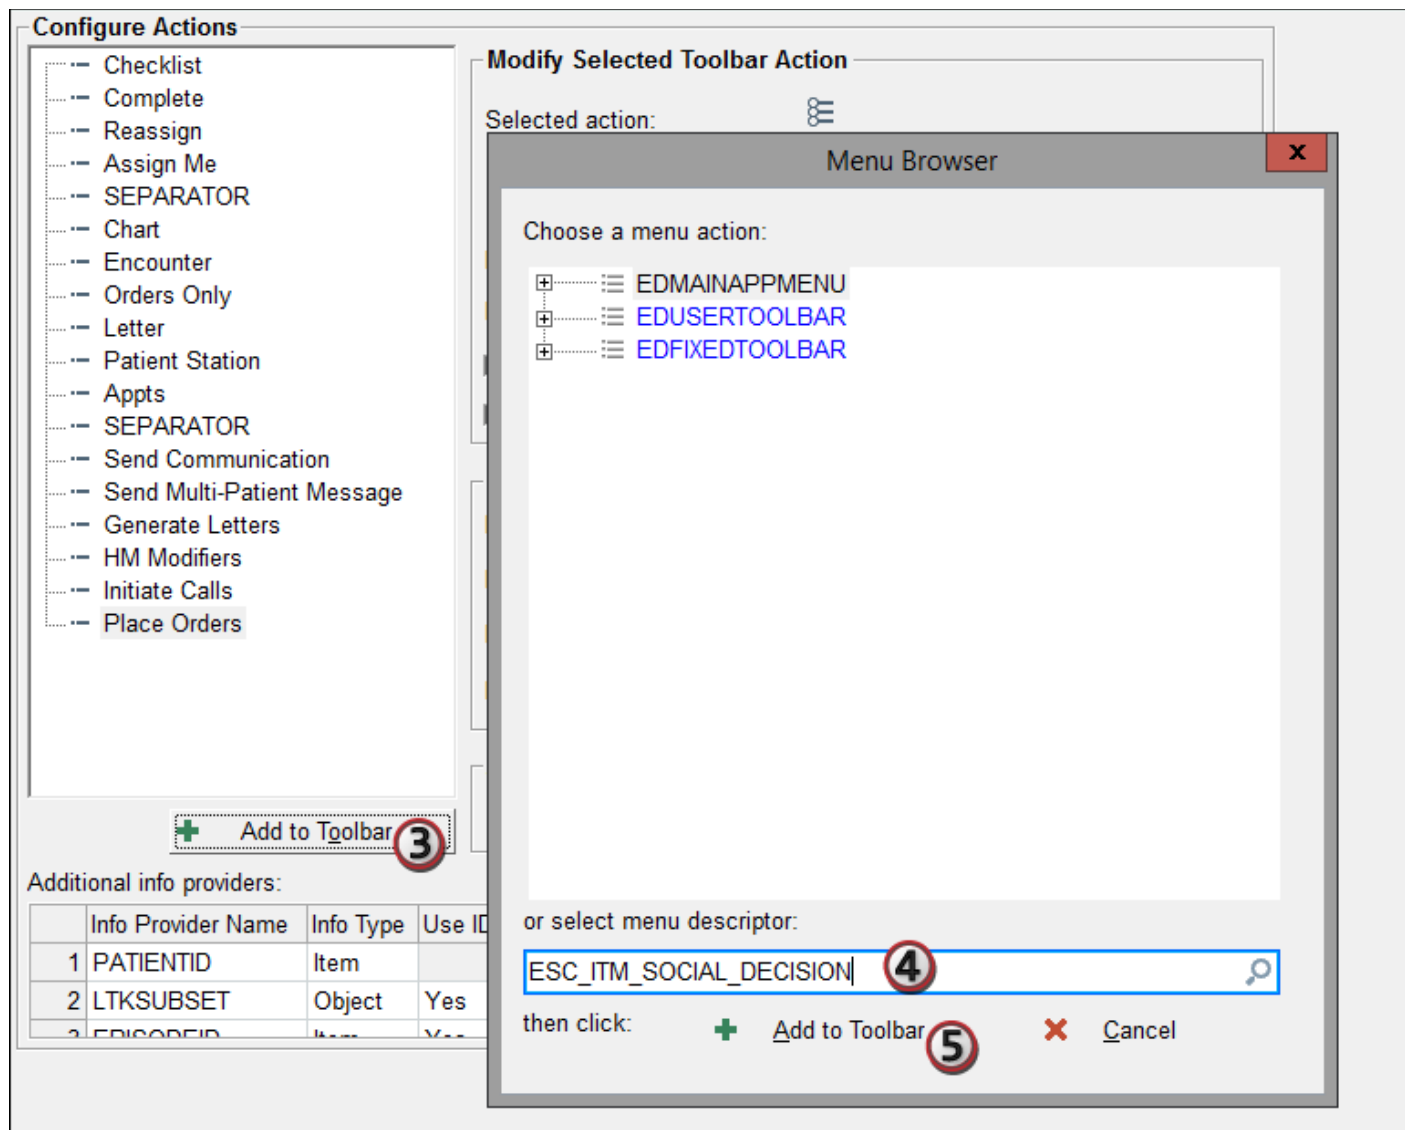

Use OurPractice Advisories to Add Tasks to Decisions

To ensure that the necessary tasks are added to a decision, you can use an OurPractice Advisory to add the tasks when the decision is created. You can also use the OurPractice Advisory to add Targets to the Targets navigator section. Note that the Targets are not linked to the decision itself.

Prerequisites

The following setup assumes that you built a task template that contains the tasks or Targets you want the OurPractice Advisory to add. For more information, refer to the [Create Tasks and Task Templates for Care Management Episodes](#) topic.

Follow the instructions in the [Build an OurPractice Advisory](#) topic to build the OurPractice Advisory criteria and OurPractice Advisory base records that determine when the OurPractice Advisory is triggered.

- When you build your OurPractice Advisory criteria record, note that you can use exclusion extensions (LGL 1100) to prevent the OurPractice Advisory from being triggered for certain types of decisions, such as negative decisions. For a complete list of the exclusion extensions that you can use, refer to the [Automatically Update Referrals When a Decision's Status Is Changed](#) topic.
- When you build your OurPractice Advisory base record:

- Use triggering action (I LGL 78) 128-Decision Created.
- On the Follow-up Actions form, enter the task template (I LGL 700) you want to add depending on the episode type (I LGL 704) in which the decision is created.

© 2020 - 2026 Epic Systems Corporation. All rights reserved. PROPRIETARY INFORMATION - This item and its contents may not be used, modified, reproduced, performed, displayed or distributed unless and only to the extent expressly authorized by a written agreement with Epic. This item contains trade secrets and commercial information that are confidential, privileged, and exempt from disclosure under the Freedom of Information Act and prohibited from disclosure under the Trade Secrets Act. The contents of this item may not be accessed or disclosed without express written authorization from Epic. After Visit Summary, ASAP, Aura, Beacon, Beaker, Beans, BedTime, Best Care Choices for My Patient, Bones, Break-the-Glass, Buggy, Caboodle, Cadence, Canto, Care Everywhere, Charge Router, Cheers, Chronicles, Clarity, Cogito ergo sum, Cohort, Comfort, Community Connect, Compass Rose, Cosmos, Cosnome, Cupid, Curiosity, Discovery, Emmie, Epic, EpicCare, EpicCare Link, Epicenter, EpicShare, EpicWeb, Epic Cosmos, Epic Earth, Epic Nexus, Epic Research, Garden Plot, Grand Central, Haiku, Happy Together, Healthy Planet, Hello World, Hey Epic!, Hyperdrive, Hyperspace, Kaleidoscope, Kit, Limerick, Lucy, Lumens, MyChart, Nebula, OpTime, Penny, Phoenix, Powered by Epic, Prelude, Pulse, Radar, Radiant, Resolute, RevCyclers, Revenue Guardian, Rover, Share Everywhere, SmartForms, Sonnet, Stork, System Pulse, Tapestry, Trove, Welcome, Willow, Wisdom, With the Patient at the Heart, and WorldWise are trademarks or service marks of Epic Systems Corporation and includes those registered in the United States and other countries. For a full list of Epic's trademarks, visit <https://www.epic.com/epic/page/trademark-list/>. Other company, product, and service names referenced herein may be trademarks or service marks of their respective owners. Patents: www.epic.com/patents.