

Willow Inventory X12 Interface Setup and Support Guide

Last Updated: May 2, 2025

Epic | 1979 Milky Way | Verona, WI 53593 | Voice: 608.271.9000 | Fax: 608.271.7237 | www.epic.com | documentation@epic.com

Your Responsibilities for Safe Use

This documentation will help guide you through the available software configuration options so you can decide the right configuration for your organization. Of course, safe and compliant use of the software in any configuration requires you and your users to use good judgment and perform certain responsibilities, including each of the following: enter and read information accurately and completely; be responsible for configuration decisions; ensure compliance with laws and regulations relevant for your organization; confirm the accuracy of critically important medical information (e.g., allergies, medications, results), just as you would with paper records; actively report suspected errors in the software to both Epic and affected personnel; thoroughly test the software to ensure it's accurate before using it; and use the software only according to standards of good medical practice. You also are responsible for training your personnel and other users to perform these responsibilities. Not performing any of these responsibilities may compromise patient safety or your compliance with applicable requirements.


Table of Contents

Willow Inventory X12 Interface Setup and Support Guide	4
Available Epic Resources	6
Pre-Build Analysis for the Willow Inventory X12 Interface	7
Decide How to Configure the X12 Interface	7
Request Information from Your Supplier Regarding X12 Interface Configuration Information	9
Willow Inventory X12 Interface: Interconnect and Network Setup	10
Create, Install, and Export Certificates	10
Additional Certificate Requirements for SSL Communication	12
Configure Interconnect for the X12 Interface	12
Configure Networking for the X12 Interface	12
Willow Inventory X12 Interface: Bridges Setup	13
Configure Interface Specification Records for the X12 Interface	13
Add Your Interfaces to a Monitor	14
Willow Inventory X12 Interface: Willow Inventory Setup	16
Configure Willow Inventory for the X12 Interface	16
Send Information to Your Supplier Regarding X12 Interface Configuration Information	16
Automatically Create and Receive Shipments Based on X12 856 Messages	17
Automatically Close Purchase Requests	18
Automatically Create Purchase Orders for Incoming Invoices Without Corresponding Requests	18
Automatically Create Balances from X12 810, 855, and 856 Messages	19
Configure Categories to Receive Additional Charges and Credits from X12 810 Messages	20
Configure a Batch Job to Recalculate Primary Contracts	20

Willow Inventory X12 Interface Setup and Support Guide

X12 is an Electronic Data Interchange standard commonly used in the United States. In Willow Inventory, X12 interfaces are used to send messages from your pharmacy to your supplier requesting purchase orders. A typical outgoing message being sent through an X12 interface follows this transmission process:


1. A message is triggered in Willow Inventory.
2. The message is created by Bridges.
3. The message is encrypted and electronically signed using Interconnect.
4. The message is sent through your firewall and port to the supplier.
5. Based on the message, the supplier creates a Message Disposition Notification (MDN), which is the acknowledgment sent in response to such a message.
6. The MDN is sent to your organization's proxy server.
7. The MDN is directed to your internal port and your specified IP/URL.
8. The MDN is brought into your system.
9. The MDN is received in Willow Inventory, matched, and verified.

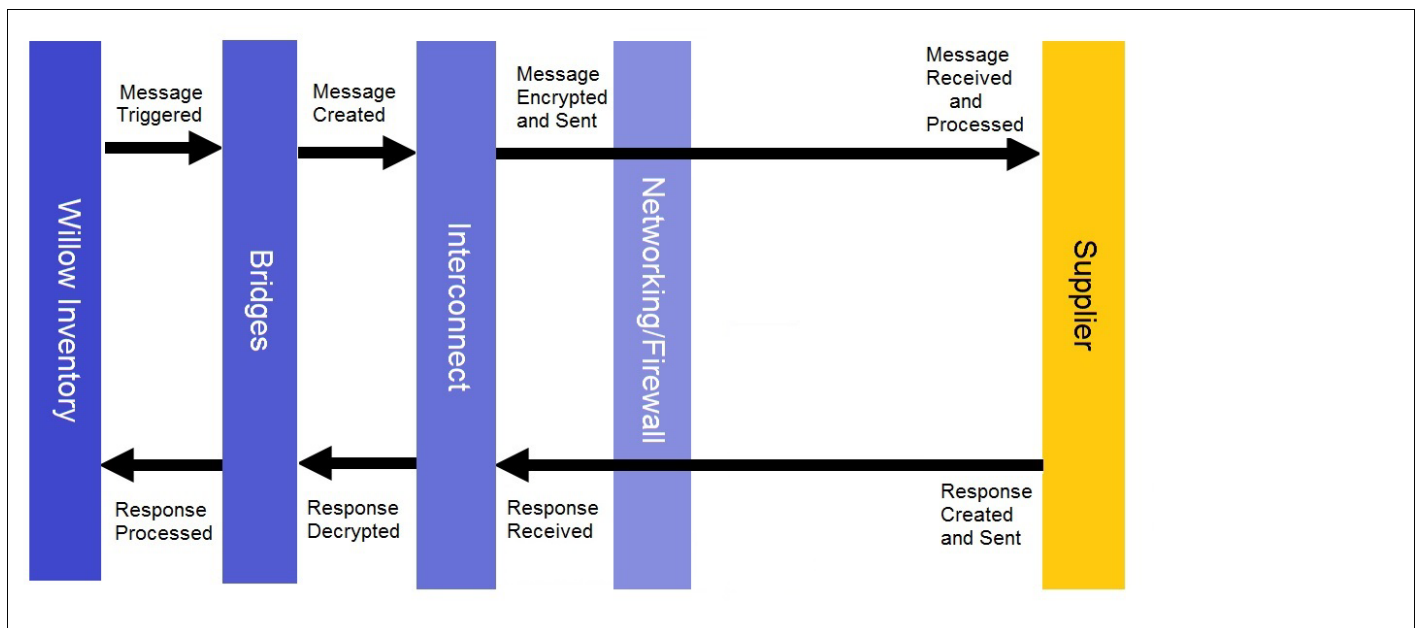

Epic supports the following X12 message types:

- 850: The message sent from the pharmacy to a supplier when requesting a purchase order.
- 855: The message sent from a supplier to the pharmacy acknowledging the receipt of the purchase order request along with any discrepancies.
- 810: The message sent from a supplier to the pharmacy containing the invoice for the purchase order.
- 856: The message sent from a supplier to the pharmacy listing all of the items and quantities that were sent in the shipment. Available starting in Epic 2018 and in Epic 2017 with special update E8317822.
- 832: The message sent from a supplier to the pharmacy with updated item prices. In November 2024 and earlier, use of the 832 message type requires additional licenses. For more information contact your Epic

representative and mention parent SLG 6010061.

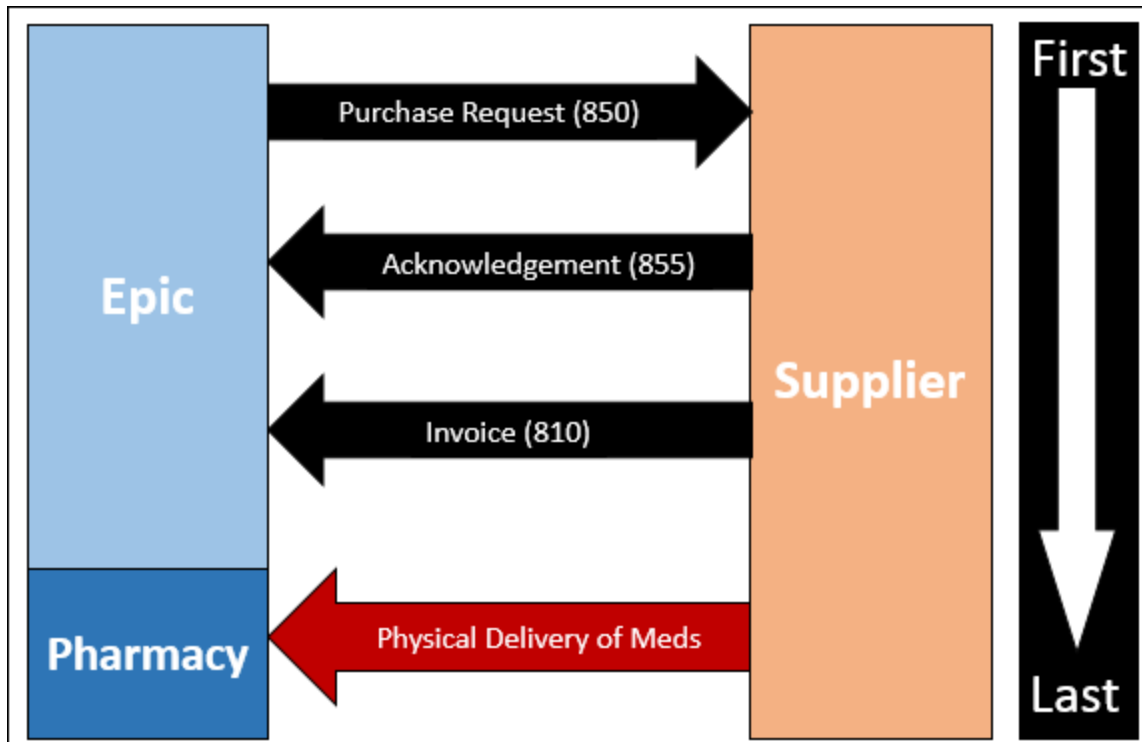

Available Epic Resources

As you complete the setup in this document, you might find it helpful to fill out the [Willow Inventory X12 Interface Connectivity Questionnaire](#). Note that this must be completed before sending information to your suppliers.

Pre-Build Analysis for the Willow Inventory X12 Interface

Before you start setting up the X12 interface, you need to make some decisions about how to send and receive messages and request some information from your supplier.

Organizations outside of the U.S. should contact their EDI and Willow Inventory Epic representatives before doing any interface setup, because there are special requirements for working with non-U.S. suppliers.

Decide How to Configure the X12 Interface

Work with your Epic Client Systems Administrator and Willow Inventory Epic representative to make the following decisions about communicating messages with the X12 interface. Many of these decisions depend on the supplier you're sending messages to, so you might want to involve your supplier contact, too. Determine:

- Which message types will use real-time AS2 communication and which message types will use flat files.
- If you're using real-time AS2 communication:
 - The kind of connection to use.
 - The kind of port to use.
 - The kind of communication to use.


All options for each configuration decision are viable, so the decisions are dependent on the needs of your organization. Note that whatever options you choose to use, you must use and track them consistently throughout all the communication elements of the interface.

The Interconnect setup in this document applies only if you're receiving or sending at least one message type using real-time AS2 communication. If you decide to use flat files for certain message types, refer to the following topics for information about completing that setup:


- [Send Inventory Requests to Suppliers Using a Flat File](#)
- [Receive Invoices, Acknowledgement Messages, or Shipment Notifications as Flat Files](#)

For real-time AS2 communication:

1. Decide if you want to set up the interface using an asynchronous connection or a synchronous connection. Most organizations use an asynchronous connection because it helps avoid timeout issues.
 - **Asynchronous Connection:** A connection from the pharmacy to the supplier is established to send the message requesting a purchase order and then immediately closed. The supplier establishes a new connection to send the MDN. If you are planning to use 855, 810, or 856 messages, you must use this kind of connection.
 - **Synchronous Connection:** A connection from the pharmacy to the supplier is established and remains open until the supplier sends the MDN and it is verified. Synchronous connection is generally considered easier to use than asynchronous connection because the supplier doesn't have to create any new connections. Synchronous connection was shown in the first image in the introduction.

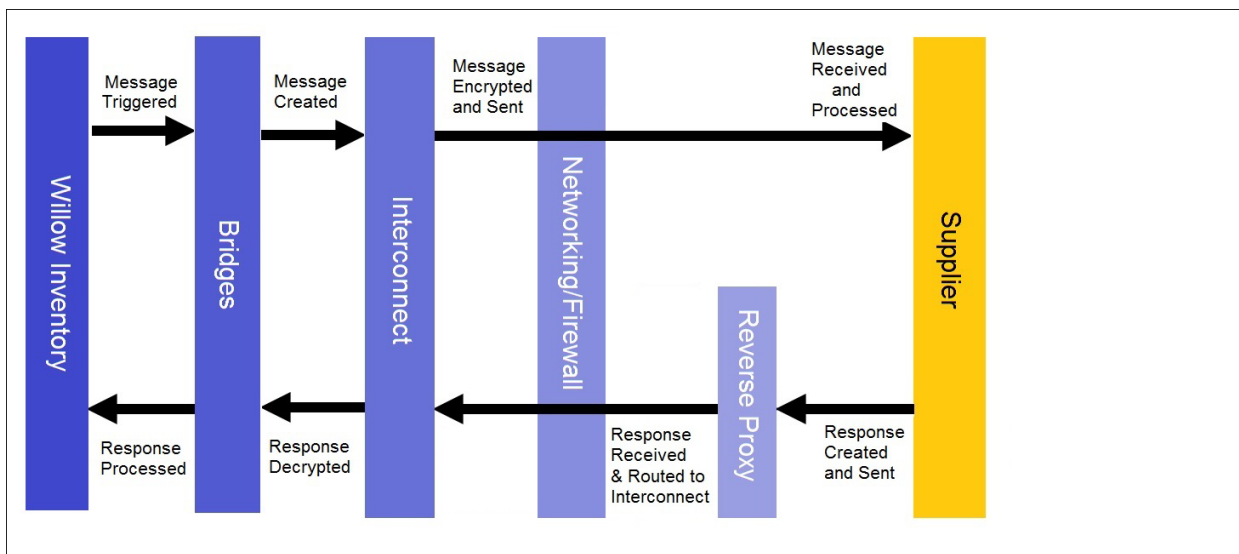

2. Decide whether to use TLS when transmitting the AS2-encrypted messages. Note that Epic recommends using TLS for all web traffic to ensure the security of the information you're transmitting.
 - Following the AS2 protocol, the message is electronically signed, and the body of the message is encrypted. If you don't use TLS, the HTTP header is not encrypted, and the HTTP server is not authenticated.
 - You might need to create and install additional certificates to use TLS.

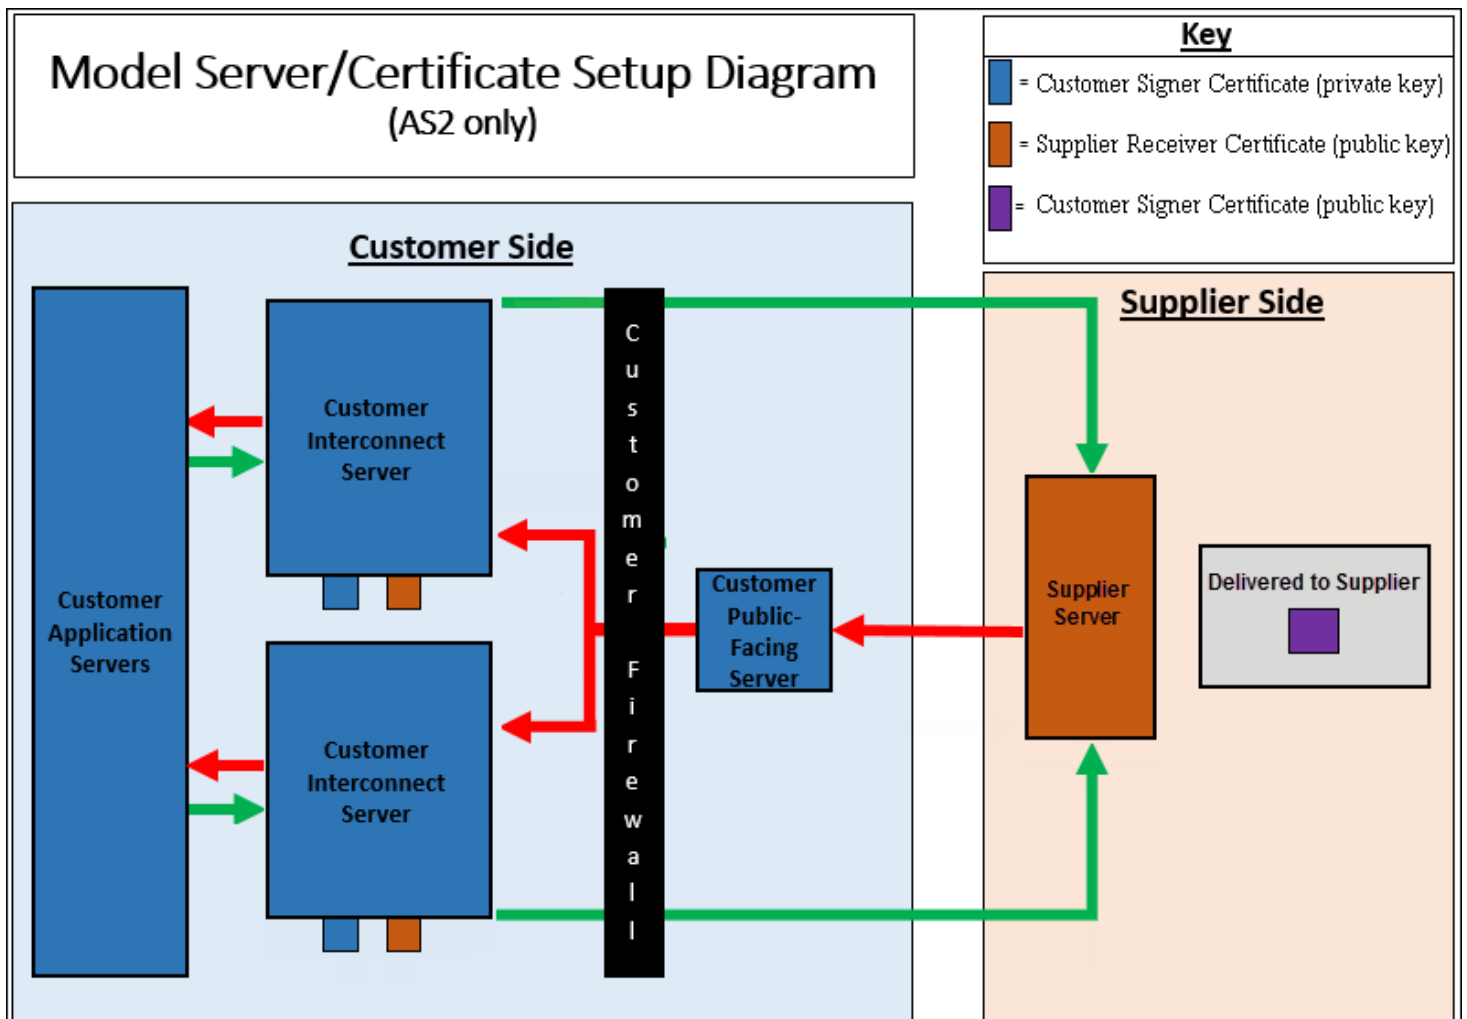

3. Decide which port you want to use to communicate the message. The primary difference between the ports is related to the security of the communication. Generally, it's easiest to use the same port that your supplier uses. Among the standard ports that suppliers typically expect traffic from are:
 - The 443, which is a secure HTTP port.
 - The 4080, which is a TCP Port.
 - The 80, which is the default HTTP port.

Request Information from Your Supplier Regarding X12 Interface Configuration Information

If you're using real-time AS2 communication, you need to collect the following information from your supplier to complete your configuration for the X12 interface:

- The URL to target at the supplier
- The IP addresses on which to expect traffic from the supplier
- The AS2 certificate to install from the supplier
- The SSL certificate to install from the supplier, if you are using HTTPS communication
- The AS2 ID to use for the supplier
- The port from which the supplier expects traffic, if there is a preference

Willow Inventory X12 Interface: Interconnect and Network Setup

The setup in this section should be completed by your Epic Client Systems Administrator (ECSA).

Create, Install, and Export Certificates



If you are using any other method of communication besides AS2 communication, such as a flat file, you do not need to complete the setup for AS2 certificates.

This topic describes the steps you need to take to configure the following AS2 certificates:

- **Signer certificate.** Used to sign the outgoing messages, such as X12 850 messages sent from a pharmacy to a supplier when requesting a purchase order, before it leaves your system. You will use a certificate from your organization saved to your Interconnect servers' personal stores to sign the message.
- **Receiver certificate.** This certificate is created by the message recipient and installed on your Interconnect server in the Other People's Certificate folder. It is used in encryption of the AS2 message sent to your supplier.

Create, Install, and Export a Signer Certificate


Select a certificate to use to sign the outgoing AS2 messages sent to the supplier. An identical certificate must be installed on each Interconnect server that sends outgoing messages. Note the following on this certificate:

- The certificate's subject name doesn't need to match the name of the Interconnect server.
- The certificate can be a self-signed certificate or a certificate signed by a third-party. The certificate public key must be delivered to the supplier for outgoing messages to be trusted.
- The certificate needs to be signed using a CAPI provider. If you're using a certificate signed by a third-party, ask the vendor to sign using a CAPI provider. If you're using a self-signed certificate and you need assistance, contact your Epic Client Systems - Web & Service Servers representative and mention parent SLG 2918620.
- If creating a CSR to be signed by an internal CA or widely trusted CA, make sure that the KeySpec = AT_KEYEXCHANGE. If it is set to AT_SIGNATURE, it can cause issues with encryption on messages when AS2Response is called. The KeySpec AT_NONE is only for CNG certificates which won't work.

To install and export the certificate:

1. For each Interconnect server that will be used to generate and send messages, use the Microsoft Management Console to save the certificate to the Personal folder in the machine's Certificate Store. Follow your standard formatting protocols while doing so, which usually means storing the certificate in either a .pfx or .p12 format.
2. Give the IIS group, found at <machinename>\IIS_IUSRS, full control permissions to the private key for the signer certificate by performing the following steps:
 - a. Open the Personal certificate folder.
 - b. Right-click on the signer certificate, and follow the path All Tasks > Manage Private Keys.
 - c. Click Add.
 - d. Click Locations, select the local machine, and click OK.

- e. In the Enter the object names to select field, enter IIS_IUSRS and click Check Names.
 - f. Click OK.
 - g. Click Apply, and then click OK again.
3. Work with your Epic Client Systems - Web & Service Servers representative to export the certificate public key and send it to your supplier.
 4. For X12 interfaces only, provide the common name or thumbprint of the signer certificate to your Bridges counterpart so that they can enter it in the Signer-Certificate-Name field in the interface. This interface setting allows Interconnect to identify the appropriate certificate to use to sign messages.

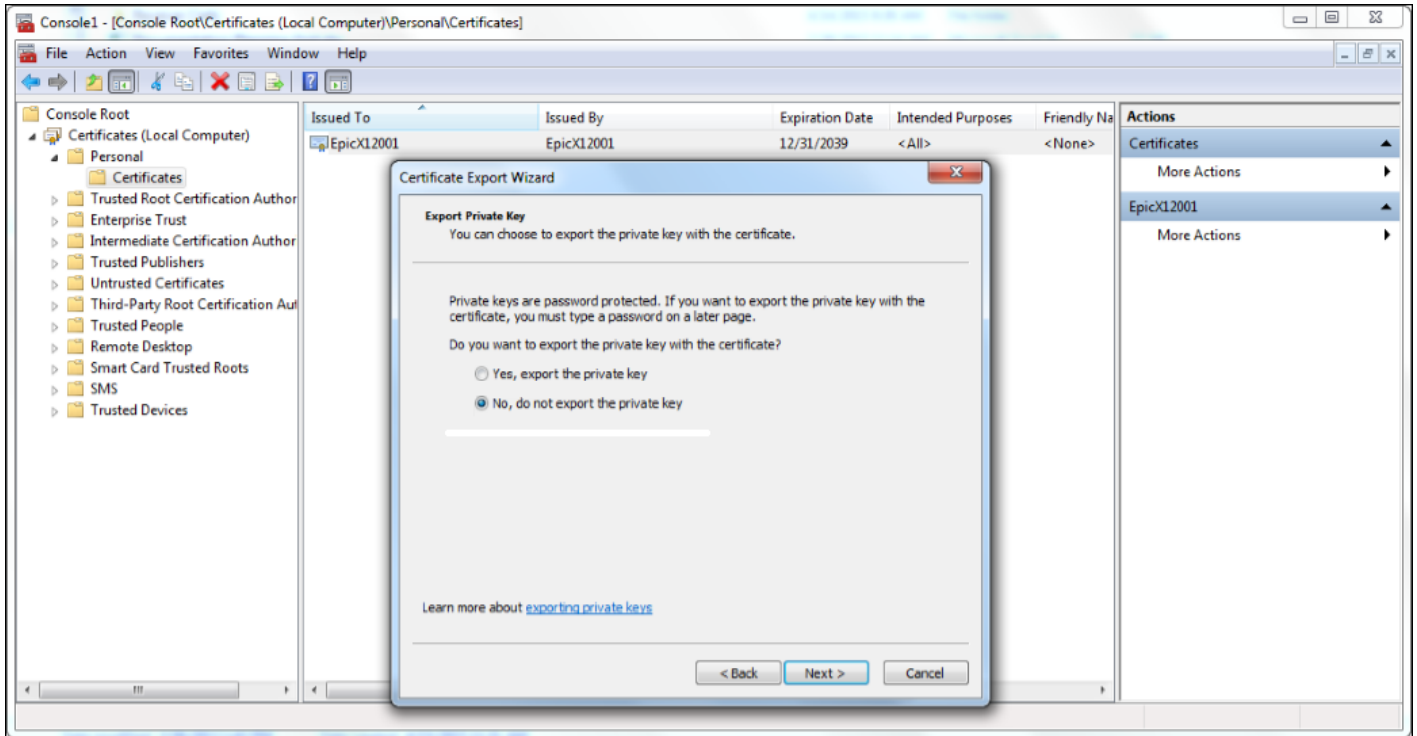

Install the Receiver Certificate from Your Recipient

Your recipient will complete their own process of creating, installing, and exporting a certificate. You need to receive this certificate and install it on the appropriate servers, which can be done by working with your Epic Client Systems - Web & Service Servers representative:

1. Launch the Certificate snap-in from the local machine's Microsoft Management Console.
2. Expand the Certificates option and, if you don't see an Other People store, add it by performing the following steps:
 - a. Open the Registry Editor by entering "Run" on the Start menu and then entering "regedit" in the window that appears.
 - b. Add the following key:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\SystemCertificates\AddressBook
 - c. Restart the Microsoft Management Console with the Certificates Snap-in.
3. Install the receiver certificate in the Other People folder.
4. For X12 interfaces only, provide the common name or thumbprint of the receiver certificate to your Bridges counterpart so that they can set it in the Custom HTTP Header Key/Value Pairs table corresponding to the Receiver-Certificate-Name header key in the interface. This setting allows Interconnect to identify

the appropriate receiver certificate to use.

Additional Certificate Requirements for SSL Communication

If your organization plans to use TLS, your supplier might need to provide you with a separate certificate for outgoing communication. The subject names on some suppliers' AS2 certificates might not match the supplier URL's hostname, so a separate certificate is required to establish trust between the servers.

If your supplier provides you with a separate TLS certificate that isn't from a trusted root CA, the public key must be installed on the Interconnect server.

If you're using asynchronous communication, you might also need to provide the supplier with the TLS certificate you use for incoming proxy or load balancer traffic. Check with your supplier to determine whether they need this information. If the certificate is not from a trusted Certificate Authority (CA), you'll also need to send the public key to your supplier.

Configure Interconnect for the X12 Interface

See the [Willow Inventory X12](#) topic in the Interconnect Use Case Guide for instructions on setting up Interconnect for the X12 interfaces.

Configure Networking for the X12 Interface

You must complete networking configurations for the X12 interface. Information that is commonly needed for these configurations is as follows:

- The target URL for the supplier
- The target IP address for the supplier
- The return IP addresses for the supplier (asynchronous connection only)
- The port from which the supplier expects messages
- The setup method, whether synchronous or asynchronous
- Your source IP address
- The port through which you plan to send the message

Configure Outgoing Networking for the X12 Interface

Messages that leave your network must be allowed out through the communication infrastructure you have previously configured. The port and firewall are the elements that are usually involved in outgoing messages being sent over the X12 interface. You must ensure that the port you've selected to use is opened for these messages and that the firewall allows them to be transmitted.

Configure Incoming Networking for the X12 Interface

Messages that enter your network while using an asynchronous connection must be allowed in through the communication infrastructure you have previously configured. You'll need to create a rewrite rule on the reverse proxy server and ensure that the firewall allows these messages to be accepted. To configure incoming messages for the X12 interface, refer to the [Willow Inventory X12](#) topic.

Willow Inventory X12 Interface: Bridges Setup

Configure Interface Specification Records for the X12 Interface

The setup in this section should be completed by your Bridges interfaces team.

Interface specification (AIP) records control the actions and configurations of a given interface. You need to create and configure these records for each type of message your organization plans to use to control the X12 interface.

The following interface reference guides describe the configuration necessary if you are creating new interfaces. Much of the necessary configuration is dependent on your organization and your supplier, although there are some standard settings:

- [Outgoing Medication Purchase Orders from Willow Inventory \(X12 850\) Interface Reference Guide \(AIK 1500\)](#)
- [Incoming Inventory Purchase Order Acknowledgement \(X12 855\) Interface Reference Guide \(AIK 1501\)](#)
- [Incoming Inventory Purchase Order Invoice \(X12 810\) Interface Reference Guide \(AIK 1502\)](#)
- [Incoming Shipment Notification to Willow Inventory \(X12 856\) Interface Reference Guide \(AIK 1504\)](#)
- [Incoming Pharmacy Price Sales Catalog to Willow Inventory \(X12 832\) Interface Reference Guide \(AIK 1505\)](#)

Configure the Interface Specification for the Incoming Purchase Order Message Splitter Interface

The Incoming Purchase Order Message Splitter interface does not actually match to a specific message, and it does not create or receive any unique messages itself. Instead, it directs 855, 810, 856, and 832 messages to their respective interfaces. This interface is required only if your organization is using two or more of these message types.

There's no need to run this interface. Note that this means that this interface does not have a filer and thus a filer cannot be started for it.

Create a Translation Table for the Incoming Purchase Order Message Splitter Interface

1. In Hyperspace, follow the path Epic button > Admin > Interface > Tables.
2. Name the table with key words such as Willow Inventory, X12, Purchase Order Response, and Splitter.
3. Create the table by entering the corresponding values in the following fields:
 - Type: Translation Table
 - Direction: Incoming
 - Destination Data Type: Numeric
 - Source Data Type: Numeric
4. After you've created the table, enter the corresponding values in the following fields:
 - Internal Value: <The AIP ID of the 855 interface>
 - External Value: 855
 - Internal Value: <The AIP ID of the 810 interface>
 - External Value: 810

- Internal Value: <The AIP ID of the 856 interface>
- External Value: 856
- Internal Value: <The AIP ID of the 850 interface>
- External Value: 850
- Internal Value: <The AIP ID of the 832 interface>
- External Value: 832

Configure the Interface Specification Record for the Incoming Purchase Order Message Splitter Interface

Prerequisites

Prior to completing the steps in this section, work with your Epic Bridges Technical Services representative to obtain a copy of the Incoming Purchase Order Acknowledgement to Willow Inventory (X12 855) interface from the Foundation System.

1. In Hyperspace, follow the path Epic button > Admin > Interface Admin > Interface Specification to open your copy of the Incoming Purchase Order Acknowledgement to Willow Inventory (X12 855) interface. You'll use this copy to create your Incoming Purchase Order Message Splitter interface.
2. Set the following profile variables:
 - INTF_USER (2). Set to <An interface background user>
 - February 2023 and later: AFTER_MESSAGE_RECEIVED_EXT (6299). Set to an extension with these settings:
 - Type: 40010-EDI Profile Variable Code
 - Code template: 331636-Bridges Sort X12 Responses to Multiple Queues
 - Message Type Function: "\$\$getType^AIX12TCI2(2) "
 - Table: <Your AIF ID>
 - November 2022 and earlier: AFTER_MESSAGE_RECEIVED_PP (194). Set to `d sortResponses^AIX12TCI2 ("$$getType^AIX12TCI2(2)", <Your AIF ID>)`
3. Under the X12 Specific Info header, enter the following information:
 - X12 version (ISA12): 00401
4. Leave the All tree root blank because this interface doesn't have to run. You have now completed setup for this interface.

Add Your Interfaces to a Monitor

To be found or used by the system, interfaces need to be manually added to a monitor. Your X12 interface must be added to the Background Monitor. This is the primary Interface Monitor, which is a dashboard-like tool used to manage interfaces. To add your interfaces to the Background Monitor, refer to the [Add Interfaces to the Background Monitor](#) topic.

You can add your X12 interface to additional custom monitors if you would like to manage it without navigating through all the other interfaces added to the Background Monitor. This is not required, and while it could be more efficient for the person managing the interface, it does not inherently improve system performance. Refer to the [Build Specific Interface Monitors](#) topic if you want to add your X12 interface to custom monitors

Willow Inventory X12 Interface: Willow Inventory Setup

The setup in this section should be completed by your Willow Inventory team.

Configure Willow Inventory for the X12 Interface

Various items and records must be built correctly in Willow Inventory such that your X12 interface is triggered and then communicates properly when you want to send a message. Records that you need to ensure are properly configured include your supplier, your inventory location, and your purchase contract. There are multiple settings you must set for the supplier.

1. You might need to create a rule to separate C-II medications into a separate purchase order, either to be manually submitted or send using the X12 interface, from all other medications. Refer to the [Create or Edit a Rule](#) topic for more information on creating rules. The following values should be used for this rule:
 - Context: Inventory Balance
 - Property: DEA Code - Federal
 - Operator: Equals
 - Value: C-II High abuse potential [2]
2. In Hyperspace, go to Supplier Admin and open your supplier record.
3. On the Request Settings form, enter the following values in the Split inventory requests submitted to this supplier using rules table:
 - a. Inventory Request Rule: the rule you created in step 1
 - b. Interface Specification: the interface specification record you previously created
4. In the Interface specification for requests not matching a rule field, enter the interface specification record you previously created. This ensures that all requests not involving a C-II medication are correctly submitted to the supplier using your new interface specification.
5. Select the Auto-send messages to supplier for requests not matching a rule checkbox.
6. Go to Location Admin and open your inventory location.
7. Ensure that the correct account numbers for the corresponding Purchase Contracts are included as location identifiers in the Contract specific location ID table.
8. Go to Purchase Contract Admin and open your purchase contract.
9. On the Inventory Items form, ensure that all the listed NDCs have a corresponding supplier item ID. For those that don't, enter the correct supplier item ID for that NDC.

Send Information to Your Supplier Regarding X12 Interface Configuration Information

Your supplier needs information from you to complete their configuration for the X12 interface.

Provide the following information to your supplier:

- Your decision on whether to use a synchronous or asynchronous connection (applies only if using real-time AS2 communication).

- The URL to which the supplier should direct messages, in the form `http(s)://<Proxy server name or alias>/<Proxy APP>/wcf/Epic.AS2.Services/AS2.svc/rest/AS2Response?q=<the ID of your 850 queue>`.
 - This URL is usually the URL of a proxy server that can be reached directly by a vendor. It should not be the URL of a server within the firewall that can't be accessed from an external location.
 - If you are requesting asynchronous MDNs from your suppliers, this URL should match what is configured in the Receipt-Delivery-Option HTTP header in your Bridges outgoing purchase order interface.
- The AS2 ID for your organization. The supplier will use this ID to identify who the AS2 messages are coming from.
- The port from which to expect traffic from you.
- The IP address from which to expect traffic from you.

Complete the [Willow Inventory X12 Interface Connectivity Questionnaire.xlsx](#) form to ensure that you provide all of the information the supplier needs.

Automatically Create and Receive Shipments Based on X12 856 Messages

Your organization might receive X12 856 advance shipment notifications from a supplier or another system, and you might not want to require technicians to validate that what was actually received matches what was included in the message. If that's the case at your organization, you can configure your Incoming Shipment Notification to Willow Inventory (X12 856) interface so that it automatically creates and completes a shipment containing exactly the items contained in the advance shipment notification.

For example, you might have a supplier in your organization that doesn't use Willow Inventory, and you might use X12 interfaces to request stock from that supplier. If the supplier sends you very accurate X12 856 advance shipment notifications, you might want to save technicians' time by automatically creating and completing a shipment containing the items included in the advance shipment notification if the advance shipment notifications received for the request contain all expected items in the expected quantities.

To configure your Incoming Shipment Notification to Willow Inventory (X12 856) interface so that shipments are automatically created and completed when an advance shipment notification is received:

1. In Hyperspace, open the interface specification you want to modify (search: Interface Specification).
2. Go to the Profile Variables form and click Edit.
3. Use the Add button to add profile variable `CREATE_SHIPMENT` (69428) and set it to 1-Yes to automatically create shipments from the advance shipment notification.
4. If you want to automatically complete these shipments when the advance shipment notifications received for the request contain all expected items in the expected quantities, too, add profile variable `AUTO_RECEIVE` (69429) and set it to 1-Yes.
5. In May 2025 and earlier, go to profile variable `INTF_USER` (2) and confirm the user listed does not have Willow security point 729-Receive Up to Requested Amounts. If the user has this security point, the items in the shipment use a quantity of 0 by default, and an inventory user must manually enter the correct amount.
6. Confirm that your X12 supplier record and receiving inventory location are not set to increment on barcode scan. Incrementing on scan indicates that users are expected to scan every item in the shipment, not just once per item. If the supplier or location are set to increment on scan and the X12 856 interface

automatically creates and completes shipments, shipments are created and received with null quantities. Refer to the [Determine How Barcode Scanning Works When Receiving or Filling Shipments](#) topic for information about configuring barcode scan actions.

Automatically Close Purchase Requests

If a purchase request hasn't been completed or closed, you can configure an extension to automatically close the purchase request after a specified number of days.

To configure an extension to automatically close purchase requests:

1. Create a copy of extension 85019-RX Inventory After Shipment Notice Received Configuration. Refer to the [Duplicate and Modify an Extension](#) topic for more information.
2. In the second parameter, enter an Inventory Request-context rule to exclude certain purchase requests from being automatically completed. Refer to the [Create or Edit a Rule](#) topic for information.
3. Set the third parameter to Yes if you want a scheduled job to automatically complete shipments and close open purchase requests after the 856 message is filed. If you leave this parameter blank, the scheduled job does not automatically complete shipments or close open purchase requests affected by this extension.
4. If you set the third parameter to Yes, set the fourth parameter to the number of days the system should wait before automatically completing shipments and closing purchase requests after an 856 message is filed. The default is 30 days.
5. Use import specification WHS,1000-WHS Import to add your extension to the X12 856 Filer Configuration Ext (I WHS 3801) item in the supplier records you want to update. Refer to the Import Suppliers section of the [Document the Suppliers from Which You Receive Inventory](#) topic for more information about working with this import specification.

Automatically Create Purchase Orders for Incoming Invoices Without Corresponding Requests

Starting in August 2023, May 2023 with special update E10502185, and February 2023 with special update E10408455, if your organization uses X12 810 messages to receive invoices from external suppliers, you can configure the X12 810 interface to automatically create purchase orders for incoming invoices that don't correspond to an existing inventory request.

When you configure your interface to create these inventory requests, the request created has the following properties:

- The destination location is the one included in the 810 message, or a configurable fallback location.
- The items being invoiced are added to the purchase order.
- A configurable default contract is used.

To create inventory requests for 810 messages that don't have a corresponding existing request in the system:

1. In Hyperspace open your Incoming Inventory Purchase Order Invoice interface specification record.
2. Add profile variable CREATE_PO_IF_NOT_FOUND (69419) and set it to 1-Yes.
3. Add profile variable DEFAULT_PURCHASE_CONTRACT (69420). Set it to the contract you want to use for these automatically created inventory purchase orders.
4. Add profile variable DEFAULT_INVENTORY_LOCATION (69421). Set it to the location you want to use by default if the 810 message doesn't contain a location identifier that matches one of your inventory

locations.

- a. Optionally, starting in February 2024, November 2023 with special update E10700158, August 2023 with special update E10605520, and May 2023 with special update E10511948, you can use the location specified in profile variable `DEFAULT_INVENTORY_LOCATION` (69421) by default in scenarios where the location identifier in the 856 message matches multiple inventory locations by setting set profile variable `USE_DEFAULT_INVENTORY_LOCATION_IF_CONFLICTS` (69458) to 1-Yes. Otherwise, the system uses the inventory location with the lowest record ID (.1) that lists the location identifier in the Location Identifier (I IVL 160) field. If no inventory locations list the location identifier in the Location Identifier field, the system uses the inventory location with the lowest record ID (.1) that lists the location identifier in the Contract Specific Location Identifier (I IVL 310) field. If no inventory locations list the location identifier in either field, the system uses the inventory location specified in profile variable `DEFAULT_INVENTORY_LOCATION` (69421).

5. Ensure that profile variable `INTF_USER` (2) is configured for the interface.

Profile Variables

- `CREATE_PO_IF_NOT_FOUND` (69419)
- `DEFAULT_PURCHASE_CONTRACT` (69420)
- `DEFAULT_INVENTORY_LOCATION` (69421)
- `USE_DEFAULT_INVENTORY_LOCATION_IF_CONFLICTS` (68458) (starting in February 2024, November 2023 with special update E10700158, August 2023 with special update E10605520, and May 2023 with special update E10511948)
- `INTF_USER` (2)

Errors

- 24012-Could Not Create New POR
- 24013-Could Not Lock POR Failure
- 24015-Missing Required Profile Variable

Automatically Create Balances from X12 810, 855, and 856 Messages

Starting in February 2022

Your organization might receive X12 810, 855, or 856 messages that you update purchase orders from. If those messages include a package that does not correspond to an inventory balance at the receiving inventory location, an interface error is logged and the package is not added to the purchase request. Your organization might instead want to create an inventory balance based on these messages. If that is the case, you can configure your interface specifications to do so automatically.

To configure your Incoming Purchase Order Invoice to Willow Inventory (X12 810) interface, Incoming Purchase Order Acknowledgement to Willow Inventory (X12 855) interface, or Incoming Shipment Notification to Willow Inventory (X12 856) interface to automatically create inventory balances for NDCs with no corresponding inventory balance:

1. In Hyperspace, open the interface specification you want to modify (search: Interface Specification).
2. Go to the Profile Variables form and click Edit.
3. Click Add to add profile variable `CREATE_BALS_FOR_UNSTOCKED_ITEMS` (69454) and set it to 1-Yes.

Configure Categories to Receive Additional Charges and Credits from X12 810 Messages

Your organization might receive additional charges and, starting in May 2025, February 2025 with special updates E11305731 and C11305731, and November 2024 with special updates E1210656 and C11210656, credits from X12 810 messages—whether in the form of summary-level tax information or other charges and credits sent in Service, Promotion, Allowance, or Change Indicator (SAC) segments. If you want to receive these additional charges and credits and not get an interface error, you need to create a category value with the appropriate additional charge or credit code:

1. In Hyperspace, open the Additional Charge Category (I PCO 620) category list (search: Category List Maintenance).
2. Add a category for each additional charge and, starting in May 2025, credit you receive.
3. In the Additional charge code field, enter the charge code corresponding to the additional charge or credit. For additional charges related to tax, such as summary-level tax information sent in the Tax Information (Summary) (TXI) segments, enter H850. For other additional charges and credits, enter the value from the Service, Promotion, Allowance, or Change Indicator (SAC) segment SAC02 in the X12 810 message.

Configure a Batch Job to Recalculate Primary Contracts

➔ **Starting in February 2024**

★ **November 2023 by SU E10704512, C10704512-HSWeb**

★ **August 2023 by SU E10608939, C10608939-HSWeb**

★ **May 2023 by SU E10515028, C10515028-HSWeb**

This topic applies only to organizations that receive X12 832 messages. These messages can update the primary contract used for a balance, such as when the message indicates that an item is no longer available from the supplier.

The primary contract that appears for each balance in the Inventory activity and the Request queue is recalculated in the following situations:

- When a user opens the activity and it's been more than four hours since the primary contract was last recalculated.
- When a user has had the activity open for more than four hours.

As a result, when you load an X12 832 message that updates the primary contract, that change isn't reflected in the system until the next recalculation.

If you want changes from your interface messages to be reflected closer to when you receive the messages, you can run a job built from Batch Scheduler template [48053 - Rx Inventory Calculate Primary Contracts for Inventory Balances](#) after you receive messages. Refer to the linked topic for configuration instructions.

© 2018 - 2026 Epic Systems Corporation. All rights reserved. PROPRIETARY INFORMATION - This item and its contents may not be used, modified, reproduced, performed, displayed or distributed unless and only to the extent expressly authorized by a written agreement with Epic. This item contains trade secrets and commercial information that are confidential, privileged, and exempt from disclosure under the Freedom of Information Act and prohibited from disclosure under the Trade Secrets Act. The contents of this item may not be accessed or disclosed without express written authorization from Epic. After Visit Summary, ASAP, Aura, Beacon, Beaker, Beans, BedTime, Best Care Choices for My Patient, Bones, Break-the-Glass, Buggy, Caboodle, Cadence, Canto, Care Everywhere, Charge Router, Cheers, Chronicles, Clarity, Cogito ergo sum, Cohort, Comfort, Community Connect, Compass Rose, Cosmos, Cosnome, Cupid, Curiosity, Discovery, Emmie, Epic, EpicCare, EpicCare Link, Epicenter, EpicShare, EpicWeb, Epic Cosmos, Epic Earth, Epic Nexus, Epic Research, Garden Plot, Grand Central, Haiku, Happy Together, Healthy Planet, Hello World, Hey Epic!, Hyperdrive, Hyperspace, Kaleidoscope, Kit, Limerick, Lucy, Lumens, MyChart, Nebula, OpTime, Penny, Phoenix, Powered by Epic, Prelude, Pulse, Radar, Radiant, Resolute, RevCyclers, Revenue Guardian, Rover, Share Everywhere, SmartForms, Sonnet, Stork, System Pulse, Tapestry, Trove, Welcome, Willow, Wisdom, With the Patient at the Heart, and WorldWise are trademarks or service marks of Epic Systems Corporation and includes those registered in the United States and other countries. For a full list of Epic's trademarks, visit <https://www.epic.com/epic/page/trademark-list/>. Other company, product, and service names referenced herein may be trademarks or service marks of their respective owners. Patents: www.epic.com/patents. Entry from the Microsoft Language Portal. © 2018 - 2026 Microsoft Corporation. All rights reserved.