

Plasma Physics and Laser-driven Plasmas

Alejandro Campos

July 26, 2024

Contents

I	Fundamentals of plasma physics	4
1	Governing equations	5
1.1	Particle description	5
1.1.1	Lagrangian mechanics	5
1.1.2	Hamiltonian mechanics	6
1.2	Kinetic description	7
1.3	Fluid description	9
1.3.1	Mass	9
1.3.2	Momentum	9
1.3.3	Energy	11
1.3.4	Kinetic and internal energies	13
1.3.5	Summary	13
2	Variants of the fluid model	14
2.1	The multi-fluid model	14
2.1.1	Multi-material multi-fluid model	14
2.1.2	Single-material multi-fluid model	15
2.1.3	Single-material two-fluid model	16
2.2	Single-fluid formulation	17
2.2.1	Single-fluid variables	17
2.2.2	Total sum of collisional terms	19
2.2.3	The general model	20
2.2.4	Multi-material multi-species model	23
2.2.5	Single-material multi-species model	25
2.2.6	Single-material two-species model	25
2.2.7	Alternate forms of the energy equations	26
3	Basic waves and parameters	28
3.1	Electron-plasma and ion-acoustic waves	28
3.1.1	Linearization	28
3.1.2	Electron Plasma Waves	29
3.1.3	Ion Acoustic Waves	30
3.2	Plasma parameters	31
3.2.1	Debye length	31
3.2.2	Plasma frequency	34
3.2.3	The coupling parameter	35
3.2.4	The plasma parameter	36
3.2.5	Electron degeneracy	37

4	Collisions	38
4.1	Cross section	38
4.1.1	General definition	38
4.1.2	Differential cross section	38
4.1.3	Mean free path & collision frequency	41
4.2	Coulomb collisions	41
4.2.1	Particle equations	41
4.2.2	Conservation of energy and momentum	42
4.2.3	Polar coordinates	44
4.2.4	Particle trajectory	45
4.2.5	The scattering angle	47
4.2.6	The differential cross section	47
4.2.7	Collision integral	48
5	Guiding center theory	49
5.1	Uniform \mathbf{E} and \mathbf{B} fields	50
5.1.1	Only \mathbf{E} field	50
5.1.2	Only \mathbf{B} field	50
5.1.3	Both \mathbf{E} and \mathbf{B} fields	51
5.2	Non-uniform \mathbf{B} field	52
5.2.1	Change in magnitude along perpendicular directions	52
5.2.2	Change in magnitude along parallel directions	54
5.2.3	Change in direction	58
5.3	Non-uniform \mathbf{E} field	60
5.4	Time-varying \mathbf{E} field	60
5.5	Time-varying \mathbf{B} field	61
6	Magnetohydrodynamics	64
6.1	Single-fluid equations	64
6.1.1	Mass	64
6.1.2	Momentum	64
6.1.3	Ion internal energy	64
6.1.4	Electron internal energy	65
6.1.5	Maxwell's equations	67
6.1.6	Summary	67
6.2	Resistive MHD	67
6.3	Ideal MHD	68
II	High energy laser-driven plasmas	70
7	Some notes on lasers	71
8	Longitudinal and transverse waves	73
8.1	Definitions	73
8.2	Electron-plasma and ion-acoustic waves	74
9	Electromagnetic waves in plasmas	76

10 Electromagnetic waves in a stable plasma	81
10.1 The vector potential	81
10.2 The electric field	82
10.3 The magnetic field	82
11 Stimulated Raman and Brillouin instabilities	84
11.1 Linearization	84
11.2 Stimulated Raman Scattering	87
11.3 Stimulated Brillouin Scattering	87
III High intensity laser-driven plasmas	89
A Lagrangian and Eulerian PDFs	90
A.1 Eulerian PDF	90
A.2 Lagrangian PDF	90
A.3 Relation between Lagrangian and Eulerian PDFs	91
A.4 Evolution equation for fine-grained Eulerian PDF	91
A.5 Evolution equation for fine-grained Lagrangian PDF	91

Part I

Fundamentals of plasma physics

Chapter 1

Governing equations

1.1 Particle description

Table 1.1: Various coordinates of classical mechanics.

Classical coordinates	$\mathbf{x}(t)$	$\mathbf{v}(t)$
Generalized coordinates	\mathbf{q}	$\dot{\mathbf{q}}$
Canonical coordinates	\mathbf{q}	\mathbf{p}
Time-dependent canonical coordinates	$\tilde{\mathbf{q}}(t)$	$\tilde{\mathbf{p}}(t)$

1.1.1 Lagrangian mechanics

- Define the position $\mathbf{x} = \mathbf{x}(t)$ and velocity $\mathbf{v} = \mathbf{v}(t)$ of a particle.
- Define the Lagrangian as $L = L(\mathbf{q}, \dot{\mathbf{q}}, t)$, where \mathbf{q} and $\dot{\mathbf{q}}$ are the generalized position and generalized velocity, respectively.
- The equations of motion are obtained from the Euler-Lagrange equation, which is

$$\frac{d}{dt} \left[\left(\frac{\partial L}{\partial \dot{q}_i} \right)_{\mathbf{q}=\mathbf{x}, \dot{\mathbf{q}}=\mathbf{v}} \right] = \left(\frac{\partial L}{\partial q_i} \right)_{\mathbf{q}=\mathbf{x}, \dot{\mathbf{q}}=\mathbf{v}}. \quad (1.1)$$

- For example, the Lagrangian of a particle in an electromagnetic field where $\phi = \phi(\mathbf{q}, t)$ is the electric potential and $\mathbf{A} = \mathbf{A}(\mathbf{q}, t)$ is the magnetic potential, is

$$L = \frac{1}{2} m \dot{q}_i \dot{q}_i + e \dot{q}_i A_i - e \phi. \quad (1.2)$$

The derivatives in the Euler-Lagrange equation are

$$\frac{\partial L}{\partial q_i} = e \dot{q}_j \frac{\partial A_j}{\partial q_i} - e \frac{\partial \phi}{\partial q_i} \quad (1.3)$$

$$\frac{\partial L}{\partial \dot{q}_i} = m \dot{q}_i + e A_i \quad (1.4)$$

$$\begin{aligned} \frac{d}{dt} \left[\left(\frac{\partial L}{\partial \dot{q}_i} \right)_{\mathbf{q}=\mathbf{x}, \dot{\mathbf{q}}=\mathbf{v}} \right] &= \frac{d}{dt} [mv_i + eA_i(\mathbf{x}, t)] \\ &= m \frac{dv_i}{dt} + ev_j \left(\frac{\partial A_i}{\partial q_j} \right)_{\mathbf{q}=\mathbf{x}} + e \left(\frac{\partial A_i}{\partial t} \right)_{\mathbf{q}=\mathbf{x}}. \end{aligned} \quad (1.5)$$

Thus, the Euler-Lagrange equation becomes

$$m \frac{dv_i}{dt} = \left(-ev_j \frac{\partial A_i}{\partial q_j} - e \frac{\partial A_i}{\partial t} + ev_j \frac{\partial A_j}{\partial q_i} - e \frac{\partial \phi}{\partial q_i} \right)_{\mathbf{q}=\mathbf{x}}. \quad (1.6)$$

In vector notation, this is written as

$$m \frac{d\mathbf{v}}{dt} = \left(-e\mathbf{v} \cdot \nabla_q \mathbf{A} - e \frac{\partial \mathbf{A}}{\partial t} + e \nabla_q (\mathbf{v} \cdot \mathbf{A}) - e \nabla_q \phi \right)_{\mathbf{q}=\mathbf{x}}. \quad (1.7)$$

Using the vector identity (4) from Griffiths book, the above can be expressed as

$$m \frac{d\mathbf{v}}{dt} = e (\mathbf{E} + \mathbf{v} \times \mathbf{B})_{\mathbf{q}=\mathbf{x}}, \quad (1.8)$$

where $\mathbf{E} = \mathbf{E}(\mathbf{q}, t)$ and $\mathbf{B} = \mathbf{B}(\mathbf{q}, t)$.

1.1.2 Hamiltonian mechanics

- Define the Hamiltonian as $H = H(\mathbf{q}, \mathbf{p}, t)$, where \mathbf{q} and \mathbf{p} are the canonical position and momentum. For all purposes here, the canonical position is the same as the generalized position.
- The Hamiltonian is obtained from the Lagrangian using

$$H = (\dot{\mathbf{q}} \cdot \mathbf{p} - L)_{\dot{\mathbf{q}}=\mathbf{f}(\mathbf{q}, \mathbf{p})}, \quad (1.9)$$

where the dependency of $\dot{\mathbf{q}}$ on \mathbf{q} and \mathbf{p} is obtained from evaluating

$$\mathbf{p} = \frac{\partial L}{\partial \dot{\mathbf{q}}}. \quad (1.10)$$

- For example, for a particle in an electromagnetic field we have

$$H = \left[\dot{q}_i p_i - \left(\frac{1}{2} m \dot{q}_i \dot{q}_i + e \dot{q}_i A_i - e \phi \right) \right]_{\dot{\mathbf{q}}=\mathbf{f}(\mathbf{q}, \mathbf{p})}. \quad (1.11)$$

Evaluating eq. (1.10) gives $p_i = m \dot{q}_i + e A_i$, which allows us to express $\dot{\mathbf{q}}$ in terms of \mathbf{q} and \mathbf{p} as $\dot{q}_i = \frac{1}{m} (p_i - e A_i)$. Thus

$$\begin{aligned} H &= \frac{1}{m} (p_i - e A_i) p_i - \frac{1}{2m} (p_i - e A_i) (p_i - e A_i) - e \frac{1}{m} (p_i - e A_i) A_i + e \phi \\ &= \frac{1}{2m} (p_i - e A_i) (p_i - e A_i) + e \phi. \end{aligned} \quad (1.12)$$

- We introduce the variables $\tilde{\mathbf{q}} = \tilde{\mathbf{q}}(t)$ and $\tilde{\mathbf{p}} = \tilde{\mathbf{p}}(t)$, which are defined by

$$\tilde{\mathbf{q}} = \mathbf{x} \quad (1.13)$$

$$\tilde{\mathbf{p}} = \left(\frac{\partial L}{\partial \dot{\mathbf{q}}} \right)_{\mathbf{q}=\mathbf{x}, \dot{\mathbf{q}}=\mathbf{v}} \quad (1.14)$$

- The equations of motion are obtained from

$$\frac{d\tilde{q}_i}{dt} = \left(\frac{\partial H}{\partial p_i} \right)_{\mathbf{q}=\tilde{\mathbf{q}}, \mathbf{p}=\tilde{\mathbf{p}}} \quad (1.15)$$

$$\frac{d\tilde{p}_i}{dt} = - \left(\frac{\partial H}{\partial q_i} \right)_{\mathbf{q}=\tilde{\mathbf{q}}, \mathbf{p}=\tilde{\mathbf{p}}} \quad (1.16)$$

- For example, for a particle in an electromagnetic field we have

$$\tilde{p}_i = mv_i + eA_i(\mathbf{x}, t) \quad (1.17)$$

and thus

$$\frac{d\tilde{p}_i}{dt} = m \frac{dv_i}{dt} + ev_j \left(\frac{\partial A_j}{\partial q_i} \right)_{\mathbf{q}=\mathbf{x}} + e \left(\frac{\partial A_i}{\partial t} \right)_{\mathbf{q}=\mathbf{x}}. \quad (1.18)$$

$$\begin{aligned} \frac{\partial H}{\partial q_i} &= \frac{\partial}{\partial q_i} \left[\frac{1}{2m} (p_j - eA_j)(p_j - eA_j) + e\phi \right] \\ &= \frac{1}{m} (p_j - eA_j) \frac{\partial}{\partial q_i} (p_j - eA_j) + e \frac{\partial \phi}{\partial q_i} \\ &= -\frac{e}{m} (p_j - eA_j) \frac{\partial A_j}{\partial q_i} + e \frac{\partial \phi}{\partial q_i} \end{aligned} \quad (1.19)$$

$$\begin{aligned} \left(\frac{\partial H}{\partial q_i} \right)_{\mathbf{q}=\tilde{\mathbf{q}}, \mathbf{p}=\tilde{\mathbf{p}}} &= -\frac{e}{m} [mv_j + eA_j(\mathbf{x}, t) - eA_j(\mathbf{x}, t)] \left(\frac{\partial A_j}{\partial q_i} \right)_{\mathbf{q}=\mathbf{x}} + e \left(\frac{\partial \phi}{\partial q_i} \right)_{\mathbf{q}=\mathbf{x}} \\ &= \left(-ev_j \frac{\partial A_j}{\partial q_i} + e \frac{\partial \phi}{\partial q_i} \right)_{\mathbf{q}=\mathbf{x}}. \end{aligned} \quad (1.20)$$

Equation (1.16) thus leads to

$$m \frac{dv_i}{dt} = \left(-ev_j \frac{\partial A_j}{\partial q_i} - e \frac{\partial A_i}{\partial t} + ev_j \frac{\partial A_j}{\partial q_i} - e \frac{\partial \phi}{\partial q_i} \right)_{\mathbf{q}=\mathbf{x}}. \quad (1.21)$$

This is the same as eq. (1.6) and thus, as shown before, the above can be expressed as

$$m \frac{d\mathbf{v}}{dt} = e(\mathbf{E} + \mathbf{v} \times \mathbf{B})_{\mathbf{q}=\mathbf{x}}. \quad (1.22)$$

1.2 Kinetic description

We denote the distribution function for a species s as $f_s = f_s(\mathbf{r}, \mathbf{v}, t)$, where \mathbf{r} and \mathbf{v} are the sample space variables for position and velocity. Note that the distribution function is appropriately normalized such that

$$\int f_s d\mathbf{r} d\mathbf{v} = N_s, \quad (1.23)$$

where N_s is the total number of particles corresponding to species s .

The dynamics of a plasma can be characterized by the Boltzmann evolution equation for the distribution function of M species along with Maxwell's equations

$$\frac{\partial f_s}{\partial t} + \mathbf{v} \cdot \nabla f_s + \frac{Z_s e}{m_s} (\mathbf{E} + \mathbf{v} \times \mathbf{B}) \cdot \nabla_{\mathbf{v}} f_s = C_s + S_s \quad (1.24)$$

$$\nabla \cdot \mathbf{E} = \frac{\rho_q}{\epsilon_0} \quad (1.25)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (1.26)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (1.27)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t} \quad (1.28)$$

$$\mathbf{J} = \sum_s^M Z_s e \int \mathbf{v} f_s d\mathbf{v} \quad (1.29)$$

$$\rho_q = \sum_s^M Z_s e \int f_s d\mathbf{v}. \quad (1.30)$$

In the above,

- m_s is the species mass
- e is the charge
- Z_s the charge number
- $\mathbf{J} = \mathbf{J}(\mathbf{r}, t)$ the charge current
- $\rho_q = \rho_q(\mathbf{r}, t)$ the charge density
- $\mathbf{E} = \mathbf{E}(\mathbf{r}, t)$ the electric field
- $\mathbf{B} = \mathbf{B}(\mathbf{r}, t)$ the magnetic field.

The terms C_s and S_s represent collision and source terms.

If we express the collision term in the usual way, that is $C_s = \sum_r^M C_{sr}$, then we can make the following statements:

1. Conservation of particles:

$$\int C_{ss} d\mathbf{v} = 0 \quad \forall s \quad \int C_{sr} d\mathbf{v} = 0 \quad \forall s, r | r \neq s. \quad (1.31)$$

2. Conservation of momentum:

$$\int m_s \mathbf{v} C_{ss} d\mathbf{v} = 0 \quad \forall s \quad \sum_s^M \sum_{r, r \neq s}^M \int m_s \mathbf{v} C_{sr} d\mathbf{v} = 0. \quad (1.32)$$

3. Conservation of energy:

$$\int \frac{1}{2} m_s v^2 C_{ss} d\mathbf{v} = 0 \quad \forall s \quad \sum_s^M \sum_{r, r \neq s}^M \int \frac{1}{2} m_s v^2 C_{sr} d\mathbf{v} = 0. \quad (1.33)$$

1.3 Fluid description

We now define the particle density $n_s = n_s(\mathbf{r}, t)$, the fluid velocity $\mathbf{u}_s = \mathbf{u}_s(\mathbf{r}, t)$ and the fluid energy per unit mass $E_s = E_s(\mathbf{r}, t)$ as follows

$$n_s = \int f_s d\mathbf{v} \quad (1.34)$$

$$\mathbf{u}_s = \frac{1}{n_s} \int \mathbf{v} f_s d\mathbf{v} \quad (1.35)$$

$$E_s = \frac{1}{n_s} \int \frac{1}{2} v^2 f_s d\mathbf{v}. \quad (1.36)$$

Their evolution equations are obtained by taking the appropriate moments of the Boltzmann plasma equation. Before doing so, we re-write the Boltzmann equation as

$$\frac{\partial f_s}{\partial t} + \nabla \cdot (\mathbf{v} f_s) + \nabla_v \cdot \left[\frac{Z_s e}{m_s} (\mathbf{E} + \mathbf{v} \times \mathbf{B}) f_s \right] = C_s + S_s \quad (1.37)$$

1.3.1 Mass

Integrating eq. (1.37) over all \mathbf{v} we obtain

$$\frac{\partial n_s}{\partial t} + \nabla \cdot (n_s \mathbf{u}_s) = \hat{S}_s \quad (1.38)$$

where

$$\hat{S}_s = \int S_s d\mathbf{v} \quad (1.39)$$

is an external source of mass.

1.3.2 Momentum

Multiplying eq. (1.37) by \mathbf{v} and then integrating over all \mathbf{v} leads to

$$\begin{aligned} \frac{\partial n_s \mathbf{u}_s}{\partial t} + \nabla \cdot \left(\int \mathbf{v} \mathbf{v} f_s d\mathbf{v} \right) + \int \nabla_v \cdot \left[\mathbf{v} \frac{Z_s e}{m_s} (\mathbf{E} + \mathbf{v} \times \mathbf{B}) f_s \right] - \nabla_v \mathbf{v} \cdot \left[\frac{Z_s e}{m_s} (\mathbf{E} + \mathbf{v} \times \mathbf{B}) f_s \right] d\mathbf{v} = \\ \sum_{r, r \neq s}^M \int \mathbf{v} C_{sr} d\mathbf{v} + \int \mathbf{v} S_s d\mathbf{v}. \end{aligned} \quad (1.40)$$

We note that the third term in eq. (1.40) is zero since we are integrating over all space, and that $\nabla_v \mathbf{v}$ is the identity matrix. We thus have

$$\begin{aligned} \frac{\partial n_s \mathbf{u}_s}{\partial t} + \nabla \cdot \left(\int \mathbf{v} \mathbf{v} f_s d\mathbf{v} \right) - \frac{Z_s e n_s}{m_s} (\mathbf{E} + \mathbf{u}_s \times \mathbf{B}) = \\ \sum_{r, r \neq s}^M \int \mathbf{v} C_{sr} d\mathbf{v} + \int \mathbf{v} S_s d\mathbf{v}. \end{aligned} \quad (1.41)$$

To proceed, we decompose \mathbf{v} into a mean and a fluctuation, that is, $\mathbf{v} = \mathbf{u}_s + \mathbf{w}_s$. Using this decomposition

$$\int \mathbf{v} \mathbf{v} f_s d\mathbf{v} = \int (\mathbf{u}_s \mathbf{u}_s + 2\mathbf{u}_s \mathbf{w}_s + \mathbf{w}_s \mathbf{w}_s) f_s d\mathbf{v} = n_s \mathbf{u}_s \mathbf{u}_s + \int \mathbf{w}_s \mathbf{w}_s f_s d\mathbf{v}. \quad (1.42)$$

Thus, eq. (1.41) becomes

$$\frac{\partial n_s \mathbf{u}_s}{\partial t} + \nabla \cdot (n_s \mathbf{u}_s \mathbf{u}_s) - \frac{Z_s e n_s}{m_s} (\mathbf{E} + \mathbf{u}_s \times \mathbf{B}) = -\nabla \cdot \int \mathbf{w}_s \mathbf{w}_s f_s d\mathbf{v} + \sum_{r, r \neq s}^M \int \mathbf{v} C_{sr} d\mathbf{v} + \int \mathbf{v} S_s d\mathbf{v}. \quad (1.43)$$

Conservation of particles is used to modify the collisional term as follows

$$\begin{aligned} \sum_{r, r \neq s}^M \int \mathbf{v} C_{sr} d\mathbf{v} &= \sum_{r, r \neq s}^M \int (\mathbf{u}_s + \mathbf{w}_s) C_{sr} d\mathbf{v} \\ &= \sum_{r, r \neq s}^M \int \mathbf{w}_s C_{sr} d\mathbf{v} \end{aligned} \quad (1.44)$$

Thus, we now have

$$\frac{\partial n_s \mathbf{u}_s}{\partial t} + \nabla \cdot (n_s \mathbf{u}_s \mathbf{u}_s) - \frac{Z_s e n_s}{m_s} (\mathbf{E} + \mathbf{u}_s \times \mathbf{B}) = -\nabla \cdot \int \mathbf{w}_s \mathbf{w}_s f_s d\mathbf{v} + \sum_{r, r \neq s}^M \int \mathbf{w}_s C_{sr} d\mathbf{v} + \int \mathbf{v} S_s d\mathbf{v}. \quad (1.45)$$

Multiplying by mass leads to the following equation

$$\frac{\partial m_s n_s \mathbf{u}_s}{\partial t} + \nabla \cdot (m_s n_s \mathbf{u}_s \mathbf{u}_s) - Z_s e n_s (\mathbf{E} + \mathbf{u}_s \times \mathbf{B}) = \nabla \cdot \boldsymbol{\sigma}_s + \mathbf{R}_s + \hat{\mathbf{M}}_s, \quad (1.46)$$

where the stress tensor is

$$\boldsymbol{\sigma}_s = - \int m_s \mathbf{w}_s \mathbf{w}_s f_s d\mathbf{v}, \quad (1.47)$$

the momentum transferred between unlike particles due to friction of collisions is

$$\mathbf{R}_s = \sum_{r, r \neq s}^M \int m_s \mathbf{w}_s C_{sr} d\mathbf{v}, \quad (1.48)$$

and the external source of momentum is

$$\hat{\mathbf{M}}_s = \int m_s \mathbf{v} S_s d\mathbf{v}. \quad (1.49)$$

The stress tensor is typically decomposed into isotropic p_s and anisotropic (shear) \mathbf{t}_s tensors as follows

$$\boldsymbol{\sigma}_s = -p_s \mathbf{I} + \mathbf{t}_s, \quad (1.50)$$

where p_s is given by

$$p_s = \frac{1}{3} \int m_s (\mathbf{w}_s \cdot \mathbf{w}_s) f_s d\mathbf{v}. \quad (1.51)$$

Thus, conservation of momentum becomes

$$\frac{\partial m_s n_s \mathbf{u}_s}{\partial t} + \nabla \cdot (m_s n_s \mathbf{u}_s \mathbf{u}_s) - Z_s e n_s (\mathbf{E} + \mathbf{u}_s \times \mathbf{B}) = -\nabla p_s + \nabla \cdot \mathbf{t}_s + \mathbf{R}_s + \hat{\mathbf{M}}_s. \quad (1.52)$$

1.3.3 Energy

Multiplying eq. (1.37) by $\frac{1}{2}v^2$ and then integrating over all \mathbf{v} leads to

$$\begin{aligned} \frac{\partial n_s E_s}{\partial t} + \nabla \cdot \left[\int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) \mathbf{v} f_s d\mathbf{v} \right] + \int \nabla_v \cdot \left[\frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) \frac{Z_s e}{m_s} (\mathbf{E} + \mathbf{v} \times \mathbf{B}) f_s \right] \\ - \nabla_v \left[\frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) \right] \cdot \left[\frac{Z_s e}{m_s} (\mathbf{E} + \mathbf{v} \times \mathbf{B}) f_s \right] d\mathbf{v} = \sum_{r, r \neq s}^M \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) C_{sr} d\mathbf{v} + \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) S_s d\mathbf{v}. \end{aligned} \quad (1.53)$$

We note that the third term above is zero since we are integrating over all space, and that $\nabla_v[1/2(\mathbf{v} \cdot \mathbf{v})] = \mathbf{v}$. Thus, we have

$$\begin{aligned} \frac{\partial n_s E_s}{\partial t} + \nabla \cdot \left[\int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) \mathbf{v} f_s d\mathbf{v} \right] - \frac{Z_s e n_s}{m_s} \mathbf{E} \cdot \mathbf{u}_s = \\ \sum_{r, r \neq s}^M \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) C_{sr} d\mathbf{v} + \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) S_s d\mathbf{v}. \end{aligned} \quad (1.54)$$

To proceed with the derivation we first note that

$$\int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) \mathbf{v} f_s d\mathbf{v} = \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) (\mathbf{u}_s + \mathbf{w}_s) f_s d\mathbf{v} = n_s E_s \mathbf{u}_s + \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) \mathbf{w}_s f_s d\mathbf{v} \quad (1.55)$$

The last term on the right-hand side above can be re-written as

$$\int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) \mathbf{w}_s f_s d\mathbf{v} = \int \frac{1}{2}(\mathbf{u}_s \cdot \mathbf{u}_s + 2\mathbf{u}_s \cdot \mathbf{w}_s + \mathbf{w}_s \cdot \mathbf{w}_s) \mathbf{w}_s f_s d\mathbf{v} \quad (1.56)$$

$$= \mathbf{u}_s \cdot \int \mathbf{w}_s \mathbf{w}_s f_s d\mathbf{v} + \int \frac{1}{2}(\mathbf{w}_s \cdot \mathbf{w}_s) \mathbf{w}_s f_s d\mathbf{v}. \quad (1.57)$$

Using the expressions above, eq. (1.54) becomes

$$\begin{aligned} \frac{\partial n_s E_s}{\partial t} + \nabla \cdot (n_s E_s \mathbf{u}_s) - \frac{Z_s e n_s}{m_s} \mathbf{E} \cdot \mathbf{u}_s = -\nabla \cdot \left(\mathbf{u}_s \cdot \int \mathbf{w}_s \mathbf{w}_s f_s d\mathbf{v} \right) - \nabla \cdot \int \frac{1}{2}(\mathbf{w}_s \cdot \mathbf{w}_s) \mathbf{w}_s f_s d\mathbf{v} \\ + \sum_{r, r \neq s}^M \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) C_{sr} d\mathbf{v} + \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) S_s d\mathbf{v}. \end{aligned} \quad (1.58)$$

Conservation of particles is used to modify the collisional term as follows

$$\begin{aligned} \sum_{r, r \neq s}^M \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) C_{sr} d\mathbf{v} &= \sum_{r, r \neq s}^M \int \frac{1}{2}[(\mathbf{u}_s + \mathbf{w}_s) \cdot (\mathbf{u}_s + \mathbf{w}_s)] C_{sr} d\mathbf{v} \\ &= \mathbf{u}_s \cdot \sum_{r, r \neq s}^M \int \mathbf{w}_s C_{sr} d\mathbf{v} + \sum_{r, r \neq s}^M \int \frac{1}{2}(\mathbf{w}_s \cdot \mathbf{w}_s) C_{sr} d\mathbf{v} \end{aligned} \quad (1.59)$$

Thus, we now have

$$\begin{aligned} \frac{\partial n_s E_s}{\partial t} + \nabla \cdot (n_s E_s \mathbf{u}_s) - \frac{Z_s e n_s}{m_s} \mathbf{E} \cdot \mathbf{u}_s = -\nabla \cdot \left(\mathbf{u}_s \cdot \int \mathbf{w}_s \mathbf{w}_s f_s d\mathbf{v} \right) - \nabla \cdot \int \frac{1}{2}(\mathbf{w}_s \cdot \mathbf{w}_s) \mathbf{w}_s f_s d\mathbf{v} \\ + \mathbf{u}_s \cdot \sum_{r, r \neq s}^M \int \mathbf{w}_s C_{sr} d\mathbf{v} + \sum_{r, r \neq s}^M \int \frac{1}{2}(\mathbf{w}_s \cdot \mathbf{w}_s) C_{sr} d\mathbf{v} + \int \frac{1}{2}(\mathbf{v} \cdot \mathbf{v}) S_s d\mathbf{v}. \end{aligned} \quad (1.60)$$

Multiplying by mass leads to the following equation

$$\begin{aligned} \frac{\partial m_s n_s E_s}{\partial t} + \nabla \cdot (m_s n_s E_s \mathbf{u}_s) - Z_s e n_s \mathbf{E} \cdot \mathbf{u}_s = \nabla \cdot (\mathbf{u}_s \cdot \boldsymbol{\sigma}_s) - \nabla \cdot \mathbf{q}_s \\ + \mathbf{u}_s \cdot \mathbf{R}_s + Q_s + \hat{Q}_s, \end{aligned} \quad (1.61)$$

where heat flux due to random motion is

$$\mathbf{q}_s = \int \frac{1}{2} m_s (\mathbf{w}_s \cdot \mathbf{w}_s) \mathbf{w}_s f_s d\mathbf{v}, \quad (1.62)$$

the heat generated and transferred between unlike particles due to collisional dissipation is

$$Q_s = \sum_{r, r \neq s}^M \int \frac{1}{2} m_s (\mathbf{w}_s \cdot \mathbf{w}_s) C_{sr} d\mathbf{v}, \quad (1.63)$$

and the external source of energy is

$$\hat{Q}_s = \int \frac{1}{2} m_s (\mathbf{v} \cdot \mathbf{v}) S_s d\mathbf{v}. \quad (1.64)$$

Using the decomposition for the stress tensor, the conservation of energy equation becomes

$$\begin{aligned} \frac{\partial m_s n_s E_s}{\partial t} + \nabla \cdot (m_s n_s E_s \mathbf{u}_s + p_s \mathbf{u}_s) - Z_s e n_s \mathbf{E} \cdot \mathbf{u}_s = \nabla \cdot (\mathbf{u}_s \cdot \mathbf{t}_s) - \nabla \cdot \mathbf{q}_s \\ + \mathbf{u}_s \cdot \mathbf{R}_s + Q_s + \hat{Q}_s, \end{aligned} \quad (1.65)$$

We also note that the energy $m_s n_s E_s$ can be decomposed into internal and kinetic energies. Using the trace of the decomposition shown in eq. (1.42) one obtains

$$\begin{aligned} m_s n_s E_s &= \int \frac{1}{2} m_s (\mathbf{v} \cdot \mathbf{v}) f_s d\mathbf{v} \\ &= \int \frac{1}{2} m_s (\mathbf{w}_s \cdot \mathbf{w}_s) f_s d\mathbf{v} + \frac{1}{2} m_s n_s (\mathbf{u}_s \cdot \mathbf{u}_s) \\ &= \frac{3}{2} p_s + \frac{1}{2} m_s n_s (\mathbf{u}_s \cdot \mathbf{u}_s) \\ &= \frac{3}{2} p_s + m_s n_s K_s. \end{aligned} \quad (1.66)$$

where $K_s = \frac{1}{2} \mathbf{u}_s \cdot \mathbf{u}_s$ is the kinetic energy of species s .

1.3.4 Kinetic and internal energies

The equation for the kinetic energy is obtained by dotting eq. (1.52) with \mathbf{u}_s . For this, we first show that

$$\mathbf{u}_s \cdot \left[\frac{\partial m_s n_s \mathbf{u}_s}{\partial t} + \nabla \cdot (m_s n_s \mathbf{u}_s \mathbf{u}_s) \right] \quad (1.67)$$

$$= \mathbf{u}_s \cdot \left\{ \left[\frac{\partial m_s n_s}{\partial t} + \nabla \cdot (m_s n_s \mathbf{u}_s) \right] \mathbf{u}_s + m_s n_s \left(\frac{\partial \mathbf{u}_s}{\partial t} + \mathbf{u}_s \cdot \nabla \mathbf{u}_s \right) \right\} \quad (1.68)$$

$$= \mathbf{u}_s \cdot \left[m_s \hat{S}_s \mathbf{u}_s + m_s n_s \left(\frac{\partial \mathbf{u}_s}{\partial t} + \mathbf{u}_s \cdot \nabla \mathbf{u}_s \right) \right] \quad (1.69)$$

$$= 2m_s \hat{S}_s K_s + m_s n_s \left(\frac{\partial K_s}{\partial t} + \mathbf{u}_s \cdot \nabla K_s \right) \quad (1.70)$$

$$= m_s \hat{S}_s K_s + \left[\frac{\partial m_s n_s}{\partial t} + \nabla \cdot (m_s n_s \mathbf{u}_s) \right] K_s + m_s n_s \left(\frac{\partial K_s}{\partial t} + \mathbf{u}_s \cdot \nabla K_s \right) \quad (1.71)$$

$$= m_s \hat{S}_s K_s + \frac{\partial m_s n_s K_s}{\partial t} + \nabla \cdot (m_s n_s K \mathbf{u}_s). \quad (1.72)$$

Thus, the equation for the turbulent kinetic energy is

$$\begin{aligned} \frac{\partial m_s n_s K_s}{\partial t} + \nabla \cdot (m_s n_s K \mathbf{u}_s) - Z_s e n_s \mathbf{E} \cdot \mathbf{u}_s = \\ \nabla \cdot (\mathbf{u}_s \cdot \boldsymbol{\sigma}_s) - \boldsymbol{\sigma}_s : \nabla \mathbf{u}_s + \mathbf{u}_s \cdot \mathbf{R}_s + \mathbf{u}_s \cdot \hat{\mathbf{M}}_s - m_s K_s \hat{S}_s. \end{aligned} \quad (1.73)$$

Subtracting the above equation from eq. (1.65) leads to

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_s \right) + \nabla \cdot \left(\frac{3}{2} p_s \mathbf{u}_s \right) = \boldsymbol{\sigma}_s : \nabla \mathbf{u}_s - \nabla \cdot \mathbf{q}_s + Q_s + \hat{Q}_s - \mathbf{u}_s \cdot \hat{\mathbf{M}}_s + m_s K_s \hat{S}_s. \quad (1.74)$$

1.3.5 Summary

To summarize, we have,

- Particle density

$$\frac{\partial n_s}{\partial t} + \nabla \cdot (n_s \mathbf{u}_s) = \hat{S}_s, \quad (1.75)$$

- Momentum

$$\frac{\partial m_s n_s \mathbf{u}_s}{\partial t} + \nabla \cdot (m_s n_s \mathbf{u}_s \mathbf{u}_s) - Z_s e n_s (\mathbf{E} + \mathbf{u}_s \times \mathbf{B}) = \nabla \cdot \boldsymbol{\sigma}_s + \mathbf{R}_s + \hat{\mathbf{M}}_s, \quad (1.76)$$

- Total Energy

$$\begin{aligned} \frac{\partial m_s n_s E_s}{\partial t} + \nabla \cdot (m_s n_s E_s \mathbf{u}_s) - Z_s e n_s \mathbf{E} \cdot \mathbf{u}_s = \nabla \cdot (\mathbf{u}_s \cdot \boldsymbol{\sigma}_s) - \nabla \cdot \mathbf{q}_s \\ + \mathbf{u}_s \cdot \mathbf{R}_s + Q_s + \hat{Q}_s, \end{aligned} \quad (1.77)$$

- Kinetic Energy

$$\begin{aligned} \frac{\partial m_s n_s K_s}{\partial t} + \nabla \cdot (m_s n_s K \mathbf{u}_s) - Z_s e n_s \mathbf{E} \cdot \mathbf{u}_s = \\ \nabla \cdot (\mathbf{u}_s \cdot \boldsymbol{\sigma}_s) - \boldsymbol{\sigma}_s : \nabla \mathbf{u}_s + \mathbf{u}_s \cdot \mathbf{R}_s + \mathbf{u}_s \cdot \hat{\mathbf{M}}_s - m_s K_s \hat{S}_s. \end{aligned} \quad (1.78)$$

- Internal Energy

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_s \right) + \nabla \cdot \left(\frac{3}{2} p_s \mathbf{u}_s \right) = \boldsymbol{\sigma}_s : \nabla \mathbf{u}_s - \nabla \cdot \mathbf{q}_s + Q_s + \hat{Q}_s - \mathbf{u}_s \cdot \hat{\mathbf{M}}_s + m_s K_s \hat{S}_s. \quad (1.79)$$

Chapter 2

Variants of the fluid model

2.1 The multi-fluid model

The following assumptions are used:

1. No sources ($\hat{S}_s = \hat{\mathbf{M}}_s = \hat{Q}_s = 0$ for all s).

2.1.1 Multi-material multi-fluid model

We define a material k as a collection of species s . Rather than labeling species using the subscript s , we'll use the subscript k, i, s and k, e , where the former denotes the ion species s that belongs to material k , and the latter denotes the electron species that belongs to material k . We also note that the number of ion species within a material will be denoted as N_k , and the total number of materials as L .

Thus, the governing equations are

$$\frac{\partial n_{k,i,s}}{\partial t} + \nabla \cdot (n_{k,i,s} \mathbf{u}_{k,i,s}) = 0, \quad (2.1)$$

$$\frac{\partial n_{k,e}}{\partial t} + \nabla \cdot (n_{k,e} \mathbf{u}_{k,e}) = 0, \quad (2.2)$$

$$\frac{\partial m_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s}}{\partial t} + \nabla \cdot (m_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} \mathbf{u}_{k,i,s}) - Z_{k,i,s} e n_{k,i,s} (\mathbf{E} + \mathbf{u}_{k,i,s} \times \mathbf{B}) = \nabla \cdot \boldsymbol{\sigma}_{k,i,s} + \mathbf{R}_{k,i,s}, \quad (2.3)$$

$$\frac{\partial m_{k,e} n_{k,e} \mathbf{u}_{k,e}}{\partial t} + \nabla \cdot (m_{k,e} n_{k,e} \mathbf{u}_{k,e} \mathbf{u}_{k,e}) + e n_{k,e} (\mathbf{E} + \mathbf{u}_{k,e} \times \mathbf{B}) = \nabla \cdot \boldsymbol{\sigma}_{k,e} + \mathbf{R}_{k,e}, \quad (2.4)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_{k,i,s} \right) + \nabla \cdot \left(\frac{3}{2} p_{k,i,s} \mathbf{u}_{k,i,s} \right) = \boldsymbol{\sigma}_{k,i,s} : \nabla \mathbf{u}_{k,i,s} - \nabla \cdot \mathbf{q}_{k,i,s} + Q_{k,i,s}, \quad (2.5)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_{k,e} \right) + \nabla \cdot \left(\frac{3}{2} p_{k,e} \mathbf{u}_{k,e} \right) = \boldsymbol{\sigma}_{k,e} : \nabla \mathbf{u}_{k,e} - \nabla \cdot \mathbf{q}_{k,e} + Q_{k,e}, \quad (2.6)$$

$$\nabla \cdot \mathbf{E} = \frac{\rho_q}{\epsilon_0}, \quad (2.7)$$

$$\nabla \cdot \mathbf{B} = 0, \quad (2.8)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad (2.9)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}, \quad (2.10)$$

$$\mathbf{J}_k = e \left(\sum_s^{N_k} Z_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} - n_{k,e} \mathbf{u}_{k,e} \right), \quad (2.11)$$

$$\mathbf{J} = \sum_k^L \mathbf{J}_k \quad (2.12)$$

$$\rho_{q,k} = e \left(\sum_s^N Z_{k,i,s} n_{k,i,s} - n_{e,k} \right), \quad (2.13)$$

$$\rho_q = \sum_k^L \rho_{q,k}, \quad (2.14)$$

$$p_{k,i,s} = n_{k,i,s} k_B T_{k,i,s}, \quad (2.15)$$

$$p_{k,e} = n_{k,e} k_B T_{k,e}. \quad (2.16)$$

2.1.2 Single-material multi-fluid model

The equations are the same as the multi-material formulation, but there is only one material now and hence the k subscript can be dropped. Thus we have

$$\frac{\partial n_{i,s}}{\partial t} + \nabla \cdot (n_{i,s} \mathbf{u}_{i,s}) = 0, \quad (2.17)$$

$$\frac{\partial n_e}{\partial t} + \nabla \cdot (n_e \mathbf{u}_e) = 0, \quad (2.18)$$

$$\frac{\partial m_{i,s} n_{i,s} \mathbf{u}_{i,s}}{\partial t} + \nabla \cdot (m_{i,s} n_{i,s} \mathbf{u}_{i,s} \mathbf{u}_{i,s}) - Z_{i,s} e n_{i,s} (\mathbf{E} + \mathbf{u}_{i,s} \times \mathbf{B}) = \nabla \cdot \boldsymbol{\sigma}_{i,s} + \mathbf{R}_{i,s}, \quad (2.19)$$

$$\frac{\partial m_e n_e \mathbf{u}_e}{\partial t} + \nabla \cdot (m_e n_e \mathbf{u}_e \mathbf{u}_e) + e n_e (\mathbf{E} + \mathbf{u}_e \times \mathbf{B}) = \nabla \cdot \boldsymbol{\sigma}_e + \mathbf{R}_e, \quad (2.20)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_{i,s} \right) + \nabla \cdot \left(\frac{3}{2} p_{i,s} \mathbf{u}_{i,s} \right) = \boldsymbol{\sigma}_{i,s} : \nabla \mathbf{u}_{i,s} - \nabla \cdot \mathbf{q}_{i,s} + Q_{i,s}, \quad (2.21)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_e \right) + \nabla \cdot \left(\frac{3}{2} p_e \mathbf{u}_e \right) = \boldsymbol{\sigma}_e : \nabla \mathbf{u}_e - \nabla \cdot \mathbf{q}_e + Q_e, \quad (2.22)$$

$$\nabla \cdot \mathbf{E} = \frac{\rho_q}{\epsilon_0}, \quad (2.23)$$

$$\nabla \cdot \mathbf{B} = 0, \quad (2.24)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad (2.25)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}, \quad (2.26)$$

$$\mathbf{J} = e \left(\sum_s^N Z_{i,s} n_{i,s} \mathbf{u}_{i,s} - n_e \mathbf{u}_e \right), \quad (2.27)$$

$$\rho_q = e \left(\sum_s^N Z_{i,s} n_{i,s} - n_e \right), \quad (2.28)$$

$$p_{i,s} = n_{i,s} k_B T_{i,s}, \quad (2.29)$$

$$p_e = n_e k_B T_e. \quad (2.30)$$

2.1.3 Single-material two-fluid model

If there is only one ion species, then we have the two-fluid model

$$\frac{\partial n_i}{\partial t} + \nabla \cdot (n_i \mathbf{u}_i) = 0, \quad (2.31)$$

$$\frac{\partial n_e}{\partial t} + \nabla \cdot (n_e \mathbf{u}_e) = 0, \quad (2.32)$$

$$\frac{\partial m_i n_i \mathbf{u}_i}{\partial t} + \nabla \cdot (m_i n_i \mathbf{u}_i \mathbf{u}_i) - Z e n_i (\mathbf{E} + \mathbf{u}_i \times \mathbf{B}) = \nabla \cdot \boldsymbol{\sigma}_i + \mathbf{R}_i, \quad (2.33)$$

$$\frac{\partial m_e n_e \mathbf{u}_e}{\partial t} + \nabla \cdot (m_e n_e \mathbf{u}_e \mathbf{u}_e) + e n_e (\mathbf{E} + \mathbf{u}_e \times \mathbf{B}) = \nabla \cdot \boldsymbol{\sigma}_e + \mathbf{R}_e, \quad (2.34)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_i \right) + \nabla \cdot \left(\frac{3}{2} p_i \mathbf{u}_i \right) = \boldsymbol{\sigma}_i : \nabla \mathbf{u}_i - \nabla \cdot \mathbf{q}_i + Q_i, \quad (2.35)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_e \right) + \nabla \cdot \left(\frac{3}{2} p_e \mathbf{u}_e \right) = \boldsymbol{\sigma}_e : \nabla \mathbf{u}_e - \nabla \cdot \mathbf{q}_e + Q_e, \quad (2.36)$$

$$\nabla \cdot \mathbf{E} = \frac{\rho_q}{\epsilon_0}, \quad (2.37)$$

$$\nabla \cdot \mathbf{B} = 0, \quad (2.38)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad (2.39)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}, \quad (2.40)$$

$$\mathbf{J} = e(Z n_i \mathbf{u}_i - n_e \mathbf{u}_e), \quad (2.41)$$

$$\rho_q = e(Z n_i - n_e). \quad (2.42)$$

$$p_i = n_i k_B T_i, \quad (2.43)$$

$$p_e = n_e k_B T_e. \quad (2.44)$$

These equations correspond to eq. (2.22) in Freidberg's Ideal MHD book, but for ions that are not singly charged.

We can also introduce the following extra assumptions

1. No stresses \mathbf{t}_s , heat flux \mathbf{q}_s , and collisions \mathbf{R}_s , Q_s . This in itself would make the flow isentropic.
2. The flow is not just isentropic but also homentropic. This allows for eqs. (2.49) and (2.50) to hold across all space, not just along streamlines.

With these, the governing equations become

$$\frac{\partial n_i}{\partial t} + \nabla \cdot (n_i \mathbf{u}_i) = 0, \quad (2.45)$$

$$\frac{\partial n_e}{\partial t} + \nabla \cdot (n_e \mathbf{u}_e) = 0, \quad (2.46)$$

$$\frac{\partial m_i n_i \mathbf{u}_i}{\partial t} + \nabla \cdot (m_i n_i \mathbf{u}_i \mathbf{u}_i) - Z e n_i (\mathbf{E} + \mathbf{u}_i \times \mathbf{B}) = -\nabla p_i, \quad (2.47)$$

$$\frac{\partial m_e n_e \mathbf{u}_e}{\partial t} + \nabla \cdot (m_e n_e \mathbf{u}_e \mathbf{u}_e) + e n_e (\mathbf{E} + \mathbf{u}_e \times \mathbf{B}) = -\nabla p_e, \quad (2.48)$$

$$p_i = C_i n_i^{\gamma_i}, \quad (2.49)$$

$$p_e = C_e n_e^{\gamma_e}, \quad (2.50)$$

$$\nabla \cdot \mathbf{E} = \frac{\rho_q}{\epsilon_0}, \quad (2.51)$$

$$\nabla \cdot \mathbf{B} = 0, \quad (2.52)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad (2.53)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}, \quad (2.54)$$

$$\mathbf{J} = e(Zn_i \mathbf{u}_i - n_e \mathbf{u}_e), \quad (2.55)$$

$$\rho_q = e(Zn_i - n_e), \quad (2.56)$$

$$p_i = n_i k_B T_i, \quad (2.57)$$

$$p_e = n_e k_B T_e. \quad (2.58)$$

2.2 Single-fluid formulation

A single-fluid formulation is defined as that for which there is a single velocity vector. For the single-fluid formulation, we'll use the following assumptions

1. $m_{k,e} \approx 0$ since $m_{k,e} \ll m_{k,i,s}$.
2. Quasi-neutrality, i.e. $\sum_s Z_{k,i,s} n_{k,i,s} = n_{k,e}$.

2.2.1 Single-fluid variables

To derive the single-fluid equations we first introduce a set of new variables.

The total density ρ is defined as

$$\rho = m/V. \quad (2.59)$$

The volume fraction η_k and mass fraction Y_k are defined as

$$\eta_k = \frac{V_k}{V}, \quad (2.60)$$

$$Y_k = \frac{m_k}{m}. \quad (2.61)$$

Note that both η_k and Y_k sum up to one over all k . A new density is also introduced, namely ρ_k which is defined as

$$\rho_k = \frac{m_k}{V_k}. \quad (2.62)$$

This can be expressed in terms of the other variables defined above by

$$\rho_k = \rho \frac{Y_k}{\eta_k}. \quad (2.63)$$

The volume fractions $\eta_{k,i,s}$ and $\eta_{k,e}$ are defined as

$$\eta_{k,i,s} = \frac{V_{k,i,s}}{V_k} \quad \eta_{k,e} = \frac{V_{k,e}}{V_k} \quad (2.64)$$

The mass fractions $Y_{k,i,s}$ and $Y_{k,e}$ are defined as

$$Y_{k,i,s} = \frac{m_{k,i,s}}{m_k} \quad Y_{k,e} = \frac{m_{k,e}}{m_k}. \quad (2.65)$$

Note that

$$1 = \sum_s^N \eta_{k,i,s} + \eta_{k,e} \approx \sum_s^N \eta_{k,i,s} = \eta_{k,i}, \quad (2.66)$$

and

$$1 = \sum_s^N Y_{k,i,s} + Y_{k,e} \approx \sum_s^N Y_{k,i,s} = Y_{k,i}. \quad (2.67)$$

New densities are also introduced, namely $\rho_{k,i,s}$ and $\rho_{k,e}$, which are defined as

$$\rho_{k,i,s} = \frac{m_{k,i,s}}{V_{k,i,s}} \quad \rho_{k,e} = \frac{m_{k,e}}{V_{k,e}}. \quad (2.68)$$

These can be expressed in terms of the other variables defined above as follows

$$\rho_{k,i,s} = \rho_k \frac{Y_{k,i,s}}{\eta_{k,i,s}} \quad \rho_{k,e} = \rho_k \frac{Y_{k,e}}{\eta_{k,e}}. \quad (2.69)$$

In terms of the number densities $n_{k,i,s}$ and $n_{k,e}$, we have

$$\rho Y_k Y_{k,i,s} = m_{k,i,s} n_{k,i,s} \quad \rho Y_k Y_{k,e} = m_e n_{k,e}. \quad (2.70)$$

where $m_{k,i,s}$ is the atomic weight of species s and m_e is the weight of an electron. The ion velocity of a material is given by $\mathbf{u}_{k,i}$ and the velocity of all materials by \mathbf{u} . These are defined below,

$$\mathbf{u}_{k,i} = \sum_s^N Y_{k,i,s} \mathbf{u}_{k,i,s} \quad (2.71)$$

$$\mathbf{u}_k = \mathbf{u}_{k,i} + Y_{k,e} \mathbf{u}_{k,e} = \mathbf{u}_{k,i} \quad (2.72)$$

$$\mathbf{u} = \sum_k^L Y_k \mathbf{u}_k. \quad (2.73)$$

If there is only one material, the relations above simplify as follows

$$\eta_{i,s} = \frac{V_{i,s}}{V} \quad \eta_e = \frac{V_e}{V}, \quad (2.74)$$

$$Y_{i,s} = \frac{m_{i,s}}{m} \quad Y_e = \frac{m_e}{m}, \quad (2.75)$$

$$1 = \sum_s^N \eta_{i,s} + \eta_e \approx \sum_s^N \eta_{i,s} = \eta_i, \quad (2.76)$$

$$1 = \sum_s^N Y_{i,s} + Y_e \approx \sum_s^N Y_{i,s} = Y_i, \quad (2.77)$$

$$\rho_{i,s} = \frac{m_{i,s}}{V_{i,s}} \quad \rho_s = \frac{m_e}{V_e}, \quad (2.78)$$

$$\rho_{i,s} = \rho \frac{Y_{i,s}}{\eta_{i,s}} \quad \rho_e = \rho \frac{Y_e}{\eta_e}, \quad (2.79)$$

$$\rho Y_{i,s} = m_{i,s} n_{i,s} \quad \rho Y_e = m_e n_e, \quad (2.80)$$

$$\mathbf{u}_i = \sum_s^N Y_{i,s} \mathbf{u}_{i,s}. \quad (2.81)$$

$$\mathbf{u} = \mathbf{u}_i + Y_e \mathbf{u}_e = \mathbf{u}_i. \quad (2.82)$$

2.2.2 Total sum of collisional terms

In this section we derive the total sum across all species (ions and electrons) of the collisional terms \mathbf{R}_s and Q_s . Use eq. (1.44) to re-write \mathbf{R}_s as

$$\mathbf{R}_s = \sum_{r, r \neq s}^M \int m_s \mathbf{w}_s C_{sr} d\mathbf{v} = \sum_{r, r \neq s}^M \int m_s \mathbf{v} C_{sr} d\mathbf{v},$$

where M is the total number of species. Using eq. (1.32) this leads to

$$\sum_s^M \mathbf{R}_s = 0. \quad (2.83)$$

Similarly, we use eq. (1.59) to re-write Q_s as

$$\begin{aligned} Q_s &= \sum_{r, r \neq s}^M \int \frac{1}{2} m_s (\mathbf{w}_s \cdot \mathbf{w}_s) C_{sr} d\mathbf{v} \\ &= \sum_{r, r \neq s}^M \int \frac{1}{2} m_s (\mathbf{v} \cdot \mathbf{v}) C_{sr} d\mathbf{v} - \mathbf{u}_s \cdot \sum_{r, r \neq s}^M \int m_s \mathbf{w}_s C_{sr} d\mathbf{v} \end{aligned}$$

Summing over all species and using eq. (1.33) leads to

$$\sum_s^M Q_s = - \sum_s^M \mathbf{u}_s \cdot \mathbf{R}_s. \quad (2.84)$$

However, for the multi-material formulation we'll enforce slightly different requirements. We first note that ion species and electrons of one material do not collided with those of a different material, that is, materials are fully segregated. Additionally, we introduce the following notation

$$\mathbf{R}_{k,i,s} = \sum_{r, r \neq s}^{N_k+e} \int m_{k,i,s} \mathbf{v} C_{s,r} d\mathbf{v},$$

for ion species of material k colliding with other species or electrons of material k , and

$$\mathbf{R}_{k,e} = \sum_r^{N_k} \int m_{k,e} \mathbf{v} C_{e,r} d\mathbf{v},$$

for electrons of material k colliding with other species of material k . We then require

$$\sum_s^{N_k} \mathbf{R}_{k,i,s} + \mathbf{R}_{k,e} = 0. \quad (2.85)$$

Similarly for collisional energy, we introduce the terms

$$\begin{aligned} Q_{k,i,s} &= \sum_{r, r \neq s}^{N_k+e} \int \frac{1}{2} m_{k,i,s} (\mathbf{v} \cdot \mathbf{v}) C_{sr} d\mathbf{v} - \mathbf{u}_{k,i,s} \cdot \sum_{r, r \neq s}^{N_k+e} \int m_{k,i,s} \mathbf{w}_{k,i,s} C_{sr} d\mathbf{v}, \\ Q_{k,e} &= \sum_r^{N_k} \int \frac{1}{2} m_{k,e} (\mathbf{v} \cdot \mathbf{v}) C_{er} d\mathbf{v} - \mathbf{u}_{k,e} \cdot \sum_r^{N_k} \int m_{k,e} \mathbf{w}_{k,e} C_{er} d\mathbf{v}, \end{aligned}$$

We then require

$$\sum_s^{N_k} Q_{k,i,s} + Q_{k,e} = \sum_s^{N_k} \mathbf{u}_{k,i,s} \cdot \mathbf{R}_{k,i,s} - \mathbf{u}_{k,e} \cdot \mathbf{R}_{k,e}. \quad (2.86)$$

2.2.3 The general model

Mass

Multiplying eq. (2.1) by $m_{i,s}$ gives

$$\frac{\partial \rho Y_k Y_{k,i,s}}{\partial t} + \nabla \cdot (\rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s}) = 0.$$

We introduce the species diffusion vector

$$\mathbf{j}_{k,i,s} = \rho Y_k Y_{k,i,s} (\mathbf{u}_{k,i,s} - \mathbf{u}). \quad (2.87)$$

The mass-conservation equation is then written as

$$\frac{\partial \rho Y_k Y_{k,i,s}}{\partial t} + \nabla \cdot (\rho Y_k Y_{k,i,s} \mathbf{u}) = -\nabla \cdot \mathbf{j}_{k,i,s}.$$

Note that adding over all s of a material gives

$$\frac{\partial \rho Y_k}{\partial t} + \nabla \cdot (\rho Y_k \mathbf{u}) = -\nabla \cdot \mathbf{j}_{k,i},$$

where

$$\mathbf{j}_{k,i} = \rho Y_k (\mathbf{u}_{k,i} - \mathbf{u}). \quad (2.88)$$

Multiplying eq. (2.1) by $Z_{k,i,s}$ and summing over all s of a material gives

$$\frac{\partial}{\partial t} \sum_s^{N_k} Z_{k,i,s} n_{i,s} + \nabla \cdot \left(\sum_s^{N_k} Z_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} \right) = 0.$$

Subtracting eq. (2.2) from the above and using the assumption of quasi-neutrality in item 2 gives

$$\nabla \cdot \left(\sum_s^{N_k} Z_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} - n_{k,e} \mathbf{u}_{k,e} \right) = 0,$$

which is equivalent to

$$\nabla \cdot \mathbf{J}_k = 0.$$

Summing over all k gives

$$\nabla \cdot \mathbf{J} = 0.$$

Momentum

We now add eqs. (2.3) and (2.4) and use item 1 to obtain

$$\begin{aligned} \frac{\partial m_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s}}{\partial t} + \nabla \cdot (m_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} \mathbf{u}_{k,i,s}) - e (Z_{k,i,s} n_{k,i,s} - n_{k,e}) \mathbf{E} \\ - e (Z_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} - n_{k,e} \mathbf{u}_{k,e}) \times \mathbf{B} = \nabla \cdot (\boldsymbol{\sigma}_{k,i,s} + \boldsymbol{\sigma}_{k,e}) + \mathbf{R}_{k,i,s} + \mathbf{R}_{k,e}. \end{aligned}$$

Using eq. (2.70) the above becomes

$$\begin{aligned} \frac{\partial \rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s}}{\partial t} + \nabla \cdot (\rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} \mathbf{u}_{k,i,s}) - e (Z_{k,i,s} n_{k,i,s} - n_{k,e}) \mathbf{E} \\ - e (Z_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} - n_{k,e} \mathbf{u}_{k,e}) \times \mathbf{B} = \nabla \cdot (\boldsymbol{\sigma}_{k,i,s} + \boldsymbol{\sigma}_{k,e}) + \mathbf{R}_{k,i,s} + \mathbf{R}_{k,e}. \end{aligned}$$

Summing over all s of a material, using the assumption of item 2 and the definition of the current in eq. (2.11) the above simplifies to

$$\begin{aligned} \frac{\partial}{\partial t} \sum_s^{N_k} \rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} + \nabla \cdot \sum_s^{N_k} \rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} \mathbf{u}_{k,i,s} - \mathbf{J}_k \times \mathbf{B} = \\ \nabla \cdot \left(\sum_s^{N_k} \boldsymbol{\sigma}_{k,i,s} + \boldsymbol{\sigma}_{k,e} \right) + \sum_s^{N_k} \mathbf{R}_{k,i,s} + \mathbf{R}_{k,e}. \end{aligned}$$

Using eq. (2.85) the last two terms above vanish. We now write the momentum equation as

$$\begin{aligned} \frac{\partial}{\partial t} \sum_s^{N_k} \rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} + \nabla \cdot \sum_s^{N_k} [\rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} \mathbf{u} + \rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} (\mathbf{u}_{k,i,s} - \mathbf{u})] - \mathbf{J}_k \times \mathbf{B} = \\ \nabla \cdot \left(\sum_s^{N_k} \boldsymbol{\sigma}_{k,i,s} + \boldsymbol{\sigma}_{k,e} \right). \end{aligned}$$

Using the definition of $\mathbf{j}_{k,i,s}$ the above becomes

$$\begin{aligned} \frac{\partial}{\partial t} \sum_s^{N_k} \rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} + \nabla \cdot \sum_s^{N_k} (\rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} \mathbf{u}) - \mathbf{J}_k \times \mathbf{B} = \\ \nabla \cdot \left(\sum_s^{N_k} \boldsymbol{\sigma}_{k,i,s} + \boldsymbol{\sigma}_{k,e} \right) - \nabla \cdot \sum_s^{N_k} \mathbf{j}_{k,i,s} \mathbf{u}_{k,i,s}. \end{aligned}$$

We now sum over all materials to obtain

$$\begin{aligned} \frac{\partial}{\partial t} \sum_k^L \sum_s^{N_k} \rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} + \nabla \cdot \sum_k^L \sum_s^{N_k} (\rho Y_k Y_{k,i,s} \mathbf{u}_{k,i,s} \mathbf{u}) - \mathbf{J} \times \mathbf{B} = \\ \nabla \cdot \sum_k^L \left(\sum_s^{N_k} \boldsymbol{\sigma}_{k,i,s} + \boldsymbol{\sigma}_{k,e} \right) - \nabla \cdot \sum_k^L \sum_s^{N_k} \mathbf{j}_{k,i,s} \mathbf{u}_{k,i,s}. \end{aligned}$$

Using the definition of \mathbf{u} we get

$$\frac{\partial \rho \mathbf{u}}{\partial t} + \nabla \cdot (\rho \mathbf{u} \mathbf{u}) - \mathbf{J} \times \mathbf{B} = \nabla \cdot \sum_k^L \left(\sum_s^{N_k} \boldsymbol{\sigma}_{k,i,s} + \boldsymbol{\sigma}_{k,e} \right) - \nabla \cdot \sum_k^L \sum_s^{N_k} \mathbf{j}_{k,i,s} \mathbf{u}_{k,i,s}.$$

Given the assumption in item 1, eq. (2.4) for electron momentum becomes

$$en_{k,e}(\mathbf{E} + \mathbf{u}_{k,e} \times \mathbf{B}) = \nabla \cdot \boldsymbol{\sigma}_{k,e} + \mathbf{R}_{k,e},$$

Using the definition of the current in eq. (2.11), the left-hand side can be re-written as

$$en_{k,e}(\mathbf{E} + \mathbf{u}_{k,e} \times \mathbf{B}) = en_{k,e} \mathbf{E} + \left(e \sum_s^{N_k} Z_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} - \mathbf{J}_k \right) \times \mathbf{B},$$

and thus the electron momentum equation becomes

$$en_{k,e} \mathbf{E} + e \sum_s^{N_k} Z_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} \times \mathbf{B} = \mathbf{J}_k \times \mathbf{B} + \nabla \cdot \boldsymbol{\sigma}_{k,e} + \mathbf{R}_{k,e},$$

Using the definition of $\mathbf{j}_{k,i,s}$, we can write

$$\begin{aligned}\sum_s^{N_k} Z_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} \times \mathbf{B} &= \sum_s^{N_k} [Z_{k,i,s} n_{k,i,s} \mathbf{u} + Z_{k,i,s} n_{k,i,s} (\mathbf{u}_{k,i,s} - \mathbf{u})] \times \mathbf{B} \\ &= \sum_s^{N_k} \left(Z_{k,i,s} n_{k,i,s} \mathbf{u} + Z_{k,i,s} n_{k,i,s} \frac{\mathbf{j}_{k,i,s}}{\rho Y_k Y_{k,i,s}} \right) \times \mathbf{B}.\end{aligned}$$

Using eq. (2.70) we get

$$\begin{aligned}\sum_s^N Z_{k,i,s} n_{k,i,s} \mathbf{u}_{k,i,s} \times \mathbf{B} &= \sum_s^{N_k} \left(Z_{k,i,s} n_{k,i,s} \mathbf{u} + \frac{Z_{k,i,s} \mathbf{j}_{k,i,s}}{m_{k,i,s}} \right) \times \mathbf{B} \\ &= \sum_s^{N_k} Z_{k,i,s} n_{k,i,s} \mathbf{u} \times \mathbf{B} + \sum_s^{N_k} \frac{Z_{k,i,s} \mathbf{j}_{k,i,s}}{m_{k,i,s}} \times \mathbf{B} \\ &= n_{k,e} \mathbf{u} \times \mathbf{B} + \sum_s^{N_k} \frac{Z_{k,i,s} \mathbf{j}_{k,i,s}}{m_{k,i,s}} \times \mathbf{B}.\end{aligned}$$

Thus, the electron momentum equation becomes

$$en_{k,e} (\mathbf{E} + \mathbf{u} \times \mathbf{B}) = \mathbf{J}_k \times \mathbf{B} + \nabla \cdot \boldsymbol{\sigma}_{k,e} + \mathbf{R}_{k,e} - e \sum_s^{N_k} \frac{Z_{k,i,s} \mathbf{j}_{k,i,s}}{m_{k,i,s}} \times \mathbf{B}.$$

We define the total electron density as

$$n_e = \sum_k^L n_{k,e}.$$

Thus, summing over all k gives

$$en_e (\mathbf{E} + \mathbf{u} \times \mathbf{B}) = \mathbf{J} \times \mathbf{B} + \nabla \cdot \sum_k^L \boldsymbol{\sigma}_{k,e} + \sum_k^L \mathbf{R}_{k,e} - e \sum_k^L \sum_s^{N_k} \frac{Z_{k,i,s} \mathbf{j}_{k,i,s}}{m_{k,i,s}} \times \mathbf{B}.$$

or

$$\mathbf{E} + \mathbf{u} \times \mathbf{B} = \frac{1}{en_e} \left(\mathbf{J} \times \mathbf{B} + \nabla \cdot \sum_k^L \boldsymbol{\sigma}_{k,e} + \sum_k^L \mathbf{R}_{k,e} \right) - \sum_k^L \sum_s^{N_k} \frac{Z_{k,i,s} \mathbf{j}_{k,i,s}}{n_e m_{k,i,s}} \times \mathbf{B}. \quad (2.89)$$

Internal energy

Use the definition of the species diffusion $\mathbf{j}_{k,i,s}$ to re-write eq. (2.5) as follows

$$\begin{aligned}\frac{\partial}{\partial t} \left(\frac{3}{2} p_{k,i,s} \right) + \nabla \cdot \left(\frac{3}{2} p_{k,i,s} \mathbf{u} \right) &= \\ \boldsymbol{\sigma}_{k,i,s} : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_{k,i,s} + Q_{k,i,s} - \nabla \cdot \left(\frac{3}{2} \frac{p_{k,i,s}}{\rho Y_k Y_{k,i,s}} \mathbf{j}_{k,i,s} \right) &+ \boldsymbol{\sigma}_{k,i,s} : \nabla \left(\frac{1}{\rho Y_k Y_{k,i,s}} \mathbf{j}_{k,i,s} \right).\end{aligned}$$

We re-write the above as

$$\begin{aligned}\frac{\partial}{\partial t} \left(\frac{3}{2} p_{k,i,s} \right) + \nabla \cdot \left(\frac{3}{2} p_{k,i,s} \mathbf{u} \right) &= \\ \boldsymbol{\sigma}_{k,i,s} : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_{k,i,s} + Q_{k,i,s} - \nabla \cdot \left(\frac{3}{2} \frac{p_{k,i,s}}{\rho Y_k Y_{k,i,s}} \mathbf{j}_{k,i,s} \right) &+ \nabla \cdot \left(\frac{\boldsymbol{\sigma}_{k,i,s} \cdot \mathbf{j}_{k,i,s}}{\rho Y_k Y_{k,i,s}} \right) - \frac{\mathbf{j}_{k,i,s}}{\rho Y_k Y_{k,i,s}} \cdot \nabla \boldsymbol{\sigma}_{k,i,s}.\end{aligned}$$

or

$$\begin{aligned} \frac{\partial}{\partial t} \left(\frac{3}{2} p_{k,i,s} \right) + \nabla \cdot \left(\frac{3}{2} p_{k,i,s} \mathbf{u} \right) = \\ \sigma_{k,i,s} : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_{k,i,s} + Q_{k,i,s} - \nabla \cdot \left[\left(\frac{3}{2} p_{k,i,s} \mathbf{I} - \sigma_{k,i,s} \right) \cdot \frac{\mathbf{j}_{k,i,s}}{\rho Y_{k,i,s}} \right] - \frac{\mathbf{j}_{k,i,s}}{\rho Y_{k,i,s}} \cdot \nabla \sigma_{k,i,s}. \end{aligned}$$

The analogous for the electron energy equation is

$$\begin{aligned} \frac{\partial}{\partial t} \left(\frac{3}{2} p_{k,e} \right) + \nabla \cdot \left(\frac{3}{2} p_{k,e} \mathbf{u} \right) = \\ \sigma_{k,e} : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_{k,e} + Q_{k,e} - \nabla \cdot \left[\left(\frac{3}{2} p_{k,e} \mathbf{I} - \sigma_{k,e} \right) \cdot \frac{\mathbf{j}_{k,e}}{\rho Y_{k,e}} \right] - \frac{\mathbf{j}_{k,e}}{\rho Y_{k,e}} \cdot \nabla \sigma_{k,e}. \end{aligned}$$

2.2.4 Multi-material multi-species model

We add two extra assumptions

1. All ions of a material move with a single ion velocity $\mathbf{u}_{k,i}$.
2. All ions of a material have the same temperature $T_{k,i}$

If all ions move with a single ion velocity, then the expressions for common velocities given in eqs. (2.71) and (2.72) give

$$\mathbf{u}_{k,i,s} = \mathbf{u}_{k,i} = \mathbf{u}_k. \quad (2.90)$$

Additionally,

$$\mathbf{j}_{k,i,s} = \rho Y_k Y_{k,i,s} (\mathbf{u}_{k,i,s} - \mathbf{u}) = \rho Y_k Y_{k,i,s} (\mathbf{u}_k - \mathbf{u}). \quad (2.91)$$

Additionally, we now define a material's ion pressure $p_{k,i}$, ion stress tensor $\sigma_{k,i}$, ion heat flux $q_{k,i}$, and ion collision term $Q_{k,i}$ as

$$p_{k,i} = \sum_s^{N_k} p_{k,i,s}, \quad \sigma_{k,i} = \sum_s^{N_k} \sigma_{k,i,s}, \quad \mathbf{q}_{k,i} = \sum_s^{N_k} \mathbf{q}_{k,i,s}, \quad Q_{k,i} = \sum_s^{N_k} Q_{k,i,s}.$$

Adding over all ion species of a material, the ion pressure equation becomes

$$\begin{aligned} \frac{\partial}{\partial t} \left(\frac{3}{2} p_{k,i} \right) + \nabla \cdot \left(\frac{3}{2} p_{k,i} \mathbf{u} \right) = \\ \sigma_{k,i} : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_{k,i} + Q_{k,i} - \nabla \cdot \left[\left(\frac{3}{2} p_{k,i} \mathbf{I} - \sigma_{k,i} \right) \cdot \frac{\mathbf{j}_{k,i,s}}{\rho Y_{k,i,s}} \right] - \frac{\mathbf{j}_{k,i,s}}{\rho Y_{k,i,s}} \cdot \nabla \sigma_{k,i}. \end{aligned}$$

Similarly, summing over all ion species, the ion equation of state becomes

$$p_{k,i} = \sum_s^{N_k} n_{k,i,s} k_B T_{k,i}.$$

To summarize, we have

$$\frac{\partial \rho Y_k Y_{k,i,s}}{\partial t} + \nabla \cdot (\rho Y_k Y_{k,i,s} \mathbf{u}) = -\nabla \cdot \mathbf{j}_{k,i,s}. \quad (2.92)$$

$$\nabla \cdot \mathbf{J} = 0. \quad (2.93)$$

$$\frac{\partial \rho \mathbf{u}}{\partial t} + \nabla \cdot (\rho \mathbf{u} \mathbf{u}) - \mathbf{J} \times \mathbf{B} = \nabla \cdot \sum_k^L (\boldsymbol{\sigma}_{k,i} + \boldsymbol{\sigma}_{k,e}) - \nabla \cdot \sum_k^L \mathbf{j}_{k,i} \mathbf{u}_k. \quad (2.94)$$

$$\mathbf{E} + \mathbf{u} \times \mathbf{B} = \frac{1}{en_e} \left(\mathbf{J} \times \mathbf{B} + \nabla \cdot \sum_k^L \boldsymbol{\sigma}_{k,e} + \sum_k^L \mathbf{R}_{k,e} \right) - \sum_s^{N_k} \frac{Z_{k,i,s} \mathbf{j}_{k,i,s}}{n_e m_{k,i,s}} \times \mathbf{B}. \quad (2.95)$$

$$\begin{aligned} \frac{\partial}{\partial t} \left(\frac{3}{2} p_{k,i} \right) + \nabla \cdot \left(\frac{3}{2} p_{k,i} \mathbf{u} \right) = \\ \boldsymbol{\sigma}_{k,i} : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_{k,i} + Q_{k,i} - \nabla \cdot \left[\left(\frac{3}{2} p_{k,i} \mathbf{I} - \boldsymbol{\sigma}_{k,i} \right) \cdot \frac{\mathbf{j}_{k,i,s}}{\rho Y_{k,i,s}} \right] - \frac{\mathbf{j}_{k,i,s}}{\rho Y_k Y_{k,i,s}} \cdot \nabla \boldsymbol{\sigma}_{k,i}. \end{aligned} \quad (2.96)$$

$$\begin{aligned} \frac{\partial}{\partial t} \left(\frac{3}{2} p_{k,e} \right) + \nabla \cdot \left(\frac{3}{2} p_{k,e} \mathbf{u} \right) = \\ \boldsymbol{\sigma}_{k,e} : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_{k,e} + Q_{k,e} - \nabla \cdot \left[\left(\frac{3}{2} p_{k,e} \mathbf{I} - \boldsymbol{\sigma}_{k,e} \right) \cdot \frac{\mathbf{j}_{k,e}}{\rho Y_k Y_{k,e}} \right] - \frac{\mathbf{j}_{k,e}}{\rho Y_k Y_{k,e}} \cdot \nabla \boldsymbol{\sigma}_{k,e}. \end{aligned} \quad (2.97)$$

$$\nabla \cdot \mathbf{E} = \frac{\rho_q}{\epsilon_0}, \quad (2.98)$$

$$\nabla \cdot \mathbf{B} = 0, \quad (2.99)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad (2.100)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}, \quad (2.101)$$

$$\mathbf{J}_k = en_{k,e} (\mathbf{u}_k - \mathbf{u}_{k,e}), \quad (2.102)$$

$$\mathbf{J} = \sum_k^L \mathbf{J}_k, \quad (2.103)$$

$$\rho_{q,k} = 0, \quad (2.104)$$

$$\rho_q = \sum_k^L \rho_{q,k}, \quad (2.105)$$

$$p_{k,i} = \sum_s^{N_k} n_{k,i,s} k_B T_{k,i}. \quad (2.106)$$

$$p_{k,e} = n_{k,e} k_B T_{k,e}. \quad (2.107)$$

Note that eq. (2.92) gives $\rho Y_k Y_{k,i,s}$. Summing over all s gives ρY_k . Summing over all k gives ρ . Dividing $\rho Y_k Y_{k,i,s}$ by ρY_k gives $Y_{k,i,s}$. Dividing ρY_k by ρ gives Y_k .

2.2.5 Single-material multi-species model

Assuming there is only one material, then eq. (2.91) gives $\mathbf{j}_{k,i,s} = 0$ and as a result $\mathbf{j}_{k,i} = 0$. Thus, the model in section 2.2.4 becomes

$$\frac{\partial \rho Y_{i,s}}{\partial t} + \nabla \cdot (\rho Y_{i,s} \mathbf{u}) = 0. \quad (2.108)$$

$$\nabla \cdot \mathbf{J} = 0. \quad (2.109)$$

$$\frac{\partial \rho \mathbf{u}}{\partial t} + \nabla \cdot (\rho \mathbf{u} \mathbf{u}) - \mathbf{J} \times \mathbf{B} = \nabla \cdot (\boldsymbol{\sigma}_i + \boldsymbol{\sigma}_e). \quad (2.110)$$

$$\mathbf{E} + \mathbf{u} \times \mathbf{B} = \frac{1}{en_e} (\mathbf{J} \times \mathbf{B} + \nabla \cdot \boldsymbol{\sigma}_e + \mathbf{R}_e). \quad (2.111)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_i \right) + \nabla \cdot \left(\frac{3}{2} p_i \mathbf{u} \right) = \boldsymbol{\sigma}_i : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_i + Q_i. \quad (2.112)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_e \right) + \nabla \cdot \left(\frac{3}{2} p_e \mathbf{u} \right) = \boldsymbol{\sigma}_e : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_e + Q_e - \nabla \cdot \left[\left(\frac{3}{2} p_e \mathbf{I} - \boldsymbol{\sigma}_e \right) \cdot \frac{\mathbf{j}_e}{\rho Y_e} \right] - \frac{\mathbf{j}_e}{\rho Y_e} \cdot \nabla \boldsymbol{\sigma}_e. \quad (2.113)$$

$$\nabla \cdot \mathbf{E} = \frac{\rho_q}{\epsilon_0}, \quad (2.114)$$

$$\nabla \cdot \mathbf{B} = 0, \quad (2.115)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad (2.116)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}, \quad (2.117)$$

$$\mathbf{J} = en_e (\mathbf{u} - \mathbf{u}_e), \quad (2.118)$$

$$\rho_q = 0, \quad (2.119)$$

$$p_i = \sum_s^N n_{i,s} k_B T_i, \quad (2.120)$$

$$p_e = n_e k_B T_e. \quad (2.121)$$

2.2.6 Single-material two-species model

If there is only one ion species, along with the electron species, then the model in section 2.2.5 simplifies to

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = 0. \quad (2.122)$$

$$\nabla \cdot \mathbf{J} = 0. \quad (2.123)$$

$$\frac{\partial \rho \mathbf{u}}{\partial t} + \nabla \cdot (\rho \mathbf{u} \mathbf{u}) - \mathbf{J} \times \mathbf{B} = \nabla \cdot (\boldsymbol{\sigma}_i + \boldsymbol{\sigma}_e). \quad (2.124)$$

$$\mathbf{E} + \mathbf{u} \times \mathbf{B} = \frac{1}{en_e} (\mathbf{J} \times \mathbf{B} + \nabla \cdot \boldsymbol{\sigma}_e + \mathbf{R}_e). \quad (2.125)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_i \right) + \nabla \cdot \left(\frac{3}{2} p_i \mathbf{u} \right) = \boldsymbol{\sigma}_i : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_i + Q_i. \quad (2.126)$$

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_e \right) + \nabla \cdot \left(\frac{3}{2} p_e \mathbf{u} \right) = \boldsymbol{\sigma}_e : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_e + Q_e - \nabla \cdot \left[\left(\frac{3}{2} p_e \mathbf{I} - \boldsymbol{\sigma}_e \right) \cdot \frac{\mathbf{j}_e}{\rho Y_e} \right] - \frac{\mathbf{j}_e}{\rho Y_e} \cdot \nabla \boldsymbol{\sigma}_e. \quad (2.127)$$

$$\nabla \cdot \mathbf{E} = \frac{\rho}{\epsilon_0}, \quad (2.128)$$

$$\nabla \cdot \mathbf{B} = 0, \quad (2.129)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad (2.130)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}, \quad (2.131)$$

$$\mathbf{J} = en_e (\mathbf{u} - \mathbf{u}_e), \quad (2.132)$$

$$\rho_q = 0, \quad (2.133)$$

$$p_i = n_i k_B T_i, \quad (2.134)$$

$$p_e = n_e k_B T_e. \quad (2.135)$$

2.2.7 Alternate forms of the energy equations

Thus far we've been working with plasmas that behave as ideal gasses with three degrees of freedom (the three translational degrees of freedom). For ideal gasses we also have

$$p_{i,s} = (\gamma - 1) \rho Y_{i,s} e_{i,s},$$

$$p_e = (\gamma - 1) \rho Y_e e_e.$$

Summing $p_{i,s}$ over all s gives

$$p_i = (\gamma - 1) \rho Y_i e_i, \quad (2.136)$$

where $Y_i e_i = \sum_s^N Y_{i,s} e_{i,s}$. Thus, given that $\gamma = 5/3$, the internal energy equation for ions given by eq. (2.112) becomes

$$\frac{\partial \rho Y_i e_i}{\partial t} + \nabla \cdot (\rho Y_i e_i \mathbf{u}) = \boldsymbol{\sigma}_i : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_i + Q_i.$$

Similarly, the internal energy equation for electrons given by eq. (2.113) becomes

$$\frac{\partial \rho Y_e e_e}{\partial t} + \nabla \cdot (\rho Y_e e_e \mathbf{u}) = \boldsymbol{\sigma}_e : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_e + Q_e - \nabla \cdot \left[(\rho Y_e e_e \mathbf{I} - \boldsymbol{\sigma}_e) \cdot \frac{\mathbf{j}_e}{\rho Y_e} \right] - \frac{\mathbf{j}_e}{\rho Y_e} \cdot \nabla \boldsymbol{\sigma}_e.$$

Expanding the stress tensor in the second-to-last term on the right-hand-side of the above gives

$$\frac{\partial \rho Y_e e_e}{\partial t} + \nabla \cdot (\rho Y_e e_e \mathbf{u}) = \boldsymbol{\sigma}_e : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_e + Q_e - \nabla \cdot \left[\left(e_e + \frac{p_e}{\rho Y_e} \right) \mathbf{j}_e \right] + \nabla \cdot \left(\mathbf{t}_e \cdot \frac{\mathbf{j}_e}{\rho Y_e} \right) - \frac{\mathbf{j}_e}{\rho Y_e} \cdot \nabla \boldsymbol{\sigma}_e.$$

Since

$$\frac{p_e}{\rho Y_e} = \frac{\eta_e \hat{p}_e}{\rho Y_e} = \frac{\hat{p}_e}{\rho_e},$$

and $h_e = e_e + \hat{p}_e / \rho_e$ we have

$$\frac{\partial \rho Y_e e_e}{\partial t} + \nabla \cdot (\rho Y_e e_e \mathbf{u}) = \boldsymbol{\sigma}_e : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_e + Q_e - \nabla \cdot (h_e \mathbf{j}_e) + \nabla \cdot \left(\mathbf{t}_e \cdot \frac{\mathbf{j}_e}{\rho Y_e} \right) - \frac{\mathbf{j}_e}{\rho Y_e} \cdot \nabla \boldsymbol{\sigma}_e.$$

Finally, we define the total internal energy as

$$e = Y_i e_i + Y_e e_e, \quad (2.137)$$

so that adding up the internal energy equations gives

$$\begin{aligned} \frac{\partial \rho e}{\partial t} + \nabla \cdot (\rho e \mathbf{u}) &= (\boldsymbol{\sigma}_i + \boldsymbol{\sigma}_e) : \nabla \mathbf{u} - \nabla \cdot (\mathbf{q}_i + \mathbf{q}_e) + Q_i + Q_e \\ &\quad - \nabla \cdot (h_e \mathbf{j}_e) + \nabla \cdot \left(\mathbf{t}_e \cdot \frac{\mathbf{j}_e}{\rho Y_e} \right) - \left(\frac{\mathbf{j}_e}{\rho Y_e} \cdot \nabla \boldsymbol{\sigma}_e \right). \end{aligned}$$

Using eq. (2.84) we have

$$\begin{aligned} Q_i + Q_e &= \sum_s^N Q_{i,s} + Q_e = - \left(\sum_s^N \mathbf{u}_{i,s} \cdot \mathbf{R}_{i,s} + \mathbf{u}_e \cdot \mathbf{R}_e \right) = \\ &\quad - \left(\mathbf{u} \cdot \sum_s^N \mathbf{R}_{i,s} + \mathbf{u}_e \cdot \mathbf{R}_e \right) = - (\mathbf{u} \cdot \mathbf{R}_i + \mathbf{u}_e \cdot \mathbf{R}_e), \end{aligned}$$

where

$$\mathbf{R}_i = \sum_s^N \mathbf{R}_{i,s} \tag{2.138}$$

Thus, the total internal energy equation becomes

$$\begin{aligned} \frac{\partial \rho e}{\partial t} + \nabla \cdot (\rho e \mathbf{u}) &= (\boldsymbol{\sigma}_i + \boldsymbol{\sigma}_e) : \nabla \mathbf{u} - \nabla \cdot (\mathbf{q}_i + \mathbf{q}_e) - (\mathbf{u} \cdot \mathbf{R}_i + \mathbf{u}_e \cdot \mathbf{R}_e) \\ &\quad - \nabla \cdot (h_e \mathbf{j}_e) + \nabla \cdot \left(\mathbf{t}_e \cdot \frac{\mathbf{j}_e}{\rho Y_e} \right) - \left(\frac{\mathbf{j}_e}{\rho Y_e} \cdot \nabla \boldsymbol{\sigma}_e \right). \end{aligned}$$

Chapter 3

Basic waves and parameters

3.1 Electron-plasma and ion-acoustic waves

3.1.1 Linearization

The following decompositions will be used in the derivation of electron-plasma and ion-acoustic waves:

$$\begin{aligned}n_i &= n_{i0} + n_{i1}, \\n_e &= n_{e0} + n_{e1}, \\p_i &= p_{i0} + p_{i1}, \\p_e &= p_{e0} + p_{e1}, \\\mathbf{u}_i &= \mathbf{u}_{i0} + \mathbf{u}_{i1}, \\\mathbf{u}_e &= \mathbf{u}_{e0} + \mathbf{u}_{e1}, \\\mathbf{E} &= \mathbf{E}_0 + \mathbf{E}_1, \\\mathbf{B} &= \mathbf{B}_0 + \mathbf{B}_1.\end{aligned}\tag{3.1}$$

For these decompositions, we'll assume

1. Terms with a subscript 1 are small and thus products of two small quantities can be neglected.
2. \mathbf{u}_{i0} , \mathbf{u}_{e0} , \mathbf{E}_0 , and \mathbf{B}_0 are zero.
3. n_{i0} , n_{e0} , p_{i0} , and p_{e0} are uniform in space and time.

Using the variable decompositions in the evolution equation for electron density eq. (2.46), we have

$$\frac{\partial n_{e0} + n_{e1}}{\partial t} + \nabla \cdot [(n_{e0} + n_{e1})(\mathbf{u}_{e0} + \mathbf{u}_{e1})] = 0.$$

Using assumptions in items 1 to 3, the above simplifies to

$$\frac{\partial n_{e1}}{\partial t} + \nabla \cdot (n_{e0}\mathbf{u}_{e1}) = 0.\tag{3.2}$$

Using the variable decompositions in the evolution equation for ion density eq. (2.45), we have

$$\frac{\partial n_{i0} + n_{i1}}{\partial t} + \nabla \cdot [(n_{i0} + n_{i1})(\mathbf{u}_{i0} + \mathbf{u}_{i1})] = 0.$$

Given the assumptions in items 1 to 3, the above simplifies to

$$\frac{\partial n_{i1}}{\partial t} + \nabla \cdot (n_{i0} \mathbf{u}_{i1}) = 0. \quad (3.3)$$

Using the variable decompositions in the momentum equation for electrons eq. (2.48), we have

$$\begin{aligned} \frac{\partial}{\partial t} [m_e (n_{e0} + n_{e1}) (\mathbf{u}_{e0} + \mathbf{u}_{e1})] + \nabla \cdot [m_e (n_{e0} + n_{e1}) (\mathbf{u}_{e0} + \mathbf{u}_{e1}) (\mathbf{u}_{e0} + \mathbf{u}_{e1})] \\ + e (n_{e0} + n_{e1}) [(\mathbf{E}_0 + \mathbf{E}_1) + (\mathbf{u}_{e0} + \mathbf{u}_{e1}) \times (\mathbf{B}_0 + \mathbf{B}_1)] = -\nabla (p_{e0} + p_{e1}). \end{aligned}$$

Given the assumptions in items 1 to 3, the above simplifies to

$$\frac{\partial n_{e0} \mathbf{u}_{e1}}{\partial t} + \frac{en_{e0}}{m_e} \mathbf{E}_1 = -\frac{1}{m_e} \nabla p_{e1}. \quad (3.4)$$

Using the variable decompositions in the momentum equation for ions eq. (2.47), we have

$$\begin{aligned} \frac{\partial}{\partial t} [m_i (n_{i0} + n_{i1}) (\mathbf{u}_{i0} + \mathbf{u}_{i1})] + \nabla \cdot [m_i (n_{i0} + n_{i1}) (\mathbf{u}_{i0} + \mathbf{u}_{i1}) (\mathbf{u}_{i0} + \mathbf{u}_{i1})] \\ - Ze (n_{i0} + n_{i1}) [(\mathbf{E}_0 + \mathbf{E}_1) + (\mathbf{u}_{i0} + \mathbf{u}_{i1}) \times (\mathbf{B}_0 + \mathbf{B}_1)] = -\nabla (p_{i0} + p_{i1}). \end{aligned}$$

Given the assumptions in items 1 to 3, the above simplifies to

$$\frac{\partial n_{i0} \mathbf{u}_{i1}}{\partial t} - \frac{Zen_{i0}}{m_i} \mathbf{E}_1 = -\frac{1}{m_i} \nabla p_{i1}. \quad (3.5)$$

We'll often need to take the gradient of the ion and electron pressure. Given $p_s = C_s n_s^{\gamma_s}$, where $s = i, e$, we have

$$\nabla p_s = C_s \gamma_s n_s^{\gamma_s - 1} \nabla n_s = C_s \gamma_s \frac{n_s^{\gamma_s}}{n_s} \nabla n_s = \gamma_s \frac{p_s}{n_s} \nabla n_s,$$

Using the equation of state $p_s = n_s k_B T_s$, the above becomes

$$\nabla p_s = \gamma_s k_B T_s \nabla n_s. \quad (3.6)$$

Given the assumption in item 3, the above simplifies to

$$\nabla p_{s1} = \gamma_s k_B T_s \nabla n_{s1}. \quad (3.7)$$

3.1.2 Electron Plasma Waves

On top of the assumptions in section 3.1.1, we'll assume

1. Quasi-neutrality for the base flow, $Ze n_{i0} = n_{e0}$.
2. Uniform ion density, $n_{i1} = 0$.

Combining Equation (3.4) with eq. (3.7) gives

$$\frac{\partial n_{e0} \mathbf{u}_{e1}}{\partial t} + \frac{en_{e0}}{m_e} \mathbf{E}_1 = -\frac{\gamma_e k_B T_e}{m_e} \nabla n_{e1}. \quad (3.8)$$

Taking the time derivative of eq. (3.2) and using eq. (3.8) leads to the wave equation for electron density

$$\frac{\partial^2 n_{e1}}{\partial t^2} - \frac{en_{e0}}{m_e} \nabla \cdot \mathbf{E}_1 = \frac{\gamma_e k_B T_e}{m_e} \nabla^2 n_{e1}. \quad (3.9)$$

For electron plasma waves, we'll assume that n_i varies in space and time so slowly that it can be assumed to be constant. That is, we assume $n_{i1} = 0$. Thus, Gauss's law now takes the form

$$\nabla \cdot \mathbf{E}_1 = \frac{e}{\epsilon_0} (Zn_{i0} - n_{e0} - n_{e1}).$$

Using the quasi-neutrality assumption ($Zn_{i0} = n_{e0}$)

$$\nabla \cdot \mathbf{E}_1 = -\frac{e}{\epsilon_0} n_{e1}. \quad (3.10)$$

Plugging the above in the electron wave equation we obtain

$$\frac{\partial^2 n_{e1}}{\partial t^2} + \frac{e^2 n_{e0}}{m_e \epsilon_0} n_{e1} = \frac{\gamma_e k_B T_e}{m_e} \nabla^2 n_{e1},$$

We now introduce the electron plasma frequency

$$w_{pe} = \left(\frac{n_{e0} e^2}{m_e \epsilon_0} \right)^{1/2}, \quad (3.11)$$

and the thermal velocity

$$v_{Ts} = \sqrt{\frac{k_B T_s}{m_s}}. \quad (3.12)$$

These two allow us to write the equation for n_{e1} as

$$\frac{\partial^2 n_{e1}}{\partial t^2} + w_{pe}^2 n_{e1} - \gamma_e v_{Te}^2 \nabla^2 n_{e1} = 0. \quad (3.13)$$

Assuming a mode of the form $n_{e1} = \tilde{n}_{e1} \exp(-i\omega t)$, where $\tilde{n}_{e1} = \tilde{n}_{e1}(\mathbf{x})$, gives the following

$$(w^2 - w_{pe}^2) n_{e1} + \gamma_e v_{Te}^2 \nabla^2 n_{e1} = 0. \quad (3.14)$$

If we assume $w_{pe} < w$, then $\tilde{n}_{e1} = \hat{n}_{e1} \exp(i\mathbf{k}_e \cdot \mathbf{x})$ is a solution to eq. (3.14). Plugging in this expression for \tilde{n}_{e1} in eq. (3.14) finally gives

$$w^2 - w_{pe}^2 - \gamma_e v_{Te}^2 k_e^2 = 0. \quad (3.15)$$

The above is the dispersion relation for electron plasma waves.

3.1.3 Ion Acoustic Waves

On top of the assumptions in section 3.1.1, we'll assume

1. Quasi-neutrality for the base flow, $Zn_{i0} = n_{e0}$.
2. Approximate quasi-neutrality for the fluctuations, $Zn_{i1} \approx n_{e1}$.
3. Negligible electron mass, $m_e \rightarrow 0$.

Combining eq. (3.5) with eq. (3.7) gives

$$\frac{\partial n_{i0} \mathbf{u}_{i1}}{\partial t} - \frac{Z e n_{i0}}{m_i} \mathbf{E}_1 = -\frac{\gamma_i k_B T_i}{m_i} \nabla n_{i1}. \quad (3.16)$$

Taking the time derivative of eq. (3.3) and using eq. (3.16) leads to the wave equation for ion density

$$\frac{\partial^2 n_{i1}}{\partial t^2} + \frac{Z e n_{i0}}{m_i} \nabla \cdot \mathbf{E}_1 = \frac{\gamma_i k_B T_i}{m_i} \nabla^2 n_{i1}. \quad (3.17)$$

For this case, we assume that the mass of the electron, which is significantly smaller than that of the ions, is negligible. Thus, eq. (3.4) simplifies to

$$e n_{e0} \mathbf{E}_1 = -\gamma_e k_B T_e \nabla n_{e1}. \quad (3.18)$$

Using the above in the ion wave equation we obtain

$$\frac{\partial^2 n_{i1}}{\partial t^2} = \frac{Z n_{i0}}{n_{e0}} \frac{\gamma_e k_B T_e}{m_i} \nabla^2 n_{e1} + \frac{\gamma_i k_B T_i}{m_i} \nabla^2 n_{i1}.$$

Due to quasi-neutrality, we have $Z n_{i0} = n_{e0}$ and $Z n_{i1} \approx n_{e1}$, which gives

$$\frac{\partial^2 n_{i1}}{\partial t^2} = \left(\frac{Z \gamma_e k_B T_e}{m_i} + \frac{\gamma_i k_B T_i}{m_i} \right) \nabla^2 n_{i1}.$$

We now introduce the following velocity

$$v_s = \sqrt{\frac{Z \gamma_e k_B T_e + \gamma_i k_B T_i}{m_i}}, \quad (3.19)$$

which allows us to write the equation for n_{i1} as

$$\frac{\partial^2 n_{i1}}{\partial t^2} - v_s^2 \nabla^2 n_{i1} = 0. \quad (3.20)$$

Assuming a mode of the form $n_{i1} = \tilde{n}_{i1} \exp(-i\omega t)$, where $\tilde{n}_{i1} = \tilde{n}_{i1}(\mathbf{x})$, gives the following

$$\omega^2 n_{i1} + v_s^2 \nabla^2 n_{i1} = 0. \quad (3.21)$$

Since ω^2 is always positive, $\tilde{n}_{i1} = \hat{n}_{i1} \exp(i\mathbf{k}_i \cdot \mathbf{x})$ is a solution to eq. (3.21). Plugging in this expression for \tilde{n}_{i1} in eq. (3.21) finally gives

$$\omega^2 - k_i^2 v_s^2 = 0. \quad (3.22)$$

The above is the dispersion relation for ion-acoustic waves.

3.2 Plasma parameters

3.2.1 Debye length

To describe the Debye length we'll use the governing equations from section 2.1.3 (without assuming isentropic/homentropic flow) as well as the following assumptions

1. Stationary plasma $\mathbf{u}_i = \mathbf{u}_e = 0$.
2. No shear stresses \mathbf{t}_s , heat flux \mathbf{q}_s , and collisions \mathbf{R}_s , Q_s .

3. Effects of magnetic fields can be neglected, i.e. $\mathbf{B} = 0$.
4. Constant temperatures T_i, T_e .

Thus we have

$$\begin{aligned}
-Zen_i\mathbf{E} &= -\nabla p_i, \\
en_e\mathbf{E} &= -\nabla p_e, \\
\nabla \cdot \mathbf{E} &= \frac{\rho_q}{\epsilon_0}, \\
\nabla \times \mathbf{E} &= 0, \\
\rho_q &= e(Zn_i - n_e), \\
p_i &= n_i k_B T_i, \\
p_e &= n_e k_B T_e.
\end{aligned}$$

We can simplify the above to obtain

$$\begin{aligned}
Zen_i \nabla \phi &= -k_B T_i \nabla n_i, \\
-en_e \nabla \phi &= -k_B T_e \nabla n_e, \\
-\nabla^2 \phi &= \frac{e}{\epsilon_0} (Zn_i - n_e).
\end{aligned}$$

The physical domain will be one dimensional with length L , namely, $[-L/2, L/2]$. Thus, we have

$$Zen_i \frac{d\phi}{dx} = -k_B T_i \frac{dn_i}{dx}, \quad (3.23)$$

$$-en_e \frac{d\phi}{dx} = -k_B T_e \frac{dn_e}{dx}, \quad (3.24)$$

$$-\frac{d^2 \phi}{dx^2} = \frac{e}{\epsilon_0} (Zn_i - n_e). \quad (3.25)$$

A voltage V is applied across this domain and thus the boundary condition for the electric potential becomes $\phi(-L/2) - \phi(L/2) = V$. We'll also enforce the condition $\phi(0) = 0$ to fix the arbitrary constant of the potential.

The simplest case to consider is the one for which the one-dimensional domain is empty. Gauss's law then gives

$$\frac{d^2 \phi}{dx^2} = 0,$$

which, upon applying the boundary conditions gives the trivial solution $\phi = -(V/L)x$ and a constant electric field $E = V/L$ pointing from left to right.

Now let's fill up the physical space with a plasma consisting of electrons and ions. Integrating eqs. (3.23) and (3.24) we obtain

$$\begin{aligned}
\ln n_i &= -\frac{Ze}{k_B T_i} \phi + C_1, \\
\ln n_e &= \frac{e}{k_B T_e} \phi + C_2,
\end{aligned}$$

which we re-write as

$$\begin{aligned} n_i &= D_1 \exp\left(-\frac{Ze\phi}{k_B T_i}\right), \\ n_e &= D_2 \exp\left(\frac{e\phi}{k_B T_e}\right). \end{aligned}$$

We introduce n_{i0} and n_{e0} as the densities at $x = 0$. Since $\phi = 0$ at $x = 0$, we have

$$\begin{aligned} n_i &= n_{i0} \exp\left(-\frac{Ze\phi}{k_B T_i}\right), \\ n_e &= n_{e0} \exp\left(\frac{e\phi}{k_B T_e}\right). \end{aligned}$$

A condition for the densities at the center is that they satisfy quasi-neutrality, that is, $Zn_{i0} = n_{e0}$. Note that this does not mean $Zn_i = n_e$. We'll assume the terms inside the exponential are small, so that we can use $\exp \alpha = 1 + \alpha$. Thus we have

$$\begin{aligned} n_i &= n_{i0} - \frac{n_{i0}Ze\phi}{k_B T_i}, \\ n_e &= n_{e0} + \frac{n_{e0}e\phi}{k_B T_e}. \end{aligned}$$

Plugin this into eq. (3.25) gives

$$\frac{d^2\phi}{dx^2} - \left(\frac{n_{i0}Z^2e^2}{\epsilon_0 k_B T_i} + \frac{n_{e0}e^2}{\epsilon_0 k_B T_e} \right) \phi = 0. \quad (3.26)$$

We now introduce the Debye length for a particular species s as

$$\lambda_{Ds} = \left(\frac{\epsilon_0 k_B T_s}{n_{s0} Z^2 e^2} \right)^{1/2}, \quad (3.27)$$

and the total Debye length λ_D as

$$\frac{1}{\lambda_D} = \sum_s \frac{1}{\lambda_{Ds}}. \quad (3.28)$$

Using this, we can re-write eq. (3.26) simply as

$$\frac{d^2\phi}{dx^2} - \frac{1}{\lambda_D^2} \phi = 0. \quad (3.29)$$

The solution to the above that also conforms to the boundary conditions is

$$\phi = -\frac{V}{2} \frac{\sinh\left(\frac{x}{\lambda_D}\right)}{\sinh\left(\frac{L}{2\lambda_D}\right)}. \quad (3.30)$$

A plot of ϕ and the corresponding E is shown in fig. 3.1 for various values of λ_D/L . As the figure shows, the presence of a plasma shields out the electric field, in contrast to the vacuum case where a constant electric field is present across the domain. Given a fixed domain size L , varying the parameter λ_D determines how well the plasma shields away the electric field.

We note that λ_{De} , w_{pe} , and v_{Te} are all related to each other as shown below

$$\lambda_{De} w_{pe} = \left(\frac{\epsilon_0 k_B T_e}{n_{e0} e^2} \right)^{1/2} \left(\frac{n_{e0} e^2}{m_e \epsilon_0} \right)^{1/2} = \left(\frac{k_B T_e}{m_e} \right)^{1/2} = v_{Te}. \quad (3.31)$$

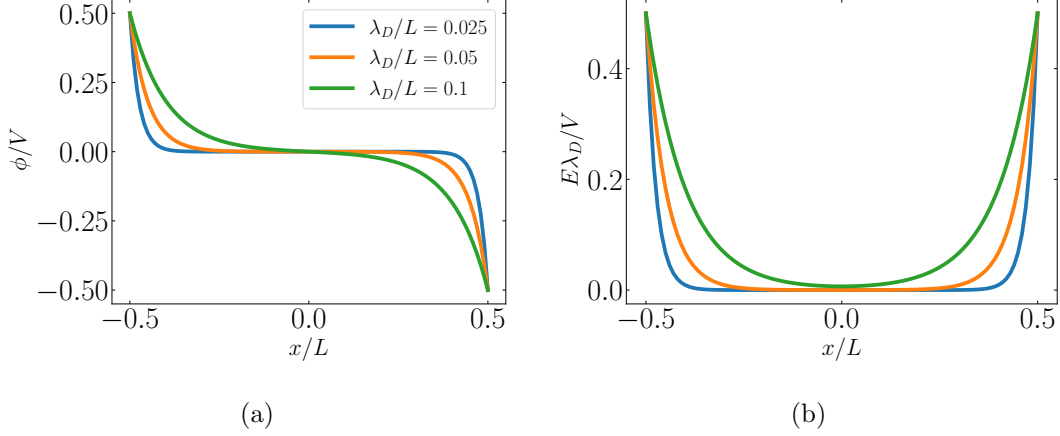


Figure 3.1: Electric potential and field for various values of λ_D/L .

3.2.2 Plasma frequency

At the end of section 3.1.2 we assumed $w_{pe} < w$ in eq. (3.14) to obtain a dispersion relation for electron-plasma waves. We now consider the cases $w_{pe} > w$ and $w_{pe} = w$ to better understand the role played by the plasma frequency w_{pe} .

We first consider the case of $w_{pe} > w$. Plugging in eq. (3.10) in eq. (3.14) and using the definition of the electric potential, we have

$$(w^2 - w_{pe}^2)\nabla^2\phi_1 + \gamma_e v_{Te}^2 \nabla^4\phi_1 = 0. \quad (3.32)$$

We'll use the same setting as that for the derivation of the Debye length. The only difference is that the potential drop across the domain now oscillates with a frequency of w , that is $\phi_1(-L/2) - \phi_1(L/2) = V \exp(-iwt)$. Simplifying due to the one-dimensional domain and rearranging, eq. (3.32) becomes

$$\frac{d^4\phi_1}{dx^4} - \frac{w_{pe}^2 - w^2}{\gamma_e v_{Te}^2} \frac{d^2\phi_1}{dx^2} = 0.$$

Using eq. (3.31) the above becomes

$$\frac{d^4\phi_1}{dx^4} - \frac{1}{\gamma_e \lambda_{De}^2} \left(1 - \frac{w^2}{w_{pe}^2}\right) \frac{d^2\phi_1}{dx^2} = 0,$$

which we re-write as

$$\frac{d^4\phi_1}{dx^4} - \frac{1}{\hat{\lambda}_{De}^2} \frac{d^2\phi_1}{dx^2} = 0,$$

where

$$\hat{\lambda}_{De}^2 = \gamma_e \lambda_{De}^2 \left(1 - \frac{w^2}{w_{pe}^2}\right)^{-1}.$$

Integrating the fourth-order PDE above twice, we get

$$\frac{d^2\phi_1}{dx^2} - \frac{1}{\hat{\lambda}_{De}^2} \phi_1 + C_1 x + C_2 = 0$$

Since to obtain eq. (3.14) we assumed $n_{e1} = \tilde{n}_{e1} \exp(-iwt)$, where $\tilde{n}_{e1} = \tilde{n}_{e1}(\mathbf{x})$, we'll also assume $\phi_1 = \tilde{\phi}_1 \exp(-iwt)$, where $\tilde{\phi}_1 = \tilde{\phi}_1(\mathbf{x})$. Plugging this into the ODE above we get

$$\left(\frac{d^2 \tilde{\phi}_1}{dx^2} - \frac{1}{\hat{\lambda}_{De}^2} \tilde{\phi}_1 \right) + \left(\frac{C_1 x + C_2}{\exp(-iwt)} \right) = 0$$

Note that the first term in parenthesis above does not depend on time, and thus the second term in parenthesis should not do so either. This can only be accomplished if we set $C_1 = C_2 = 0$. Thus we finally have

$$\frac{d^2 \tilde{\phi}_1}{dx^2} - \frac{1}{\hat{\lambda}_{De}^2} \tilde{\phi}_1 = 0. \quad (3.33)$$

The solution to the above that also conforms to the boundary conditions is ...

It is often important to know the plasma density at which the electron plasma frequency w_{pe} equals the external frequency w . This density is referred to as the critical density n_{cr} . Equating the electron plasma frequency with the external frequency we get

$$\frac{n_{cr} e^2}{m_e \epsilon_0} = w^2,$$

which leads to

$$n_{cr} = \frac{m_e \epsilon_0 w^2}{e^2} \quad (3.34)$$

The above can be re-written as

$$n_{cr} = \frac{m_e \epsilon_0 (2\pi\nu)^2}{e^2} = \frac{4\pi^2 m_e \epsilon_0 c^2}{e^2} \frac{1}{\lambda^2} = 1.115 \times 10^{27} \frac{1}{\lambda_{\mu m}^2},$$

where $\lambda_{\mu m}$ is in units of microns and n_{cr} in units of $\#/m^3$.

3.2.3 The coupling parameter

Coulomb interactions are those which occur when two charge particles head towards each other. We can define two types of Coulomb interactions: strong and weak. Strong Coulomb interactions are those for which the particle's Coulomb potential energy is larger than its kinetic energy, and vice versa for weak Coulomb interactions. Thus, we can also define two types of plasma regimes:

- Strongly-coupled plasmas: plasmas where the Coulomb interactions are mostly strong and thus drive the dynamics of its evolution. Coulomb interactions tend to be strong when the inter-particle distances are small, and thus this regime would be dominated by *short-range* interactions. These plasmas are also described as exhibiting *collisional* behavior, since a strong Coulomb interaction essentially means a collision has occurred.
- Weakly-coupled plasmas: plasmas where the Coulomb interactions are mostly weak, and as a result do not drive the dynamics of its evolution. The plasma dynamics are instead driven by *long-range* effects caused by smooth electromagnetic fields that result from integrating a large number of particles. These plasmas are also described as exhibiting *collective* behavior, since the long-range electromagnetic fields follow from the collective integration of many particles.

We describe an approximate Coulomb potential energy for particles in a plasma as

$$U = \frac{q_s^2}{4\pi\epsilon_0 a_s}. \quad (3.35)$$

The impact parameter that has been used above is a_s , the sphere radius. This provides a decent measure on the average spacing between particles in a plasma. Since the volume of a single particle is $1/n_s$, and if we assume that this volume is given by $4/3\pi a_s^3$, then equating these two gives the expression for the sphere radius

$$a_s = \left(\frac{3}{4\pi n_s} \right)^{1/3}. \quad (3.36)$$

The thermal velocity of a particle is given by

$$v_{T_s} = \sqrt{\frac{k_B T_s}{m_s}} \quad (3.37)$$

A measure of the kinetic energy of a particle is given in terms of the thermal velocity as shown below

$$K = m_s v_{T_s}^2 = k_B T_s \quad (3.38)$$

The ratio of the particle's Coulomb potential energy and its kinetic energy is referred to as the coupling parameter Γ_s . That is

$$\Gamma_s = \frac{q_s^2}{4\pi\epsilon_0 a_s k_B T_s}. \quad (3.39)$$

$\Gamma_s > 1$ denotes a strongly coupled plasma, and $\Gamma_s < 1$ denotes a weakly coupled plasma.

3.2.4 The plasma parameter

The standard plasma parameter Λ_s is defined as

$$\Lambda_s = \frac{4}{3}\pi\lambda_{D_s}^3 n_s. \quad (3.40)$$

There is a one to one relationship between the coupling parameter and the standard plasma parameter. Simple algebra shows that

$$\Gamma_s = (1/3)\Lambda_s^{-2/3}. \quad (3.41)$$

Thus, the coupling and plasma parameters are inversely proportional to each other. $\Lambda_s < 1$ implies strongly-coupled plasmas, and $\Lambda_s > 1$ weakly-coupled plasmas. Since Λ_s represents the number of particles per Debye sphere, it is interesting to see that a large number of particles within such a sphere is needed to be in the weakly-coupled-plasma regime. However, this does not correspond to a plasma with large density, in fact, it corresponds to the opposite. The explicit n_s term in the definition $\Lambda_s = (4/3)\pi\lambda_{D_s}^3 n_s$ is dominated by the n_s in the denominator of λ_{D_s} . In other words, low plasma densities lead to large Debye spheres, which in turn leads to many particles per Debye sphere, and hence a weakly-coupled plasma.

3.2.5 Electron degeneracy

- DeBroglie wavelength

$$\lambda_{Bs} = \frac{h}{\sqrt{2\pi m_s v_{Ts}}} \quad (3.42)$$

- Quantum plasma parameter

$$\chi_s = \frac{4}{3}\pi\lambda_{Bs}^3 n_s \quad (3.43)$$

- Fermi energy:

$$E_{fs} = \frac{\hbar^2}{2m_s} (3\pi^2 n_s)^{2/3} \quad (3.44)$$

- The Fermi energy can be used to define the Fermi temperature T_{fs} , Fermi velocity v_{fs} , Fermi momentum p_{fs} , and Fermi wave vector k_{fs}

$$E_{fs} = k_B T_{fs} = \frac{1}{2} m_s v_{fs}^2 = \frac{p_{fs}^2}{2m_s} = \frac{(\hbar k_{fs})^2}{2m_s} \quad (3.45)$$

- Degeneracy parameter:

$$\Theta_s = \frac{k_B T_s}{E_{fs}} = \left(\frac{2^{10}\pi}{3^4} \right)^{1/3} \chi_s^{-2/3}. \quad (3.46)$$

Chapter 4

Collisions

4.1 Cross section

4.1.1 General definition

Two particles traveling towards each other can undergo an interaction. Types of interactions include Coulomb collisions between two charged particles, fusion reactions between ions, and photon-matter phenomena such as Compton scattering, the photoelectric effect, and pair production.

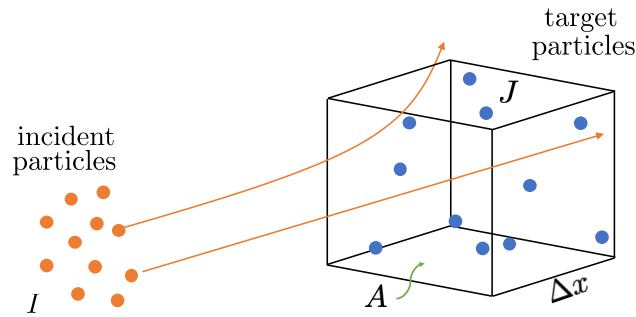


Figure 4.1: Interaction of incident and target particles.

To define the cross section, we'll consider I incident particles heading towards J stationary target particles (see fig. 4.1). Not all of the incident particles will interact with the target particles, some will instead continue to travel in a uniform trajectory. The number of incident particles that do interact with the target particles is labeled as N . The cross section σ is then a constant of proportionality defined by the following equation

$$N = \sigma I n_A. \quad (4.1)$$

In the above, n_A is the areal number density, that is, $n_A = J/A = n\Delta x$, where n is the volume number density.

4.1.2 Differential cross section

Consider the scattering of two particles: an incident and a target particle. If we fix the reference frame to follow the target particle, then the scattering can be depicted as shown in fig. 4.2. The

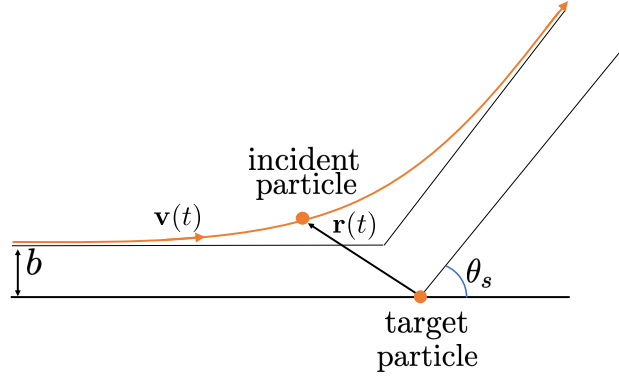


Figure 4.2: Depiction of particle scattering.

displacement parameter is labelled as b , and the scattering angle as θ_s . For three dimensional scattering, the encounter is as shown in fig. 4.3. Note that in that figure the incident particle starts within the $x - z$ plane, and after scattering the particle is confined to a plane that is tilted an angle ϕ_s from the $x - z$ plane.

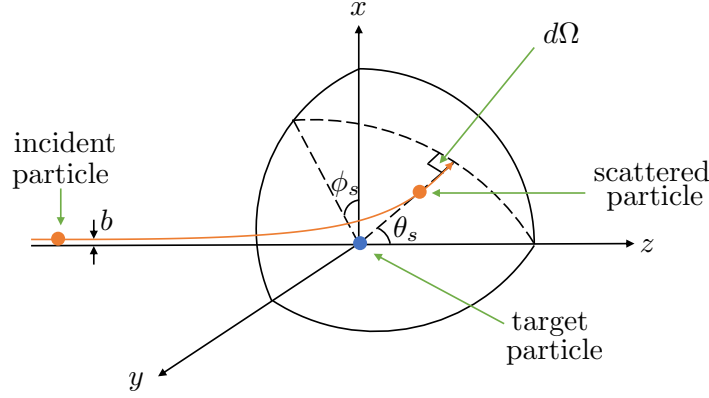


Figure 4.3: Depiction of particle scattering in 3D.

From the entire set of incident particles N that interact with the target particles, one can define an infinitesimal subset $N_{\theta,\phi}d\Omega$ as the number of particles scattered into an infinitesimal solid angle $d\Omega = \sin\theta_s d\theta_s d\phi_s$, as shown in fig. 4.3. We note that $N_{\theta,\phi} = N_{\theta,\phi}(\theta_s, \phi_s)$. We introduce the differential cross section

$$\frac{d\sigma_{\theta,\phi}}{d\Omega} = \frac{d\sigma_{\theta,\phi}}{d\Omega}(\theta_s, \phi_s), \quad (4.2)$$

which is defined by the following expression in an analogous manner to eq. (4.1),

$$N_{\theta,\phi}d\Omega = \left(\frac{d\sigma_{\theta,\phi}}{d\Omega} \right) In_A. \quad (4.3)$$

It is best to not think of it as a derivative (what does a derivative with respect to solid angle mean?) and instead to simply think of it as a function that depends on θ_s and ϕ_s . Integrating over all θ_s and ϕ_s , i.e.

$$\int_{\theta_s=0}^{\pi} \int_{\phi_s=0}^{2\pi} N_{\theta,\phi}d\Omega = \int_{\theta_s=0}^{\pi} \int_{\phi_s=0}^{2\pi} \frac{d\sigma_{\theta,\phi}}{d\Omega} d\Omega In_A$$

gives eq. (4.1).

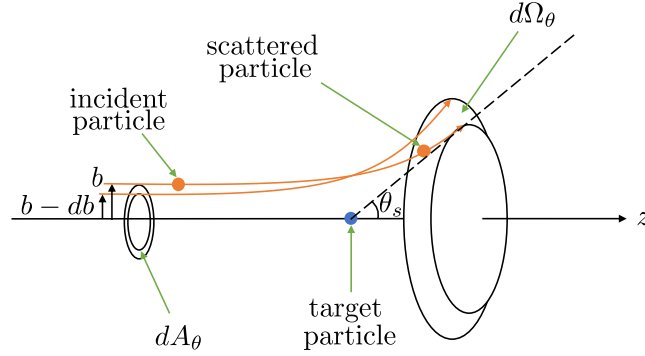


Figure 4.4: Depiction of particle scattering in for axi-symmetric interactions.

For various cases the scattering is axi-symmetric, that is, it is independent of ϕ_s . Thus

$$N_{\theta,\phi} \rightarrow N_{\theta} \quad \frac{d\sigma_{\theta,\phi}}{d\Omega} \rightarrow \frac{d\sigma_{\theta}}{d\Omega},$$

where

$$N_{\theta} = N_{\theta}(\theta_s),$$

and

$$\frac{d\sigma_{\theta}}{d\Omega} = \frac{d\sigma_{\theta}}{d\Omega}(\theta_s).$$

Integrating eq. (4.3) from $\phi_s = 0$ to $\phi_s = 2\pi$ gives

$$N_{\theta}d\Omega_{\theta} = \frac{d\sigma_{\theta}}{d\Omega}d\Omega_{\theta}In_A, \quad (4.4)$$

where $d\Omega_{\theta} = 2\pi \sin \theta_s d\theta_s$. $N_{\theta}d\Omega_{\theta}$ thus represents the number of particles that are scattered into the infinitesimal band $d\Omega_{\theta}$ on a sphere, where $d\Omega_{\theta}$ is defined by scattering angle θ_s (see fig. 4.4). We will note that there is a one-to-one correspondence between the impact parameter b and the scattering angle θ_s , that is, $b = b(\theta_s)$. In other words, any incident particle scattered out through the infinitesimal band $d\Omega_{\theta}$ would have approached the target-particle through the infinitesimal ring dA_{θ} that corresponds to $d\Omega_{\theta}$. Since there are many target particles, there are many dA_{θ} 's that correspond to the same $d\Omega_{\theta}$. Thus, the total number of particles scattered through $d\Omega_{\theta}$ is given by all the incident particles that cross through the dA_{θ} 's of all the target particles.

The number of incident particles crossing all the infinitesimal rings dA_{θ} is equal to the total number of incident particles I times the probability P that any single incident particle will cross one of those rings. Thus, we can write

$$N_{\theta}d\Omega_{\theta} = IP.$$

The probability that an incident particle will cross one of those rings is simply the ratio of the surface area covered by all the rings in a section of the target material to the total area of that section. The surface area covered by all the rings in a section of area S is given by $(n_AS)dA_{\theta}$. Thus, $P = n_AdA_{\theta}$ and

$$N_{\theta}d\Omega_{\theta} = In_AdA_{\theta}.$$

We now introduce the differential

$$db = \frac{db}{d\theta_s} d\theta_s. \quad (4.5)$$

We note that by definition $d\theta_s$ is positive but db can be either positive or negative depending on the sign of $db/d\theta_s$. The infinitesimal area dA_θ is then given by

$$dA_\theta = 2\pi b|db| = 2\pi b \left| \frac{db}{d\theta_s} \right| d\theta_s. \quad (4.6)$$

Thus,

$$N_\theta d\Omega_\theta = n_A I 2\pi b \left| \frac{db}{d\theta_s} \right| d\theta_s.$$

Using eq. (4.4) in the above, we get

$$\frac{d\sigma_\theta}{d\Omega} d\Omega_\theta I n_A = I n_A 2\pi b \left| \frac{db}{d\theta_s} \right| d\theta_s,$$

or

$$\frac{d\sigma_\theta}{d\Omega} = \frac{b}{\sin \theta_s} \left| \frac{db}{d\theta_s} \right|. \quad (4.7)$$

4.1.3 Mean free path & collision frequency

The mean free path can be expressed in terms of the cross section as

$$\lambda_m = \frac{1}{n_1 \sigma}. \quad (4.8)$$

Given the particle's speed v , on can also define the collision time as follows

$$\tau_m = \frac{\lambda_m}{v} = \frac{1}{n_1 \sigma v}. \quad (4.9)$$

Finally, the collision frequency is simply the inverse of the collision time, that is

$$\nu_m = \frac{1}{\tau_m} = n_1 \sigma v. \quad (4.10)$$

4.2 Coulomb collisions

4.2.1 Particle equations

Consider two particles, with positions $\mathbf{r}_1 = \mathbf{r}_1(t)$ and $\mathbf{r}_2 = \mathbf{r}_2(t)$, velocities $\mathbf{v}_1 = \mathbf{v}_1(t)$ and $\mathbf{v}_2 = \mathbf{v}_2(t)$, charges q_1 and q_2 , and masses m_1 and m_2 , respectively. Their positions and velocities are governed by the following equations

$$\frac{d\mathbf{r}_1}{dt} = \mathbf{v}_1, \quad (4.11)$$

$$\frac{d\mathbf{r}_2}{dt} = \mathbf{v}_2, \quad (4.12)$$

$$m_1 \frac{d\mathbf{v}_1}{dt} = -\frac{q_1 q_2}{4\pi\epsilon} \frac{\mathbf{r}_2 - \mathbf{r}_1}{|\mathbf{r}_2 - \mathbf{r}_1|^3}, \quad (4.13)$$

$$m_2 \frac{d\mathbf{v}_2}{dt} = -\frac{q_1 q_2}{4\pi\epsilon} \frac{\mathbf{r}_1 - \mathbf{r}_2}{|\mathbf{r}_1 - \mathbf{r}_2|^3}. \quad (4.14)$$

We note that the above system consists of twelve equations for twelve unknowns. We now introduce the center-of-mass position $\mathbf{R} = \mathbf{R}(t)$, the center-of-mass velocity $\mathbf{V} = \mathbf{V}(t)$, the shifted position $\mathbf{r} = \mathbf{r}(t)$ and the shifted velocity $\mathbf{v} = \mathbf{v}(t)$ as follows

$$\mathbf{R} = \frac{m_1 \mathbf{r}_1 + m_2 \mathbf{r}_2}{m_1 + m_2} \quad \mathbf{r} = \mathbf{r}_1 - \mathbf{r}_2,$$

$$\mathbf{V} = \frac{m_1 \mathbf{v}_1 + m_2 \mathbf{v}_2}{m_1 + m_2} \quad \mathbf{v} = \mathbf{v}_1 - \mathbf{v}_2$$

Thus, in terms of these new four variables, the particle equations can be written as

$$\frac{d\mathbf{R}}{dt} = \mathbf{V}, \quad (4.15)$$

$$\frac{d\mathbf{V}}{dt} = 0, \quad (4.16)$$

$$\frac{d\mathbf{r}}{dt} = \mathbf{v}, \quad (4.17)$$

$$\frac{d\mathbf{v}}{dt} = \frac{q_1 q_2}{4\pi\epsilon_0 m_r} \frac{\mathbf{r}}{r^3}, \quad (4.18)$$

where the reduced mass m_r is given by

$$\frac{1}{m_r} = \frac{1}{m_1} + \frac{1}{m_2}. \quad (4.19)$$

The first two equations above give the trivial solution $\mathbf{V} = \text{constant}$ and $\mathbf{R} = \mathbf{R}(0) + \mathbf{V}t$. Thus, we have reduced the problem from twelve unknowns to six unknowns, namely \mathbf{r} and \mathbf{v} .

4.2.2 Conservation of energy and momentum

Dotting eq. (4.18) by \mathbf{v} gives

$$\begin{aligned} \mathbf{v} \cdot \frac{d\mathbf{v}}{dt} &= \frac{q_1 q_2}{4\pi\epsilon_0 m_r} \mathbf{v} \cdot \frac{\mathbf{r}}{r^3} \\ &= \frac{q_1 q_2}{4\pi\epsilon_0 m_r} \frac{d\mathbf{r}}{dt} \cdot \frac{\mathbf{r}}{r^3} \\ &= \frac{q_1 q_2}{4\pi\epsilon_0 m_r} \frac{1}{2} \frac{dr^2}{dt} \frac{1}{r^3} \\ &= \frac{q_1 q_2}{4\pi\epsilon_0 m_r} \frac{1}{r^2} \frac{dr}{dt} \\ &= -\frac{q_1 q_2}{4\pi\epsilon_0 m_r} \frac{d}{dt} \left(\frac{1}{r} \right). \end{aligned}$$

For the left hand side above we have

$$\mathbf{v} \cdot \frac{d\mathbf{v}}{dt} = \frac{1}{2} \frac{dv^2}{dt},$$

and thus we obtain the following expression for conservation of energy

$$\frac{d}{dt} \left(\frac{1}{2} m_r v^2 + \frac{q_1 q_2}{4\pi\epsilon_0} \frac{1}{r} \right) = 0.$$

Crossing eq. (4.18) by \mathbf{r} gives

$$\mathbf{r} \times \frac{d\mathbf{v}}{dt} = \frac{q_1 q_2}{4\pi\epsilon_0 m_r} \frac{\mathbf{r} \times \mathbf{r}}{r^3} = 0,$$

and thus

$$\frac{d}{dt} [m_r (\mathbf{r} \times \mathbf{v})] = 0.$$

That is, angular momentum is conserved. A consequence of this is that the vector $\mathbf{r} \times \mathbf{v}$ is always pointing in the same direction. Thus, if $\mathbf{r}(0)$ and $\mathbf{v}(0)$ form a plane, then $\mathbf{r}(t)$ and $\mathbf{v}(t)$ need to reside within that same plane for all times t so that $\mathbf{r}(t) \times \mathbf{v}(t)$ points in the same direction as $\mathbf{r}(0) \times \mathbf{v}(0)$. Therefore, the evolution of the position and velocity are confined to a plane and the problem can be reduced from six unknowns to four unknowns. This planar encounter is depicted in fig. 4.5.

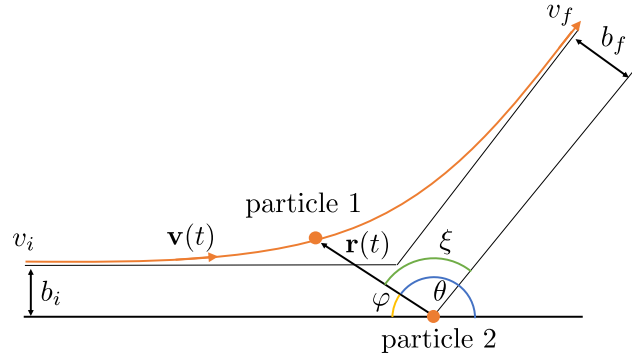


Figure 4.5: Depiction of Coulomb scattering.

If we refer to the plane shown in fig. 4.5 as the $x - y$ plane, then one can tell that the angular-momentum vector points in the negative z direction. We will denote the magnitude of the conserved angular momentum by L , and thus we can write

$$m_r (\mathbf{r} \times \mathbf{v}) = -L \hat{\mathbf{z}}. \quad (4.20)$$

A consequence of both conservation of energy and momentum is as follows. Consider the two limiting states of particle 1—the initial state v_i, b_i and the final state v_f, b_f . Assuming the potential energy is very low at sufficiently early and late times, conservation of energy gives

$$\frac{1}{2} m_r v_i^2 = \frac{1}{2} m_r v_f^2, \quad (4.21)$$

that is, $v_i = v_f$ (note that for other scattering processes, e.g. Compton scattering, this is not necessarily the case). For the angular momentum of the initial state we have

$$\begin{aligned} m_r (\mathbf{r}_i \times \mathbf{v}_i) &= m_r \sin(-\theta_i) r_i v_i \hat{\mathbf{z}} = -m_r \sin(\theta_i) r_i v_i \hat{\mathbf{z}} = -m_r \sin(\pi - \varphi_i) r_i v_i \hat{\mathbf{z}} \\ &= -m_r \sin(\varphi_i) r_i v_i \hat{\mathbf{z}} = -m_r b_i v_i \hat{\mathbf{z}} \end{aligned} \quad (4.22)$$

Similarly, for the angular momentum of the final state we have

$$m_r (\mathbf{r}_f \times \mathbf{v}_f) = m_r \sin(-\xi_f) r_f v_f \hat{\mathbf{z}} = -m_r \sin(\xi_f) r_f v_f \hat{\mathbf{z}} = -m_r b_f v_f \hat{\mathbf{z}}. \quad (4.23)$$

Equating the last two relationships gives $m_r b_i v_i = m_r b_f v_f$. Since $v_i = v_f$, we finally have $b_i = b_f = b$. Using eq. (4.20) in eq. (4.22), we can also write

$$L = m_r b v_i. \quad (4.24)$$

4.2.3 Polar coordinates

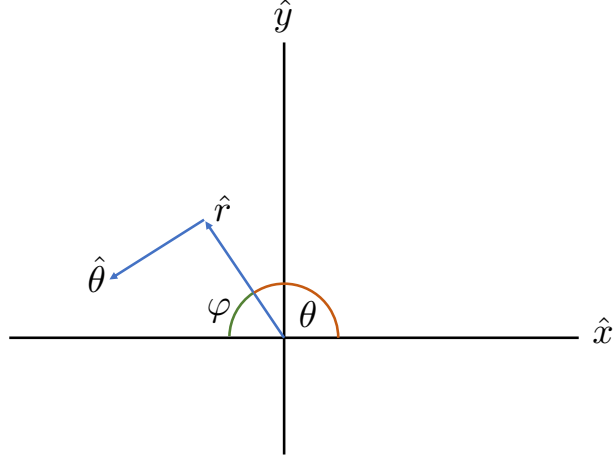


Figure 4.6: Polar coordinates in plane of interaction.

Using polar coordinates, as shown in fig. 4.6, we get

$$r_x = r \cos \theta = r \cos(\pi - \varphi) = -r \cos \varphi,$$

$$r_y = r \sin \theta = r \sin(\pi - \varphi) = r \sin \varphi.$$

Also, since $\mathbf{r} = r\hat{\mathbf{r}}$, we have

$$\begin{aligned} \mathbf{v} &= \frac{d\mathbf{r}}{dt} = \frac{dr}{dt}\hat{\mathbf{r}} + r\frac{d\hat{\mathbf{r}}}{dt} \\ &= \frac{dr}{dt}\hat{\mathbf{r}} + r\frac{d\hat{\mathbf{r}}}{d\theta}\frac{d\theta}{dt} \\ &= \frac{dr}{dt}\hat{\mathbf{r}} + r\frac{d\theta}{dt}\hat{\boldsymbol{\theta}}, \end{aligned}$$

and

$$\begin{aligned} \frac{d\mathbf{v}}{dt} &= \frac{d^2r}{dt^2}\hat{\mathbf{r}} + \frac{dr}{dt}\frac{d\hat{\mathbf{r}}}{dt} + \frac{d}{dt}\left(r\frac{d\theta}{dt}\right)\hat{\boldsymbol{\theta}} + r\frac{d\theta}{dt}\frac{d\hat{\boldsymbol{\theta}}}{dt} \\ &= \frac{d^2r}{dt^2}\hat{\mathbf{r}} + \frac{dr}{dt}\frac{d\hat{\mathbf{r}}}{d\theta}\frac{d\theta}{dt} + \frac{d}{dt}\left(r\frac{d\theta}{dt}\right)\hat{\boldsymbol{\theta}} + r\frac{d\theta}{dt}\frac{d\hat{\boldsymbol{\theta}}}{d\theta}\frac{d\theta}{dt} \\ &= \frac{d^2r}{dt^2}\hat{\mathbf{r}} + \frac{dr}{dt}\frac{d\theta}{dt}\hat{\boldsymbol{\theta}} + \frac{d}{dt}\left(r\frac{d\theta}{dt}\right)\hat{\boldsymbol{\theta}} - r\left(\frac{d\theta}{dt}\right)^2\hat{\mathbf{r}}. \end{aligned}$$

The radial component of eq. (4.18) thus becomes

$$\frac{d^2r}{dt^2} - r\left(\frac{d\theta}{dt}\right)^2 = \frac{q_1q_2}{4\pi\epsilon_0m_r}\frac{1}{r^2}.$$

Since $\theta = \pi - \varphi$, we have

$$\frac{d^2r}{dt^2} - r\left(\frac{d\varphi}{dt}\right)^2 = \frac{q_1q_2}{4\pi\epsilon_0m_r}\frac{1}{r^2}. \quad (4.25)$$

For the angular momentum we have

$$m_r \mathbf{r} \times \mathbf{v} = m_r r \hat{\mathbf{r}} \times \left(\frac{dr}{dt} \hat{\mathbf{r}} + r \frac{d\theta}{dt} \hat{\boldsymbol{\theta}} \right) = m_r r^2 \frac{d\theta}{dt} \hat{\mathbf{z}}$$

Using eq. (4.20), we can write the above as

$$m_r r^2 \frac{d\varphi}{dt} = L. \quad (4.26)$$

4.2.4 Particle trajectory

The goal is to find the radial position of the particle as a function of its angular orientation. That is, we want to find $\tilde{r} = \tilde{r}(\tilde{\varphi})$ such that

$$r(t) = \tilde{r}(\varphi(t)). \quad (4.27)$$

To simplify the math, we introduce $\tilde{u} = \tilde{u}(\tilde{\varphi})$ such that $\tilde{u} = 1/\tilde{r}$. Thus

$$\frac{d\tilde{u}}{d\tilde{\varphi}} = -\frac{1}{\tilde{r}^2} \frac{d\tilde{r}}{d\tilde{\varphi}},$$

or, after re-arranging

$$\frac{d\tilde{r}}{d\tilde{\varphi}} = -\frac{1}{\tilde{u}^2} \frac{d\tilde{u}}{d\tilde{\varphi}}. \quad (4.28)$$

We now proceed as follows. Taking the derivative of r , we get

$$\begin{aligned} \frac{dr}{dt} &= \left(\frac{d\tilde{r}}{d\tilde{\varphi}} \right)_{\tilde{\varphi}=\varphi(t)} \frac{d\varphi}{dt} && [eq. (4.27)] \\ &= \left(-\frac{1}{\tilde{u}^2} \frac{d\tilde{u}}{d\tilde{\varphi}} \right)_{\tilde{\varphi}=\varphi(t)} \frac{d\varphi}{dt} && [eq. (4.28)] \\ &= \left(-\frac{1}{\tilde{u}^2} \frac{d\tilde{u}}{d\tilde{\varphi}} \right)_{\tilde{\varphi}=\varphi(t)} \frac{L}{m_r r^2} && [eq. (4.26)] \\ &= \left(-\frac{1}{\tilde{u}^2} \frac{d\tilde{u}}{d\tilde{\varphi}} \frac{L}{m_r \tilde{r}^2} \right)_{\tilde{\varphi}=\varphi(t)} && [eq. (4.27)] \\ &= \left(-\frac{d\tilde{u}}{d\tilde{\varphi}} \frac{L}{m_r} \right)_{\tilde{\varphi}=\varphi(t)} && (4.29) \end{aligned}$$

Taking the derivative of the above, we get

$$\begin{aligned} \frac{d}{dt} \frac{dr}{dt} &= \left[\frac{d}{d\tilde{\varphi}} \left(-\frac{d\tilde{u}}{d\tilde{\varphi}} \frac{L}{m_r} \right) \right]_{\tilde{\varphi}=\varphi(t)} \frac{d\varphi}{dt} \\ &= \left(-\frac{d^2\tilde{u}}{d\tilde{\varphi}^2} \frac{L}{m_r} \right)_{\tilde{\varphi}=\varphi(t)} \frac{L}{m_r r^2} && [eq. (4.26)] \\ &= \left(-\frac{d^2\tilde{u}}{d\tilde{\varphi}^2} \frac{L}{m_r} \frac{L}{m_r \tilde{r}^2} \right)_{\tilde{\varphi}=\varphi(t)} && [eq. (4.27)] \\ &= \left(-\frac{d^2\tilde{u}}{d\tilde{\varphi}^2} \frac{L^2 \tilde{u}^2}{m_r^2} \right)_{\tilde{\varphi}=\varphi(t)} && (4.30) \end{aligned}$$

Plugging the last relation into eq. (4.25) gives

$$\left[-\frac{d^2\tilde{u}}{d\tilde{\varphi}^2} \frac{L^2\tilde{u}^2}{m_r^2} - \frac{1}{\tilde{u}} \left(\frac{L\tilde{u}^2}{m_r} \right)^2 \right]_{\tilde{\varphi}=\varphi(t)} = \left(\frac{q_1 q_2}{4\pi\epsilon_0 m_r} \tilde{u}^2 \right)_{\tilde{\varphi}=\varphi(t)},$$

which, upon re-arranging and dropping the $\varphi(t)$ dependance, becomes

$$\frac{d^2\tilde{u}}{d\tilde{\varphi}^2} + \tilde{u} = -\frac{q_1 q_2 m_r}{4\pi\epsilon_0 L^2} \quad (4.31)$$

Using eq. (4.24) we write the evolution equation for \tilde{u} as

$$\frac{d^2\tilde{u}}{d\tilde{\varphi}^2} + \tilde{u} = -\frac{q_1 q_2}{4\pi\epsilon_0 m_r b^2 v_i^2}. \quad (4.32)$$

Introducing the notation

$$b_{90} = \frac{q_1 q_2}{4\pi\epsilon_0 m_r v_i^2}, \quad (4.33)$$

the evolution equation for \tilde{u} can be simply expressed as

$$\frac{d^2\tilde{u}}{d\tilde{\varphi}^2} + \tilde{u} = -\frac{b_{90}}{b^2}. \quad (4.34)$$

The boundary conditions for eq. (4.34) are as follows

$$\text{as } \varphi(t) \rightarrow 0, \quad r(t) \rightarrow \infty \quad (4.35)$$

$$\text{as } \varphi(t) \rightarrow 0, \quad \frac{dr(t)}{dt} \rightarrow -v_i \quad (4.36)$$

Given eq. (4.27), eq. (4.35) can only be satisfied if as $\tilde{\varphi} \rightarrow 0$, $\tilde{r} \rightarrow \infty$. Thus, we also have, as $\tilde{\varphi} \rightarrow 0$, $\tilde{u} \rightarrow 0$. Similarly, given eq. (4.29), eq. (4.36) can only be satisfied if as $\tilde{\varphi} \rightarrow 0$

$$\frac{d\tilde{u}}{d\tilde{\varphi}} \frac{L}{m_r} \rightarrow v_i.$$

Using eq. (4.24) we rewrite the above as

$$\frac{d\tilde{u}}{d\tilde{\varphi}} \rightarrow \frac{1}{b}.$$

The general solution to eq. (4.34) is

$$\tilde{u} = A \cos \tilde{\varphi} + B \sin \tilde{\varphi} - \frac{b_{90}}{b^2}.$$

Applying the boundary conditions, we get

$$\tilde{u} = \frac{b_{90}}{b^2} \cos \tilde{\varphi} + \frac{1}{b} \sin \tilde{\varphi} - \frac{b_{90}}{b^2},$$

which we finally re-write as

$$\frac{1}{\tilde{r}} = \frac{1}{b} \sin \tilde{\varphi} + \frac{b_{90}}{b^2} (\cos \tilde{\varphi} - 1). \quad (4.37)$$

4.2.5 The scattering angle

We now drop the tilde notation for the sake of simplicity. That is, for the radial location of an incident particle, we have

$$\frac{1}{r} = \frac{1}{b} \sin \varphi + \frac{b_{90}}{b^2} (\cos \varphi - 1), \quad (4.38)$$

where φ is the independent variable and $r = r(\varphi)$. We want to know the value of φ as r goes to infinity. Using eq. (4.38), and labeling this angle as φ_s , we have

$$0 = \sin \varphi_s + \frac{b_{90}}{b} (\cos \varphi_s - 1).$$

We express the above in terms of the scattering angle $\theta_s = \pi - \varphi_s$,

$$0 = \sin(\pi - \theta_s) + \frac{b_{90}}{b} [\cos(\pi - \theta_s) - 1].$$

or

$$0 = \sin \theta_s + \frac{b_{90}}{b} (-\cos \theta_s - 1).$$

Re-writing the above as

$$\frac{\cos \theta_s + 1}{\sin \theta_s} = \frac{b}{b_{90}},$$

and using the trig identity $\cot(\theta/2) = (\cos \theta + 1)/\sin \theta$, we get

$$\cot\left(\frac{\theta_s}{2}\right) = \frac{b}{b_{90}}. \quad (4.39)$$

4.2.6 The differential cross section

The differential cross section for Coulomb scattering can be computed by making use of eq. (4.7), which is repeated below

$$\frac{d\sigma_\theta}{d\Omega} = \frac{b}{\sin \theta_s} \left| \frac{db}{d\theta_s} \right|. \quad (4.7)$$

From eq. (4.39) we get,

$$\frac{db}{d\theta} = -\frac{b_{90}}{2} \frac{1}{\sin^2(\theta_s/2)}, \quad (4.40)$$

which, plugging in eq. (4.7), gives

$$\frac{d\sigma_\theta}{d\Omega} = \left[b_{90} \frac{\cot(\theta_s/2)}{\sin \theta_s} \right] \left[\frac{b_{90}}{2} \frac{1}{\sin^2(\theta_s/2)} \right].$$

Using the trig identities $\cot(\theta) = \cos(\theta)/\sin(\theta)$ and $\sin(\theta) = 2 \sin(\theta/2) \cos(\theta/2)$ we get

$$\frac{d\sigma_\theta}{d\Omega} = \frac{b_{90}^2}{4} \frac{1}{\sin^4(\theta_s/2)}. \quad (4.41)$$

4.2.7 Collision integral

$$\Omega_{\alpha\beta}^{(lk)} = \sqrt{\frac{k_B T}{2\pi M_{\alpha\beta}}} \int_0^\infty e^{-g^2} g^{2k+3} \phi_{\alpha\beta}^{(l)} dg. \quad (4.42)$$

In the above $M_{\alpha\beta}$ is the reduced mass, given by

$$M_{\alpha\beta} = \frac{M_\alpha M_\beta}{M_\alpha + M_\beta}, \quad (4.43)$$

and $\phi_{\alpha\beta}^{(l)}$ is the collision cross section for a given velocity, and is computed as

$$\phi_{\alpha\beta}^{(l)} = 2\pi \int_0^\infty \left(1 - \cos^l \chi_{\alpha\beta}\right) b db. \quad (4.44)$$

The scattering angle $\chi_{\alpha\beta}$ is given by

$$\chi_{\alpha\beta} = \pi - 2 \int_{r_{\alpha\beta}^{\min}}^\infty \frac{b}{r^2 \left[1 - \frac{b^2}{r^2} - \frac{V_{\alpha\beta}(r)}{g^2 k_B T}\right]^{1/2}} dr. \quad (4.45)$$

For a Coulombic interaction between ions, we can define the natural scale for the cross-sectional area as

$$\phi_{\alpha\beta}^{(0)} = \frac{\pi (Z_\alpha Z_\beta e^2)^2}{(2k_B T)^2}. \quad (4.46)$$

Given this definition, we express the collision integral as

$$\Omega_{\alpha\beta} = \sqrt{\frac{\pi}{M_{\alpha\beta}}} \frac{(Z_\alpha Z_\beta e^2)^2}{(2k_B T)^{3/2}} \mathcal{F}_{\alpha\beta}^{lk}, \quad (4.47)$$

where

$$\mathcal{F}_{\alpha\beta}^{(lk)} = \frac{1}{2\phi_0} \int_0^\infty e^{-g^2} g^{2k+3} \phi_{\alpha\beta}^{(l)} dg \quad (4.48)$$

We note that $\mathcal{F}_{\alpha\beta}^{(lk)} = 4\mathcal{K}_{lk}(g_{\alpha\beta})$, where $\mathcal{K}_{lk}(g_{\alpha\beta})$ is the notation from the Stanton-Murillo paper.

Chapter 5

Guiding center theory

We begin with the velocity equation for a particle under the action of electric and magnetic fields,

$$m \frac{d\mathbf{v}}{dt} = e (\mathbf{E} + \mathbf{v} \times \mathbf{B})_{\mathbf{q}=\mathbf{x}}. \quad (5.1)$$

In the above, $\mathbf{v} = \mathbf{v}(t)$ is the particle velocity, $\mathbf{x} = \mathbf{x}(t)$ the particle position, $\mathbf{E} = \mathbf{E}(\mathbf{q}, t)$ the electric field, and $\mathbf{B} = \mathbf{B}(\mathbf{q}, t)$ the magnetic field. In the subsections that follow, we will solve this equation of motion for simplified forms of \mathbf{E} and \mathbf{B} . The solutions for the velocity vector will typically be of the form

$$\mathbf{v} = \mathbf{v}^{(c)} + \mathbf{v}^{(g)} + v^{\parallel} \mathbf{b}, \quad (5.2)$$

where $\mathbf{v}^{(c)} = \mathbf{v}^{(c)}(t)$ is the gyro-motion (cyclotron) velocity, $\mathbf{v}^{(g)} = \mathbf{v}^{(g)}(t)$ is the guiding center velocity, $v^{\parallel} = v^{\parallel}(t)$ is the parallel velocity. Not all of the velocities will always be present. $\mathbf{b} = \mathbf{B}/B$ is the unit magnetic field vector. The position of the particle is governed by

$$\frac{d\mathbf{x}}{dt} = \mathbf{v}. \quad (5.3)$$

Using eq. (5.2), we integrate the above to obtain

$$\int_0^t d\mathbf{x}(t') = \int_0^t \mathbf{v}^{(c)}(t') dt' + \int_0^t \mathbf{v}^{(g)}(t') dt' + \int_0^t v^{\parallel}(t) \mathbf{b} dt'. \quad (5.4)$$

We introduce the positions $\mathbf{x}^{(c)} = \mathbf{x}^{(c)}(t)$, $\mathbf{x}^{(g)} = \mathbf{x}^{(g)}(t)$, and $\mathbf{x}^{\parallel} = \mathbf{x}^{\parallel}(t)$, which are defined as follows

$$\mathbf{x}^{(c)} = \int \mathbf{v}^{(c)} dt, \quad (5.5)$$

$$\mathbf{x}^{(g)} = \int \mathbf{v}^{(g)} dt, \quad (5.6)$$

$$\mathbf{x}^{\parallel} = \int v^{\parallel} \mathbf{b} dt. \quad (5.7)$$

Thus, eq. (5.4) is now re-written as

$$\mathbf{x}(t) - \mathbf{x}(0) = \mathbf{x}^{(c)}(t) - \mathbf{x}^{(c)}(0) + \mathbf{x}^{(g)}(t) - \mathbf{x}^{(g)}(0) + \mathbf{x}^{\parallel}(t) - \mathbf{x}^{\parallel}(0). \quad (5.8)$$

Without loss of generality, we will assume that the initial condition is as follows

$$\mathbf{x}(0) = \mathbf{x}^{(c)}(0) + \mathbf{x}^{(g)}(0) + \mathbf{x}^{\parallel}(0). \quad (5.9)$$

Thus, the particle position is finally expressed as

$$\mathbf{x} = \mathbf{x}^{(c)} + \mathbf{x}^{(g)} + \mathbf{x}^{\parallel}. \quad (5.10)$$

5.1 Uniform \mathbf{E} and \mathbf{B} fields

5.1.1 Only \mathbf{E} field

Let's orient our coordinate system such that \mathbf{E} points in the \mathbf{e}_z direction. Thus, the equations of motion are

$$\begin{aligned}\frac{dv_x}{dt} &= 0 & v_x(0) &= v_{\perp} \cos(\phi), \\ \frac{dv_y}{dt} &= 0 & v_y(0) &= v_{\perp} \sin(\phi), \\ \frac{dv_z}{dt} &= \frac{eE}{m} & v_z(0) &= v_{\parallel}.\end{aligned}\tag{5.11}$$

The solution of the above is

$$\begin{aligned}v_x &= v_{\perp} \cos(\phi) \\ v_y &= v_{\perp} \sin(\phi) \\ v_z &= v_{\parallel} + \frac{eE}{m}t.\end{aligned}\tag{5.12}$$

5.1.2 Only \mathbf{B} field

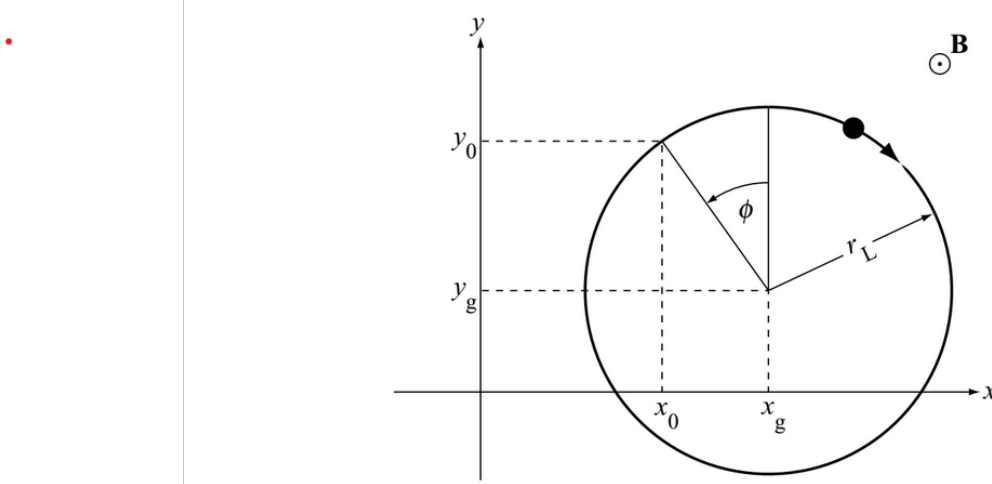


Figure 8.1 Gyro orbit of a positively charged particle in a magnetic field. Shown are the guiding center x_g, y_g and the initial position x_0, y_0 .

Figure 5.1: Coordinates for gyro-motion (extracted from Plasma Physics and Fusion Energy, J. P. Freidberg).

Let's orient our coordinate system such that \mathbf{B} points in the \mathbf{e}_z direction. Thus, the equations of motion are

$$\frac{dv_x}{dt} = \frac{eB}{m}v_y \quad v_x(0) = v_{\perp} \cos(\phi), \tag{5.13a}$$

$$\frac{dv_y}{dt} = -\frac{eB}{m}v_x \quad v_y(0) = v_{\perp} \sin(\phi), \tag{5.13b}$$

$$\frac{dv_z}{dt} = 0 \quad v_z(0) = v_{\parallel}. \tag{5.13c}$$

The z component is decoupled from the rest and has a trivial solution. For the other two components, we begin by taking the time derivative of eq. (5.13b). Thus

$$\frac{d^2 v_y}{dt^2} = -\frac{eB}{m} \frac{dv_x}{dt} = -w_c^2 v_y, \quad (5.14)$$

where $w_c = |e|B/m$ is the gyro frequency. We know that the general solution to the above is $v_y = c_1 \cos(w_c t) + c_2 \sin(w_c t)$. If we use the ICs and assume ions, we have

$$v_y = -v_\perp \sin(w_c t - \phi). \quad (5.15)$$

Integrating eq. (5.13a) then gives

$$v_x = v_\perp \cos(w_c t - \phi). \quad (5.16)$$

The final solution, for either positive or negative charges, can be written as

$$\begin{aligned} v_x^{(c)} &= v_\perp \cos(w_c t \pm \phi) \\ v_y^{(c)} &= \pm v_\perp \sin(w_c t \pm \phi), \end{aligned} \quad (5.17)$$

where upper signs correspond to a negative charge. Integrating the equations above leads to

$$\begin{aligned} x^{(c)} &= r_L \sin(w_c t \pm \phi) \\ y^{(c)} &= \mp r_L \cos(w_c t \pm \phi). \end{aligned} \quad (5.18)$$

where $r_L = v_\perp/w_c$ is the gyro radius.

5.1.3 Both E and B fields

Let's orient our coordinate system such that \mathbf{B} still points along \mathbf{e}_z . The equations of motion are

$$\frac{dv_x}{dt} = \frac{eE_x}{m} + \frac{eB}{m} v_y \quad v_x(0) = v_\perp \cos(\phi) + \frac{E_y}{B}, \quad (5.19a)$$

$$\frac{dv_y}{dt} = \frac{eE_y}{m} - \frac{eB}{m} v_x \quad v_y(0) = v_\perp \sin(\phi) - \frac{E_x}{B}, \quad (5.19b)$$

$$\frac{dv_z}{dt} = \frac{eE_\parallel}{m} \quad v_z(0) = v_\parallel, \quad (5.19c)$$

where we have chosen the given initial conditions simply to facilitate the math. Again, the z component is decoupled from the rest and has the trivial solution $v_z = v_\parallel + (eE_\parallel/m)t$. Thus, eq. (5.2) for the x and y components are

$$\begin{aligned} v_x &= v_x^{(c)} + v_x^{(g)}, \\ v_y &= v_y^{(c)} + v_y^{(g)}. \end{aligned} \quad (5.20)$$

We assume $v_x^{(g)}$ and $v_y^{(g)}$ are time independent. Using eq. (5.20) in eq. (5.19) we obtain

$$\begin{aligned} 0 &= \frac{eE_x}{m} + \frac{eB}{m} v_y^{(g)} \\ 0 &= \frac{eE_y}{m} - \frac{eB}{m} v_x^{(g)}. \end{aligned} \quad (5.21)$$

Thus, $v_x^{(g)} = E_y/B$ and $v_y^{(g)} = -E_x/B$, which in vector notation can be expressed as

$$\mathbf{v}_E^{(g)} = \frac{\mathbf{E} \times \mathbf{B}}{B^2}. \quad (5.22)$$

5.2 Non-uniform B field

5.2.1 Change in magnitude along perpendicular directions

The magnetic field still points in the \mathbf{e}_z direction, but its magnitude changes in directions perpendicular to \mathbf{e}_z : $B = B(q_x, q_y)$. The equations of motion are

$$\frac{dv_x}{dt} = \frac{eB(x, y)}{m} v_y \quad v_x(0) = v_\perp \cos(\phi) - \frac{v_\perp^2}{2w_c} \left. \frac{\partial B}{\partial q_y} \right|_{x^{(g)}, y^{(g)}} \frac{1}{B(x^{(g)}, y^{(g)})}, \quad (5.23a)$$

$$\frac{dv_y}{dt} = -\frac{eB(x, y)}{m} v_x \quad v_y(0) = v_\perp \sin(\phi) + \frac{v_\perp^2}{2w_c} \left. \frac{\partial B}{\partial q_x} \right|_{x^{(g)}, y^{(g)}} \frac{1}{B(x^{(g)}, y^{(g)})}, \quad (5.23b)$$

$$\frac{dv_z}{dt} = 0 \quad v_z(0) = v_\parallel. \quad (5.23c)$$

In the above, the x and y in $B(x, y)$ are the perpendicular components of the particle's position. The v_z component is decoupled from the rest and has a trivial solution. Thus, eqs. (5.2) and (5.10) for the x and y components are

$$v_x = v_x^{(c)} + v_x^{(g)}, \quad (5.24)$$

$$v_y = v_y^{(c)} + v_y^{(g)}, \quad (5.25)$$

$$x = x^{(c)} + x^{(g)}, \quad (5.26)$$

$$y = y^{(c)} + y^{(g)}. \quad (5.27)$$

We begin by employing a Taylor-series expansion for the magnetic field

$$B(x, y) = B(x^{(g)}, y^{(g)}) + \left. \frac{\partial B}{\partial q_x} \right|_{x^{(g)}, y^{(g)}} x^{(c)} + \left. \frac{\partial B}{\partial q_y} \right|_{x^{(g)}, y^{(g)}} y^{(c)} + \dots \quad (5.28)$$

Thus, eqs. (5.23a) and (5.23b) are now

$$\frac{dv_x}{dt} = \frac{eB(x^{(g)}, y^{(g)})}{m} v_y + \frac{e}{m} \left(\left. \frac{\partial B}{\partial q_x} \right|_{x^{(g)}, y^{(g)}} x^{(c)} + \left. \frac{\partial B}{\partial q_y} \right|_{x^{(g)}, y^{(g)}} y^{(c)} \right) v_y \quad (5.29)$$

$$\frac{dv_y}{dt} = -\frac{eB(x^{(g)}, y^{(g)})}{m} v_x + \frac{e}{m} \left(\left. \frac{\partial B}{\partial q_x} \right|_{x^{(g)}, y^{(g)}} x^{(c)} + \left. \frac{\partial B}{\partial q_y} \right|_{x^{(g)}, y^{(g)}} y^{(c)} \right) v_x. \quad (5.30)$$

As before, we assume $v_x^{(g)}, v_y^{(g)}$ are time independent. Also, for simplicity we assume ions only. Plugging in eqs. (5.24) and (5.25) into the above, we get

$$0 = B(x^{(g)}, y^{(g)}) v_y^{(g)} + \left(\left. \frac{\partial B}{\partial q_x} \right|_{x^{(g)}, y^{(g)}} x^{(c)} + \left. \frac{\partial B}{\partial q_y} \right|_{x^{(g)}, y^{(g)}} y^{(c)} \right) (v_y^{(c)} + v_y^{(g)}), \quad (5.31)$$

$$0 = -B(x^{(g)}, y^{(g)}) v_x^{(g)} + \left(\left. \frac{\partial B}{\partial q_x} \right|_{x^{(g)}, y^{(g)}} x^{(c)} + \left. \frac{\partial B}{\partial q_y} \right|_{x^{(g)}, y^{(g)}} y^{(c)} \right) (v_x^{(c)} + v_x^{(g)}). \quad (5.32)$$

We assume $v_x^{(g)} \ll v_x^{(c)}$ and $v_y^{(g)} \ll v_y^{(c)}$. Thus, the above becomes

$$0 = B(x^{(g)}, y^{(g)}) v_y^{(g)} + \left(\left. \frac{\partial B}{\partial q_x} \right|_{x^{(g)}, y^{(g)}} x^{(c)} + \left. \frac{\partial B}{\partial q_y} \right|_{x^{(g)}, y^{(g)}} y^{(c)} \right) v_y^{(c)}, \quad (5.33)$$

$$0 = -B(x^{(g)}, y^{(g)})v_x^{(g)} + \left(\frac{\partial B}{\partial q_x} \Big|_{x^{(g)}, y^{(g)}} x^{(c)} + \frac{\partial B}{\partial q_y} \Big|_{x^{(g)}, y^{(g)}} y^{(c)} \right) v_x^{(c)}. \quad (5.34)$$

We now use the definitions in eq. (5.17) and eq. (5.18). For example, with those definitions we can show that

$$\begin{aligned} x^{(c)}v_y^{(c)} &= [r_L \sin(w_c t - \phi)] [-v_\perp \sin(w_c t - \phi)] \\ &= -\frac{v_\perp^2}{w_c} \sin^2(w_c t - \phi) \\ &= -\frac{v_\perp^2}{2w_c} \{1 - \cos[2(w_c t - \phi)]\} \end{aligned} \quad (5.35)$$

Similar derivations can be carried out for $y^{(c)}v_y^{(c)}$, $x^{(c)}v_x^{(c)}$, and $y^{(c)}v_x^{(c)}$. Thus, eqs. (5.33) and (5.34) become

$$\begin{aligned} 0 = B(x^{(g)}, y^{(g)})v_y^{(g)} - \frac{v_\perp^2}{2w_c} \frac{\partial B}{\partial q_x} \Big|_{x^{(g)}, y^{(g)}} \{1 - \cos[2(w_c t - \phi)]\} \\ - \frac{v_\perp^2}{2w_c} \frac{\partial B}{\partial q_y} \Big|_{x^{(g)}, y^{(g)}} \sin[2(w_c t - \phi)], \end{aligned} \quad (5.36)$$

$$\begin{aligned} 0 = -B(x^{(g)}, y^{(g)})v_x^{(g)} - \frac{v_\perp^2}{2w_c} \frac{\partial B}{\partial q_x} \Big|_{x^{(g)}, y^{(g)}} \sin[2(w_c t - \phi)] \\ - \frac{v_\perp^2}{2w_c} \frac{\partial B}{\partial q_y} \Big|_{x^{(g)}, y^{(g)}} \{1 + \cos[2(w_c t - \phi)]\}. \end{aligned} \quad (5.37)$$

We neglect the oscillatory terms containing the sines and cosines—if it was not possible to neglect them, then the assumption that $v_x^{(g)}$, $v_y^{(g)}$ are time independent would not hold. Thus,

$$\begin{aligned} 0 &= B(x^{(g)}, y^{(g)})v_y^{(g)} - \frac{v_\perp^2}{2w_c} \frac{\partial B}{\partial q_x} \Big|_{x^{(g)}, y^{(g)}} \\ 0 &= -B(x^{(g)}, y^{(g)})v_x^{(g)} - \frac{v_\perp^2}{2w_c} \frac{\partial B}{\partial q_y} \Big|_{x^{(g)}, y^{(g)}}. \end{aligned} \quad (5.38a)$$

Solving for the guiding center velocities, we finally have

$$\begin{aligned} v_x^{(g)} &= -\frac{v_\perp^2}{2w_c} \frac{\partial B}{\partial q_y} \Big|_{x^{(g)}, y^{(g)}} \frac{1}{B(x^{(g)}, y^{(g)})} \\ v_y^{(g)} &= \frac{v_\perp^2}{2w_c} \frac{\partial B}{\partial q_x} \Big|_{x^{(g)}, y^{(g)}} \frac{1}{B(x^{(g)}, y^{(g)})}. \end{aligned} \quad (5.39)$$

In vector notation, this is written as

$$\mathbf{v}_{\nabla B}^{(g)} = \mp \frac{v_\perp^2}{2w_c} \frac{\mathbf{B} \times \nabla B}{B^2}. \quad (5.40)$$

In the above, the fields and w_c are evaluated at $(x^{(g)}, y^{(g)})$.

5.2.2 Change in magnitude along parallel directions

Ideally, one would introduce a gradient only in the direction parallel to the magnetic field, that is, one would have $\mathbf{B} = B(q_z)\mathbf{e}_z$. However, due to Gauss's law, this is too restrictive and instead we generalize and use $\mathbf{B} = B_x\mathbf{e}_x + B_z\mathbf{e}_z$, where $B_x = B_x(q_x, q_z)$ and $B_z = B_z(q_x, q_z)$. Thus, the equations of motion are

$$\frac{dv_x}{dt} = \frac{e}{m}v_y B_z(x, z), \quad (5.41)$$

$$\frac{dv_y}{dt} = -\frac{e}{m}[v_x B_z(x, z) - v_z B_x(x, z)], \quad (5.42)$$

$$\frac{dv_z}{dt} = -\frac{e}{m}v_y B_x(x, z). \quad (5.43)$$

However, the z direction no longer corresponds to the parallel direction, since the magnetic field also has a component along the x direction. To account for this, we will introduce a rotating reference frame, in which one of the axis will always be aligned with the magnetic field vector, and thus would denote the parallel direction. In the original static reference frame the unit vectors are $(\mathbf{e}_x, \mathbf{e}_y, \mathbf{e}_z)$ and the velocity components are (v_x, v_y, v_z) , whereas in this new rotating reference frame the unit vectors are $(\mathbf{e}_{\perp 1}, \mathbf{e}_{\perp 2}, \mathbf{b})$ and the velocity components are $(v_{\perp 1}, v_{\perp 2}, v_{\parallel})$.

The rotating reference frame is described by the rotation matrix

$$\mathbf{Q}(t) = \begin{bmatrix} b_x & 0 & b_z \\ 0 & 1 & 0 \\ b_z & 0 & -b_x \end{bmatrix}, \quad (5.44)$$

where $b_x = b_x(t)$ and $b_y = b_y(t)$ are given by

$$b_x = \frac{B_x(x, z)}{B(x, z)} \quad b_z = \frac{B_z(x, z)}{B(x, z)} \quad (5.45)$$

In the above, $B(x, z) = [B_x^2(x, z) + B_z^2(x, z)]^{1/2}$. As an example, the matrix above leads to the following transformations for the unit vectors and velocities in the rotating reference frame

$$\mathbf{b} = b_x\mathbf{e}_x + b_z\mathbf{e}_z \quad (5.46)$$

$$\mathbf{e}_{\perp 2} = \mathbf{e}_y \quad (5.47)$$

$$\mathbf{e}_{\perp 1} = b_z\mathbf{e}_x - b_x\mathbf{e}_z = \mathbf{e}_{\perp 2} \times \mathbf{b}, \quad (5.48)$$

$$v_{\parallel} = b_x v_x + b_z v_z \quad (5.49)$$

$$v_{\perp 2} = v_y \quad (5.50)$$

$$v_{\perp 1} = b_z v_x - b_x v_z. \quad (5.51)$$

Using the transformation rule for the acceleration of a particle, but for some reason neglecting the coriolis and centrifugal forces, we obtain for the velocity derivatives

$$\frac{dv_{\parallel}}{dt} = \frac{dv_x}{dt}b_x + \frac{dv_z}{dt}b_z - K v_{\perp 1} \quad (5.52)$$

$$\frac{dv_{\perp 2}}{dt} = \frac{dv_y}{dt} \quad (5.53)$$

$$\frac{dv_{\perp 1}}{dt} = \frac{dv_x}{dt}b_z - \frac{dv_z}{dt}b_x + K v_{\parallel}, \quad (5.54)$$

where $K = K(t)$ is given by $K = b_x db_z/dt - b_z db_x/dt$. Using eqs. (5.41) to (5.43) in the above leads to

$$\frac{dv_{||}}{dt} = \frac{e}{m} v_y [B_z(x, z) b_x - B_x(x, z) b_z] - K v_{\perp 1} \quad (5.55)$$

$$\frac{dv_{\perp 2}}{dt} = -\frac{eB}{m} (v_x b_z - v_z b_x) \quad (5.56)$$

$$\frac{dv_{\perp 1}}{dt} = \frac{e}{m} v_y [B_z(x, z) b_z + B_x(x, z) b_x] + K v_{||} \quad (5.57)$$

Using the definitions for b_x and b_z in eq. (5.45), as well as the expressions for $v_{\perp 1}$, $v_{\perp 2}$ in eqs. (5.50) and (5.51), we get

$$\frac{dv_{||}}{dt} = -K v_{\perp 1}, \quad (5.58)$$

$$\frac{dv_{\perp 2}}{dt} = -w_c v_{\perp 1}, \quad (5.59)$$

$$\frac{dv_{\perp 1}}{dt} = w_c v_{\perp 2} + K v_{||}, \quad (5.60)$$

where $w_c = w_c(t)$ is given by $w_c = eB(x, z)/m$.

We now introduce a time transformation to simplify the equations above. To do so, we introduce the following variables

$$\hat{v}_{||} = \hat{v}_{||}(\tau) \quad \hat{v}_{\perp 2} = \hat{v}_{\perp 2}(\tau) \quad \hat{v}_{\perp 1} = \hat{v}_{\perp 1}(\tau) \quad (5.61)$$

$$\hat{x} = \hat{x}(\tau) \quad \hat{z} = \hat{z}(\tau) \quad (5.62)$$

such that

$$v_{||} = \hat{v}_{||}(h(t)) \quad v_{\perp 2} = \hat{v}_{\perp 2}(h(t)) \quad v_{\perp 1} = \hat{v}_{\perp 1}(h(t)) \quad (5.63)$$

$$x = \hat{x}(h(t)) \quad z = \hat{z}(h(t)). \quad (5.64)$$

The function $h(t)$ is given by

$$h(t) = \int_0^t w_c(t') dt'. \quad (5.65)$$

We also show that

$$b_x = \frac{B_x(x, z)}{B(x, z)} = \frac{B_x(\hat{x}(h(t)), \hat{z}(h(t)))}{B(\hat{x}(h(t)), \hat{z}(h(t)))}, \quad (5.66)$$

and thus

$$\frac{db_x}{dt} = \frac{dh(t)}{dt} \frac{d}{d\tau} \left[\frac{B_x(\hat{x}, \hat{z})}{B(\hat{x}, \hat{z})} \right]_{\tau=h(t)} = w_c \left. \frac{d\hat{b}_x}{d\tau} \right|_{\tau=h(t)}, \quad (5.67)$$

where $\hat{b}_x = \hat{b}_x(\tau)$ is given by $\hat{b}_x = B_x(\hat{x}, \hat{z})/B(\hat{x}, \hat{z})$. The analogous holds for b_z . This allows us to write

$$K = w_c \left(\hat{b}_x \frac{d\hat{b}_z}{d\tau} - \hat{b}_z \frac{d\hat{b}_x}{d\tau} \right)_{\tau=h(t)} = w_c \left. \hat{K} \right|_{\tau=h(t)}, \quad (5.68)$$

where $\hat{K} = \hat{K}(\tau)$ is given by $\hat{K} = \hat{b}_x d\hat{b}_z/d\tau - \hat{b}_z d\hat{b}_x/d\tau$. With these transformation, eqs. (5.58) to (5.60) are re-written as

$$\frac{d\hat{v}_{||}}{d\tau} = -\hat{K} \hat{v}_{\perp 1}, \quad (5.69)$$

$$\frac{d\hat{v}_{\perp 2}}{d\tau} = -\hat{v}_{\perp 1}, \quad (5.70)$$

$$\frac{d\hat{v}_{\perp 1}}{d\tau} = \hat{v}_{\perp 2} + \hat{K} \hat{v}_{||}. \quad (5.71)$$

We now simplify B_z so that $B_z = B_z(q_z)$. To be consistent with Gauss's law, we require $B_x = B_x(q_x, q_y)$ where $B_x = -q_x dB_z/dq_z$. With these simplified forms, we have

$$\hat{K} = -\hat{b}_z^2 \frac{d}{d\tau} \left(\frac{\hat{b}_x}{\hat{b}_z} \right) \quad (5.72)$$

$$= -\frac{B_z^2(\hat{z})}{B^2(\hat{x}, \hat{z})} \frac{d}{d\tau} \left(\frac{B_x(\hat{x}, \hat{z})}{B_z(\hat{z})} \right) \quad (5.73)$$

$$= \frac{B_z^2(\hat{z})}{B^2(\hat{x}, \hat{z})} \frac{d}{d\tau} \left[\hat{x} \left(\frac{1}{B_z} \frac{dB_z}{dq_z} \right)_{q_z=\hat{z}} \right]. \quad (5.74)$$

We now use the long-thin approximation. For this approximation, we assume that $B_x/B_z \ll 1$, and also that $\frac{1}{B_z} \frac{dB_z}{dq_z}$ changes very slowly. We thus have

$$\hat{K} \approx \frac{d\hat{x}}{d\tau} \left(\frac{1}{B_z} \frac{dB_z}{dq_z} \right)_{q_z=\hat{z}}. \quad (5.75)$$

Also, using the long-thin approximation in eqs. (5.49) and (5.51) allows us to write

$$v_{||} \approx v_z = \frac{dz}{dt} = \left(\frac{d\hat{z}}{d\tau} \right)_{\tau=h(t)} w_c \quad (5.76)$$

$$v_{\perp 1} \approx v_x = \frac{dx}{dt} = \left(\frac{d\hat{x}}{d\tau} \right)_{\tau=h(t)} w_c. \quad (5.77)$$

Evaluating the above at $t = h^{-1}(\tau)$, and defining $\hat{w}_c(\tau)$ from $w_c = \hat{w}_c(h(t))$, we obtain

$$\hat{v}_{||} \approx \frac{d\hat{z}}{d\tau} \hat{w}_c \quad (5.78)$$

$$\hat{v}_{\perp 1} \approx \frac{d\hat{x}}{d\tau} \hat{w}_c. \quad (5.79)$$

We also note that

$$\frac{dB_z(\hat{z})}{d\tau} = \left(\frac{dB_z}{dq_z} \right)_{q_z=\hat{z}} \frac{d\hat{z}}{d\tau}. \quad (5.80)$$

Using the expressions above in eq. (5.75), one can approximate \hat{K} using either of the two forms below

$$\hat{K} \approx \frac{\hat{v}_{\perp 1}}{\hat{w}_c B_z(\hat{z})} \left(\frac{dB_z}{dq_z} \right)_{q_z=\hat{z}} \approx \frac{\hat{v}_{\perp 1}}{\hat{v}_{||} B_z(\hat{z})} \frac{dB_z(\hat{z})}{d\tau}. \quad (5.81)$$

We thus write the governing equations for the velocities as

$$\frac{d\hat{v}_{||}}{d\tau} = -\frac{\hat{v}_{\perp 1}^2}{\hat{w}_c B_z(\hat{z})} \left(\frac{dB_z}{dq_z} \right)_{q_z=\hat{z}}, \quad (5.82)$$

$$\frac{d\hat{v}_{\perp 2}}{d\tau} = -\hat{v}_{\perp 1}, \quad (5.83)$$

$$\frac{d\hat{v}_{\perp 1}}{d\tau} = \hat{v}_{\perp 2} + \frac{\hat{v}_{\perp 1}}{B_z(\hat{z})} \frac{dB_z(\hat{z})}{d\tau}. \quad (5.84)$$

We now assume the solution for the perpendicular velocities is of the form

$$\hat{v}_{\perp 1} = \hat{v}_{\perp} \cos[\tau + \hat{\epsilon}] \quad (5.85)$$

$$\hat{v}_{\perp 2} = -\hat{v}_{\perp} \sin[\tau + \hat{\epsilon}], \quad (5.86)$$

where $\hat{v}_\perp = \hat{v}_\perp(\tau)$ and $\hat{\epsilon} = \hat{\epsilon}(\tau)$. Plugging these two assumed solutions into eqs. (5.83) and (5.84), and using some simple algebra, gives

$$\frac{d\hat{v}_\perp}{d\tau} = \frac{\hat{v}_\perp}{2B_z(\hat{z})} \frac{dB_z(\hat{z})}{d\tau} \{1 + \cos[2(\tau + \hat{\epsilon})]\}. \quad (5.87)$$

The above can be re-arranged and expressed as

$$\frac{d \ln \hat{\mu}}{d\tau} = \frac{d \ln B_z(\hat{z})}{d\tau} \cos[2(\tau + \hat{\epsilon})], \quad (5.88)$$

where $\hat{\mu} = \hat{\mu}(\tau)$ is the adiabatic invariant, and is given by

$$\hat{\mu} = \frac{m\hat{v}_\perp^2}{2B_z(\hat{z})}. \quad (5.89)$$

Integrating eq. (5.88) from τ_1 to τ_2 gives

$$\ln \hat{\mu}(\tau_2) - \ln \hat{\mu}(\tau_1) = \ln[B_z(\hat{z})] \cos[2(\tau + \hat{\epsilon})] \Big|_{\tau_1}^{\tau_2} + \int_{\tau_1}^{\tau_2} 2 \ln[B_z(\hat{z})] \sin[2(\tau + \hat{\epsilon})] d\tau. \quad (5.90)$$

Picking τ_1 and τ_2 such that $[\tau_2 + \hat{\epsilon}(\tau_2)] - [\tau_1 + \hat{\epsilon}(\tau_1)] = 2\pi$, and assuming $B(\hat{z})$ doesn't change significantly from τ_1 to τ_2 , gives $\hat{\mu}(\tau_2) = \hat{\mu}(\tau_1)$, that is, $\hat{\mu}$ is constant over one gyro-period. One can also define

$$\mu = \frac{mv_\perp^2}{2B_z(z)} \quad (5.91)$$

where $\mu = \mu(t)$ and $v_\perp = v_\perp(t)$. Given that $v_\perp = \hat{v}_\perp(h(t))$, we have $\mu = \hat{\mu}(h(t))$. Thus, $\hat{\mu}(\tau_2) = \hat{\mu}(\tau_1)$ translates to $\mu(t_2) = \mu(t_1)$, where $t_2 = h^{-1}(\tau_2)$ and $t_1 = h^{-1}(\tau_1)$.

Finally, we focus not on the perpendicular velocities but the parallel velocity. Plugging-in the assumed solutions in the governing eq. (5.82) gives

$$\frac{d\hat{v}_\parallel}{d\tau} = -\frac{\hat{v}_\perp^2}{2\hat{w}_c B_z(\hat{z})} \left(\frac{dB_z}{dq_z} \right)_{q_z=\hat{z}} \{1 + \cos[2(\tau + \hat{\epsilon})]\}. \quad (5.92)$$

We now average the above from τ_1 to τ_2 while assuming $B(\hat{z})$, $d\hat{v}_\parallel/d\tau$ and \hat{v}_\perp^2 do not change significantly during that time scale. Note that since this is an average, we are not just integrating from τ_1 to τ_2 , but we are also dividing by $\tau_2 - \tau_1$. After averaging, we obtain

$$\frac{d\hat{v}_\parallel}{d\tau} = -\frac{\hat{v}_\perp^2}{2\hat{w}_c B_z(\hat{z})} \left(\frac{dB_z}{dq_z} \right)_{q_z=\hat{z}}. \quad (5.93)$$

or

$$m \frac{d\hat{v}_\parallel}{d\tau} = -\frac{\hat{\mu}}{\hat{w}_c} \left(\frac{dB_z}{dq_z} \right)_{q_z=\hat{z}}. \quad (5.94)$$

Converting back to time t gives

$$m \frac{dv_\parallel}{dt} = -\mu \left(\frac{dB_z}{dq_z} \right)_{q_z=z}. \quad (5.95)$$

5.2.3 Change in direction

Rather than writing eq. (5.1) in terms of its components as done in previous sections, we leave the equation in vector form. Expressing the velocity as $\mathbf{v} = \mathbf{v}_\perp + v_\parallel \mathbf{b}$ and assuming no electric field, we write eq. (5.1) as

$$\frac{d}{dt}(\mathbf{v}_\perp + v_\parallel \mathbf{b}) = \mp w_c(\mathbf{v}_\perp + v_\parallel \mathbf{b}) \times \mathbf{b}, \quad (5.96)$$

where upper sign corresponds to negative charge and lower sign to positive charge. For simplicity we will assume positively charged particles only. We then cross both sides of the above by \mathbf{b} , that is

$$\mathbf{b} \times \left\{ \left[\frac{d}{dt}(\mathbf{v}_\perp + v_\parallel \mathbf{b}) - w_c(\mathbf{v}_\perp + v_\parallel \mathbf{b}) \times \mathbf{b} \right] \times \mathbf{b} \right\} = 0. \quad (5.97)$$

The above is simplified using the following three manipulations

$$\begin{aligned} \mathbf{b} \times \left\{ [w_c(\mathbf{v}_\perp + v_\parallel \mathbf{b}) \times \mathbf{b}] \times \mathbf{b} \right\} &= \mathbf{b} \times \{ [w_c \mathbf{v}_\perp \times \mathbf{b}] \times \mathbf{b} \} \\ &= -\mathbf{b} \times \{ w_c \mathbf{v}_\perp (\mathbf{b} \cdot \mathbf{b}) - \mathbf{b}(\mathbf{b} \cdot w_c \mathbf{v}_\perp) \} \\ &= w_c \mathbf{v}_\perp \times \mathbf{b}. \end{aligned} \quad (5.98)$$

$$\mathbf{b} \times \left\{ \left[\frac{d\mathbf{v}_\perp}{dt} \right] \times \mathbf{b} \right\} = \frac{d\mathbf{v}_\perp}{dt} (\mathbf{b} \cdot \mathbf{b}) - \mathbf{b} \left(\mathbf{b} \cdot \frac{d\mathbf{v}_\perp}{dt} \right) = \left(\frac{d\mathbf{v}_\perp}{dt} \right)_\perp. \quad (5.99)$$

$$\begin{aligned} \mathbf{b} \times \left\{ \left[\frac{dv_\parallel \mathbf{b}}{dt} \times \mathbf{b} \right] \right\} &= v_\parallel \mathbf{b} \times \left\{ \left[\frac{d\mathbf{b}}{dt} \times \mathbf{b} \right] \right\} \\ &= v_\parallel \left[\frac{d\mathbf{b}}{dt} (\mathbf{b} \cdot \mathbf{b}) - \mathbf{b} \left(\mathbf{b} \cdot \frac{d\mathbf{b}}{dt} \right) \right] \\ &= v_\parallel \left[\frac{d\mathbf{b}}{dt} - \mathbf{b} \left(\frac{1}{2} \frac{d\mathbf{b} \cdot \mathbf{b}}{dt} \right) \right] \\ &= v_\parallel \frac{d\mathbf{b}}{dt} \end{aligned} \quad (5.100)$$

Thus, we have

$$\left(\frac{d\mathbf{v}_\perp}{dt} \right)_\perp - w_c \mathbf{v}_\perp \times \mathbf{b} = -v_\parallel \frac{d\mathbf{b}}{dt}. \quad (5.101)$$

As shown in Freidberg

$$\frac{d\mathbf{b}(\mathbf{x}(t))}{dt} = \frac{d\mathbf{x}(t)}{dt} \cdot \nabla \mathbf{b} = \mathbf{v} \cdot \nabla \mathbf{b} = \mathbf{v}_\perp \cdot \nabla \mathbf{b} + v_\parallel \mathbf{b} \cdot \nabla \mathbf{b}, \quad (5.102)$$

where $\nabla \mathbf{b}$ is evaluated at $\mathbf{x} = \mathbf{x}(t)$. Thus, eq. (5.101) becomes

$$\left(\frac{d\mathbf{v}_\perp}{dt} \right)_\perp - w_c \mathbf{v}_\perp \times \mathbf{b} = -v_\parallel \mathbf{v}_\perp \cdot \nabla \mathbf{b} - v_\parallel^2 \mathbf{b} \cdot \nabla \mathbf{b}. \quad (5.103)$$

As was done for the other drifts, we assume the solution is of the form $\mathbf{v}_\perp = \mathbf{v}^{(c)} + \mathbf{v}^{(g)}$, where we assume again that $\mathbf{v}^{(g)}$ is time independent. The term $\mathbf{v}^{(c)}$ corresponds to gyro-motion in a rotating reference frame, and is thus given by

$$\mathbf{v}^{(c)} = v_{\perp 1}^{(c)} \mathbf{e}_{\perp 1} + v_{\perp 2}^{(c)} \mathbf{e}_{\perp 2}, \quad (5.104)$$

where $\mathbf{e}_{\perp 1}$ and $\mathbf{e}_{\perp 2}$ are orthogonal to \mathbf{b} and thus rotate in time. $v_{\perp 1}^{(c)}$ is given by eq. (5.16) and $v_{\perp 2}^{(c)}$ by eq. (5.15). We note that, in the non-rotating reference frame, $\mathbf{v}^{(c)}$ is expressed as $\mathbf{v}^{(c)} = v_x^{(c)} \mathbf{e}_x + v_y^{(c)} \mathbf{e}_y + v_z^{(c)} \mathbf{e}_z$. We now prove that $\mathbf{v}_{\perp}^{(c)}$ is the solution to the two terms on the left-hand side of eq. (5.103). To show this we first use the transformation rule for the acceleration of a particle in a rotating reference frame, but for some reason ignore the coriolis and centrifugal terms. Thus

$$\begin{aligned} \frac{d\mathbf{v}^{(c)}}{dt} &= \frac{dv_x^{(c)}}{dt} \mathbf{e}_x + \frac{dv_y^{(c)}}{dt} \mathbf{e}_y + \frac{dv_z^{(c)}}{dt} \mathbf{e}_z \\ &= \frac{dv_{\perp 1}^{(c)}}{dt} \mathbf{e}_{\perp 1} + \frac{dv_{\perp 2}^{(c)}}{dt} \mathbf{e}_{\perp 2} + 2\Omega \times \mathbf{v}^{(c)}. \end{aligned} \quad (5.105)$$

We do not allow the rotating reference frame to rotate about the \mathbf{b} axis. Thus, $\Omega = \Omega_{\perp 1} \mathbf{e}_{\perp 1} + \Omega_{\perp 2} \mathbf{e}_{\perp 2}$. Given that Ω and $\mathbf{v}^{(c)}$ are in the same plane, $\Omega \times \mathbf{v}^{(c)}$ must point in the \mathbf{b} direction. Thus,

$$\left(\frac{d\mathbf{v}^{(c)}}{dt} \right)_{\perp} = \frac{dv_{\perp 1}^{(c)}}{dt} \mathbf{e}_{\perp 1} + \frac{dv_{\perp 2}^{(c)}}{dt} \mathbf{e}_{\perp 2}. \quad (5.106)$$

This allows us to show that

$$\left(\frac{d\mathbf{v}^{(c)}}{dt} \right)_{\perp} - w_c \mathbf{v}^{(c)} \times \mathbf{b} = \frac{dv_{\perp 1}^{(c)}}{dt} \mathbf{e}_{\perp 1} + \frac{dv_{\perp 2}^{(c)}}{dt} \mathbf{e}_{\perp 2} - w_c v_{\perp 2}^{(c)} \mathbf{e}_{\perp 1} + w_c v_{\perp 1}^{(c)} \mathbf{e}_{\perp 2} = 0. \quad (5.107)$$

We now plug in $\mathbf{v}_{\perp} = \mathbf{v}^{(c)} + \mathbf{v}^{(g)}$ in eq. (5.103) to obtain

$$-w_c \mathbf{v}^{(g)} \times \mathbf{b} = -v_{\parallel} \mathbf{v}_{\perp} \cdot \nabla \mathbf{b} - v_{\parallel}^2 \mathbf{b} \cdot \nabla \mathbf{b}. \quad (5.108)$$

As explained in Freidberg, the term $v_{\parallel} \mathbf{v}_{\perp} \cdot \nabla \mathbf{b}$ leads to small modifications of the gyro motion, but does not lead to a drift of the particles, and thus is ignored. Taking the cross product of eq. (5.108) with \mathbf{b} finally gives the curvature drift

$$\mathbf{v}_{\kappa}^{(g)} = \pm \frac{v_{\parallel}^2}{w_c} \frac{(\mathbf{b} \cdot \nabla \mathbf{b}) \times \mathbf{B}}{B}. \quad (5.109)$$

We now show that, if we assume $\nabla \times \mathbf{B} = 0$, the grad-B drift

$$\mathbf{v}_{\nabla B}^{(g)} = \mp \frac{v_{\perp}^2}{2w_c} \frac{\mathbf{B} \times \nabla B}{B^2} \quad (5.110)$$

can be written in the same form as the curvature drift. We begin by showing that

$$\mathbf{B} \times \nabla B = \mathbf{B} \times \nabla (\mathbf{B} \cdot \mathbf{B})^{1/2} = \mathbf{B} \times \frac{1}{2B} \nabla (\mathbf{B} \cdot \mathbf{B}). \quad (5.111)$$

We now use the vector identity $\nabla (\mathbf{B} \cdot \mathbf{B}) = 2\mathbf{B} \times (\nabla \times \mathbf{B}) + 2\mathbf{B} \cdot \nabla \mathbf{B}$, and assume magnetic curl of zero to obtain

$$\begin{aligned} \mathbf{B} \times \nabla B &= \mathbf{B} \times \frac{1}{B} \mathbf{B} \cdot \nabla \mathbf{B} \\ &= \mathbf{B} \times \mathbf{b} \cdot \nabla (B\mathbf{b}) \\ &= \mathbf{B} \times (\mathbf{b} \cdot \nabla B) \mathbf{b} + \mathbf{B} \times B (\mathbf{b} \cdot \nabla \mathbf{b}) \\ &= -B (\mathbf{b} \cdot \nabla \mathbf{b}) \times \mathbf{B}. \end{aligned} \quad (5.112)$$

Thus, the grad-B drift can be written as

$$\mathbf{v}_{\nabla B}^{(g)} = \pm \frac{v_{\perp}^2}{2w_c} \frac{(\mathbf{b} \cdot \nabla \mathbf{b}) \times \mathbf{B}}{B}. \quad (5.113)$$

5.3 Non-uniform E field

5.4 Time-varying E field

Consider the scenario used in section 5.1.3, but with a time varying electric field. The equations of motion are

$$\frac{dv_x}{dt} = \frac{eE_x(t)}{m} + \frac{eB}{m}v_y \quad v_x(0) = v_\perp \cos(\phi) + \frac{E_y(t)}{B} + \frac{m}{eB^2} \frac{dE_x(t)}{dt}, \quad (5.114a)$$

$$\frac{dv_y}{dt} = \frac{eE_y(t)}{m} - \frac{eB}{m}v_x \quad v_y(0) = v_\perp \sin(\phi) - \frac{E_x(t)}{B} + \frac{m}{eB^2} \frac{dE_y(t)}{dt}, \quad (5.114b)$$

$$\frac{dv_z}{dt} = \frac{eE_{||}(t)}{m} \quad v_z(0) = v_{||}, \quad (5.114c)$$

where again we chose the initial conditions simply to be consistent with the solution that we'll derive. The parallel velocity is independent of the perpendicular velocities, and we won't worry about it for now. To solve for the perpendicular velocities, we again assume the general solution is

$$\begin{aligned} v_x &= v_x^{(c)} + v_x^{(g)} \\ v_y &= v_y^{(c)} + v_y^{(g)} \end{aligned} \quad (5.115)$$

but now do not assume $v_x^{(g)}$ and $v_y^{(g)}$ are time independent. We expand $v_i^{(g)}$ as

$$v_i^{(g)} = v_i^{(g,1)} + v_i^{(g,2)} + \dots, \quad (5.116)$$

where $v_i^{(g,\alpha)} \sim \epsilon v_i^{(g,\alpha-1)}$, and the small parameter ϵ follows from assuming

$$\frac{1}{v_i^{(g,\alpha)}} \frac{dv_i^{(g,\alpha)}}{dt} \sim \epsilon \omega_c. \quad (5.117)$$

That is, the time scale associated with the rate of change of all of the $v_i^{(g,\alpha)}$ components is much larger than the time scale of the gyro-motion. In other words, we assume particles gyrate faster than how quickly their drift velocity changes. Using eq. (5.115) in eq. (5.114) leads to

$$\begin{aligned} \frac{dv_x^{(g,1)}}{dt} + \frac{dv_x^{(g,2)}}{dt} &= \frac{eE_x(t)}{m} + \frac{eB}{m}v_y^{(g,1)} + \frac{eB}{m}v_y^{(g,2)} \\ \frac{dv_y^{(g,1)}}{dt} + \frac{dv_y^{(g,2)}}{dt} &= \frac{eE_y(t)}{m} - \frac{eB}{m}v_x^{(g,1)} - \frac{eB}{m}v_x^{(g,2)}. \end{aligned} \quad (5.118)$$

Collecting lowest order terms

$$\begin{aligned} 0 &= \frac{eE_x(t)}{m} + \frac{eB}{m}v_y^{(g,1)} \\ 0 &= \frac{eE_y(t)}{m} - \frac{eB}{m}v_x^{(g,1)}, \end{aligned} \quad (5.119)$$

and thus $v_x^{(g,1)} = E_y(t)/B$ and $v_y^{(g,1)} = -E_x(t)/B$, which in vector notation is

$$\mathbf{v}^{(g,1)} = \frac{\mathbf{E}(t) \times \mathbf{B}}{B^2}. \quad (5.120)$$

Collecting first order terms

$$\begin{aligned}\frac{dv_x^{(g,1)}}{dt} &= \frac{eB}{m}v_y^{(g,2)} \\ \frac{dv_y^{(g,1)}}{dt} &= -\frac{eB}{m}v_x^{(g,2)},\end{aligned}\tag{5.121}$$

and thus $v_x^{(g,2)} = (m/eB^2)dE_x(t)/dt$ and $v_y^{(g,2)} = (m/eB^2)dE_y(t)/dt$, which in vector notation is

$$\mathbf{v}^{(g,2)} = \mp \frac{1}{w_c B} \frac{d\mathbf{E}_\perp}{dt}.\tag{5.122}$$

We note that, by looking at the solutions for $v_x^{(g,1)}$ and $v_y^{(g,1)}$, the assumption in eq. (5.117) is equivalent to stating that the electric field changes slowly.

5.5 Time-varying B field

Let's assume the magnetic field points in the z direction again. Using Faraday's law, we have

$$\left(\frac{\partial E_z}{\partial q_y} - \frac{\partial E_y}{\partial q_z}\right)\mathbf{e}_x - \left(\frac{\partial E_z}{\partial q_x} - \frac{\partial E_x}{\partial q_z}\right)\mathbf{e}_y + \left(\frac{\partial E_y}{\partial q_x} - \frac{\partial E_x}{\partial q_y}\right)\mathbf{e}_z = -\frac{\partial B}{\partial t}\mathbf{e}_z.\tag{5.123}$$

To satisfy the above, we set $E_z = 0$, and $E_x = E_x(q_x, q_y, t)$, $E_y = E_y(q_x, q_y, t)$. That is, a time varying magnetic field requires a time and spatially varying electric field.

We will further simplify our analysis by having $E_x = 0$ and $E_y = E_y(q_x, t)$. Thus, the equations of motion are

$$\frac{dv_x}{dt} = \frac{eB(t)}{m}v_y,\tag{5.124}$$

$$\frac{dv_y}{dt} = \frac{eE_y(x, t)}{m} - \frac{eB(t)}{m}v_x,\tag{5.125}$$

with v_z constant. As done in previous sections, the velocities and positions are decomposed as follows

$$v_x = v_x^{(c)} + v_x^{(g)},\tag{5.126}$$

$$v_y = v_y^{(c)} + v_y^{(g)},\tag{5.127}$$

$$x = x^{(c)} + x^{(g)},\tag{5.128}$$

$$y = y^{(c)} + y^{(g)}.\tag{5.129}$$

The electric field is then linearized using a Taylor-series expansion about the guiding center,

$$\frac{dv_x}{dt} = \frac{eB(t)}{m}v_y\tag{5.130}$$

$$\frac{dv_y}{dt} = \frac{e}{m} \left[E_y \left(x^{(g)}, t \right) + \left. \frac{\partial E_y}{\partial q_x} \right|_{x^{(g)}} x^{(c)} \right] - \frac{eB(t)}{m}v_x,\tag{5.131}$$

We assume positive ions for simplicity and re-write the above as

$$\frac{dv_x}{dt} = w_c v_y\tag{5.132}$$

$$\frac{dv_y}{dt} = \frac{w_c}{B(t)} \left[E_y \left(x^{(g)}, t \right) + \left. \frac{\partial E_y}{\partial q_x} \right|_{x^{(g)}} x^{(c)} \right] - w_c v_x.\tag{5.133}$$

where $w_c = w_c(t)$. We introduce new variables

$$\begin{aligned}\hat{v}_x &= \hat{v}_x(\tau) & \hat{v}_y &= \hat{v}_y(\tau) & \hat{x}^{(c)} &= \hat{x}^{(c)}(\tau) & \hat{x}^{(g)} &= \hat{x}^{(g)}(\tau) \\ \hat{E}_y &= \hat{E}_y(q_x, \tau) & \hat{B} &= \hat{B}(\tau)\end{aligned}\quad (5.134)$$

such that

$$\begin{aligned}v_x(t) &= \hat{v}_x(h(t)) & v_y(t) &= \hat{v}_y(h(t)) & x^{(c)}(t) &= \hat{x}^{(c)}(h(t)) & x^{(g)}(t) &= \hat{x}^{(g)}(h(t)) \\ E_y(q_x, t) &= \hat{E}_y(q_x, h(t)) & B(t) &= \hat{B}(h(t)).\end{aligned}\quad (5.135)$$

For the above

$$h(t) = \int_0^t w_c(t') dt'. \quad (5.136)$$

The equations of motion then become

$$\begin{aligned}\frac{d\hat{v}_x}{d\tau} &= \hat{v}_y \\ \frac{d\hat{v}_y}{d\tau} &= \frac{1}{\hat{B}(\tau)} \left[\hat{E}_y(\hat{x}^{(g)}, \tau) + \left. \frac{\partial \hat{E}_y}{\partial q_x} \right|_{\hat{x}^{(g)}} \hat{x}^{(c)} \right] - \hat{v}_x.\end{aligned}\quad (5.137)$$

For the gyro-motion quantities, we'll assume they are of the following form,

$$\hat{v}_x^{(c)} = \hat{v}_\perp \cos(\tau + \hat{\epsilon}), \quad (5.138)$$

$$\hat{v}_y^{(c)} = -\hat{v}_\perp \sin(\tau + \hat{\epsilon}), \quad (5.139)$$

$$\hat{x}^{(c)} = \hat{r}_L \sin(\tau + \hat{\epsilon}), \quad (5.140)$$

$$\hat{y}^{(c)} = \hat{r}_L \cos(\tau + \hat{\epsilon}), \quad (5.141)$$

where $\hat{v}_\perp = \hat{v}_\perp(\tau)$, $\hat{\epsilon} = \hat{\epsilon}(\tau)$, $\hat{w}_c = \hat{w}_c(\tau) = e\hat{B}(\tau)/m$, and $\hat{r}_L = \hat{v}_\perp/\hat{w}_c$ are now time-dependent functions. Note that for this specific case, the τ -derivatives of the positions above are not equal to their respective velocities, and instead the relationship holds only to leading order. For the guiding center velocities, we'll guess a given form and then check if it satisfies the governing equations. Thus, we guess

$$\begin{aligned}\hat{v}_x^{(g)} &= \frac{\hat{E}_y(\hat{x}^{(g)}, \tau)}{\hat{B}(\tau)} \\ \hat{v}_y^{(g)} &= \frac{d}{d\tau} \left(\frac{\hat{E}_y(\hat{x}^{(g)}, \tau)}{\hat{B}(\tau)} \right).\end{aligned}\quad (5.142)$$

Plugging in all of these expressions in the evolution equations given by eq. (5.137), and using a bit of algebra, leads to

$$\frac{d \ln \hat{\mu}}{d\tau} = \frac{d \ln \hat{B}(\tau)}{d\tau} \cos[2(\tau + \hat{\epsilon})], \quad (5.143)$$

where $\hat{\mu} = \hat{\mu}(\tau)$ is given by

$$\hat{\mu} = \frac{m \hat{v}_\perp^2}{2 \hat{B}(\tau)}. \quad (5.144)$$

Integrating over one gyro-period, i.e. from τ_1 to τ_2 such that $[\tau_2 + \epsilon(\tau_2)] - [\tau_1 + \epsilon(\tau_1)] = 2\pi$, gives

$$\ln \hat{\mu}(\tau_2) - \ln \hat{\mu}(\tau_1) = \ln[\hat{B}(\tau)] \cos[2(\tau + \hat{\epsilon})] \Big|_{\tau_1}^{\tau_2} + \int_{\tau_1}^{\tau_2} 2 \ln[\hat{B}(\tau)] \sin[2(\tau + \hat{\epsilon})] d\tau. \quad (5.145)$$

Assuming $\hat{B}(\tau)$ doesn't change significantly from τ_1 to τ_2 , then we have $\hat{\mu}(\tau_2) = \hat{\mu}(\tau_1)$, that is, $\hat{\mu}$ is constant over one gyro-period. One can also define

$$\mu = \frac{mv_{\perp}^2}{2B(t)} \quad (5.146)$$

where $\mu = \mu(t)$ and $v_{\perp} = v_{\perp}(t)$. Given that $v_{\perp} = \hat{v}_{\perp}(h(t))$, we have $\mu = \hat{\mu}(h(t))$. Thus, $\hat{\mu}(\tau_2) = \hat{\mu}(\tau_1)$ translates to $\mu(t_2) = \mu(t_1)$, where $t_2 = h^{-1}(\tau_2)$ and $t_1 = h^{-1}(\tau_1)$.

As shown in the analysis above, for a time dependent magnetic field a drift of the following form is introduced

$$\hat{v}_y^{(g)} = \frac{d}{d\tau} \left(\frac{\hat{E}_y(\hat{x}^{(g)}, \tau)}{\hat{B}(\tau)} \right). \quad (5.147)$$

Converting back to time t

$$v_y^{(g)} = \frac{1}{w_c} \frac{d}{dt} \left(\frac{E_y(x^{(g)}, t)}{B(t)} \right). \quad (5.148)$$

For the more general case where $E_x = E_x(q_x, q_y, t)$ and $E_y = E_y(q_x, q_y, t)$ then

$$\mathbf{v}_p^{(g)} = \mp \frac{1}{w_c} \frac{d}{dt} \left(\frac{\mathbf{E}_{\perp}}{B} \right), \quad (5.149)$$

where top sign is for electrons and bottom sign is for ions, and it is assumed that the electric field is evaluated at the guiding center. For an even more general case where the magnetic field does not necessarily point in one direction,

$$\mathbf{v}_p^{(g)} = \mp \frac{1}{w_c} \mathbf{b} \times \frac{d\mathbf{v}_E^{(g)}}{dt}. \quad (5.150)$$

Chapter 6

Magnetohydrodynamics

6.1 Single-fluid equations

The starting point are the single-fluid equations shown in section 2.2.5.

6.1.1 Mass

Summing the species mass density over all ions gives

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = 0. \quad (6.1)$$

We then note that

$$\nabla \cdot \mathbf{u} = -\frac{1}{\rho} \frac{\partial \rho}{\partial t} - \frac{1}{\rho} \nabla \rho \cdot \mathbf{u} = -\frac{\partial \ln \rho}{\partial t} - \nabla \ln \rho \cdot \mathbf{u},$$

and thus

$$\gamma \nabla \cdot \mathbf{u} = -\frac{1}{\rho^\gamma} \frac{\partial \rho^\gamma}{\partial t} - \frac{1}{\rho^\gamma} \nabla \rho^\gamma \cdot \mathbf{u}. \quad (6.2)$$

6.1.2 Momentum

Using the expressions for $\boldsymbol{\sigma}_i$ and $\boldsymbol{\sigma}_e$, the momentum equation becomes

$$\frac{\partial \rho \mathbf{u}}{\partial t} + \nabla \cdot (\rho \mathbf{u} \mathbf{u}) - \mathbf{J} \times \mathbf{B} = -\nabla (p_i + p_e) + \nabla \cdot (\mathbf{t}_i + \mathbf{t}_e),$$

If we define the total pressure p as $p = p_i + p_e$ we get

$$\frac{\partial \rho \mathbf{u}}{\partial t} + \nabla \cdot (\rho \mathbf{u} \mathbf{u}) - \mathbf{J} \times \mathbf{B} = -\nabla p + \nabla \cdot (\mathbf{t}_i + \mathbf{t}_e),$$

6.1.3 Ion internal energy

The second term on the left-hand side of the ion internal energy equation can be expanded to obtain

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_i \right) + \mathbf{u} \cdot \nabla \left(\frac{3}{2} p_i \right) + \frac{3}{2} p_i \nabla \cdot \mathbf{u} = \boldsymbol{\sigma}_i : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_i + Q_i,$$

Expanding the stress tensor we get

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_i \right) + \mathbf{u} \cdot \nabla \left(\frac{3}{2} p_i \right) + \frac{5}{2} p_i \nabla \cdot \mathbf{u} = \mathbf{t}_i : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_i + Q_i,$$

Since for a plasma with three translational degrees of freedom $\gamma = 5/3$, we re-write the above as

$$\frac{1}{\gamma - 1} \left(\frac{\partial p_i}{\partial t} + \mathbf{u} \cdot \nabla p_i + \gamma p_i \nabla \cdot \mathbf{u} \right) = \mathbf{t}_i : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_i + Q_i,$$

or

$$\frac{\partial p_i}{\partial t} + \mathbf{u} \cdot \nabla p_i + \gamma p_i \nabla \cdot \mathbf{u} = (\gamma - 1) (\mathbf{t}_i : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_i + Q_i).$$

Using eq. (6.2) we can show that

$$\begin{aligned} \frac{\partial p_i}{\partial t} + \mathbf{u} \cdot \nabla p_i + \gamma p_i \nabla \cdot \mathbf{u} &= \frac{\partial p_i}{\partial t} - p_i \frac{1}{\rho^\gamma} \frac{\partial \rho^\gamma}{\partial t} + \mathbf{u} \cdot \nabla p_i - p_i \frac{1}{\rho^\gamma} \nabla \rho^\gamma \cdot \mathbf{u} \\ &= \rho^\gamma \left[\frac{\partial}{\partial t} \left(\frac{p_i}{\rho^\gamma} \right) + \mathbf{u} \cdot \nabla \left(\frac{p_i}{\rho^\gamma} \right) \right]. \end{aligned}$$

Thus, the ion internal energy equation can finally be written as

$$\frac{\partial}{\partial t} \left(\frac{p_i}{\rho^\gamma} \right) + \mathbf{u} \cdot \nabla \left(\frac{p_i}{\rho^\gamma} \right) = \frac{\gamma - 1}{\rho^\gamma} (\mathbf{t}_i : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_i + Q_i).$$

6.1.4 Electron internal energy

Using the equation for current we obtain

$$\mathbf{J} = en_e (\mathbf{u} - \mathbf{u}_e) = -en_e (\mathbf{u}_e - \mathbf{u}) = -en_e \frac{\mathbf{j}_e}{\rho Y_e},$$

or

$$\frac{\mathbf{j}_e}{\rho Y_e} = -\frac{\mathbf{J}}{en_e}. \quad (6.3)$$

We re-write the last two terms of the electron energy equation as

$$\begin{aligned} -\nabla \cdot \left[\left(\frac{3}{2} p_e \mathbf{I} - \boldsymbol{\sigma}_e \right) \cdot \frac{\mathbf{j}_e}{\rho Y_e} \right] - \frac{\mathbf{j}_e}{\rho Y_e} \cdot \nabla \boldsymbol{\sigma}_e &= -\nabla \cdot \left(\frac{3}{2} \frac{p_e}{\rho Y_e} \mathbf{j}_e \right) + \nabla \cdot \left(\frac{\boldsymbol{\sigma}_e \cdot \mathbf{j}_e}{\rho Y_e} \right) - \frac{\mathbf{j}_e}{\rho Y_e} \cdot \nabla \boldsymbol{\sigma}_e \\ &= -\nabla \cdot \left(\frac{3}{2} \frac{p_e}{\rho Y_e} \mathbf{j}_e \right) + \boldsymbol{\sigma}_e : \nabla \left(\frac{1}{\rho Y_e} \mathbf{j}_e \right). \end{aligned}$$

Using the above and eq. (6.3) we can write the electron internal energy equation as

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_e \right) + \nabla \cdot \left(\frac{3}{2} p_e \mathbf{u} \right) = \boldsymbol{\sigma}_e : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_e + Q_e + \nabla \cdot \left(\frac{3}{2} p_e \frac{\mathbf{J}}{en_e} \right) - \boldsymbol{\sigma}_e : \nabla \left(\frac{\mathbf{J}}{en_e} \right).$$

The second term on the left-hand side of the electron internal energy equation is expanded to obtain

$$\frac{\partial}{\partial t} \left(\frac{3}{2} p_e \right) + \mathbf{u} \cdot \nabla \left(\frac{3}{2} p_e \right) + \frac{3}{2} p_e \nabla \cdot \mathbf{u} = \boldsymbol{\sigma}_e : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_e + Q_e + \nabla \cdot \left(\frac{3}{2} p_e \frac{\mathbf{J}}{en_e} \right) - \boldsymbol{\sigma}_e : \nabla \left(\frac{\mathbf{J}}{en_e} \right).$$

And expanding the stress tensor we get

$$\begin{aligned} \frac{\partial}{\partial t} \left(\frac{3}{2} p_e \right) + \mathbf{u} \cdot \nabla \left(\frac{3}{2} p_e \right) + \frac{5}{2} p_e \nabla \cdot \mathbf{u} &= \\ \mathbf{t}_e : \nabla \left(\mathbf{u} - \frac{\mathbf{J}}{en_e} \right) - \nabla \cdot \mathbf{q}_e + Q_e + \nabla \cdot \left(\frac{3}{2} p_e \frac{\mathbf{J}}{en_e} \right) + p_e \nabla \cdot \left(\frac{\mathbf{J}}{en_e} \right). \end{aligned}$$

The last two terms above can be re-written as

$$\begin{aligned}
\nabla \cdot \left(\frac{3}{2} p_e \frac{\mathbf{J}}{en_e} \right) + p_e \nabla \cdot \left(\frac{\mathbf{J}}{en_e} \right) &= \frac{\mathbf{J}}{en_e} \cdot \nabla \left(\frac{3}{2} p_e \right) + \frac{3}{2} p_e \nabla \cdot \left(\frac{\mathbf{J}}{en_e} \right) + p_e \nabla \cdot \left(\frac{\mathbf{J}}{en_e} \right) \\
&= \frac{\mathbf{J}}{en_e} \cdot \nabla \left(\frac{3}{2} p_e \right) + \frac{5}{2} p_e \nabla \cdot \left(\frac{\mathbf{J}}{en_e} \right) \\
&= \frac{\mathbf{J}}{en_e} \cdot \nabla \left(\frac{3}{2} p_e \right) + \frac{5}{2} p_e \left(\frac{\nabla \cdot \mathbf{J}}{en_e} - \frac{\mathbf{J}}{(en_e)^2} \cdot \nabla(en_e) \right) \\
&= \frac{\mathbf{J}}{en_e} \cdot \nabla \left(\frac{3}{2} p_e \right) - \frac{5}{2} p_e \frac{\mathbf{J}}{(en_e)^2} \cdot \nabla(en_e) \\
&= \frac{\mathbf{J}}{en_e} \cdot \left[\nabla \left(\frac{3}{2} p_e \right) - \frac{5}{2} p_e \frac{1}{n_e} \nabla n_e \right].
\end{aligned}$$

Since for a plasma with three translational degrees of freedom we have $\gamma = 5/3$, we re-write the electron internal energy equation as

$$\begin{aligned}
\frac{1}{\gamma - 1} \left(\frac{\partial p_e}{\partial t} + \mathbf{u} \cdot \nabla p_e + \gamma p_e \nabla \cdot \mathbf{u} \right) &= \\
\mathbf{t}_e : \nabla \left(\mathbf{u} - \frac{\mathbf{J}}{en_e} \right) - \nabla \cdot \mathbf{q}_e + Q_e + \frac{1}{\gamma - 1} \frac{\mathbf{J}}{en_e} \cdot \left[\nabla p_e - \gamma p_e \frac{1}{n_e} \nabla n_e \right],
\end{aligned}$$

or

$$\frac{\partial p_e}{\partial t} + \mathbf{u} \cdot \nabla p_e + \gamma p_e \nabla \cdot \mathbf{u} = (\gamma - 1) \left[\mathbf{t}_e : \nabla \left(\mathbf{u} - \frac{\mathbf{J}}{en_e} \right) - \nabla \cdot \mathbf{q}_e + Q_e \right] + \frac{\mathbf{J}}{en_e} \cdot \left[\nabla p_e - \gamma p_e \frac{1}{n_e} \nabla n_e \right],$$

The last term above can be written as

$$\begin{aligned}
\frac{\mathbf{J}}{en_e} \cdot \left[\nabla p_e - \gamma p_e \frac{1}{n_e} \nabla n_e \right] &= \frac{\mathbf{J}}{en_e} \cdot \{ \nabla p_e - p_e \nabla [\gamma \ln(n_e)] \} \\
&= \frac{\mathbf{J}}{en_e} \cdot [\nabla p_e - p_e \nabla \ln(n_e^\gamma)] \\
&= \frac{\mathbf{J}}{en_e} \cdot \left[\nabla p_e - \frac{p_e}{n_e^\gamma} \nabla n_e^\gamma \right] \\
&= n_e^\gamma \frac{\mathbf{J}}{en_e} \cdot \nabla \left(\frac{p_e}{n_e^\gamma} \right).
\end{aligned}$$

Also, using eq. (6.2) we can show that

$$\begin{aligned}
\frac{\partial p_e}{\partial t} + \mathbf{u} \cdot \nabla p_e + \gamma p_e \nabla \cdot \mathbf{u} &= \frac{\partial p_e}{\partial t} - p_e \frac{1}{\rho^\gamma} \frac{\partial \rho^\gamma}{\partial t} + \mathbf{u} \cdot \nabla p_e - p_e \frac{1}{\rho^\gamma} \nabla \rho^\gamma \cdot \mathbf{u} \\
&= \rho^\gamma \left[\frac{\partial}{\partial t} \left(\frac{p_e}{\rho^\gamma} \right) + \mathbf{u} \cdot \nabla \left(\frac{p_e}{\rho^\gamma} \right) \right].
\end{aligned}$$

Thus, the electron internal energy equation can finally be written as

$$\frac{\partial}{\partial t} \left(\frac{p_e}{\rho^\gamma} \right) + \mathbf{u} \cdot \nabla \left(\frac{p_e}{\rho^\gamma} \right) = \frac{\gamma - 1}{\rho^\gamma} \left[\mathbf{t}_e : \nabla \left(\mathbf{u} - \frac{\mathbf{J}}{en_e} \right) - \nabla \cdot \mathbf{q}_e + Q_e \right] + \left(\frac{n_e}{\rho} \right)^\gamma \frac{\mathbf{J}}{en_e} \cdot \nabla \left(\frac{p_e}{n_e^\gamma} \right).$$

In the specific case where there is only one ion species, then quasi-neutrality gives $n_e = n_i = n$. Additionally, eq. (2.80) gives $\rho = M_i n_i$. Thus, the last term in the electron internal energy equation can be written as

$$\left(\frac{n_e}{\rho} \right)^\gamma \frac{\mathbf{J}}{en_e} \cdot \nabla \left(\frac{p_e}{n_e^\gamma} \right) = \left(\frac{n_i}{\rho} \right)^\gamma \frac{\mathbf{J}}{en} \cdot \nabla \left(\frac{p_e}{n_i^\gamma} \right) = \frac{\mathbf{J}}{en} \cdot \nabla \left(\frac{p_e}{\rho^\gamma} \right) \quad (6.4)$$

6.1.5 Maxwell's equations

We assume that the electromagnetic-wave velocity and the ion and electron thermal velocities are much smaller than the speed of light, that is, $w/k \ll c$ and $V_{Ti}, V_{Te} \ll c$. This allows us to neglect Maxwell's correction in Ampere's law, so as to obtain

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J}. \quad (6.5)$$

6.1.6 Summary

Combining all of the results above, we now have

$$\frac{\partial \rho Y_{i,s}}{\partial t} + \nabla \cdot (\rho Y_{i,s} \mathbf{u}) = 0. \quad (6.6)$$

$$\nabla \cdot \mathbf{J} = 0. \quad (6.7)$$

$$\rho \left(\frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \cdot \mathbf{u} \right) - \mathbf{J} \times \mathbf{B} + \nabla p = \nabla \cdot (\mathbf{t}_i + \mathbf{t}_e), \quad (6.8)$$

$$\mathbf{E} + \mathbf{u} \times \mathbf{B} = \frac{1}{en_e} (\mathbf{J} \times \mathbf{B} - \nabla p_e + \nabla \cdot \mathbf{t}_e + \mathbf{R}_e). \quad (6.9)$$

$$\frac{\partial}{\partial t} \left(\frac{p_i}{\rho^\gamma} \right) + \mathbf{u} \cdot \nabla \left(\frac{p_i}{\rho^\gamma} \right) = \frac{\gamma - 1}{\rho^\gamma} (\mathbf{t}_i : \nabla \mathbf{u} - \nabla \cdot \mathbf{q}_i + Q_i). \quad (6.10)$$

$$\frac{\partial}{\partial t} \left(\frac{p_e}{\rho^\gamma} \right) + \mathbf{u} \cdot \nabla \left(\frac{p_e}{\rho^\gamma} \right) = \frac{\gamma - 1}{\rho^\gamma} \left[\mathbf{t}_e : \nabla \left(\mathbf{u} - \frac{\mathbf{J}}{en_e} \right) - \nabla \cdot \mathbf{q}_e + Q_e \right] + \left(\frac{n_e}{\rho} \right)^\gamma \frac{\mathbf{J}}{en_e} \cdot \nabla \left(\frac{p_e}{n_e^\gamma} \right). \quad (6.11)$$

$$\nabla \cdot \mathbf{E} = \frac{\rho}{\epsilon_0}, \quad (6.12)$$

$$\nabla \cdot \mathbf{B} = 0, \quad (6.13)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad (6.14)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J}, \quad (6.15)$$

$$\mathbf{J} = en_e (\mathbf{u} - \mathbf{u}_e), \quad (6.16)$$

$$\rho_q = 0, \quad (6.17)$$

$$p_i = \sum_s^N n_{i,s} k_B T_i, \quad (6.18)$$

$$p_e = n_e k_B T_e. \quad (6.19)$$

6.2 Resistive MHD

The electron collision term is modeled as

$$\mathbf{R}_e = m_e n_e \nu_{ei} (\mathbf{u}_i - \mathbf{u}_e), \quad (6.20)$$

where ν_{ei} is the momentum exchange collision frequency. Using the expression for current in eq. (6.16) we get

$$\mathbf{R}_e = \frac{m_e \nu_{ei}}{e} \mathbf{J}. \quad (6.21)$$

Neglecting all terms on the right-hand side of eq. (6.9) except for the electron collision term, we have

$$\mathbf{E} + \mathbf{u} \times \mathbf{B} = \frac{1}{en_e} \mathbf{R}_e. \quad (6.22)$$

Using eq. (6.21) in the above, we have

$$\mathbf{E} + \mathbf{u} \times \mathbf{B} = \frac{m_e \nu_{ei}}{e^2 n_e} \mathbf{J}, \quad (6.23)$$

which we re-write as

$$\mathbf{E} + \mathbf{u} \times \mathbf{B} = \eta \mathbf{J}, \quad (6.24)$$

where

$$\eta = \frac{m_e \nu_{ei}}{e^2 n_e} \quad (6.25)$$

is the resistivity.

6.3 Ideal MHD

To derive the ideal MHD equations we neglect the right-hand sides of eqs. (6.8) to (6.11) and assume a single ion species plus a single electron species. Summing the two pressure equations shown in section 6.1.6, the resulting equations would be

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = 0, \quad (6.26)$$

$$\rho \left(\frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \mathbf{u} \right) = -\nabla p + \mathbf{J} \times \mathbf{B} \quad (6.27)$$

$$\mathbf{E} + \mathbf{u} \times \mathbf{B} = 0, \quad (6.28)$$

$$\frac{\partial}{\partial t} \left(\frac{p}{\rho^\gamma} \right) + \mathbf{u} \cdot \nabla \left(\frac{p}{\rho^\gamma} \right) = 0, \quad (6.29)$$

$$\nabla \cdot \mathbf{E} = 0. \quad (6.30)$$

$$\nabla \cdot \mathbf{B} = 0. \quad (6.31)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad (6.32)$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J}, \quad (6.33)$$

Given the vector identity

$$\frac{1}{2} \nabla (B^2) = \mathbf{B} \times (\nabla \times \mathbf{B}) + (\mathbf{B} \cdot \nabla) \mathbf{B}, \quad (6.34)$$

we can use Ampere's law to re-write the $\mathbf{J} \times \mathbf{B}$ term in the velocity equation as

$$\mathbf{J} \times \mathbf{B} = \frac{1}{\mu_0} (\nabla \times \mathbf{B}) \times \mathbf{B} = \frac{1}{\mu_0} \left[(\mathbf{B} \cdot \nabla) \mathbf{B} - \frac{1}{2} \nabla (B^2) \right]. \quad (6.35)$$

Similarly, given the vector identity

$$\nabla \times (\mathbf{B} \times \mathbf{u}) = (\mathbf{u} \cdot \nabla) \mathbf{B} - (\mathbf{B} \cdot \nabla) \mathbf{u} + \mathbf{B} (\nabla \cdot \mathbf{u}) - \mathbf{u} (\nabla \cdot \mathbf{B}), \quad (6.36)$$

we can use Ohm's law to re-write the $\nabla \times \mathbf{E}$ term in Faraday's law as

$$\nabla \times \mathbf{E} = \nabla \times (-\mathbf{u} \times \mathbf{B}) = (\mathbf{u} \cdot \nabla) \mathbf{B} - (\mathbf{B} \cdot \nabla) \mathbf{u} + \mathbf{B}(\nabla \cdot \mathbf{u}). \quad (6.37)$$

Thus, the ideal MHD equations can be summarized as follows

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = 0, \quad (6.38)$$

$$\nabla \cdot \mathbf{B} = 0. \quad (6.39)$$

$$\rho \left(\frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \mathbf{u} \right) = -\nabla p + \frac{1}{\mu_0} \left[(\mathbf{B} \cdot \nabla) \mathbf{B} - \frac{1}{2} \nabla (B^2) \right] \quad (6.40)$$

$$\frac{\partial \mathbf{B}}{\partial t} + (\mathbf{u} \cdot \nabla) \mathbf{B} = (\mathbf{B} \cdot \nabla) \mathbf{u} - \mathbf{B}(\nabla \cdot \mathbf{u}) \quad (6.41)$$

$$\frac{\partial}{\partial t} \left(\frac{p}{\rho^\gamma} \right) + \mathbf{u} \cdot \nabla \left(\frac{p}{\rho^\gamma} \right) = 0, \quad (6.42)$$

If we assume incompressibility, then the above simplifies to

$$\nabla \cdot \mathbf{u} = 0, \quad (6.43)$$

$$\nabla \cdot \mathbf{B} = 0. \quad (6.44)$$

$$\rho \left(\frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \mathbf{u} \right) = -\nabla p + \frac{1}{\mu_0} \left[(\mathbf{B} \cdot \nabla) \mathbf{B} - \frac{1}{2} \nabla (B^2) \right] \quad (6.45)$$

$$\frac{\partial \mathbf{B}}{\partial t} + (\mathbf{u} \cdot \nabla) \mathbf{B} = (\mathbf{B} \cdot \nabla) \mathbf{u} \quad (6.46)$$

Part II

High energy laser–driven plasmas

Chapter 7

Some notes on lasers

Consider a wave that depends on time t and single spatial dimension x , which is orthogonal to the direction of propagation.

A wave is spatially coherent at a given time t , position x , and separation distance L if the phase difference between the points x and $x + L$ at time t is the same as that at a later time $t + dt$. You can keep on picking larger and larger values of L until this is not the case, this L would be the spatial coherence length $L_c = L_c(t, x)$.

A wave is temporally coherent at a given time t , position x , and separation time τ if the phase difference between times t and $t + \tau$ at position x is the same as that between times $t + dt$ and $t + dt + \tau$. You can keep on picking larger and larger values of τ until this is no longer the case, this τ would be the temporal coherence length $\tau_c = \tau_c(t, x)$.

A depiction of temporal coherence is provided in fig. 7.1, which shows a light pulse as a function of time. An arbitrary time t_* is chosen along the light wave, and the wave's phase at that time is θ_1 . At the time $t_* + \tau$ the wave has a different phase θ_2 , and thus the phase difference between times t_* and $t_* + \tau$ is $\theta_2 - \theta_1$. This is depicted by the orange dots. The green dots are used to highlight the phase difference between times $t_* + dt$ and $t_* + dt + \tau$. In this case, the phases are respectively $\theta_1 + d\theta$ and $\theta_2 + d\theta$, and hence the phase difference is still maintained at $\theta_2 - \theta_1$.

Rather than picking the time t_* to be at an arbitrary location along the wave, in fig. 7.2a we choose t_* to be at the beginning of the wave, and also choose τ to be just a bit smaller than the entire duration of the pulse. For this case, the phase difference between t_* and $t_* + \tau$ is $d\theta$, which is equal to the phase difference between $t_* + dt$ and $t_* + dt + \tau$. On the other hand, in fig. 7.2b we have chosen τ to be just a bit larger so as to be equal to the duration of the wave. For this case the phase difference between t_* and $t_* + \tau$ is zero, which is not the same as the phase difference between $t_* + dt$ and $t_* + dt + \tau$, namely $d\theta$. Thus, the maximum value of τ that maintains a constant phase difference has been reached, and therefore by definition this value is referred to as the temporal coherence length τ_c at time t_* (other locations of t_* , such as that in fig. 7.1, have a different τ_c).



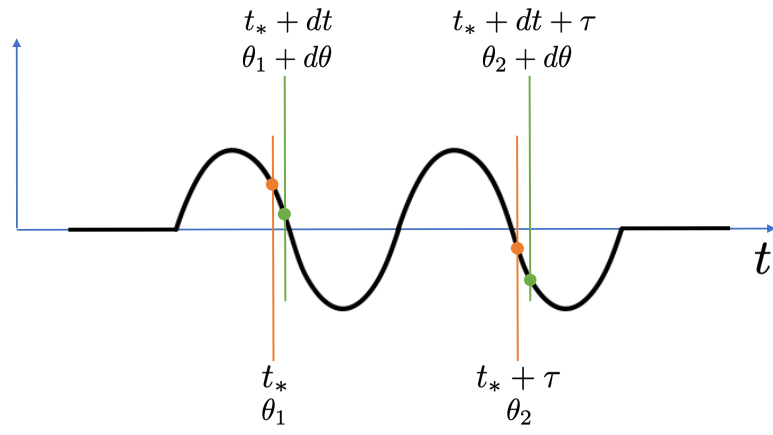


Figure 7.1

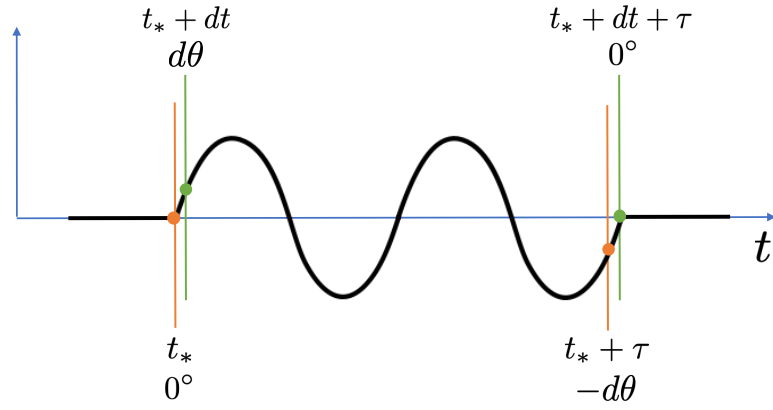

(a)

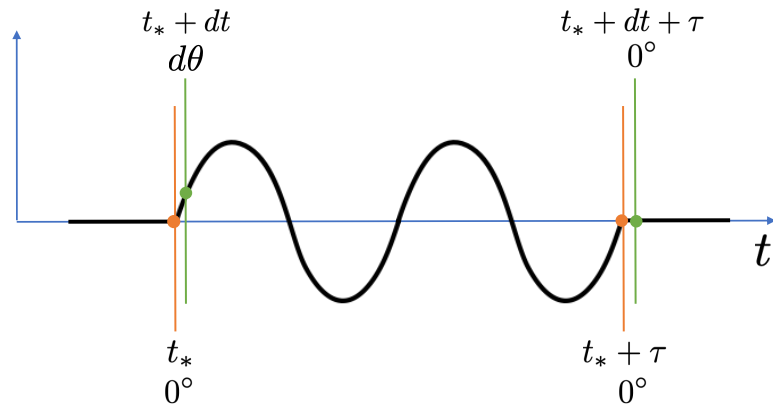

(b)

Figure 7.2: Depiction of temporal coherence for a light pulse.

Chapter 8

Longitudinal and transverse waves

8.1 Definitions

The Helmholtz decomposition for a function $\mathbf{F} = \mathbf{F}(\mathbf{x}, t)$ is of the following form

$$\mathbf{F} = \mathbf{F}_l + \mathbf{F}_t, \quad (8.1)$$

where $\mathbf{F}_l = \mathbf{F}_l(\mathbf{x}, t)$ is the longitudinal component and $\mathbf{F}_t = \mathbf{F}_t(\mathbf{x}, t)$ the transverse component. These are defined by

$$\nabla \times \mathbf{F}_l = 0, \quad (8.2)$$

$$\nabla \cdot \mathbf{F}_t = 0. \quad (8.3)$$

We'll assume that any vector function $\mathbf{G} = \mathbf{G}(\mathbf{x}, t)$ can be expressed as the real component of

$$\mathbf{G} = \hat{\mathbf{G}} \exp \left[i \left(\int_0^x k_x(x') dx' + \int_0^y k_y(y') dy' + \int_0^z k_z(z') dz' - wt \right) \right]. \quad (8.4)$$

For the above, w a frequency constant in time and space, and $k_x = k_x(x)$, $k_y = k_y(y)$, and $k_z = k_z(z)$ form the wave vector $\mathbf{k} = [k_x, k_y, k_z]$. $\hat{\mathbf{G}} = \hat{\mathbf{G}}(\mathbf{x}, t)$ is a complex vector where the real and complex components point in the same direction. Additionally, we enforce the constraint that if $\nabla \times \mathbf{G} = 0$, then $\nabla \times \hat{\mathbf{G}} = 0$, and similarly, if $\nabla \cdot \mathbf{G} = 0$, then $\nabla \cdot \hat{\mathbf{G}} = 0$. We'll often use a different subscript in the wave vectors and frequencies of different waves. For example, we'll use \mathbf{k}_e for electron-plasma waves, \mathbf{k}_i for ion-acoustic waves, \mathbf{k}_L for laser waves, and \mathbf{k}_s for scattered waves. Similarly for the frequencies w_e , w_i , w_L , w_s .

We note that

$$\begin{aligned} \nabla \exp \left[i \left(\int_0^x k_x(x') dx' + \int_0^y k_y(y') dy' + \int_0^z k_z(z') dz' - wt \right) \right] \\ = i\mathbf{k} \exp \left[i \left(\int_0^x k_x(x') dx' + \int_0^y k_y(y') dy' + \int_0^z k_z(z') dz' - wt \right) \right] \end{aligned} \quad (8.5)$$

Given the identity $\nabla \times (\mathbf{A}f) = (\nabla \times \mathbf{A})f - \mathbf{A} \times (\nabla f)$, we can show that

$$\begin{aligned} \nabla \times \mathbf{G} &= \nabla \times [\hat{\mathbf{G}} \exp(\dots)] \\ &= (\nabla \times \hat{\mathbf{G}}) \exp(\dots) - \hat{\mathbf{G}} \times [\nabla \exp(\dots)] \\ &= (\nabla \times \hat{\mathbf{G}}) \exp(\dots) - \hat{\mathbf{G}} \times [i\mathbf{k} \exp(\dots)] \\ &= (\nabla \times \hat{\mathbf{G}}) \exp(\dots) + i\mathbf{k} \times \mathbf{G}. \end{aligned} \quad (8.6)$$

Given the identity $\nabla \cdot (\mathbf{A}f) = (\nabla \cdot \mathbf{A})f + \mathbf{A} \cdot (\nabla f)$, we can show that

$$\begin{aligned}
\nabla \cdot \mathbf{G} &= \nabla \cdot [\hat{\mathbf{G}} \exp(\dots)] \\
&= (\nabla \cdot \hat{\mathbf{G}}) \exp(\dots) + \hat{\mathbf{G}} \cdot [\nabla \exp(\dots)] \\
&= (\nabla \cdot \hat{\mathbf{G}}) \exp(\dots) + \hat{\mathbf{G}} \cdot [i\mathbf{k} \exp(\dots)] \\
&= (\nabla \cdot \hat{\mathbf{G}}) \exp(\dots) + i\mathbf{k} \cdot \mathbf{G}.
\end{aligned} \tag{8.7}$$

By definition, \mathbf{F}_l has no curl and \mathbf{F}_t has no divergence. As mentioned earlier, we then require $\hat{\mathbf{F}}_l$ to have no curl and $\hat{\mathbf{F}}_t$ to have no divergence. Using this in eqs. (8.6) and (8.7) allow us to write

$$\mathbf{k} \times \mathbf{F}_l = 0 \tag{8.8}$$

$$\mathbf{k} \cdot \mathbf{F}_t = 0. \tag{8.9}$$

The first expression above says \mathbf{F}_l is parallel to \mathbf{k} and the second says \mathbf{F}_t is orthogonal to \mathbf{k} . Thus, $\mathbf{F}_l \cdot \mathbf{F}_t = 0$. We will often have situations where $\nabla \times \mathbf{F} = \nabla \cdot \mathbf{F} = 0$, which by its own does not imply $\mathbf{F} = 0$. However, using eqs. (8.6) and (8.7), this translates to $\mathbf{k} \times \mathbf{F} = \mathbf{k} \cdot \mathbf{F} = 0$. The latter equality states that \mathbf{k} and \mathbf{F} are orthogonal, that is, the angle between them is 90° . The former equality leads to $|\mathbf{F}| \sin(90^\circ) = 0$, which in turn means $\mathbf{F} = 0$. To summarize,

$$\nabla \times \mathbf{F} = \nabla \cdot \mathbf{F} = 0 \rightarrow \mathbf{F} = 0. \tag{8.10}$$

For some cases we'll further restrict $\hat{\mathbf{G}}$ in eq. (8.4) such that $\hat{\mathbf{G}} = \hat{\mathbf{G}}(\mathbf{x})$, that is, the time dependence of the wave is fully captured by the $\exp(-i\omega t)$ term. For this case, we'll often re-write the expression for \mathbf{G} as

$$\mathbf{G} = \tilde{\mathbf{G}} \exp(-i\omega t), \tag{8.11}$$

where $\tilde{\mathbf{G}} = \tilde{\mathbf{G}}(\mathbf{x})$ is given by

$$\tilde{\mathbf{G}} = \hat{\mathbf{G}} \exp \left[i \left(\int_0^x k_x(x') dx' + \int_0^y k_y(y') dy' + \int_0^z k_z(z') dz' \right) \right]. \tag{8.12}$$

Finally, a further simplification occurs when \mathbf{k} and $\hat{\mathbf{G}}$ are assumed to be constant in space. For this case, the expression for \mathbf{G} becomes

$$\mathbf{G} = \hat{\mathbf{G}} \exp [i (\mathbf{k} \cdot \mathbf{x} - \omega t)]. \tag{8.13}$$

These are the so-called plane waves. We end with the cautionary note that the second gradients of \mathbf{G} in eq. (8.4) are not necessarily the same as those of \mathbf{G} in eq. (8.13).

8.2 Electron-plasma and ion-acoustic waves

For both electron-plasma and ion-acoustic waves we can assume the magnetic field does not change. Thus, Faraday's law gives

$$\nabla \times \mathbf{E} = \nabla \times \mathbf{E}_t = 0. \tag{8.14}$$

By definition, $\nabla \cdot \mathbf{E}_t = 0$. Thus, using eq. (8.10) we get $\mathbf{E}_t = 0$, that is, $\mathbf{E} = \mathbf{E}_l$.

For electron-plasma waves, we can use eq. (8.13) to write eq. (3.8) in spectral form and thus obtain

$$-i\omega n_{e0}\hat{\mathbf{u}}_{e1} + \frac{en_{e0}}{m_e}\hat{\mathbf{E}}_{1,l} = -\mathbf{k}_e \frac{\gamma_e p_{e0}}{n_{e0}m_e}\hat{n}_{e1}. \quad (8.15)$$

Since the second term on the left-hand side and the term on the right-hand side point along \mathbf{k}_e , $\hat{\mathbf{u}}_{e1}$ also points along \mathbf{k}_e , that is, $\hat{\mathbf{u}}_{e1} = \hat{\mathbf{u}}_{e1,l}$.

For ion-acoustic waves, we can use eq. (8.13) to write eq. (3.16) in spectral form and thus obtain

$$-i\omega n_{i0}\hat{\mathbf{u}}_{i1} - \frac{Zen_{i0}}{m_i}\hat{\mathbf{E}}_{1,l} = -\mathbf{k}_i \frac{\gamma_i p_{i0}}{n_{i0}m_i}\hat{n}_{i1}. \quad (8.16)$$

Since the second term on the left-hand side and the term on the right-hand side point along \mathbf{k}_i , $\hat{\mathbf{u}}_{i1}$ also points along \mathbf{k}_i , that is, $\hat{\mathbf{u}}_{i1} = \hat{\mathbf{u}}_{i1,l}$. Finally, we note that the electric field being purely longitudinal is in agreement with eq. (3.18).

Chapter 9

Electromagnetic waves in plasmas

In introductory electrodynamics, one typically studies electromagnetic waves in vacuum, that is, for cases where $\rho_q = \mathbf{J} = 0$. In this section we relax both of these assumptions. Consider the electric and magnetic fields as well as the scalar and vector potentials, which satisfy

$$\mathbf{E} = -\nabla\phi - \frac{\partial\mathbf{A}}{\partial t}, \quad (9.1)$$

$$\mathbf{B} = \nabla \times \mathbf{A}. \quad (9.2)$$

For the above, we choose $\nabla \cdot \mathbf{A} = 0$. Using the fact that the magnetic field is solenoidal, we have

$$\nabla \cdot \mathbf{B} = \nabla \cdot \mathbf{B}_l + \nabla \cdot \mathbf{B}_t = \nabla \cdot \mathbf{B}_l = 0.$$

However, by definition, $\nabla \times \mathbf{B}_l = 0$ as well. Thus, using eq. (8.10), we have $\mathbf{B}_l = 0$. The same argument applies to the vector potential, and thus $\mathbf{A}_l = 0$. For the electric field, we have

$$\nabla \cdot \mathbf{E} = \nabla \cdot \mathbf{E}_l + \nabla \cdot \mathbf{E}_t = \nabla \cdot \mathbf{E}_l.$$

Taking the divergence of eq. (9.1), we get

$$\nabla \cdot \mathbf{E} = \nabla \cdot (-\nabla\phi). \quad (9.3)$$

Combining the last two equations gives

$$\nabla \cdot (\mathbf{E}_l + \nabla\phi) = 0.$$

By definition, we also have

$$\nabla \times (\mathbf{E}_l + \nabla\phi) = 0.$$

Thus, using eq. (8.10), we have $\mathbf{E}_l = -\nabla\phi$. A similar argument can be used to show $\mathbf{E}_t = -\partial\mathbf{A}/\partial t$. Our goal in this section will be to determine equations for \mathbf{E}_l , \mathbf{E}_t and \mathbf{B} .

We'll begin with the conservation of charge equation

$$\frac{\partial\rho_q}{\partial t} + \nabla \cdot \mathbf{J} = 0,$$

which we re-write as

$$\frac{\partial\rho_q}{\partial t} + \nabla \cdot \mathbf{J}_l = 0,$$

Using Poisson's equation $\nabla^2\phi = -\rho_q/\epsilon_0$ in the above, we get

$$\frac{\partial}{\partial t} (-\epsilon_0 \nabla^2\phi) + \nabla \cdot \mathbf{J}_l = 0,$$

or

$$\nabla \cdot \left(\frac{\partial \nabla \phi}{\partial t} - \frac{1}{\epsilon_0} \mathbf{J}_l \right) = 0.$$

However, by definition, we also have

$$\nabla \times \left(\frac{\partial \nabla \phi}{\partial t} - \frac{1}{\epsilon_0} \mathbf{J}_l \right) = 0.$$

Using eq. (8.10), we conclude

$$\frac{\partial \nabla \phi}{\partial t} = \frac{1}{\epsilon_0} \mathbf{J}_l. \quad (9.4)$$

This gives the equation for \mathbf{E}_l , namely,

$$\frac{\partial^2 \mathbf{E}_l}{\partial t^2} + \frac{1}{\epsilon_0} \frac{\partial \mathbf{J}_l}{\partial t} = 0. \quad (9.5)$$

Both \mathbf{E}_t and \mathbf{B} can be extracted from \mathbf{A} , so now we proceed to find an equation for the transverse vector potential. Ampere's law with Maxwell's correction gives

$$\nabla \times (\nabla \times \mathbf{A}) = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}.$$

The above is re-written as

$$\nabla (\nabla \cdot \mathbf{A}) - \nabla^2 \mathbf{A} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \left(-\frac{\partial \nabla \phi}{\partial t} - \frac{\partial^2 \mathbf{A}}{\partial t^2} \right),$$

which gives

$$\frac{\partial^2 \mathbf{A}}{\partial t^2} - \frac{1}{\mu_0 \epsilon_0} \nabla^2 \mathbf{A} = \frac{1}{\epsilon_0} \mathbf{J} - \frac{\partial \nabla \phi}{\partial t},$$

or

$$\frac{\partial^2 \mathbf{A}}{\partial t^2} - c_0^2 \nabla^2 \mathbf{A} = \frac{1}{\epsilon_0} \mathbf{J} - \frac{\partial \nabla \phi}{\partial t},$$

where $c_0 = 1/\sqrt{\mu_0 \epsilon_0}$. Expanding the current density as $\mathbf{J} = \mathbf{J}_l + \mathbf{J}_t$, and using eq. (9.4), we get

$$\frac{\partial^2 \mathbf{A}}{\partial t^2} - c_0^2 \nabla^2 \mathbf{A} = \frac{1}{\epsilon_0} \mathbf{J}_t. \quad (9.6)$$

Using the functional form in eq. (8.13) for \mathbf{A} and \mathbf{J}_t gives

$$-w^2 \hat{\mathbf{A}} + k^2 c_0^2 \hat{\mathbf{A}} = \frac{1}{\epsilon_0} \hat{\mathbf{J}}_t. \quad (9.7)$$

That is, \mathbf{A} and \mathbf{J}_t point in the same direction.

Taking the time derivative of eq. (9.6) gives the equation for \mathbf{E}_t , that is

$$\frac{\partial^2 \mathbf{E}_t}{\partial t^2} - c_0^2 \nabla^2 \mathbf{E}_t + \frac{1}{\epsilon_0} \frac{\partial \mathbf{J}_t}{\partial t} = 0. \quad (9.8)$$

Taking the curl of eq. (9.6) gives the equation for \mathbf{B} , that is

$$\frac{\partial^2 \mathbf{B}}{\partial t^2} - c_0^2 \nabla^2 \mathbf{B} - \frac{1}{\epsilon_0} \nabla \times \mathbf{J}_t = 0. \quad (9.9)$$

Using the functional form in eq. (8.13) for \mathbf{E}_t , \mathbf{B} and \mathbf{J}_t gives

$$-w^2 \hat{\mathbf{E}}_t + k^2 c_0^2 \hat{\mathbf{E}}_t - \frac{iw}{\epsilon_0} \hat{\mathbf{J}}_t = 0, \quad (9.10)$$

$$-w^2 \mathbf{B} + k^2 c_0^2 \mathbf{B} - \frac{i}{\epsilon_0} \mathbf{k} \times \mathbf{J}_t = 0. \quad (9.11)$$

That is, \mathbf{E}_t points in the same direction as \mathbf{J}_t , which as shown before points in the same direction as \mathbf{A} . Additionally, \mathbf{B} points in the direction of $\mathbf{k} \times \mathbf{J}_t$, that is, it is orthogonal to \mathbf{E}_t .

We briefly note that taking the curl of eq. (2.53), and using eq. (2.54), gives the wave equation for the total electric field \mathbf{E} , that is

$$\frac{\partial^2 \mathbf{E}}{\partial t^2} - c_0^2 \nabla^2 \mathbf{E} + c_0^2 \nabla(\nabla \cdot \mathbf{E}) + \frac{1}{\epsilon_0} \frac{\partial \mathbf{J}}{\partial t} = 0. \quad (9.12)$$

The above can be considered as the sum of the following three equations

$$\begin{aligned} \frac{\partial^2 \mathbf{E}_l}{\partial t^2} + \frac{1}{\epsilon_0} \frac{\partial \mathbf{J}_l}{\partial t} &= 0, \\ \frac{\partial^2 \mathbf{E}_t}{\partial t^2} - c_0^2 \nabla^2 \mathbf{E}_t + \frac{1}{\epsilon_0} \frac{\partial \mathbf{J}_t}{\partial t} &= 0, \\ -c_0^2 \nabla^2 \mathbf{E}_l + c_0^2 \nabla(\nabla \cdot \mathbf{E}_l) &= 0. \end{aligned}$$

The first is the equation for the longitudinal electric field, that is eq. (9.5). The second is the equation for the transverse electric field, that is eq. (9.8). The third equation above follows from the vector identity $\nabla \times (\nabla \times \mathbf{F}) = -\nabla^2 \mathbf{F} + \nabla(\nabla \cdot \mathbf{F})$ and the fact that $\nabla \times \mathbf{E}_l = 0$.

It will often be the case that transverse waves will oscillate at such a fast rate that the ions, which have a large inertia, will be unable to react quickly enough. Thus, we can assume $\mathbf{u}_{i,t} = 0$. Given the definition of the current density in eq. (2.55), the transverse current density is expressed as $\mathbf{J}_t = e(Zn_i \mathbf{u}_{i,t} - n_e \mathbf{u}_{e,t})$, which now simplifies to

$$\mathbf{J}_t = -en_e \mathbf{u}_{e,t}. \quad (9.13)$$

Thus, the transverse electron velocity $\mathbf{u}_{e,t}$ points in the same direction as \mathbf{J}_t , which is the same direction as \mathbf{E}_t and \mathbf{A} . The next section focuses on deriving an expression for $\mathbf{u}_{e,t}$.

We begin with eq. (2.48), the electron momentum equation, which, due to the electron continuity equation, can be written as

$$m_e n_e \frac{\partial \mathbf{u}_e}{\partial t} + m_e n_e \mathbf{u}_e \cdot \nabla \mathbf{u}_e + en_e (\mathbf{E} + \mathbf{u}_e \times \mathbf{B}) = -\nabla p_e,$$

or

$$\frac{\partial \mathbf{u}_e}{\partial t} + \mathbf{u}_e \cdot \nabla \mathbf{u}_e + \frac{e}{m_e} (\mathbf{E} + \mathbf{u}_e \times \mathbf{B}) = -\frac{1}{n_e m_e} \nabla p_e,$$

Using the scalar and vector potentials we have

$$\frac{\partial \mathbf{u}_e}{\partial t} + \mathbf{u}_e \cdot \nabla \mathbf{u}_e + \frac{e}{m_e} \left[-\nabla \phi - \frac{\partial \mathbf{A}}{\partial t} + \mathbf{u}_e \times (\nabla \times \mathbf{A}) \right] = -\frac{1}{n_e m_e} \nabla p_e.$$

Using the vector identity $\nabla (F^2/2) = \mathbf{F} \times (\nabla \times \mathbf{F}) + \mathbf{F} \cdot \nabla \mathbf{F}$, we write the above as

$$\frac{\partial \mathbf{u}_e}{\partial t} - \mathbf{u}_e \times (\nabla \times \mathbf{u}_e) + \nabla \left(\frac{u_e^2}{2} \right) + \frac{e}{m_e} \left[-\nabla \phi - \frac{\partial \mathbf{A}}{\partial t} + \mathbf{u}_e \times (\nabla \times \mathbf{A}) \right] = -\frac{1}{n_e m_e} \nabla p_e, \quad (9.14)$$

which is equivalent to

$$\frac{\partial \mathbf{u}_e}{\partial t} - \mathbf{u}_e \times (\nabla \times \mathbf{u}_{e,t}) + \nabla \left(\frac{u_e^2}{2} \right) + \frac{e}{m_e} \left[-\nabla \phi - \frac{\partial \mathbf{A}}{\partial t} + \mathbf{u}_e \times (\nabla \times \mathbf{A}) \right] = -\frac{1}{n_e m_e} \nabla p_e. \quad (9.15)$$

We'll now introduce a more specific coordinate system. We'll be dealing with at most three waves at a time: a laser wave, a scattered wave, and a plasma wave (either electron-plasma or ion-acoustic wave). We'll assume all three of these waves lie on a so-called base plane. That is, \mathbf{k}_e (or \mathbf{k}_i), \mathbf{k}_L , and \mathbf{k}_s all point along this plane. We now choose the main transverse direction, that is, the direction of $\mathbf{u}_{e,t}$, \mathbf{J}_t , \mathbf{E}_t , and \mathbf{A} to be the direction orthogonal to this plane, so that these vectors are orthogonal to any \mathbf{k} . As an aside, we note that the longitudinal and transverse components of the electron velocity can belong to different waves. That is

$$\mathbf{u}_{e,l} = \hat{\mathbf{u}}_{e,l} \exp [i(\mathbf{k}_p \cdot \mathbf{x} - w_p t)] \quad (9.16)$$

$$\mathbf{u}_{e,t} = \hat{\mathbf{u}}_{e,t} \exp [i(\mathbf{k}_q \cdot \mathbf{x} - w_q t)]. \quad (9.17)$$

The vectors $\nabla (u_e^2/2)$, $\nabla \phi$ and ∇p_e are all by definition longitudinal. As eq. (8.8) states, longitudinal vectors point along their wave vectors. Since we chose all wave vectors to be confined to the base plane, $\nabla (u_e^2/2)$, $\nabla \phi$ and ∇p_e do not have a component along the main transverse direction. As a result, the component of eq. (9.15) along the main transverse direction simplifies to

$$\frac{\partial \mathbf{u}_{e,t}}{\partial t} - \mathbf{u}_{e,l} \times (\nabla \times \mathbf{u}_{e,t}) + \frac{e}{m_e} \left[-\frac{\partial \mathbf{A}}{\partial t} + \mathbf{u}_{e,l} \times (\nabla \times \mathbf{A}) \right] = 0. \quad (9.18)$$

Using $c = w/k$, we show the following scalings

$$\begin{aligned} \frac{1}{c^2} \frac{\partial \mathbf{u}_{e,t}}{\partial t} &= -\frac{i w \mathbf{u}_{e,t}}{c^2} \sim i \frac{\mathbf{u}_{e,t}}{c} k, \\ \frac{1}{c^2} \mathbf{u}_{e,l} \times (\nabla \times \mathbf{u}_{e,t}) &= \frac{i \mathbf{u}_{e,l} \times (\mathbf{k} \times \mathbf{u}_{e,t})}{c^2} \sim i \frac{\mathbf{u}_{e,l}}{c} \frac{\mathbf{u}_{e,t}}{c} k, \\ \frac{1}{c^2} \frac{\partial \mathbf{A}}{\partial t} &= -\frac{i w \mathbf{A}}{c^2} \sim i \frac{\mathbf{A}}{c} k, \\ \frac{1}{c^2} \mathbf{u}_{e,l} \times (\nabla \times \mathbf{A}) &= \frac{i \mathbf{u}_{e,l} \times (\mathbf{k} \times \mathbf{A})}{c^2} \sim i \frac{\mathbf{u}_{e,l}}{c} \frac{\mathbf{A}}{c} k. \end{aligned} \quad (9.19)$$

Thus, assuming $\mathbf{u}_{e,l} \ll c$, the terms involving the double cross product are smaller than those involving the time derivative. As a result, eq. (9.18) becomes

$$\frac{\partial \mathbf{u}_{e,t}}{\partial t} - \frac{e}{m_e} \frac{\partial \mathbf{A}}{\partial t} = 0. \quad (9.20)$$

Using eq. (8.11), the above is equivalent to

$$-i w \mathbf{u}_{e,t} + i w \frac{e \mathbf{A}}{m_e} = 0, \quad (9.21)$$

which upon re-arranging gives

$$\mathbf{u}_{e,t} = \frac{e \mathbf{A}}{m_e}. \quad (9.22)$$

Using both the transverse current given by eq. (9.13) and the transverse velocity given by eq. (9.22), eq. (9.6) can be re-written as

$$\frac{\partial^2 \mathbf{A}}{\partial t^2} - c_0^2 \nabla^2 \mathbf{A} = -\frac{e n_e}{\epsilon_0} \mathbf{u}_{e,t} = -\frac{e^2 n_e}{\epsilon_0 m_e} \mathbf{A}.$$

We now use the decomposition $n_e = n_{e0} + n_{e1}$, where n_{e0} is time independent. The above becomes

$$\frac{\partial^2 \mathbf{A}}{\partial t^2} + w_{pe}^2 \mathbf{A} - c_0^2 \nabla^2 \mathbf{A} = -\frac{e^2 n_{e1}}{\epsilon_0 m_e} \mathbf{A}, \quad (9.23)$$

where $w_{pe}^2 = e^2 n_{e0} / m_e \epsilon_0$.

Chapter 10

Electromagnetic waves in a stable plasma

10.1 The vector potential

We start with eq. (9.23), but focus on the stable-plasma case, that is, $n_{e1} = 0$. Thus, we have

$$\frac{\partial^2 \mathbf{A}}{\partial t^2} + w_{pe}^2 \mathbf{A} - c_0^2 \nabla^2 \mathbf{A} = 0. \quad (10.1)$$

We note that n_{e0} is only time independent, that is, it is still allowed to vary across space. As a result, w_{pe}^2 is also allowed to vary across space. Using eq. (8.11) for the vector potential, eq. (10.1) becomes

$$-w^2 \mathbf{A} + w_{pe}^2 \mathbf{A} - c_0^2 \nabla^2 \mathbf{A} = 0.$$

We re-write the above as

$$\frac{w^2}{c_0^2} \mathbf{A} - \frac{w^2}{c_0^2} \frac{w_{pe}^2}{w^2} \mathbf{A} + \nabla^2 \mathbf{A} = 0.$$

Defining $\epsilon = 1 - w_{pe}^2/w^2$, we ultimately get

$$\frac{w^2}{c_0^2} \epsilon \mathbf{A} + \nabla^2 \mathbf{A} = 0. \quad (10.2)$$

We now consider the case of a *uniform* stable plasma, that is, a plasma where n_{e0} is uniform across space, and thus w_{pe} and ϵ are also uniform across space. Using the standard plane-wave expression $\mathbf{A} = \hat{\mathbf{A}} \exp[i(\mathbf{k} \cdot \mathbf{x} - wt)]$ in eq. (10.2) gives the following dispersion relation

$$\frac{w^2}{c_0^2} \epsilon = k^2. \quad (10.3)$$

We expand the above to obtain

$$w^2 - w_{pe}^2 = c_0^2 k^2.$$

Taking the derivative $\partial/\partial k$ on both sides we get

$$2w \frac{\partial w}{\partial k} = 2c_0^2 k,$$

which in turn gives the following expressions for the group velocity v_g

$$v_g = \frac{c_0^2 k}{w}. \quad (10.4)$$

Using eq. (10.3), we can also write the above as

$$v_g = \frac{c_0^2 k}{w} = c_0^2 \frac{\sqrt{\epsilon}}{c_0} = c_0 \sqrt{\epsilon}. \quad (10.5)$$

10.2 The electric field

Taking the time derivative of eq. (10.1) gives the equation for \mathbf{E}_t , that is

$$\frac{\partial^2 \mathbf{E}_t}{\partial t^2} + w_{pe}^2 \mathbf{E}_t - c_0^2 \nabla^2 \mathbf{E}_t = 0. \quad (10.6)$$

Using eq. (8.11) for the electric field, the time derivative in eq. (10.6) evaluates such that

$$-w^2 \mathbf{E}_t + w_{pe}^2 \mathbf{E}_t - c_0^2 \nabla^2 \mathbf{E}_t = 0.$$

We re-write the above as

$$\frac{w^2}{c_0^2} \mathbf{E}_t - \frac{w^2}{c_0^2} \frac{w_{pe}^2}{w^2} \mathbf{E}_t + \nabla^2 \mathbf{E}_t = 0,$$

which becomes

$$\frac{w^2}{c_0^2} \epsilon \mathbf{E}_t + \nabla^2 \mathbf{E}_t = 0. \quad (10.7)$$

10.3 The magnetic field

Taking the curl of eq. (10.1) gives the equation for \mathbf{B} , that is

$$\frac{\partial^2 \mathbf{B}}{\partial t^2} + w_{pe}^2 \mathbf{B} - c_0^2 \nabla^2 \mathbf{B} + \nabla w_{pe}^2 \times \mathbf{A} = 0. \quad (10.8)$$

Using eq. (8.11) for the magnetic field, the time derivative in eq. (10.8) evaluates such that

$$-w^2 \mathbf{B} + w_{pe}^2 \mathbf{B} - c_0^2 \nabla^2 \mathbf{B} + \nabla w_{pe}^2 \times \mathbf{A} = 0.$$

We re-write the above as

$$\frac{w^2}{c_0^2} \mathbf{B} - \frac{w^2}{c_0^2} \frac{w_{pe}^2}{w^2} \mathbf{B} + \nabla^2 \mathbf{B} - \frac{w^2}{c_0^2} \nabla \left(\frac{w_{pe}^2}{w^2} \right) \times \mathbf{A} = 0,$$

which becomes

$$\frac{w^2}{c_0^2} \epsilon \mathbf{B} + \nabla^2 \mathbf{B} + \frac{w^2}{c_0^2} \nabla \epsilon \times \mathbf{A} = 0.$$

Using eq. (10.2) we get

$$\frac{w^2}{c_0^2} \epsilon \mathbf{B} + \nabla^2 \mathbf{B} - \frac{1}{\epsilon} \nabla \epsilon \times \nabla^2 \mathbf{A} = 0.$$

The vector identity $\nabla \times (\nabla \times \mathbf{F}) = \nabla (\nabla \cdot \mathbf{F}) - \nabla^2 \mathbf{F}$ gives $\nabla \times (\nabla \times \mathbf{A}) = -\nabla^2 \mathbf{A}$, or

$$\nabla \times \mathbf{B} = -\nabla^2 \mathbf{A}. \quad (10.9)$$

Thus, we finally get

$$\frac{w^2}{c_0^2} \epsilon \mathbf{B} + \nabla^2 \mathbf{B} + \frac{1}{\epsilon} \nabla \epsilon \times (\nabla \times \mathbf{B}) = 0. \quad (10.10)$$

As a side note, we can use the expressions above to write Ampere's law in a new form. We combine the vector identity eq. (10.9) with eq. (10.2) to obtain

$$\nabla \times \mathbf{B} = \frac{w^2}{c_0^2} \epsilon \mathbf{A}.$$

Using eq. (8.11) for the vector potential, the expression $\mathbf{E}_t = -\partial \mathbf{A} / \partial t$ gives

$$\mathbf{E}_t = iw \mathbf{A}.$$

Thus, the curl of \mathbf{B} can be expressed as

$$\nabla \times \mathbf{B} = -i \frac{w}{c_0^2} \epsilon \mathbf{E}_t. \tag{10.11}$$

As mentioned in section 10.1, for a uniform stable plasma we have ϵ equal to a constant. Thus, eq. (10.10) becomes identical to eq. (10.7), that is, the wave forms of \mathbf{E}_t and \mathbf{B} are the same.

Chapter 11

Stimulated Raman and Brillouin instabilities

11.1 Linearization

The following decompositions will be used in the derivation of stimulated Raman and Brillouin instabilities:

$$\begin{aligned}n_i &= n_{i0} + n_{i1}, \\n_e &= n_{e0} + n_{e1}, \\p_i &= p_{i0} + p_{i1}, \\p_e &= p_{e0} + p_{e1}, \\\mathbf{u}_{i,l} &= \mathbf{u}_{i0,l} + \mathbf{u}_{i1,l}, \\\mathbf{u}_{e,l} &= \mathbf{u}_{e0,l} + \mathbf{u}_{e1,l}, \\\mathbf{E}_l &= \mathbf{E}_{0,l} + \mathbf{E}_{1,l}, \\\mathbf{A} &= \mathbf{A}_L + \mathbf{A}_s.\end{aligned}\tag{11.1}$$

For these decompositions, we'll assume

1. Terms with a subscript 1 are small and thus products of two small quantities can be neglected.
2. $\mathbf{u}_{i0,l}$, $\mathbf{u}_{e0,l}$, and $\mathbf{E}_{0,l}$ are zero.
3. n_{i0} , n_{e0} , p_{i0} , and p_{e0} are uniform in space and time.

Thus, unlike the previous section, we do not assume the plasma is stable, that is, we assume fluctuations such as n_{e1} are small but non zero. \mathbf{A}_L is the vector potential associated with the laser light, and \mathbf{A}_s is the potential associated with the scattered light. For linearization purposes, we'll assume \mathbf{A}_s is small.

Using the decomposition for \mathbf{A} , eq. (9.23) is written as

$$\frac{\partial^2 \mathbf{A}_L}{\partial t^2} + \frac{\partial^2 \mathbf{A}_s}{\partial t^2} + w_{pe}^2 \mathbf{A}_L + w_{pe}^2 \mathbf{A}_s - c_0^2 \nabla^2 \mathbf{A}_L - c_0^2 \nabla^2 \mathbf{A}_s = -\frac{e^2 n_{e1}}{\epsilon_0 m_e} \mathbf{A}_L - \frac{e^2 n_{e1}}{\epsilon_0 m_e} \mathbf{A}_s, \tag{11.2}$$

Dropping products of small quantities we have

$$\frac{\partial^2 \mathbf{A}_L}{\partial t^2} + \frac{\partial^2 \mathbf{A}_s}{\partial t^2} + w_{pe}^2 \mathbf{A}_L + w_{pe}^2 \mathbf{A}_s - c_0^2 \nabla^2 \mathbf{A}_L - c_0^2 \nabla^2 \mathbf{A}_s = -\frac{e^2 n_{e1}}{\epsilon_0 m_e} \mathbf{A}_L. \tag{11.3}$$

We'll assume the laser light is stable, that is, it satisfies eq. (10.1), which we re-write below

$$\frac{\partial^2 \mathbf{A}_L}{\partial t} + w_{pe}^2 \mathbf{A}_L - c_0^2 \nabla^2 \mathbf{A}_L = 0. \quad (11.4)$$

Thus, eq. (11.3) becomes

$$\frac{\partial^2 \mathbf{A}_s}{\partial t} + w_{pe}^2 \mathbf{A}_s - c_0^2 \nabla^2 \mathbf{A}_s = -\frac{e^2 n_{e1}}{\epsilon_0 m_e} \mathbf{A}_L. \quad (11.5)$$

The above shows that the fluctuating n_{e1} couples with the laser light to serve as a source for the scattered light.

The electron density equation is now written as

$$\frac{\partial n_{e0} + n_{e1}}{\partial t} + \nabla \cdot [(n_{e0} + n_{e1}) (\mathbf{u}_{e,t} + \mathbf{u}_{e0,l} + \mathbf{u}_{e1,l})] = 0,$$

which, since $\mathbf{u}_{e,t}$ is transverse, can be written as

$$\frac{\partial n_{e0} + n_{e1}}{\partial t} + \mathbf{u}_{e,t} \cdot \nabla (n_{e0} + n_{e1}) + \nabla \cdot [(n_{e0} + n_{e1}) (\mathbf{u}_{e0,l} + \mathbf{u}_{e1,l})] = 0.$$

Given the assumptions in items 1 to 3, the above simplifies to

$$\frac{\partial n_{e1}}{\partial t} + \mathbf{u}_{e,t} \cdot \nabla n_{e1} + \nabla \cdot (n_{e0} \mathbf{u}_{e1,l}) = 0.$$

Since $\mathbf{u}_{e,t}$ and ∇n_{e1} are orthogonal, we finally have

$$\frac{\partial n_{e1}}{\partial t} + \nabla \cdot (n_{e0} \mathbf{u}_{e1,l}) = 0. \quad (11.6)$$

The ion density equation is now written as

$$\frac{\partial n_{i0} + n_{i1}}{\partial t} + \nabla \cdot [(n_{i0} + n_{i1}) (\mathbf{u}_{i,t} + \mathbf{u}_{i0,l} + \mathbf{u}_{i1,l})] = 0,$$

As stated in chapter 9, it is often the case that transverse waves oscillate at such a fast rate that the ions, which have large inertia, are unable to react on comparable time scales. Thus, we can assume $\mathbf{u}_{i,t} = 0$,

$$\frac{\partial n_{i0} + n_{i1}}{\partial t} + \nabla \cdot [(n_{i0} + n_{i1}) (\mathbf{u}_{i0,l} + \mathbf{u}_{i1,l})] = 0.$$

Given the assumptions in items 1 to 3, the above simplifies to

$$\frac{\partial n_{i1}}{\partial t} + \nabla \cdot (n_{i0} \mathbf{u}_{i1,l}) = 0. \quad (11.7)$$

Consider the electron momentum equation. Subtracting eq. (9.18) from eq. (9.15) gives

$$\frac{\partial \mathbf{u}_{e,l}}{\partial t} - \mathbf{u}_{e,t} \times (\nabla \times \mathbf{u}_{e,t}) + \nabla \left(\frac{u_e^2}{2} \right) + \frac{e}{m_e} [-\nabla \phi + \mathbf{u}_{e,t} \times (\nabla \times \mathbf{A})] = -\frac{1}{n_e m_e} \nabla p_e. \quad (11.8)$$

Since $\mathbf{u}_{e,t} = e\mathbf{A}/m_e$, the above simplifies to

$$\frac{\partial \mathbf{u}_{e,l}}{\partial t} + \nabla \left(\frac{u_e^2}{2} \right) - \frac{e}{m_e} \nabla \phi = -\frac{1}{n_e m_e} \nabla p_e,$$

or

$$\frac{\partial \mathbf{u}_{e,l}}{\partial t} + \nabla \left(\frac{u_e^2}{2} \right) + \frac{e}{m_e} \mathbf{E}_l = -\frac{1}{n_e m_e} \nabla p_e.$$

Since $\mathbf{u}_{e,l}$ and $\mathbf{u}_{e,t}$ are orthogonal $u_e^2 = \mathbf{u}_e \cdot \mathbf{u}_e = u_{e,l}^2 + u_{e,t}^2$. The electron momentum equation is then

$$\frac{\partial \mathbf{u}_{e,l}}{\partial t} + \nabla \left(\frac{u_{e,l}^2 + u_{e,t}^2}{2} \right) + \frac{e}{m_e} \mathbf{E}_l = -\frac{1}{n_e m_e} \nabla p_e.$$

Given the assumptions in items 1 to 3, the above simplifies to

$$\frac{\partial n_{e0} \mathbf{u}_{e1,l}}{\partial t} + n_{e0} \nabla \left(\frac{u_{e,t}^2}{2} \right) + \frac{e n_{e0}}{m_e} \mathbf{E}_{1,l} = -\frac{1}{m_e} \nabla p_{e1}.$$

For the transverse electron velocity we have

$$u_{e,t}^2 = \left(\frac{e \mathbf{A}}{m_e} \right) \cdot \left(\frac{e \mathbf{A}}{m_e} \right) = \frac{e^2}{m_e^2} (\mathbf{A}_L \cdot \mathbf{A}_L + 2 \mathbf{A}_L \cdot \mathbf{A}_s + \mathbf{A}_s \cdot \mathbf{A}_s).$$

Since the product of small quantities can be neglected, the $\mathbf{A}_s \cdot \mathbf{A}_s$ term is dropped. We'll also ignore the $\mathbf{A}_L \cdot \mathbf{A}_L$ term, given that \mathbf{A}_L is stable and thus its magnitude does not play a critical role in the growth of the instabilities. Thus, the electron momentum equation becomes

$$\frac{\partial n_{e0} \mathbf{u}_{e1,l}}{\partial t} + \frac{e^2 n_{e0}}{m_e^2} \nabla (\mathbf{A}_L \cdot \mathbf{A}_s) + \frac{e n_{e0}}{m_e} \mathbf{E}_{1,l} = -\frac{1}{m_e} \nabla p_{e1}. \quad (11.9)$$

Consider now the ion momentum equation, given by eq. (2.47), which we re-write below as

$$\frac{\partial n_i \mathbf{u}_i}{\partial t} + \nabla \cdot (n_i \mathbf{u}_i \mathbf{u}_i) - \frac{Z e n_i}{m_i} (\mathbf{E} + \mathbf{u}_i \times \mathbf{B}) = -\frac{1}{m_i} \nabla p_i,$$

The longitudinal component of the above is

$$\frac{\partial n_i \mathbf{u}_{i,l}}{\partial t} + [\nabla \cdot (n_i \mathbf{u}_i \mathbf{u}_i)]_l - \frac{Z e n_i}{m_i} (\mathbf{E}_l + \mathbf{u}_{i,t} \times \mathbf{B}) = -\frac{1}{m_i} \nabla p_i,$$

where $[\cdot]_l$ denotes longitudinal component. Since $\mathbf{u}_{i,t} = 0$, we have

$$\frac{\partial n_i \mathbf{u}_{i,l}}{\partial t} + [\nabla \cdot (n_i \mathbf{u}_i \mathbf{u}_i)]_l - \frac{Z e n_i}{m_i} \mathbf{E}_l = -\frac{1}{m_i} \nabla p_i.$$

Using the variable decompositions, we have

$$\begin{aligned} & \frac{\partial}{\partial t} [(n_{i0} + n_{i1}) (\mathbf{u}_{i0,l} + \mathbf{u}_{i1,l})] \\ & + \{ \nabla \cdot [(n_{i0} + n_{i1}) (\mathbf{u}_{i,t} + \mathbf{u}_{i0,l} + \mathbf{u}_{i1,l}) (\mathbf{u}_{i,t} + \mathbf{u}_{i0,l} + \mathbf{u}_{i1,l})] \}_l \\ & - \frac{Z e}{m_i} (n_{i0} + n_{i1}) (\mathbf{E}_{0,l} + \mathbf{E}_{1,l}) = -\frac{1}{m_i} \nabla (p_{i0} + p_{i1}). \end{aligned}$$

Given the assumptions in items 1 to 3, the above simplifies to

$$\frac{\partial n_{i0} \mathbf{u}_{i1,l}}{\partial t} - \frac{Z e n_{i0}}{m_i} \mathbf{E}_{1,l} = -\frac{1}{m_i} \nabla p_{i1}. \quad (11.10)$$

11.2 Stimulated Raman Scattering

We employ the same assumptions as for the electron-plasma waves, that is

1. Quasi-neutrality for the base flow, $Zn_{i0} = n_{e0}$.
2. Uniform ion density, $n_{i1} = 0$.

Combining eq. (11.9) with eq. (3.7) gives

$$\frac{\partial n_{e0} \mathbf{u}_{e1,l}}{\partial t} + \frac{e^2 n_{e0}}{m_e^2} \nabla (\mathbf{A}_L \cdot \mathbf{A}_s) + \frac{en_{e0}}{m_e} \mathbf{E}_{1,l} = -\frac{\gamma_e k_B T_e}{m_e} \nabla n_{e1}. \quad (11.11)$$

Taking the time derivative of eq. (11.6) and using eq. (11.11) leads to the wave equation for electron density

$$\frac{\partial^2 n_{e1}}{\partial t^2} - \frac{e^2 n_{e0}}{m_e^2} \nabla^2 (\mathbf{A}_L \cdot \mathbf{A}_s) - \frac{en_{e0}}{m_e} \nabla \cdot \mathbf{E}_{1,l} = \frac{\gamma_e k_B T_e}{m_e} \nabla^2 n_{e1}.$$

As before, using eq. (3.10) we obtain

$$\frac{\partial^2 n_{e1}}{\partial t^2} - \frac{e^2 n_{e0}}{m_e^2} \nabla^2 (\mathbf{A}_L \cdot \mathbf{A}_s) + \frac{e^2 n_{e0}}{m_e \epsilon_0} n_{e1} = \frac{\gamma_e k_B T_e}{m_e} \nabla^2 n_{e1}.$$

or

$$\frac{\partial^2 n_{e1}}{\partial t^2} + w_{pe}^2 n_{e1} - \frac{\gamma_e k_B T_e}{m_e} \nabla^2 n_{e1} = \frac{e^2 n_{e0}}{m_e^2} \nabla^2 (\mathbf{A}_L \cdot \mathbf{A}_s). \quad (11.12)$$

Thus, the scattered laser light \mathbf{A}_s couples with the laser light to serve as a source for the electron-plasma wave.

11.3 Stimulated Brillouin Scattering

We employ the same assumptions as for the ion-acoustic waves, that is

1. Quasi-neutrality for the base flow, $Zn_{i0} = n_{e0}$.
2. Approximate quasi-neutrality for the fluctuations, $Zn_{i1} \approx n_{e1}$.
3. Negligible electron mass, $m_e \rightarrow 0$.

Combining eq. (11.10) with eq. (3.7) gives

$$\frac{\partial n_{i0} \mathbf{u}_{i1,l}}{\partial t} - \frac{Zn_{i0}}{m_i} \mathbf{E}_{1,l} = -\frac{\gamma_i k_B T_i}{m_i} \nabla n_{i1}. \quad (11.13)$$

Taking the time derivative of eq. (11.7) and using eq. (11.13) leads to the wave equation for ion density

$$\frac{\partial^2 n_{i1}}{\partial t^2} + \frac{Zn_{i0}}{m_i} \nabla \cdot \mathbf{E}_{1,l} = \frac{\gamma_i k_B T_i}{m_i} \nabla^2 n_{i1}. \quad (11.14)$$

For this case, we assume that the mass of the electron, which is significantly smaller than that of the ions, is negligible. Thus, eq. (11.9) simplifies to

$$\frac{e^2 n_{e0}}{m_e} \nabla (\mathbf{A}_L \cdot \mathbf{A}_s) + en_{e0} \mathbf{E}_{1,l} = -\gamma_e k_B T_e \nabla n_{e1}. \quad (11.15)$$

Using the above in the ion wave equation we obtain

$$\frac{\partial^2 n_{i1}}{\partial t^2} = \frac{Z n_{i0}}{n_{e0}} \frac{\gamma_e k_B T_e}{m_i} \nabla^2 n_{e1} + \frac{\gamma_i k_B T_i}{m_i} \nabla^2 n_{i1} + \frac{Z e^2 n_{i0}}{m_i m_e} \nabla^2 (\mathbf{A}_L \cdot \mathbf{A}_s). \quad (11.16)$$

Due to quasi-neutrality, we have $Z n_{i0} = n_{e0}$ and $Z n_{i1} \approx n_{e1}$, which gives

$$\frac{\partial^2 n_{i1}}{\partial t^2} = \left(\frac{Z \gamma_e k_B T_e}{m_i} + \frac{\gamma_i k_B T_i}{m_i} \right) \nabla^2 n_{i1} + \frac{Z e^2 n_{i0}}{m_i m_e} \nabla^2 (\mathbf{A}_L \cdot \mathbf{A}_s). \quad (11.17)$$

We now use the velocity defined in eq. (3.19), which allows us to write the equation for n_{i1} as

$$\frac{\partial^2 n_{i1}}{\partial t^2} - v_s^2 \nabla^2 n_{i1} = \frac{Z e^2 n_{i0}}{m_i m_e} \nabla^2 (\mathbf{A}_L \cdot \mathbf{A}_s). \quad (11.18)$$

Thus, the scattered laser light \mathbf{A}_s couples with the laser light to serve as a source for the ion-acoustic wave.

Part III

High intensity laser–driven plasmas

Appendix A

Lagrangian and Eulerian PDFs

A.1 Eulerian PDF

Consider an Eulerian velocity field $\mathbf{u} = \mathbf{u}(\mathbf{x}, t)$. The Eulerian PDF $f = f(\mathbf{V}; \mathbf{x}, t)$ gives the probability that the velocity field will have a value of \mathbf{V} at location \mathbf{x} and at time t . We'll also introduce the fine-grained Eulerian PDF $f' = f'(\mathbf{V}; \mathbf{x}, t)$, which is defined as

$$f'(\mathbf{V}; \mathbf{x}, t) = \delta(\mathbf{u}(\mathbf{x}, t) - \mathbf{V}). \quad (\text{A.1})$$

Note: a delta function of a 3D argument means the following $\delta(\mathbf{a}) = \delta(a_1)\delta(a_2)\delta(a_3)$. The Eulerian PDF can be obtained from the fine-grained Eulerian PDF using

$$f(\mathbf{V}; \mathbf{x}, t) = \langle f'(\mathbf{V}; \mathbf{x}, t) \rangle. \quad (\text{A.2})$$

The proof is as follows,

$$\begin{aligned} \langle f'(\mathbf{V}; \mathbf{x}, t) \rangle &= \langle \delta(\mathbf{u}(\mathbf{x}, t) - \mathbf{V}) \rangle \\ &= \int \delta(\mathbf{V}' - \mathbf{V}) f(\mathbf{V}'; \mathbf{x}, t) d\mathbf{V}' \\ &= f(\mathbf{V}; \mathbf{x}, t). \end{aligned} \quad (\text{A.3})$$

A.2 Lagrangian PDF

Consider a Lagrangian particle with velocity $\mathbf{u}^+ = \mathbf{u}^+(t, \mathbf{y})$ and position $\mathbf{x}^+(t, \mathbf{y})$. The Lagrangian PDF $f_L = f_L(\mathbf{V}, \mathbf{x}; t|\mathbf{y})$ gives the probability that the particle that started at location \mathbf{y} at the reference time t_0 will have a velocity \mathbf{V} and position \mathbf{x} at time t . We'll also introduce the fine-grained Eulerian PDF $f'_L = f'_L(\mathbf{V}, \mathbf{x}; t|\mathbf{y})$, which is defined as

$$f'_L(\mathbf{V}, \mathbf{x}; t|\mathbf{y}) = \delta(\mathbf{u}^+(t, \mathbf{y}) - \mathbf{V}) \delta(\mathbf{x}^+(t, \mathbf{y}) - \mathbf{x}). \quad (\text{A.4})$$

Note: a delta function of a 3D argument means the following $\delta(\mathbf{a}) = \delta(a_1)\delta(a_2)\delta(a_3)$. The Lagrangian PDF can be obtained from the fine-grained Lagrangian PDF using

$$f_L(\mathbf{V}, \mathbf{x}; t|\mathbf{y}) = \langle f'_L(\mathbf{V}, \mathbf{x}; t|\mathbf{y}) \rangle. \quad (\text{A.5})$$

The proof is as follows,

$$\begin{aligned} \langle f'_L(\mathbf{V}, \mathbf{x}; t|\mathbf{y}) \rangle &= \langle \delta(\mathbf{u}^+(t, \mathbf{y}) - \mathbf{V}) \delta(\mathbf{x}^+(t, \mathbf{y}) - \mathbf{x}) \rangle \\ &= \int \delta(\mathbf{V}' - \mathbf{V}) \delta(\mathbf{x}' - \mathbf{x}) f(\mathbf{V}', \mathbf{x}'; t|\mathbf{y}) d\mathbf{V}' d\mathbf{x}' \\ &= f_L(\mathbf{V}, \mathbf{x}; t|\mathbf{y}). \end{aligned} \quad (\text{A.6})$$

A.3 Relation between Lagrangian and Eulerian PDFs

As a quick side note, we mention that the inverse of \mathbf{x}^+ is $\mathbf{y}^+ = \mathbf{y}^+(t, \mathbf{z})$, which gives the initial location of a fluid particle that at time t is located at position \mathbf{z} . Thus, $\mathbf{x}^+(t, \mathbf{y}^+(t, \mathbf{z})) = \mathbf{z}$.

We begin as follows

$$\begin{aligned} \int f'_L(\mathbf{V}, \mathbf{x}; t | \mathbf{y}) d\mathbf{y} &= \int \delta(\mathbf{u}^+(t, \mathbf{y}) - \mathbf{V}) \delta(\mathbf{x}^+(t, \mathbf{y}) - \mathbf{x}) d\mathbf{y} \\ &= \int \delta(\mathbf{u}(\mathbf{x}^+(t, \mathbf{y}), t) - \mathbf{V}) \delta(\mathbf{x}^+(t, \mathbf{y}) - \mathbf{x}) d\mathbf{y} \\ &= \int \delta(\mathbf{u}(\mathbf{x}^+(t, \mathbf{y}), t) - \mathbf{V}) \delta(\mathbf{x}^+(t, \mathbf{y}) - \mathbf{x}) |\det D\mathbf{x}^+| d\mathbf{y}, \end{aligned} \quad (\text{A.7})$$

where we have introduced $|\det D\mathbf{x}^+|$, which is the absolute value of the determinant of the Jacobean $\partial\mathbf{x}^+/\partial\mathbf{y}$, and is equal to one for incompressible flows. Using integration by substitution we obtain

$$\int f'_L(\mathbf{V}, \mathbf{x}; t | \mathbf{y}) d\mathbf{y} = \int \delta(\mathbf{u}(\mathbf{z}, t) - \mathbf{V}) \delta(\mathbf{z} - \mathbf{x}) d\mathbf{z} = \delta(\mathbf{u}(\mathbf{x}, t) - \mathbf{V}) \quad (\text{A.8})$$


Given the definition of $f'(\mathbf{V}; \mathbf{x}, t)$, we have

$$\int f'_L(\mathbf{V}, \mathbf{x}; t | \mathbf{y}) d\mathbf{y} = f'(\mathbf{V}; \mathbf{x}, t). \quad (\text{A.9})$$

Taking the expectation of the above we obtain

$$\int f_L(\mathbf{V}, \mathbf{x}; t | \mathbf{y}) d\mathbf{y} = f(\mathbf{V}; \mathbf{x}, t). \quad (\text{A.10})$$

A summary of all of the relations derived thus far is given by the following graph

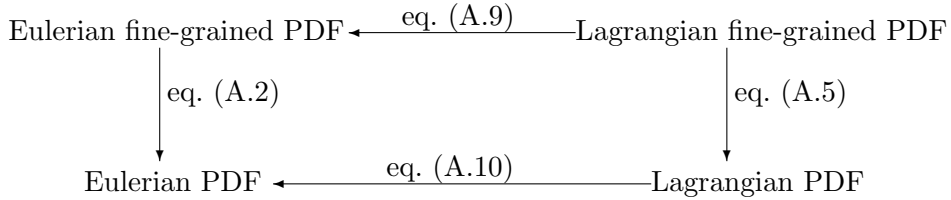

A.4 Evolution equation for fine-grained Eulerian PDF

A.5 Evolution equation for fine-grained Lagrangian PDF