

## Part 1: Assess Quality of Tests using Line Coverage

### 1. Report three different scenarios you have tested and the corresponding coverage results.

1. A scenario which was tested was starting the game with the `start` button and then stopping the game with the `stop` button. This appears to freeze the game in its current state.

This code is from: `/jpacman-framework/src/main/java/nl/tudelft/jpacman/ui/PacManUiBuilder.java`.

```
1  /**
2   * Adds a button with the caption {@value #STOP_CAPTION} that stops the
3   * game.
4   *
5   * @param game
6   *       The game to stop.
7   */
8  private void addStopButton(final Game game) {
9      assert game != null;
10
11      buttons.put(STOP_CAPTION, new Action() {
12          @Override
13          public void doAction() {
14              game.stop();
15          }
16      });
17 }
```

It appears that as the UI is built, the `stop` button is added to `this.buttons`. This functionality works but the test coverage is lacking. The action which is performed is `game.stop()` on line 14. After observing coverage results, it seems that line 9 doesn't have full branch coverage. The prediction here is that only one state of `game` is tested. Also on line 14 where `game.stop()` is called, no coverage exists. The prediction here is that no test exists where `doAction` is called.

2. A scenario tested was when the `stop` button was pressed, that no more moves could be made.

This code is from `/jpacman-framework/src/main/java/nl/tudelft/jpacman/level/Level.java`.

```
1  /**
2   * Moves the unit into the given direction if possible and handles all
3   * collisions.
4   *
5   * @param unit
6   *       The unit to move.
7   * @param direction
8   *       The direction to move the unit in.
9   */
10 public void move(Unit unit, Direction direction) {
11     assert unit != null;
12     assert direction != null;
13
14     if (!isInProgress()) {
15         return;
16     }
17
18     synchronized (moveLock) {
19         ...
20     }
21 }
```

While this functionality works the branch coverage is lacking. On line 14, only one value of the predicate `isInProgress()` is used thus not coverage every branch test scenario.

3. A scenario tested was pressing the arrow keys to move pacman around the board.

This code is from `/jpacman-framework/src/main/java/nl/tudelft/jpacman/ui/PacKeyListener.java`.

```
1 | @Override
2 | public void keyPressed(KeyEvent e) {
3 |     assert e != null;
4 |     Action action = mappings.get(e.getKeyCode());
5 |     if (action != null) {
6 |         action.doAction();
7 |     }
8 | }
```

This is run everytime a key is pressed from the keyboard. It handles mapping a `KeyEvent` to a specific action, as this functionality works, the entire function does not have test coverage.


## 2. Report the coverage percentage. Identify the three least covered application classes. Identify the three least covered application classes. Explain why the tests for them are adequate or how they can be improved.

Three application classes exist with 0% coverage.

1. `/jpacman-framework/src/main/java/nl/tudelft/jpacman/level/CollisionInteractionMap.java`
  - Simply no tests import `CollisionInteractionMap` so none of its functions are used in tests.
2. `/jpacman-framework/src/main/java/nl/tudelft/jpacman/level/DefaultPlayerInteractionMap.java`
  - Simply no tests import `DefaultPlayerInteractionMap` so none of its functions are used in tests.
3. `/jpacman-framework/src/main/java/nl/tudelft/jpacman/PacmanConfigurationException.java`
  - Simply no tests import `PacmanConfigurationException` so none of its functions are used in tests.

## 3. Measure the code coverage again, but this time with a configuration that has runtime assertion enabled (add ‘-ea’ as VM argument). To do this, right click on the project, select “Coverage As”, then go to “Coverage Configurations”. Then under “Arguments” add “-ea” to VM arguments. Explain the coverage changes you see.

- Without `-ea`

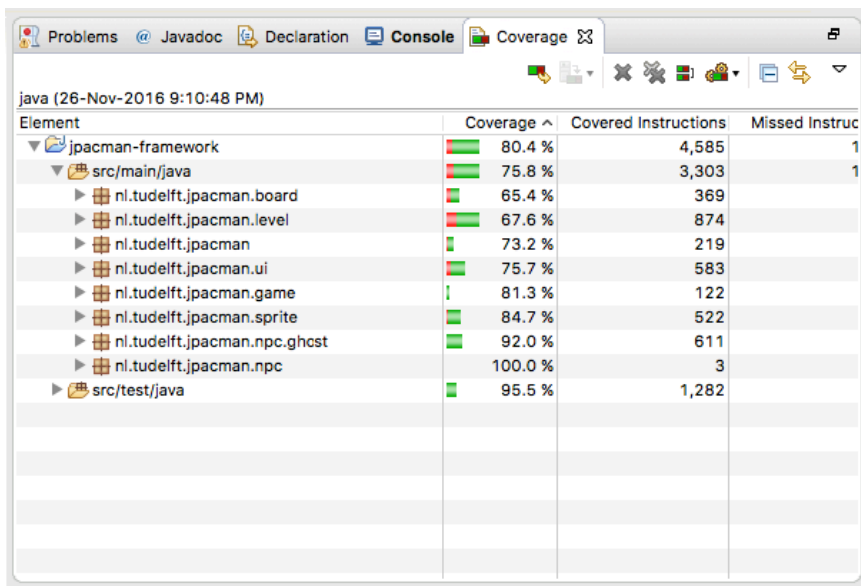

Element	Coverage ^	Covered Instructions	Missed Instruc
jpacman-framework	80.4 %	4,585	1
src/main/java	75.8 %	3,303	1
nl.tudelft.jpacman.board	65.4 %	369	0
nl.tudelft.jpacman.level	67.6 %	874	0
nl.tudelft.jpacman	73.2 %	219	0
nl.tudelft.jpacman.ui	75.7 %	583	0
nl.tudelft.jpacman.game	81.3 %	122	0
nl.tudelft.jpacman.sprite	84.7 %	522	0
nl.tudelft.jpacman.npc.ghost	92.0 %	611	0
nl.tudelft.jpacman.npc	100.0 %	3	0
src/test/java	95.5 %	1,282	0

- With `-ea`

java (26-Nov-2016 9:12:53 PM)

Element	Coverage ^	Covered Instructions	Missed Instruc
▼ jpacman-framework	83.3 %	4,748	
▼ src/main/java	79.5 %	3,466	
nl.tudelft.jpacman.level	68.7 %	888	
nl.tudelft.jpacman	73.2 %	219	
nl.tudelft.jpacman.ui	78.6 %	605	
nl.tudelft.jpacman.game	83.3 %	125	
nl.tudelft.jpacman.board	86.0 %	485	
nl.tudelft.jpacman.sprite	86.0 %	530	
nl.tudelft.jpacman.npc.ghost	92.0 %	611	
nl.tudelft.jpacman.npc	100.0 %	3	
src/test/java	95.5 %	1,282	

Runtime assertions enable `assert` statements to be run. Some functions which act as invariants are held within `assert` statements thus causing less coverage to be obtained when running without `-ea`.

An example is here in `/jpacman-framework/src/main/java/nl/tudelft/jpacman/board/Board.java`. This is the coverage when run without `-ea`.

```
/**
 * Creates a new board.
 *
 * @param grid
 *         The grid of squares with grid[x][y] being the square at column
 *         x, row y.
 */
Board(Square[][] grid) {
    assert grid != null;
    this.board = grid;
    assert invariant() : "Initial grid cannot contain null squares";
}

/**
 * Whatever happens, the squares on the board can't be null.
 * @return false if any square on the board is null.
 */
protected final boolean invariant() {
    for (Square[] row : board) {
        for (Square square : row) {
            if (square == null) {
                return false;
            }
        }
    }
    return true;
}
```

And this is the coverage when run with `-ea`.

```

/**
 * Creates a new board.
 *
 * @param grid
 *         The grid of squares with grid[x][y] being the square at column
 *         x, row y.
 */
Board(Square[][] grid) {
    assert grid != null;
    this.board = grid;
    assert invariant() : "Initial grid cannot contain null squares";
}


/**
 * Whatever happens, the squares on the board can't be null.
 * @return false if any square on the board is null.
 */
protected final boolean invariant() {
    for (Square[] row : board) {
        for (Square square : row) {
            if (square == null) {
                return false;
            }
        }
    }
    return true;
}

```

As you can see the function inside the `assert invariant()` was run during the tests when Runtime Assertion was enabled. However all branch coverage does not exist still around the `assert` statements indicating a lack of test coverage still exists.

## Part 2: Assess Quality of Tests using Mutation Testing

1. Run PIT with the default set of mutation operators on the existing test suite and measure mutation coverage. Report the results and compare them with line coverage results you got earlier. Explain what you see.

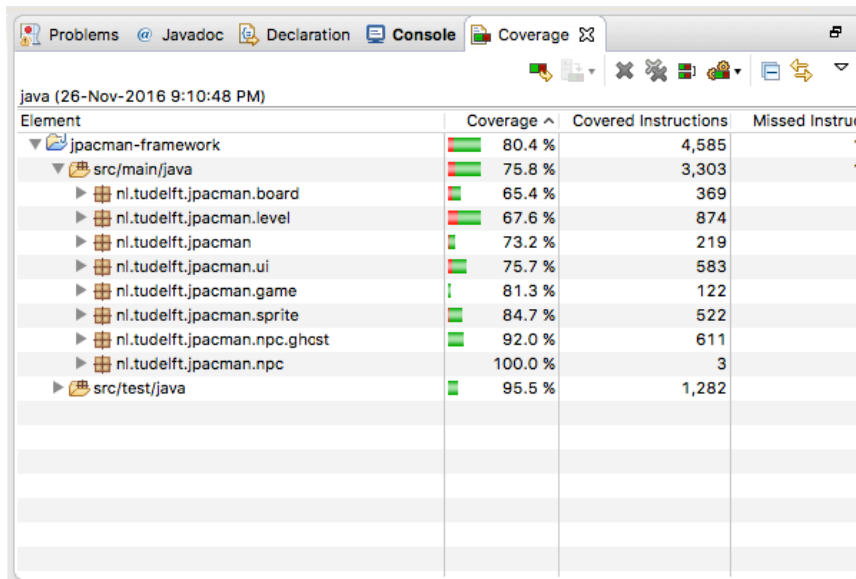

The screenshot shows the Coverage window in an IDE, displaying test coverage results for the `jpacman-framework` project. The window has tabs for Problems, Javadoc, Declaration, Console, and Coverage. The Coverage tab is active, showing a table with columns: Element, Coverage, Covered Instructions, and Missed Instructions. The table lists various classes and packages, including `src/main/java` and `src/test/java`, with their respective coverage percentages and instruction counts.

Element	Coverage	Covered Instructions	Missed Instructions
jpacman-framework	80.4 %	4,585	1
src/main/java	75.8 %	3,303	1
nl.tudelft.jpacman.board	65.4 %	369	
nl.tudelft.jpacman.level	67.6 %	874	
nl.tudelft.jpacman	73.2 %	219	
nl.tudelft.jpacman.ui	75.7 %	583	
nl.tudelft.jpacman.game	81.3 %	122	
nl.tudelft.jpacman.sprite	84.7 %	522	
nl.tudelft.jpacman.npc.ghost	92.0 %	611	
nl.tudelft.jpacman.npc	100.0 %	3	
src/test/java	95.5 %	1,282	

- Test coverage results:

# Pit Test Coverage Report

## Project Summary

Number of Classes	Line Coverage	Mutation Coverage
36	81% <div><div>788/973</div></div>	48% <div><div>220/461</div></div>

## Breakdown by Package

Name	Number of Classes	Line Coverage	Mutation Coverage
<a href="#">nl.tudelft.jpacman</a>	1	77% <div><div>46/60</div></div>	55% <div><div>12/22</div></div>
<a href="#">nl.tudelft.jpacman.board</a>	5	90% <div><div>96/107</div></div>	53% <div><div>34/64</div></div>
<a href="#">nl.tudelft.jpacman.game</a>	3	90% <div><div>38/42</div></div>	67% <div><div>12/18</div></div>
<a href="#">nl.tudelft.jpacman.level</a>	9	67% <div><div>219/326</div></div>	56% <div><div>81/144</div></div>
<a href="#">nl.tudelft.jpacman.npc.ghost</a>	7	91% <div><div>134/148</div></div>	49% <div><div>41/84</div></div>
<a href="#">nl.tudelft.jpacman.sprite</a>	5	92% <div><div>115/125</div></div>	51% <div><div>36/71</div></div>
<a href="#">nl.tudelft.jpacman.ui</a>	6	85% <div><div>140/165</div></div>	7% <div><div>4/58</div></div>

---

Report generated by [PIT](#) 1.1.0

- PIT coverage results:

As you can see line coverage seems to be very similar but mutation coverage has a large margin in difference.

Lets look at an example where there is a large difference in line coverage and mutation coverage.

As you can see in `/jpacman-framework/src/main/java/nl/tudelft/jpacman/Launcher.java` , 100% line coverage..

```
/**
 * Creates and starts a JPac-Man game.
 */
public void launch() {
    game = makeGame();
    PacManUiBuilder builder = new PacManUiBuilder().withDefaultButtons();
    addSinglePlayerKeys(builder, game);
    pacManUI = builder.build(game);
    pacManUI.start();
}

/**
 * Disposes of the UI. For more information see {@link javax.swing.JFrame#dispose()}.
 */
public void dispose() {
    pacManUI.dispose();
}
```

But in the same file we have marginally less mutation coverage:

```

194     * Creates and starts a JPac-Man game.
195     */
196     public void launch() {
197         game = makeGame();
198         PacManUiBuilder builder = new PacManUiBuilder().withDefaultButtons();
199         addSinglePlayerKeys(builder, game);
200         pacManUI = builder.build(game);
201         pacManUI.start();
202     }
203
204     /**
205     * Disposes of the UI. For more information see {@link javax.swing.JFrame#dispose()}.
206     */
207     public void dispose() {
208         pacManUI.dispose();
209     }
210

```

Mutation testing will run tests with some tests removed to see if they still pass. The red highlights here indicate that PIT ran the test suite with line 199 removed and the tests still passed. This indicates a `survived` mutation which it will not count into mutation coverage.

## 2. Run PIT with only “Conditionals Boundary Mutator”, “Increments Mutator”, and “Math Mutator”, respectively. Compare the results and explain.

The mutators specified are a subset of the default mutators used thus less mutators are used when running the test suite.

One example here is shown.

As you can see this is the summary of mutation coverage results for `nl.tudelft.jpacman.board`.

# Pit Test Coverage Report

## Package Summary

nl.tudelft.jpacman.board

Number of Classes	Line Coverage	Mutation Coverage
5	90% <div><div></div></div> 96/107	53% <div><div></div></div> 34/64

## Breakdown by Class

Name	Line Coverage	Mutation Coverage
<a href="#">Board.java</a>	67% <div><div></div></div> 12/18	14% <div><div></div></div> 3/22
<a href="#">BoardFactory.java</a>	100% <div><div></div></div> 29/29	91% <div><div></div></div> 21/23
<a href="#">Direction.java</a>	100% <div><div></div></div> 16/16	100% <div><div></div></div> 2/2
<a href="#">Square.java</a>	82% <div><div></div></div> 18/22	33% <div><div></div></div> 2/6
<a href="#">Unit.java</a>	95% <div><div></div></div> 21/22	55% <div><div></div></div> 6/11

This is the same summary but with the specified mutators.

# Pit Test Coverage Report

## Package Summary

nl.tudelft.jpacman.board

Number of Classes	Line Coverage	Mutation Coverage
2	84% <div><div>31/37</div></div>	60% <div><div>12/20</div></div>

### Breakdown by Class

Name	Line Coverage	Mutation Coverage
<a href="#">Board.java</a>	67% <div><div>12/18</div></div>	0% <div><div>0/8</div></div>
<a href="#">BoardFactory.java</a>	100% <div><div>19/19</div></div>	100% <div><div>12/12</div></div>

As you can see, less classes were covered with mutators. This is because the classes which were excluded do not contain code which can pertain to the specific mutators chosen.

A more specific example is shown when looking at a class which did not get covered in our second PIT test coverage (the one with mutators specified).

## Direction.java

```
1 package nl.tudelft.jpacman.board;
2
3 /**
4  * An enumeration of possible directions on a two-dimensional square grid.
5  *
6  * @author Jeroen Roosen
7  */
8 public enum Direction {
9
10     /**
11      * North, or up.
12      */
13     NORTH(0, -1),
14
15     /**
16      * South, or down.
17      */
18     SOUTH(0, 1),
19
20     /**
21      * West, or left.
22      */
23     WEST(-1, 0),
24
25     /**
26      * East, or right.
27      */
```

The rest of the file shows only green lines as well. This file was not covered in the test run where we specified mutators because the file does not contain lines with:

- Conditional boundaries: `<`, `<=`, `>`, `>=`
- Increments: `++`, `--`
- Mathematical operators: `+`, `-`, `...`

3. Add one Junit test case to an appropriate package (e.g., in “ src/test/java/... ”) so that with it more mutants can be killed

using default PIT configurations (i.e., the mutation score increases). Include your test case in the report and explain.

Found in `/jpacman-framework/src/main/java/nl/tudelft/jpacman/level/Level.java` starting on line 274.

```
1  /**
2   * Returns true iff at least one of the players in this level
3   * is alive.
4   *
5   * @return true if at least one of the registered players is
6   *         alive.
7   */
8  public boolean isAnyPlayerAlive() {
9      for (Player p : players) {
10         if (p.isAlive()) {
11             return true;
12         }
13     }
14     return false;
15 }
```

Before:

# Pit Test Coverage Report

## Package Summary

nl.tudelft.jpacman.level

Number of Classes	Line Coverage	Mutation Coverage
9	67% <div><div>219/326</div></div>	56% <div><div>81/144</div></div>

## Breakdown by Class

Name	Line Coverage	Mutation Coverage
<a href="#">CollisionInteractionMap.java</a>	0% <div><div>0/57</div></div>	0% <div><div>0/24</div></div>
<a href="#">DefaultPlayerInteractionMap.java</a>	0% <div><div>0/19</div></div>	0% <div><div>0/7</div></div>
<a href="#">Level.java</a>	95% <div><div>97/102</div></div>	75% <div><div>33/44</div></div>

PIT reported this for the return line for `isAnyPlayerAlive` :

1.1 Location : isAnyPlayerAlive Killed by : none replaced return of integer sized value with (x == 0 ? 1 : 0) → SURVIVED

This simply means that PIT tried running the test suite with returning True instead of False and they all succeeded. This means that the return value is not being asserted anywhere in the test suite.

After:



# Pit Test Coverage Report

## Package Summary

nl.tudelft.jpacman.level

Number of Classes	Line Coverage	Mutation Coverage
9	68% <div><div>223/326</div></div>	57% <div><div>82/144</div></div>

## Breakdown by Class

Name	Line Coverage	Mutation Coverage
<a href="#">CollisionInteractionMap.java</a>	0% <div><div>0/57</div></div>	0% <div><div>0/24</div></div>
<a href="#">DefaultPlayerInteractionMap.java</a>	0% <div><div>0/19</div></div>	0% <div><div>0/7</div></div>
<a href="#">Level.java</a>	95% <div><div>97/102</div></div>	77% <div><div>34/44</div></div>

Test added:

```
1  /**
2   * Verifies if no players are in the game, no one is alive.
3   */
4   @Test
5   @SuppressWarnings("PMD.JUnitTestsShouldIncludeAssert")
6   public void isAnyPlayerAlive() {
7       assertFalse(level.isAnyPlayerAlive());
8   }
```

With this test, the return value of `isAnyPlayerAlive` is checked, thus the mutation mentioned previously will be killed.

## Part 3: Extend Test Suite with Symbolic Execution

1.

Part 1: Note that in order to apply SPF on a non-static method, you need to write a driver method ‘`static void main(String[])`’ which instantiates the target class and calls the target methods.

```

1 // added to Board.java
2 static void main(String[] args){
3     Square x0y0 = new BasicSquare();
4     Square x0y1 = new BasicSquare();
5     Square x0y2 = new BasicSquare();
6     Square x1y0 = new BasicSquare();
7     Square x1y1 = new BasicSquare();
8     Square x1y2 = new BasicSquare();
9     Unit occupant = new BasicUnit();
10    x0y0.put(occupant);
11    Unit occupant1 = new BasicUnit();
12    x0y1.put(occupant1);
13    Unit occupant2 = new BasicUnit();
14    x0y2.put(occupant2);
15    Unit occupant3 = new BasicUnit();
16    x1y0.put(occupant3);
17    Unit occupant4 = new BasicUnit();
18    x1y1.put(occupant4);
19    Unit occupant5 = new BasicUnit();
20    x1y2.put(occupant5);
21    Square[][] grid = new Square[2][3];
22    grid[0][0] = x0y0;
23    grid[0][1] = x0y1;
24    grid[0][2] = x0y2;
25    grid[1][0] = x1y0;
26    grid[1][1] = x1y1;
27    grid[1][2] = x1y2;
28    Board board = new Board(grid);
29    board.withinBorders(1, 2);
30 }

```

When running

```
java -jar /Users/alecbrunelle/Github/jpf-core/build/RunJPF.jar +shell.port=4242 /Users/alecbrunelle/School/CSC410-A2/q3part1.jpf ...
```

```

1 Executing command: java -jar /Users/alecbrunelle/Github/jpf-core/build/RunJPF.jar +shell.port=4242 /Users/alecbrunelle/School/CSC4
2 Running Symbolic Pathfinder ...
3 symbolic.dp=choco
4 symbolic.string_dp_timeout_ms=0
5 symbolic.string_dp=none
6 symbolic.choco_time_bound=30000
7 symbolic.max_pc_length=2147483647
8 symbolic.max_pc_msec=0
9 symbolic.min_int=-1000000
10 symbolic.max_int=1000000
11 symbolic.min_double=-8.0
12 symbolic.max_double=7.0
13 JavaPathfinder core system v8.0 (rev ${version}) - (C) 2005-2014 United States Government. All rights reserved.
14
15
16 ===== system under test
17 nl.tudelft.jpacman.board.Board.main()
18
19 ===== search started: 30/11/16 11:48 AM
20
21 ===== Method Summaries
22 Inputs: x_1_SYMINT,y_CONCRETE,
23
24 nl.tudelft.jpacman.board.Board.withinBorders(0,2) --> Return Value: 1
25 nl.tudelft.jpacman.board.Board.withinBorders(2,2) --> Return Value: 0
26 nl.tudelft.jpacman.board.Board.withinBorders(-1000000,2) --> Return Value: 0
27
28 ===== Method Summaries (HTML)
29 <h1>Test Cases Generated by Symbolic JavaPath Finder for nl.tudelft.jpacman.board.Board.withinBorders (Path Coverage) </h1>
30 <table border=1>
31 <tr><td>x_1_SYMINT</td><td>y_CONCRETE</td><td>RETURN</td></tr>
32 <tr><td>0</td><td>2</td><td>Return Value: 1</td></tr>
33 <tr><td>2</td><td>2</td><td>Return Value: 0</td></tr>
34 <tr><td>-1000000</td><td>2</td><td>Return Value: 0</td></tr>
35 </table>
36
37 ===== results
38 no errors detected
39
40 ===== statistics
41 elapsed time:      00:00:00
42 states:           new=5,visited=0,backtracked=5,end=3
43 search:           maxDepth=3,constraints=0
44 choice generators: thread=1 (signal=0,lock=1,sharedRef=0,threadApi=0,reschedule=0), data=2
45 heap:             new=484,released=173,maxLive=476,gcCycles=5
46 instructions:     5282
47 max memory:       123MB
48 loaded code:      classes=77,methods=1681
49
50 ===== search finished: 30/11/16 11:49 AM

```

**Part 2: Write a fully functional JUnit test class 'JPFBBoardTest' for the test cases generated in a new file**

**'src/test/java/nl/tudelft/jpacman/board/JPFBBoardTest.java'. The test class should have a test fixture (i.e., @Before) and several test cases (i.e., @Test). Include your test class in the report as well.**

Test class `/jpacman-framework/src/test/java/nl/tudelft/jpacman/board/JPFBBoardTest.java`.

```

1  package nl.tudelft.jpacman.board;
2
3  import static org.junit.Assert.assertFalse;
4  import static org.junit.Assert.assertTrue;
5  import static org.mockito.Mockito.mock;
6
7  import org.junit.Before;
8  import org.junit.Test;
9
10 /*
11  * Test suite for JPF related Board class tests.
12  */
13 public class JPFBoardTest {
14     private Board board;
15
16     private final Square x0y0 = mock(Square.class);
17     private final Square x0y1 = mock(Square.class);
18     private final Square x0y2 = mock(Square.class);
19     private final Square x1y0 = mock(Square.class);
20     private final Square x1y1 = mock(Square.class);
21     private final Square x1y2 = mock(Square.class);
22
23     private static final int MAX_WIDTH = 2;
24     private static final int MAX_HEIGHT = 3;
25
26     /**
27      * Setup a board that can be used for testing.
28      */
29     @Before
30     public void setUp() {
31         Square[][] grid = new Square[MAX_WIDTH][MAX_HEIGHT];
32         grid[0][0] = x0y0;
33         grid[0][1] = x0y1;
34         grid[0][2] = x0y2;
35         grid[1][0] = x1y0;
36         grid[1][1] = x1y1;
37         grid[1][2] = x1y2;
38         board = new Board(grid);
39     }
40
41     /**
42      * Verifies that given a position on the board, returns True.
43      */
44     @Test
45     public void verifyWithinBorders() {
46         assertTrue(board.withinBorders(0, 2));
47     }
48
49     /**
50      * Verifies that given a position on the board, returns False.
51      */
52     @Test
53     public void verifyWithinBordersOutsideBounds() {
54         assertFalse(board.withinBorders(2, 2));
55     }
56
57     /**
58      * Verifies that given a position on the board, returns False.
59      */
60     @Test
61     public void verifyWithinBordersOutsideBounds2() {
62         assertFalse(board.withinBorders(-1000000, 2));
63     }
64 }
65

```

