

# charmmgui2cp2k: automated generation of CP2K QM/MM input from CHARMM-GUI/AMBER biomolecular setups

[ Author One ]<sup>1</sup>, [ Author Two ]<sup>1,2</sup>, [ Corresponding Author ]<sup>1,\*</sup>

<sup>1</sup> [ Department / Institute, University, City, Country ]   <sup>2</sup> [ Second affiliation ]

\* Correspondence: [ email ]

Open source · MIT

v0.1.0

Python 3.10-3.12

CP2K ≥ 7.1

DOI: 10.xxxx/zenodo · on release

Availability ↓

## ABSTRACT

Setting up a biomolecular quantum-mechanics/molecular-mechanics (QM/MM) simulation in CP2K from an existing AMBER / CHARMM-GUI system is a manual, error-prone expert task: the QM region must be enumerated, every boundary link atom defined, boundary charges redistributed, and the AMBER topology pre-edited. We present **charmmgui2cp2k**, a terminal-native wizard (a plain CLI and a full-screen Textual TUI sharing one validated core) that automates this end to end and emits immediately runnable CP2K QM/MM input, embedding the scientific safeguards a careful setup requires — topology validation, hydrogen link atoms with forbidden-cut rejection, charge-conserving boundary schemes, spin-state risk analysis, and CP2K version/data-file capability gating. To our knowledge it is the first automated CHARMM-GUI/AMBER → CP2K QM/MM input generator. We validate correctness by NVE energy conservation, real-CP2K parser acceptance, and an independent ParmEd cross-check, and show the generated boundary is energy-conserving.

**Availability and implementation:** open source under the MIT license; source, tests, and the reproducible validation harness at the repository (archived on Zenodo at release). **Contact:** [ email ].

# 1 Statement of need

CP2K is a widely used engine for biomolecular QM/MM, able to read AMBER `prmtop` and CHARMM PSF topologies directly, but it ships no setup GUI or wizard: users hand-author the `&QMMM` region ( `QM_KIND` / `MM_INDEX` ), every `&LINK` atom, the boundary charge handling, and Lennard-Jones/charge pre-edits of the topology. Mistakes in any of these silently produce physically wrong simulations.

No existing tool closes this gap end to end (Table 1). CHARMM-GUI’s QM/MM Interfacer is web-based, semiempirical-only, and targets the CHARMM/AMBER engines, not CP2K; ASH is a scripting library rather than a guided wizard; MiMiCPy targets CPMD+GROMACS. **charmmgui2cp2k** fills this gap and is delivered as an offline, terminal-native wizard aimed at enzyme active sites, metalloproteins, and redox cofactors — the systems where boundary and charge correctness matter most.

**Table 1.** Landscape of QM/MM setup tools and the unmet gap.

| Tool                        | Form                    | Engine target               | Closes CHARMM-GUI/AMBER→CP2K gap?  |
|-----------------------------|-------------------------|-----------------------------|------------------------------------|
| CHARMM-GUI QM/MM Interfacer | web GUI                 | CHARMM/AMBER, semiempirical | No — no CP2K, no DFT               |
| CP2K (native)               | input language          | CP2K                        | No — no setup wizard               |
| ASH                         | Python library          | many (CP2K as a backend)    | No — library, no CHARMM-GUI ingest |
| MiMiCPy                     | wizard                  | CPMD + GROMACS              | No — different stack               |
| gmx2qmmm                    | script                  | GROMACS↔Gaussian/ORCA/...   | No — no CP2K                       |
| QwikMD                      | VMD GUI                 | NAMD                        | No — no CP2K                       |
| <b>charmmgui2cp2k</b>       | <b>CLI + TUI wizard</b> | <b>CP2K</b>                 | <b>Yes</b>                         |


# 2 Implementation

The pipeline is a single Python module exposing three frontends over one shared scientific core (Figure 1): a plain CLI wizard, a Textual TUI workbench (Figure 2; eight phases:

System → QM region → Boundary → Method → Electronic → Workflow → Preview → Generate), and a non-interactive batch mode. The core performs:

- ◆ **Topology validation** — AMBER `POINTERS` /array cross-checks, CHAMBER rejection, mixed-SCEE detection.
- ◆ **QM/MM boundary** — automatic detection of bonds crossing the boundary, hydrogen link-atom capping (IMOMM), classification and rejection of chemically impossible cuts, M1/M2 neighbour enrichment, GEEP embedding radii, and generation-time link-geometry sanity checks.
- ◆ **Charge conservation** — residual-charge redistribution across split-residue MM atoms with PRMTOP round-trip verification, plus a combined cross-channel audit (FIST residual + ADD\_MM\_CHARGE embedding).
- ◆ **Electronic structure** — GTH-valence electron counting, multiplicity-parity enforcement, and a multi-detector spin-risk taxonomy (transition metals, redox cofactors,  $\pi$ -stacking geometry, unresolved elements) that refuses to auto-assign spin when the choice is unreliable.
- ◆ **CP2K capability gating** — keyword/basis/dispersion emission gated against the detected CP2K version *and* against the presence of the corresponding data files (GTH potentials, ADMM basis, dftd3.dat) in the install.
- ◆ **Provenance** — every generated input embeds a deterministic parameter header; a full decision log, boundary-charge audit, and electronic-state report are written alongside.

A `--strict` mode turns unresolved scientific concerns into a non-zero exit for reproducible pipelines.

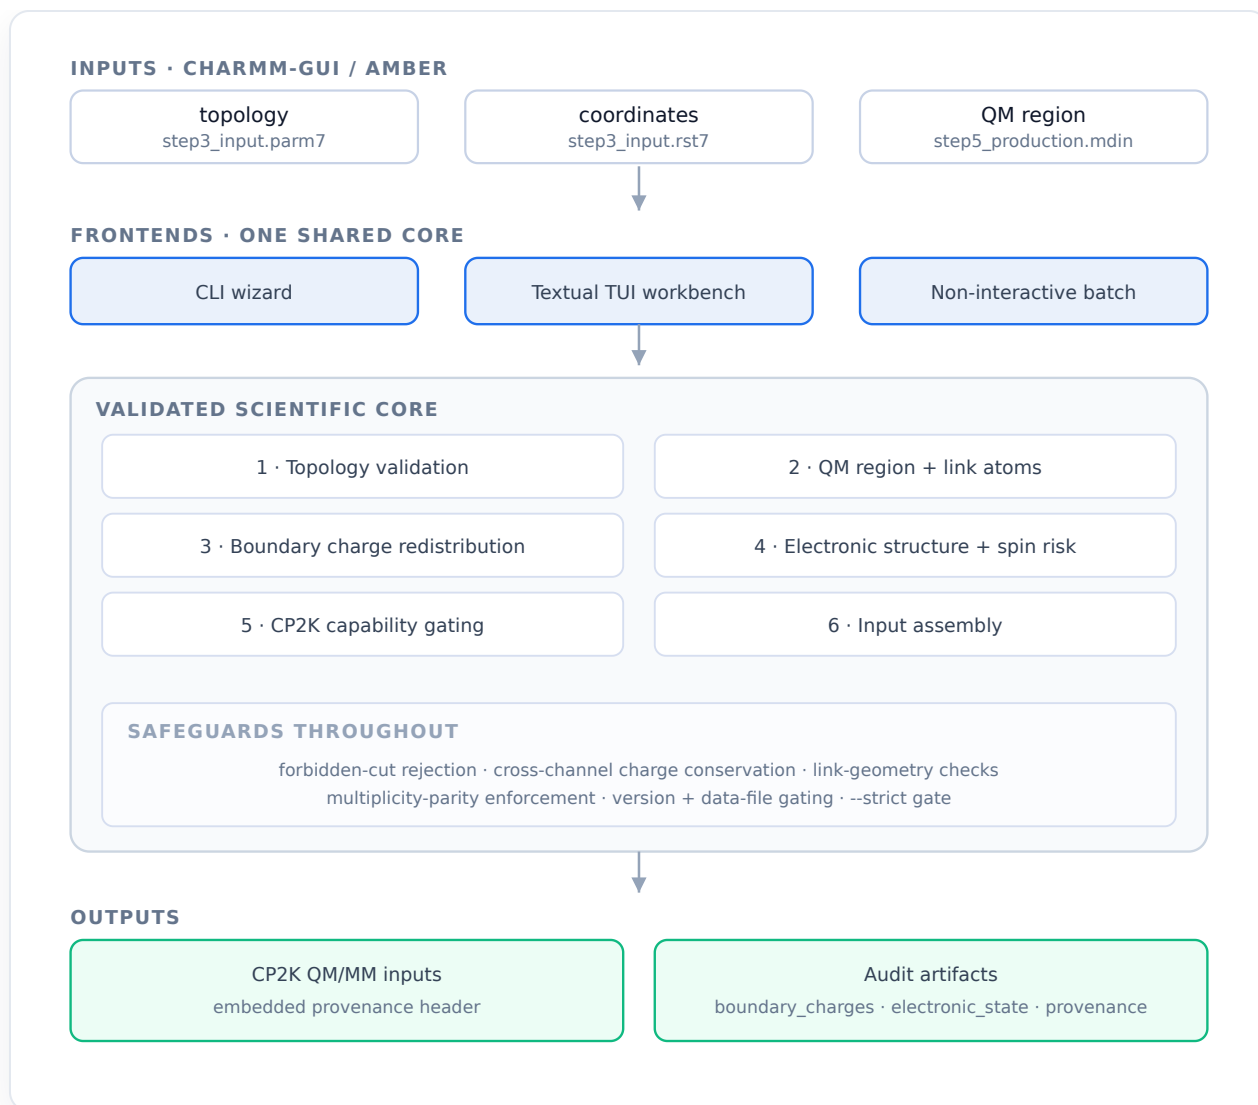

**Figure 1.** Architecture and data flow. Three frontends share one validated scientific core that ingests CHARMM-GUI/AMBER inputs, applies six sequential stages under cross-cutting safeguards, and emits runnable CP2K QM/MM input plus machine- and human-readable audit artifacts.



**Figure 2.** The Textual TUI workbench (rendered live, headlessly) on the System phase: a persistent phase rail, sticky system summary, validation tray, and keyboard-first navigation make the next safe action obvious without a manual.

### 3 Validation


All validation is reproducible from the `validation/` harness on a committed alanine-dipeptide demo system (build script included); production-scale agreement is the metalloprotein case study (§3.4).

### 3.1 Real-CP2K acceptance

Every generated staged input passes a real CP2K binary's parser-only `--input-check` (CP2K 2025.2); see `tests/regression/test_cp2k_input_check.py`.

### 3.2 NVE energy conservation

A self-contained NVE QM/MM trajectory of the generated setup (PBE, 50 fs) gives a conserved-quantity range of 0.104 kcal/mol and a drift of  $2.6 \times 10^{-4}$  kT/dof/ps with no systematic trend (Figure 3), demonstrating the link atoms, deleted boundary terms, and boundary charges are mutually consistent. A longer trajectory with tighter SCF tolerance reduces this toward the literature reference ( $10^{-5}$ – $10^{-6}$  kT/dof/ps; Götz *et al.*, 2014 [6]).

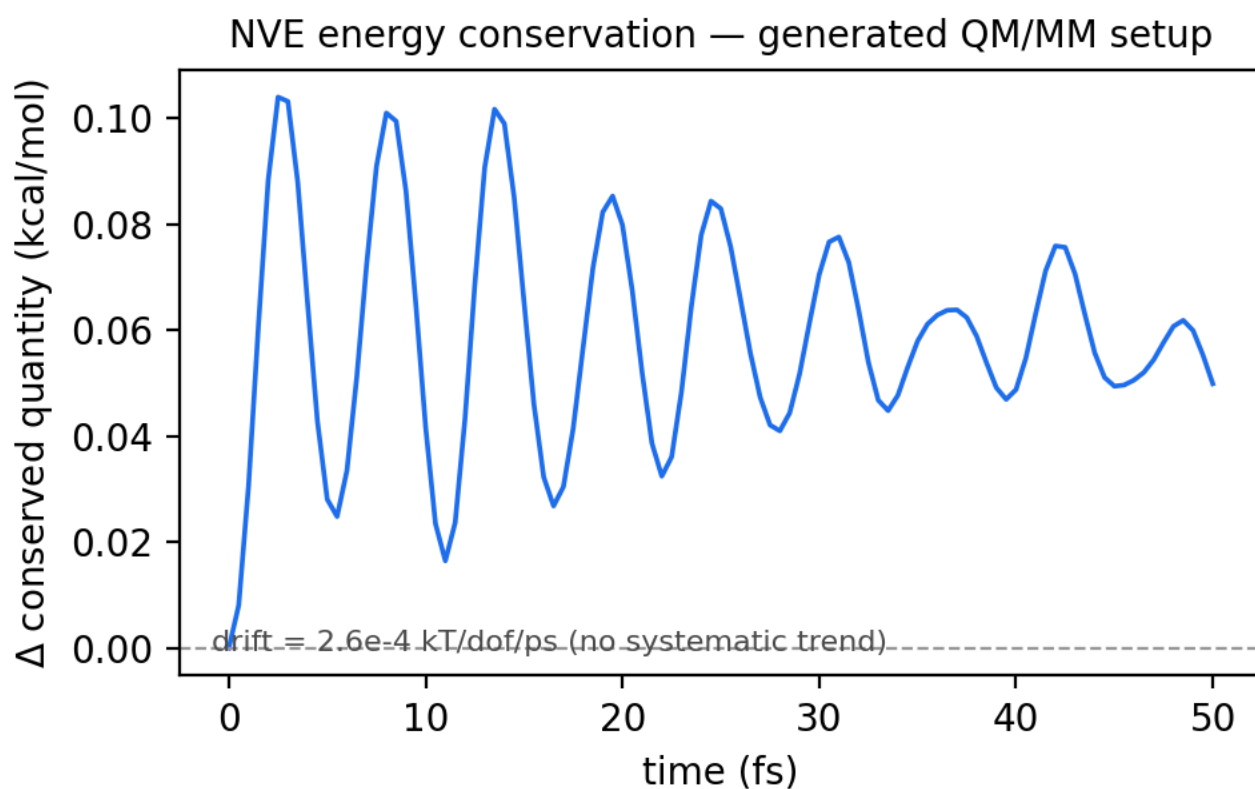


**Figure 3.** NVE energy conservation of the tool-generated QM/MM setup (alanine-dipeptide demo, PBE, 50 fs). The conserved quantity oscillates within  $\sim 0.1$  kcal/mol and the transient *decays* — bounded, with no systematic drift.

### 3.3 Boundary handling and reproducibility

Single-point energies under the NONE / Z1 / CHARGE\_SHIFT boundary schemes differ measurably: NONE (the full M1 frontier charge retained in the embedding) lies 2.61 kcal/mol from CHARGE\_SHIFT, while Z1 and CHARGE\_SHIFT

(both remove M1 from the embedding) agree to 0.26 kcal/mol (Figure 4). This confirms the boundary charge treatment is physically active and that the redistribution schemes control the frontier over-polarization NONE exhibits. Repeated runs are bitwise reproducible ( $|\Delta E| = 5 \times 10^{-15}$  Ha). Element identities and charges agree with an independent ParmEd parse ( `tests/unit/test_parmed_crosscheck.py` ).

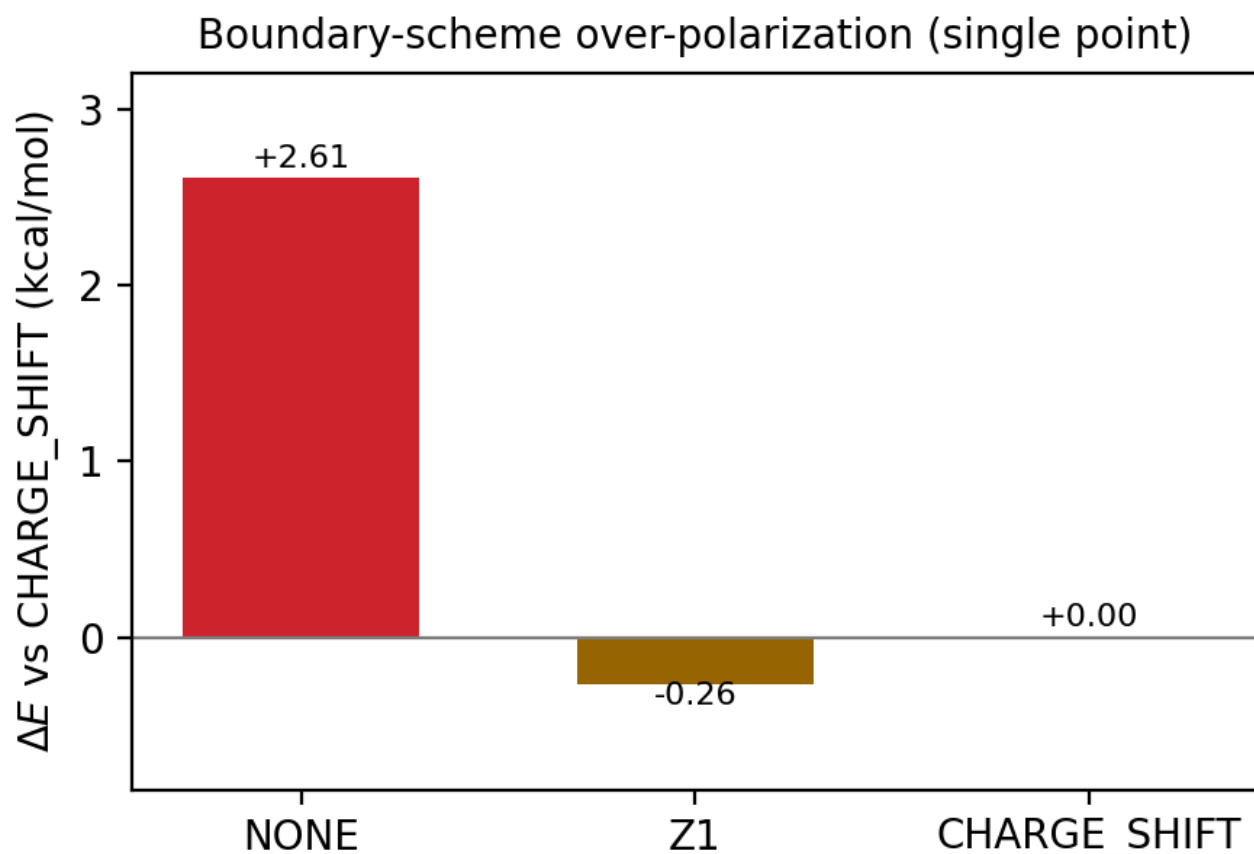

**Figure 4.** Boundary-scheme over-polarization. Single-point QM/MM energy relative to CHARGE\_SHIFT: NONE (full M1 charge in the embedding) is an outlier by +2.61 kcal/mol, while Z1 and CHARGE\_SHIFT — which both remove M1 from the embedding — agree to within 0.26 kcal/mol.

### 3.4 Metalloprotein case study DATA PENDING

Headline validation on a metal-containing active site (L-amino-acid oxidase, LAAO), where boundary/charge correctness is most scrutinized: single-point and short-MD agreement against a reference, plus a boundary over-polarization probe. The harness runs unchanged via `--dir`; results will be inserted here.

### 3.5 Benchmark suite DATA PENDING

Agreement with the BioExcel GROMACS+CP2K QM/MM benchmark systems (MQAE, ClC, CBD\_PHY, GFP) to show tool-generated CP2K input matches standalone references.

## 4 Usability and reproducibility (FAIR)

The primary workflow is designed to need no external manual: defaults trace to source evidence, expert controls use progressive disclosure, validation failures state the corrective action, and the generation phase shows progress and final artifacts. Each generated input embeds its full parameter set as a comment header (FAIR R1.2 [15]); a one-command `--demo` reproduces a complete run from bundled data. The software ships an OSI license, a `CITATION.cff`, and continuous-integration tests; releases will be archived on Zenodo for a versioned DOI.

## 5 Availability

Source code, tests, and the validation harness are available under the MIT license at [ repository URL — on publication ], archived on Zenodo for a versioned DOI. Tested on Linux with Python 3.10–3.12 and CP2K  $\geq 7.1$ .

## References

- 1 Senn HM, Thiel W. QM/MM methods for biomolecular systems. *Angew Chem Int Ed*. 2009;48(7):1198–1229.
- 2 Lin H, Truhlar DG. QM/MM: what have we learned, where are we, and where do we go from here? *Theor Chem Acc*. 2007;117:185–199.
- 3 Laino T, Mohamed F, Curioni A, VandeVondele J. An efficient real space multigrid QM/MM electrostatic coupling. *J Chem Theory Comput*. 2005;1(6):1176–1184.
- 4 Laino T, Mohamed F, Curioni A, VandeVondele J. An efficient linear-scaling electrostatic coupling for treating periodic boundary conditions in QM/MM simulations. *J Chem Theory Comput*. 2006;2(5):1370–1378.
- 5 Kühne TD, Iannuzzi M, Del Ben M, *et al*. CP2K: An electronic structure and molecular dynamics software package — Quickstep. *J Chem Phys*. 2020;152:194103.
- 6 Götz AW, Clark MA, Walker RC. An extensible interface for QM/MM molecular dynamics simulations with AMBER. *J Comput Chem*. 2014;35(2):95–108.
- 7 Maier JA, Martinez C, Kasavajhala K, Wickstrom L, Hauser KE, Simmerling C. ff14SB: improving the accuracy of protein side chain and backbone parameters. *J Chem Theory Comput*. 2015;11(8):3696–3713.

- 8 Grimme S, Ehrlich S, Goerigk L. Effect of the damping function in dispersion corrected density functional theory. *J Comput Chem*. 2011;32(7):1456–1465.
- 9 Guidon M, Hutter J, VandeVondele J. Auxiliary density matrix methods for Hartree–Fock exchange calculations. *J Chem Theory Comput*. 2010;6(8):2348–2364.
- 10 VandeVondele J, Hutter J. Gaussian basis sets for accurate calculations on molecular systems in gas and condensed phases. *J Chem Phys*. 2007;127:114105.
- 11 Cordero B, Gómez V, Platero-Prats AE, et al. Covalent radii revisited. *Dalton Trans*. 2008; (21):2832–2838.
- 12 Jo S, Kim T, Iyer VG, Im W. CHARMM-GUI: a web-based graphical user interface for CHARMM. *J Comput Chem*. 2008;29(11):1859–1865.
- 13 Lee J, Cheng X, Swails JM, et al. CHARMM-GUI Input Generator for NAMD, GROMACS, AMBER, OpenMM, and CHARMM/OpenMM simulations. *J Chem Theory Comput*. 2016;12(1):405–413.
- 14 List M, Ebert P, Albrecht F. Ten Simple Rules for Developing Usable Software in Computational Biology. *PLoS Comput Biol*. 2017;13(1):e1005265.
- 15 Barker M, Chue Hong NP, Katz DS, et al. Introducing the FAIR Principles for research software. *Sci Data*. 2022;9:622.

**Editorial note (preprint).** Author names/affiliations and the repository DOI are placeholders pending submission; §3.4–3.5 await the production metalloprotein system and the external benchmark suite. Reference details should be verified against the publishers’ records before submission.

MIT license

Reproducible: `figures/make_figures.py`

Figures embedded

charmmgui2cp2k — automated CHARMM-GUI/AMBER→CP2K QM/MM input generation. Self-contained manuscript compiled 2026-06-24. Figures 3–4 are generated directly from the committed validation output; Figure 2 is a live headless render of the TUI.