


1º) Creamos un core, sin modificar ningún elemento; Edit → Hardware → Core

Podemos poner cualquier tipo de planificación desde este apartado:

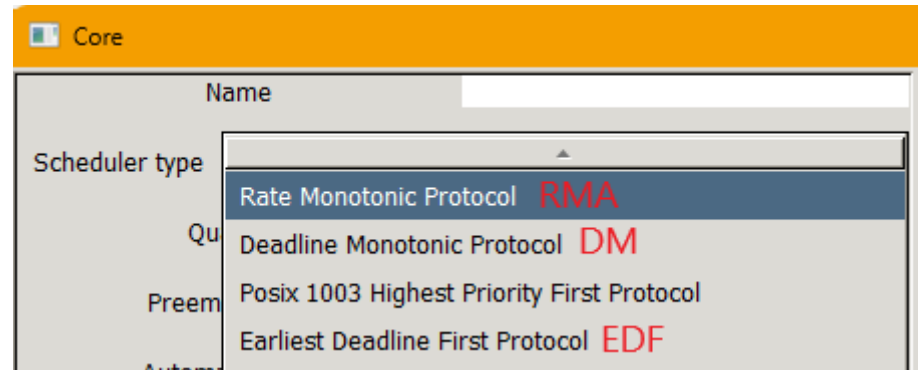

2º) Creamos un procesador, al cual le asignamos el core creado anterior; Edit → Hardware → Processor

3º) Creamos un espacio de direcciones (No modificamos nada); Edit → Software → Address space

4º) Creamos las tareas que nos requiera el enunciado con los siguientes valores: Edit → Software → Task

- Name → Nombre
- Capacity → Tº ejecución
- Deadline → Periodo
- Period → Periodo

5º) A continuación ejecutamos los test:

5.1º) El primero es: Tools → Customize scheduling feasibility. Ponemos estas casillas

Feasibility On All Processors	☐	Processor	Processor1 ▼
Feasibility Test Based On The Processor Utilization Factor		☒	
Feasibility Test Based On Worst Case Task Response Time		☒	
Feasibility Test Based On Processor Demand Bound		☐	

5.2º) El siguiente es: Tools → Customize scheduling options

Schedule all processors :		☒	Processor :		Processor1 ▼
Number Of Context Switches :		☒	Display Event Table :		☐
Number Of Preemptions :		☒	Automatically Export Of Event Table :		☐
Run Event Analyzer :		☐	Event Table File Name :		default_event_table_file.xml
Worst Case		Best Case		Average Case	
Task response Time :		☒	☒	☒	☐
Blocking Time :		☐	☐	☐	☐
				Graph	