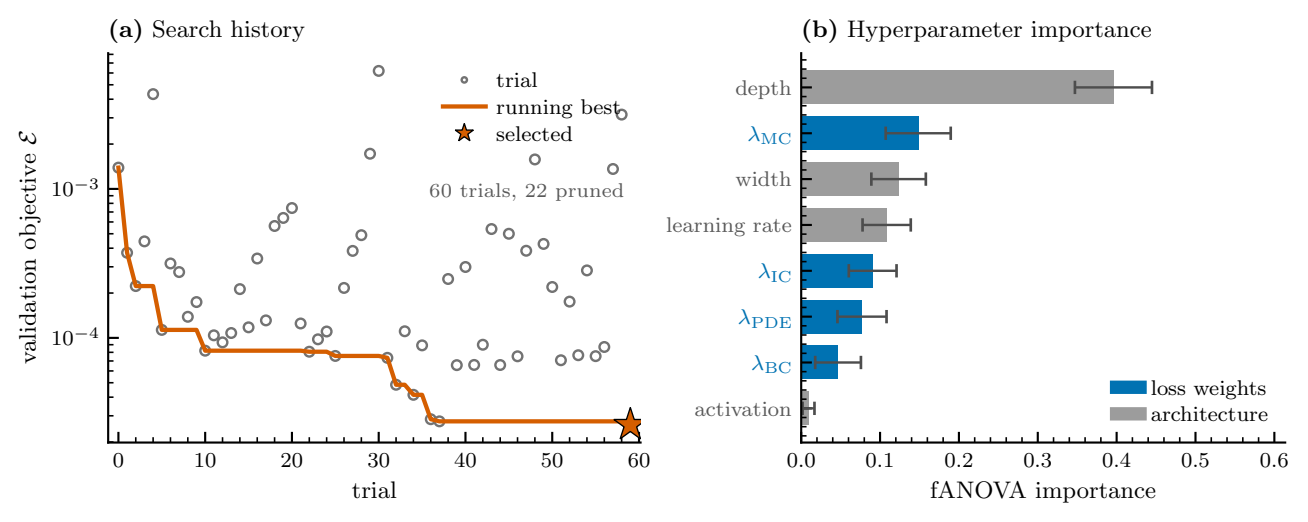

(a) Search history
trial
running best
selected
60 trials, 22 pruned
validation objective $\mathcal{E}$
10^{-3}
10^{-4}
0
10
20
30
40
50
60
trial
(b) Hyperparameter importance
depth
λ_{MC}
width
learning rate
λ_{IC}
λ_{PDE}
λ_{BC}
activation
loss weights
architecture
0.0
0.1
0.2
0.3
0.4
0.5
0.6
fANOVA importance