
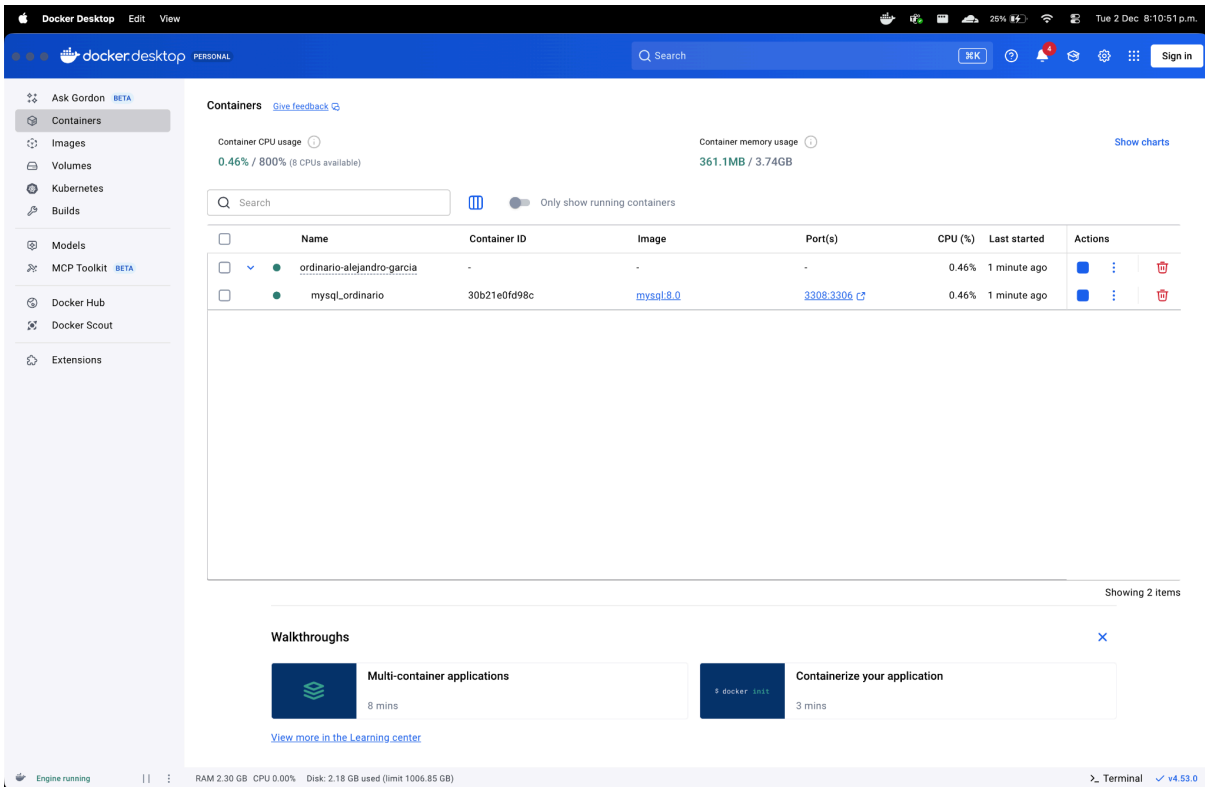


Capturas de pantalla

Creación del contenedor:

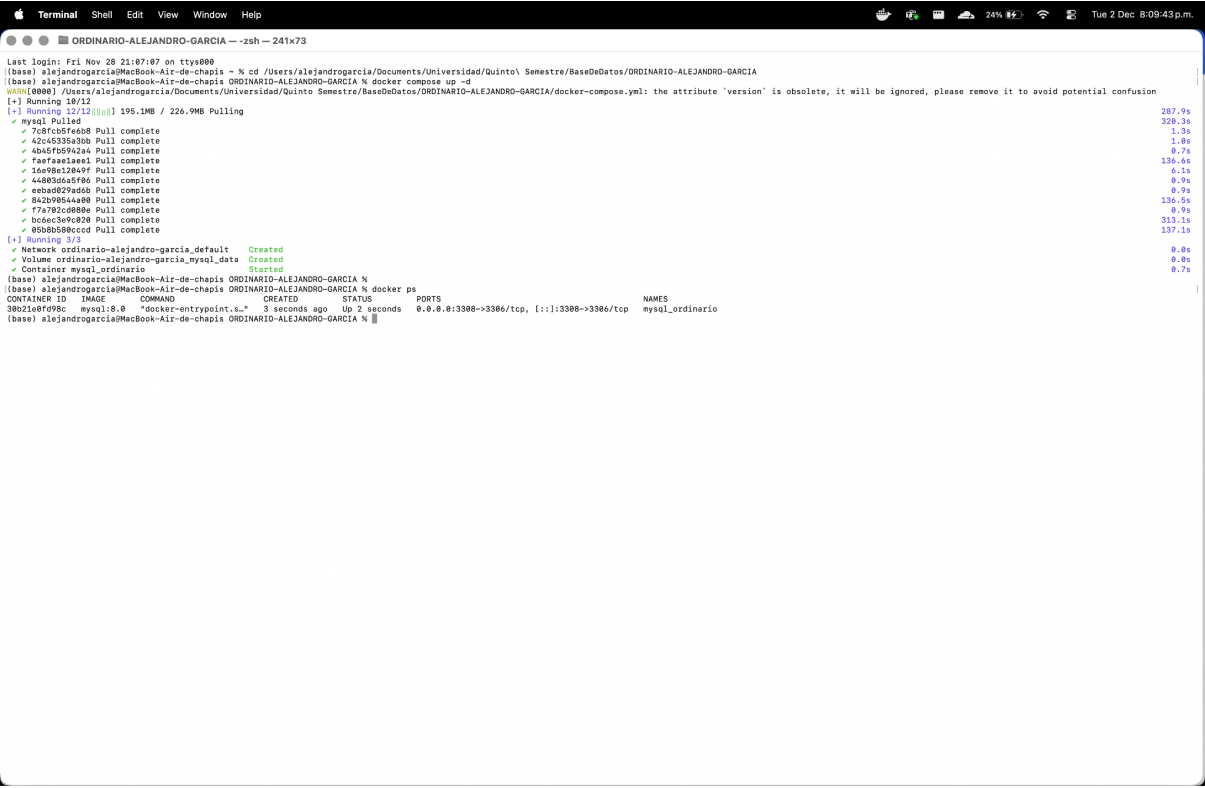

Creación de tablas

```
Terminal Shell Edit View Window Help
ORDINARIO-ALEJANDRO-GARCIA — docker exec -it mysql_ordinario sh -c 'mysql -u root -p$(cat /run/secrets/mysql_root_password)' — 241x73

mysql> exit;
Bye
bash-5.1# exit;
exit
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -i mysql_ordinario mysql -u root -p< scripts/tables.sql
mysql: [Warning] Using a password on the command line interface can be insecure.
ERROR 1064 (3D000) at line 1: No database selected
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -i mysql_ordinario mysql -u root -p< scripts/tables.sql
mysql: [Warning] Using a password on the command line interface can be insecure.
ERROR 1064 (42000) at line 1: Unknown database 'database'
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -i mysql_ordinario mysql -u root -p< scripts/tables.sql
mysql: [Warning] Using a password on the command line interface can be insecure.
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -i mysql_ordinario mysql -u root -p< scripts/tables.sql
mysql: [Warning] Using a password on the command line interface can be insecure.
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -i mysql_ordinario mysql -u root -p$(cat /run/secrets/mysql_root_password) 'garcia-kuri-alejandro' < scripts/tables.sql
ERROR 1064 (42000) at line 1: Unknown database 'garcia-kuri-alejandro'
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -i mysql_ordinario sh -c 'mysql -u root -p$(cat /run/secrets/mysql_root_password)'
mysql: [Warning] Using a password on the command line interface can be insecure.
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -it mysql_ordinario sh -c 'mysql -u root -p$(cat /run/secrets/mysql_root_password)'

mysql: [Warning] Using a password on the command line interface can be insecure.
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 18
Server version: 8.0.44 MySQL Community Server - GPL

Copyright (c) 2000, 2025, Oracle and/or its affiliates.
Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show database;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'database' at line 1
mysql> show databases;
+-----+
| Database |
+-----+
| garcia-kuri-alejandro |
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
5 rows in set (0.00 sec)

mysql> use garcia-kuri-alejandro
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> show tables;
+-----+
| Tables_in_garcia-kuri-alejandro |
+-----+
| clients |
| employees |
| inventory_movements |
| order_details |
| orders |
| product_supplier |
| products |
| suppliers |
| warehouse_inventory |
| warehouses |
+-----+
10 rows in set (0.00 sec)

mysql> 
```

5 Registros para cada tabla (INSERTS)

```
Terminal Shell Edit View Window Help
ORDINARIO-ALEJANDRO-GARCIA — docker exec -it mysql_ordinario sh -c 'mysql -u root -p$(cat /run/secrets/mysql_root_password)' — 241x73

Last login: Tue Dec 2 20:01:35 on tty003
(base) alejandrogarcia@MacBook-Air-de-chapis ~ % cd /Users/alejandrogarcia/Documents/Universidad/Quinto/ Semestre/BasesDeDatos/ORDINARIO-ALEJANDRO-GARCIA
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -i mysql_ordinario sh -c 'mysql -u root -p$(cat /run/secrets/mysql_root_password)' 'garcia-kuri-alejandro' < scripts/inserts.sql
mysql: [Warning] Using a password on the command line interface can be insecure.
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -it mysql_ordinario sh -c 'mysql -u root -p$(cat /run/secrets/mysql_root_password)'

mysql: [Warning] Using a password on the command line interface can be insecure.
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 20
Server version: 8.0.44 MySQL Community Server - GPL

Copyright (c) 2000, 2025, Oracle and/or its affiliates.
Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+-----+
| Database |
+-----+
| garcia-kuri-alejandro |
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
5 rows in set (0.02 sec)

mysql> use garcia-kuri-alejandro
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> show tables;
+-----+
| Tables_in_garcia-kuri-alejandro |
+-----+
| clients |
| employees |
| inventory_movements |
| order_details |
| orders |
| product_supplier |
| products |
| suppliers |
| warehouse_inventory |
| warehouses |
+-----+
10 rows in set (0.00 sec)

mysql> select * from products;
+-----+
| product_id | code | name | description | sale_price | unit | created_by | created_at | updated_by | updated_at | active |
+-----+
| 1 | USB-C-001 | USB-C Cable | In fast charge cable | 120.00 | piece | 1 | 2025-12-03 02:34:32 | NULL | NULL | 1 |
| 2 | HOME-002 | HDMI Cable 2m | High speed HDMI | 180.00 | piece | 1 | 2025-12-03 02:34:32 | NULL | NULL | 1 |
| 3 | BATT-003 | AA Battery Pack | Pack of 4 AA batteries | 85.00 | pack | 1 | 2025-12-03 02:34:32 | NULL | NULL | 1 |
| 4 | CHARG-004 | Wall Charger 25W | Fast charger | 250.00 | piece | 1 | 2025-12-03 02:34:32 | NULL | NULL | 1 |
| 5 | ADAPT-005 | USB-A to USB-C Adapter | Compact adapter | 45.00 | piece | 1 | 2025-12-03 02:34:32 | NULL | NULL | 1 |
+-----+
5 rows in set (0.01 sec)

mysql> 
```

Creación de roles

```
Terminal Shell Edit View Window Help
ORDINARIO-ALEJANDRO-GARCIA — docker exec -it mysql_ordinario sh -c mysql -u root -p$(cat /run/secrets/mysql_root_password) — 241x73
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -i mysql_ordinario sh -c 'mysql -u root -p$(cat /run/secrets/mysql_root_password)' garcia-kuri-alejandro < scripts/roles.sql

mysql: [Warning] Using a password on the command line interface can be insecure.
(base) alejandrogarcia@MacBook-Air-de-chapis ORDINARIO-ALEJANDRO-GARCIA % docker exec -it mysql_ordinario sh -c 'mysql -u root -p$(cat /run/secrets/mysql_root_password)''

mysql: [Warning] Using a password on the command line interface can be insecure.
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 25
Server version: 8.0.44 MySQL Community Server - GPL

Copyright (c) 2000, 2025, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> use garcia-kuri-alejandro
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> SHOW GRANTS FOR role_admin_full;
+-----+
| Grants for role_admin_full%          |
+-----+
| GRANT USAGE ON *.* TO 'role_admin_full'@'%' |
| GRANT SELECT, INSERT, UPDATE, DELETE ON 'garcia-kuri-alejandro'.* TO 'role_admin_full'@'%' |
+-----+
2 rows in set (0.00 sec)

mysql> SHOW GRANTS FOR role_almacen_rw;
+-----+
| Grants for role_almacen_rw%          |
+-----+
| GRANT USAGE ON *.* TO 'role_almacen_rw'@'%' |
| GRANT SELECT, INSERT, UPDATE ON 'garcia-kuri-alejandro'.* TO 'role_almacen_rw'@'%' |
+-----+
2 rows in set (0.00 sec)

mysql> SHOW GRANTS FOR role_almacen_r;
+-----+
| Grants for role_almacen_r%           |
+-----+
| GRANT USAGE ON *.* TO 'role_almacen_r'@'%' |
| GRANT SELECT ON 'garcia-kuri-alejandro'.* TO 'role_almacen_r'@'%' |
+-----+
2 rows in set (0.00 sec)

mysql> |
```