
REASON

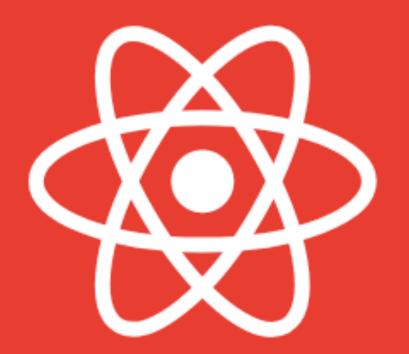

ReasonReact

Stateless Component

Greeting.re

```
[@react.component]
let make = () => <div> {React.string("Hello")} </div>;
```

App.re

Props

Greeting.re

```
[@react.component]
let make = (~name) => <div> {React.string("Hello " ++ name)} </div>;
```

App.re

ReactDOMRe.renderToElementWithId(<Greeting name="Vienna" />, "root");

Props

```
[@react.componen]
let make = (~name) => <div> {React.string("Hello " ++ name)} </div>;
```

App.re

ReactDOMRe.renderToElementWithId(<Greeting name="Helsinki" />, "root");

Props

Greeting.re

```
[@react.component]
let make = (~name) => <div> {React.string("Hello " ++ name)} </div>;
```

App.re

ReactDOMRe.renderToElementWithId(<Greeting name="Helsinki" />, "root");

The Snal