



# SWAPI Password strength checker


(a)  
Fetch checker script

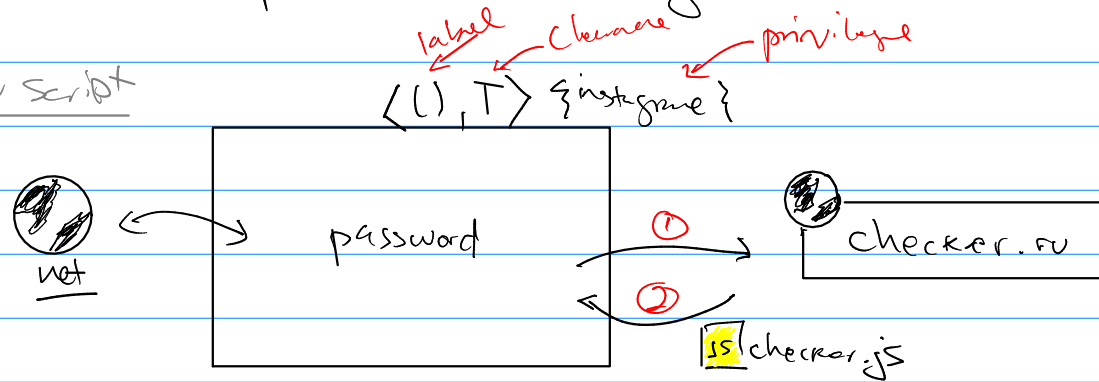

(b)  
execute checker

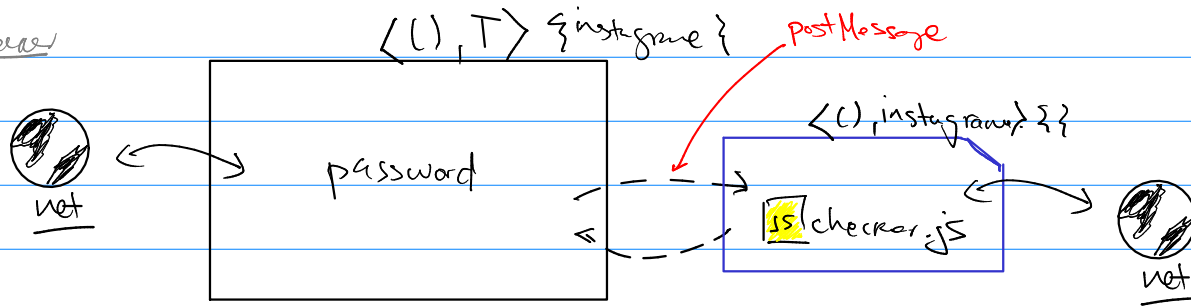


(c)  
Send password

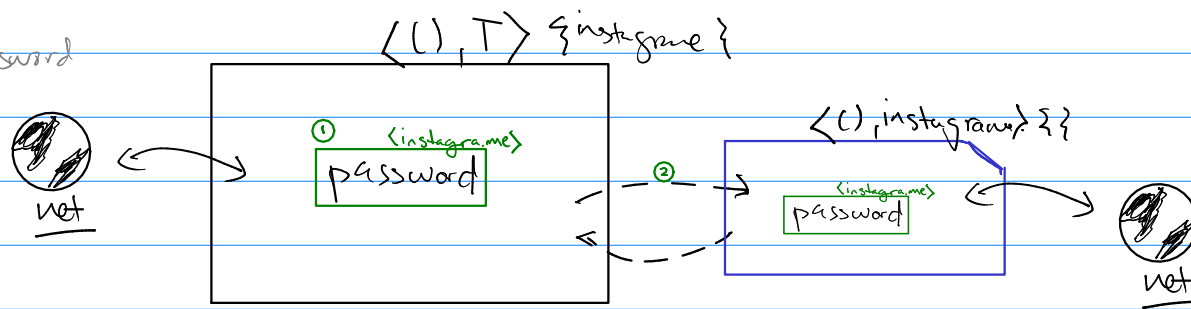

First approach  
(labeled values)


(d)

unlabel: password

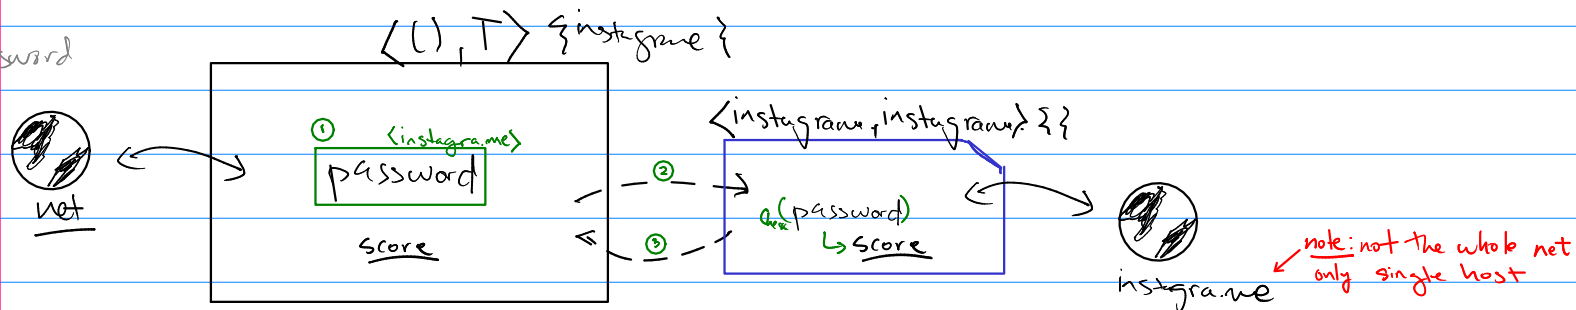


(d)

unlabel: password with  
fresh privileges

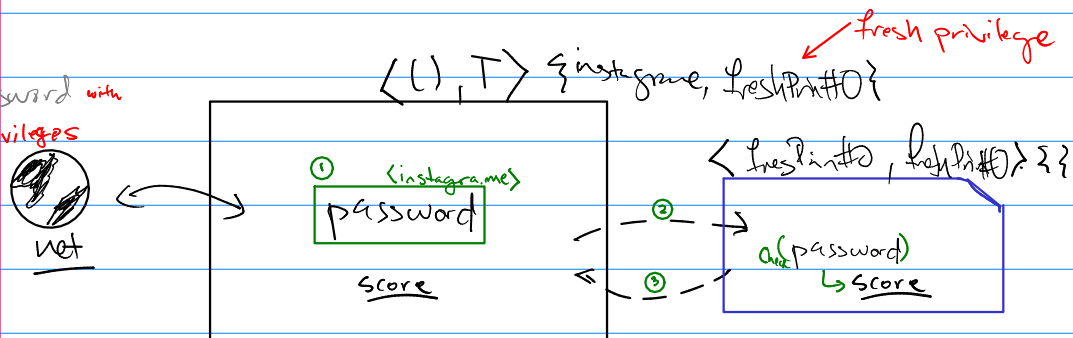


Second approach  
(no labeled vals)

(c) without  
labeled values  
raise lbl

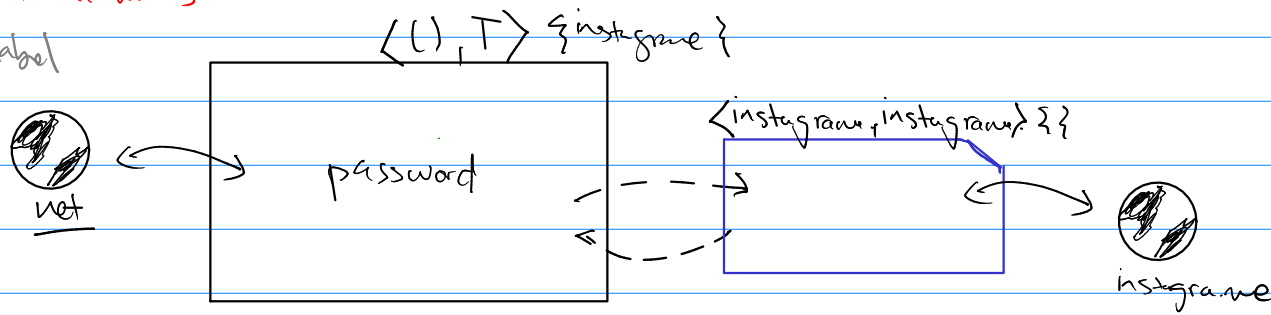

note: not the whole net  
only single host

(d) without  
labeled values  
send password

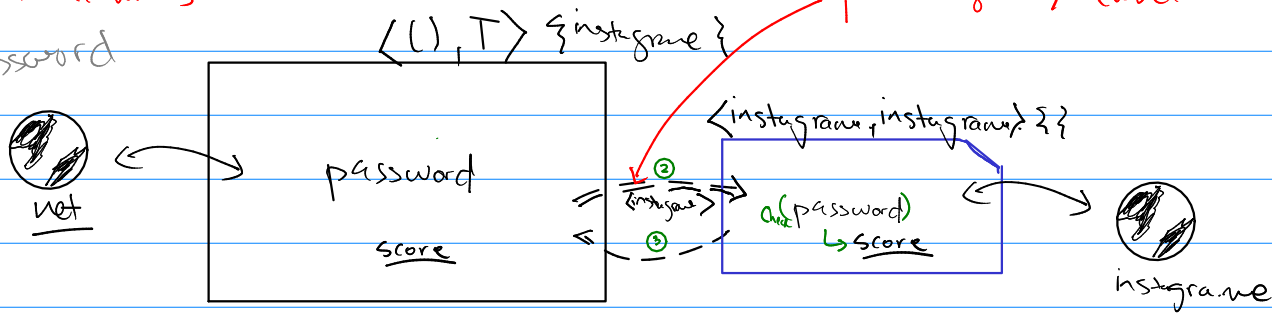

(d) the fresh privilege approach follows as before.