

Detalle de la clase: MavenWrapperDownloader

Package: @paquetico@

Class type: class

Class Signature Line: public class MavenWrapperDownloader

Class ClassPath: C:\REPOSITORYES\BPM_work_flow_engine\EngineBpm\.

mvn\wrapper\MavenWrapperDownloader.java

Class UML:

MavenWrapperDownloader

Attributes:

Methods:

(#) protected PasswordAuthentication getPasswordAuthentication() :
PasswordAuthentication

Relations:

Strong Association

-PasswordAuthentication

Detaille de la classe: RestTemplateConfig

Package: com.bpm.engine.configurations

Class type: class

Class Signature Line: public class RestTemplateConfig

Class ClassPath: C:

\\REPOSITORYES\\BPM_work_flow_engine\\EngineBpm\\src\\main\\java\\com\\bpm\\engine\\c

Class UML:

RestTemplateConfig

Attributes:

Methods:

(+) public RestTemplate restTemplate() : RestTemplate

Relations:

Strong Association

-RestTemplate

Class Anotations

@Configuration ,

Detaille de la classe: AppScheduleProperties

Package: com.bpm.engine.configurations.schedule

Class type: class

Class Signature Line:public class AppScheduleProperties

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

AppScheduleProperties

Attributes:

(-) cronExpressionCheckReturnCommand : String

Methods:

(+) public String getCronExpression() : String

(+) public void setCronExpression(String cronExpression) : void

Class Anotations

@ConfigurationProperties("app") ,@Component ,

Detalle de la clase: AsyncConfig

Package: com.bpm.engine.configurations.schedule

Class type: class

Class Signature Line: public class AsyncConfig

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

AsyncConfig

Attributes:

Methods:

(+) public Executor taskExecutor() : Executor

Relations:

Strong Association

-ThreadPoolTaskExecutor

Class Anotations

@Configuration ,@EnableAsync ,

Detalle de la clase: SchedulerConfig

Package: com.bpm.engine.configurations.schedule

Class type: class

Class Signature Line: public class SchedulerConfig

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

SchedulerConfig

Attributes:

Methods:

Class Anotations

@Configuration ,@EnableScheduling ,@ConditionalOnProperty(name = "scheduler.enabled", matchIfMissing = true) ,

Detaille de la classe: ScheduleTasks

Package: com.bpm.engine.configurations.schedule

Class type: class

Class Signature Line: public class ScheduleTasks

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

ScheduleTasks

Attributes:

(-) app : AppScheduleProperties

(-) returnCommandService : ReturnCommandService

Methods:

(+) public void scheduleTaskReturnCommand() : void

(+) public void scheduleTaskWithFixedRate() : void

Relations:

loc

-AppScheduleProperties

-ReturnCommandService

Strong Association

-Date

Project Imports

Project Imports

import com.bpm.engine.relief.service.ReturnCommandService

External Imports

import java.util.Date

import org.springframework.beans.factory.annotation.Autowired

```
import org.springframework.scheduling.annotation.Scheduled
```

```
import org.springframework.stereotype.Service
```

```
import org.springframework.scheduling.annotation.Async
```

Class Anotations

```
@Service ,
```

Detalle de la clase: SwaggerConfig

Package: com.bpm.engine.configurations

Class type: class

Class Signature Line: public class SwaggerConfig

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

SwaggerConfig

Attributes:

Methods:

(+) public Docket api() : Docket

(-) private ApilInfo apiEndpointsInfo() : ApilInfo

Relations:

Strong Association

-Docket

-Contact

-ApilInfoBuilder

Association static or patter Build

-RequestHandlerSelectors

Class Anotations

@EnableSwagger2 ,

Detaille de la classe: AssignedController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line: public class AssignedController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class Constructors

Constructors

```
+ public AssignedController(AssignedService assignedService,  
AssignedValidation assignedValidationService, MapperEntityResponse  
mapperEntityResponse, RoleValidation roleValidationService, RoleMapper  
roleMapper, BpmAssignedManager bpmAssignedManager,  
BpmAssignedService bpmAssignedService)
```

Class UML:

AssignedController

Attributes:

- (-) assignedService : AssignedService
- (-) assignedValidationService : AssignedValidation
- (-) mapperEntityResponse : MapperEntityResponse
- (-) roleValidationService : RoleValidation
- (-) roleMapper : RoleMapper
- (-) bpmAssignedManager : BpmAssignedManager
- (-) bpmAssignedService : BpmAssignedService

Methods:

- (-) private boolean saveOrUpdateBpmAssigned(@RequestBody BpmAssignedDTO assignedBPM) : boolean
- (-) private boolean saveOrUpdateAssigned(@RequestBody AssignedModel assigned) : boolean

Project Imports

Project Imports

```
import com.bpm.engine.dto.BpmAssignedDTO
```

```
import com.bpm.engine.entitys.Assigned
```

```
import com.bpm.engine.service.BpmAssignedService
```

```
import com.bpm.engine.validation.AssignedValidation
```

```
import com.bpm.engine.service.AssignedService
```

```
import com.bpm.engine.dto.EntityResponse
```

```
import com.bpm.engine.entitys.Role
```

```
import com.bpm.engine.managers.BpmAssignedManager
```

```
import com.bpm.engine.mappers.AssignedMapper
```

```
import com.bpm.engine.mappers.MapperEntityResponse
```

```
import com.bpm.engine.mappers.RoleMapper
```

```
import com.bpm.engine.models.AssignedModel
```

```
import com.bpm.engine.models.BpmAssignedModel
```

```
import com.bpm.engine.models.RoleModel
```

```
import com.bpm.engine.validation.RoleValidation
```

External Imports

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Anotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/assigned") ,
```

Detaille de la classe: EngineBpmController

Package: com.bpm.engine.controller.client


Class type: class

Class Signature Line:public class EngineBpmController


Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c


Class UML:

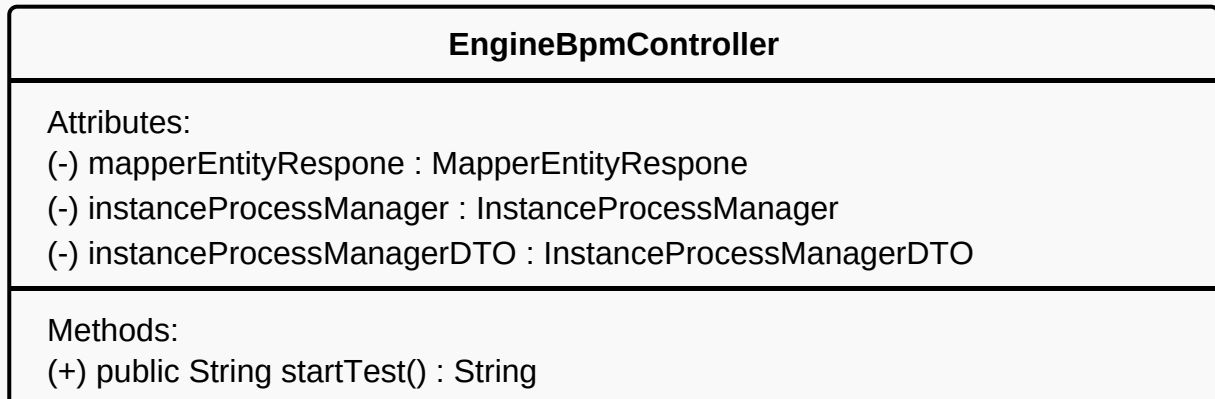

Relations:

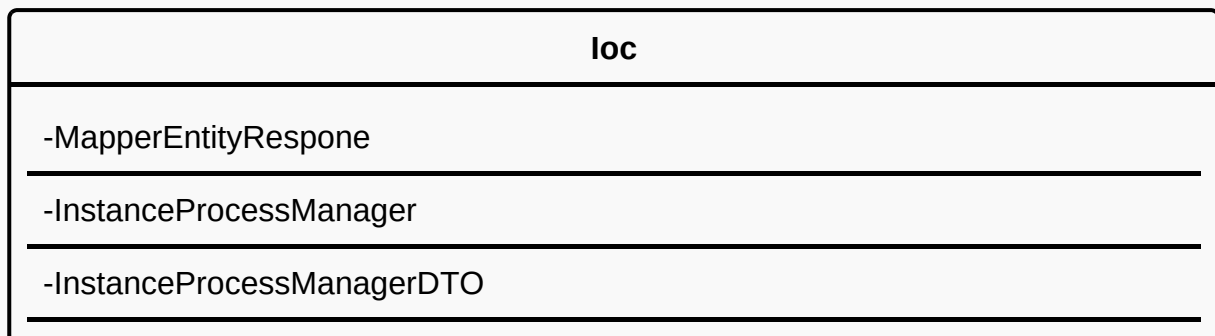

Project Imports

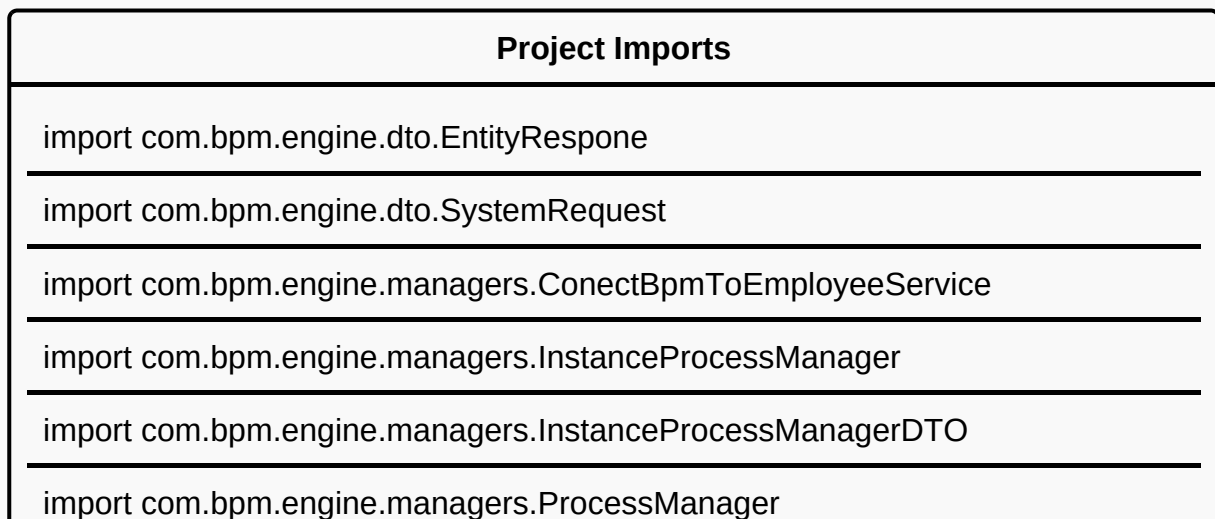

```
import com.bpm.engine.mappers.MapperEntityResponse
```

```
import com.bpm.engine.models.ProcessModel
```

External Imports

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.HttpStatus
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.web.bind.annotation.CrossOrigin
```

```
import org.springframework.web.bind.annotation.GetMapping
```

```
import org.springframework.web.bind.annotation.PathVariable
```

```
import org.springframework.web.bind.annotation.PostMapping
```

```
import org.springframework.web.bind.annotation.RequestBody
```

```
import org.springframework.web.bind.annotation.RequestMapping
```

```
import org.springframework.web.bind.annotation.RestController
```

Class Annotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/engine/bpm")  
,
```

Detaille de la classe: ControlProcessReferentController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line: public class ControlProcessReferentController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

ControlProcessReferentController

Attributes:

Methods:

(-) private Boolean saveControlProcess(@RequestBody
ControlProcessReferentModel controlprocess) : Boolean

(-) private Long UpdateControlProcess(@RequestBody
ControlProcessReferentModel controlprocess) : Long

(-) private boolean saveOrUpdateControlProcess(@RequestBody
ControlProcessReferentModel controlprocess) : boolean

Project Imports

Project Imports

import com.bpm.engine.validation.ControlProcessReferentValidation

import com.bpm.engine.service.ControlProcessReferentService

import com.bpm.engine.dto.EntityResponse

import com.bpm.engine.mappers.ControlProcessReferentMapper

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.models.ControlProcessReferentModel

External Imports

import org.springframework.beans.factory.annotation.Autowired

import java.util.Date

import org.springframework.dao.DataAccessException

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Anotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/control  
/process") ,
```

Detaille de la classe: InstanceTaskEmailController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line: public class InstanceTaskEmailController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

InstanceTaskEmailController

Attributes:

Methods:

(-) private Long UpdateInstanceTaskEmail(@RequestBody
InstanceTaskEmailModel instancetaskemail) : Long

(-) private boolean saveOrUpdateInstanceTaskEmail(@RequestBody
InstanceTaskEmailModel instancetaskemail) : boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.InstanceTaskEmail

import com.bpm.engine.mappers.InstanceTaskEmailMapper

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.models.InstanceTaskEmailModel

import com.bpm.engine.validation.InstanceTaskEmailValidation

import com.bpm.engine.service.InstanceTaskEmailService

import com.bpm.engine.dto.EntityResponse

External Imports

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

```
import java.util.ArrayList
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Anotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/instancetaskemail") ,
```


Detalle de la clase: PageController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line: public class PageController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

PageController

Attributes:

Methods:

(+) public String showMyPage() : String

Class Anotations

@Controller ,@CrossOrigin(origins = "*") ,@RequestMapping("/template") ,

Detaille de la classe: ProcessController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line: public class ProcessController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

ProcessController

Attributes:

(-) processManager : ProcessManager

Methods:

(-) private Boolean saveProcess(@RequestBody ProcessModel process) : Boolean

(-) private Long UpdateProcess(@RequestBody ProcessModel process) : Long

(-) private boolean saveOrUpdateProcess(@RequestBody ProcessModel process) : boolean

Relations:

loc

-ProcessManager

Project Imports

Project Imports

import com.bpm.engine.entitys.Process

import com.bpm.engine.validation.ProcessValidation

import com.bpm.engine.service.ProcessService

import com.bpm.engine.dto.EntityResponse

import com.bpm.engine.entitys.Stage

import com.bpm.engine.managers.ProcessManager

import com.bpm.engine.mappers.MapperEntityResponse

```
import com.bpm.engine.mappers.ProcessMapper
```

```
import com.bpm.engine.mappers.StageMapper
```

```
import com.bpm.engine.models.ProcessModel
```

```
import com.bpm.engine.models.StageModel
```

```
import com.bpm.engine.validation.StageValidation
```

External Imports

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Annotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/process") ,
```

Detaille de la classe: RoleController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line:public class RoleController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

RoleController

Attributes:

Methods:

(-) private Long UpdateRole(@RequestBody RoleModel role) : Long

(-) private boolean saveOrUpdateRole(@RequestBody RoleModel role) :
boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.mappers.RoleMapper

import com.bpm.engine.models.RoleModel

import com.bpm.engine.validation.RoleValidation

import com.bpm.engine.service.RoleService

import com.bpm.engine.dto.EntityResponse

External Imports

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

import java.util.ArrayList

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Anotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/role") ,
```

Detaille de la classe: StageController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line: public class StageController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

StageController

Attributes:

Methods:

(-) private Long UpdateStage(@RequestBody StageModel stage) : Long

(-) private boolean saveOrUpdateStage(@RequestBody StageModel stage) : boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.Stage

import com.bpm.engine.validation.StageValidation

import com.bpm.engine.service.StageService

import com.bpm.engine.dto.EntityResponse

import com.bpm.engine.entitys.Stage

import com.bpm.engine.validation.StageValidation

import com.bpm.engine.entitys.Role

import com.bpm.engine.validation.RoleValidation

import com.bpm.engine.entitys.Task

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.mappers.RoleMapper

import com.bpm.engine.mappers.StageMapper

```
import com.bpm.engine.mappers.TaskMapper
```

```
import com.bpm.engine.models.RoleModel
```

```
import com.bpm.engine.models.StageModel
```

```
import com.bpm.engine.models.TaskModel
```

```
import com.bpm.engine.validation.TaskValidation
```

External Imports

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Annotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/stage") ,
```

Detaille de la classe: StateController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line:public class StateController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

StateController

Attributes:

Methods:

(-) private Long UpdateState(@RequestBody StateModel state) : Long

(-) private boolean saveOrUpdateState(@RequestBody StateModel state) :
boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.State

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.mappers.StateMapper

import com.bpm.engine.models.StateModel

import com.bpm.engine.validation.StateValidation

import com.bpm.engine.service.StateService

import com.bpm.engine.dto.EntityResponse

External Imports

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

import java.util.ArrayList


```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Anotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/state") ,
```

Detaille de la classe: SystemResponseController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line:public class SystemResponseController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

SystemResponseController

Attributes:

Methods:

(-) private Long UpdateSystemResponse(@RequestBody
SystemResponseModel systemresponse) : Long

(-) private boolean saveOrUpdateSystemResponse(@RequestBody
SystemResponseModel systemresponse) : boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.SystemResponse

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.mappers.SystemResponseMapper

import com.bpm.engine.models.SystemResponseModel

import com.bpm.engine.validation.SystemResponseValidation

import com.bpm.engine.service.SystemResponseService

import com.bpm.engine.dto.EntityResponse

External Imports

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

```
import java.util.ArrayList
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Anotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/system  
/response") ,
```

Detaille de la classe: TaskController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line:public class TaskController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

TaskController

Attributes:

Methods:

(-) private Boolean saveTask(@RequestBody TaskModel task) : Boolean

(-) private Long UpdateTask(@RequestBody TaskModel task) : Long

(-) private boolean saveOrUpdateTask(@RequestBody TaskModel task) :
boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.Task

import com.bpm.engine.validation.TaskValidation

import com.bpm.engine.service.TaskService

import com.bpm.engine.dto.EntityResponse

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.mappers.TaskMapper

import com.bpm.engine.mappers.TaskTypeMapper

import com.bpm.engine.models.TaskModel

import com.bpm.engine.models.TaskTypeModel

import com.bpm.engine.validation.TaskTypeValidation

External Imports

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

import java.util.ArrayList

import org.springframework.dao.DataAccessException

import org.springframework.http.ResponseEntity

import org.springframework.http.HttpStatus

Class Annotations

@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/task") ,

Detaille de la classe: TaskEmailController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line:public class TaskEmailController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

TaskEmailController

Attributes:

Methods:

(-) private Long UpdateTaskEmail(@RequestBody TaskEmailModel taskemail) : Long

(-) private boolean saveOrUpdateTaskEmail(@RequestBody TaskEmailModel taskemail) : boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskEmail

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.mappers.TaskEmailMapper

import com.bpm.engine.models.TaskEmailModel

import com.bpm.engine.validation.TaskEmailValidation

import com.bpm.engine.service.TaskEmailService

import com.bpm.engine.dto.EntityResponse

External Imports

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

```
import java.util.ArrayList
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Anotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/taskemail") ,
```

Detaille de la classe: TaskTypeController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line:public class TaskTypeController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

TaskTypeController

Attributes:

Methods:

(-) private Long UpdateTaskType(@RequestBody TaskTypeModel tasktype) : Long

(-) private boolean saveOrUpdateTaskType(@RequestBody TaskTypeModel tasktype) : boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.mappers.TaskTypeMapper

import com.bpm.engine.models.TaskTypeModel

import com.bpm.engine.validation.TaskTypeValidation

import com.bpm.engine.service.TaskTypeService

import com.bpm.engine.dto.EntityResponse

External Imports

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date


```
import java.util.ArrayList
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.http.HttpStatus
```

Class Anotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("/tasktype") ,
```

Detaille de la classe: TemplateController

Package: com.bpm.engine.controller

Class type: class

Class Signature Line: public class TemplateController

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

TemplateController
Attributes: (-) templateService : TemplateService (-) templateMapper : TemplateMapper (-) mapperEntityResponse : MapperEntityResponse (-) pageController : PageController
Methods: (+) public String processForm(@RequestParam String codeTemplate, @RequestParam String typeTemplate, @RequestParam String company, @RequestParam String TemplateDescription, @RequestParam("file") : String (-) private boolean delete(@PathVariable("id") : boolean

Relations:

loc
-TemplateService
-TemplateMapper
-MapperEntityResponse
-PageController

Project Imports

Project Imports
import com.bpm.engine.dto.EntityResponse
import com.bpm.engine.mappers.MapperEntityResponse

```
import com.bpm.engine.mappers.TemplateMapper
```

```
import com.bpm.engine.service.TemplateService
```

External Imports

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.http.HttpStatus
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.web.multipart.MultipartFile
```

Class Annotations

```
@RestController ,@CrossOrigin(origins = "*") ,@RequestMapping("config  
/template") ,
```

Detaille de la classe: AssignedDTO

Package: com.bpm.engine.dto

Class type: class

Class Signature Line: public class AssignedDTO

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class Constructors

Constructors

+ public AssignedDTO() public AssignedDTO(String name, String
codeEmployee, RoleDTO employeeRole, String mail)

Class UML:

AssignedDTO

Attributes:

(-) id : Long
(-) name : String
(-) codeEmployee : String
(-) employeeRole : RoleDTO
(-) mail : String

Methods:

(+) public Long getId() : Long
(+) public void setId(Long id) : void
(+) public String getName() : String
(+) public void setName(String name) : void
(+) public String getCodeEmployee() : String
(+) public void setCodeEmployee(String codeEmployee) : void
(+) public RoleDTO getEmployeeRole() : RoleDTO
(+) public void setEmployeeRole(RoleDTO employeeRole) : void
(+) public String getMail() : String
(+) public void setMail(String mail) : void
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Detaille de la classe: BpmAssignedDTO

Package: com.bpm.engine.dto

Class type: class

Class Signature Line: public class BpmAssignedDTO

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class Constructors

Constructors

+ public BpmAssignedDTO()

Class UML:

BpmAssignedDTO

Attributes:

(-) assigned : AssignedModel

Methods:

(+) public AssignedModel getAssigned() : AssignedModel

(+) public void setAssigned(AssignedModel assigned) : void

(+) public void setCodeTaskOrProces(List<String> codeTaskOrProces) : void

(+) public boolean equals(Object o) : boolean

(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Project Imports

Project Imports

import com.bpm.engine.models.AssignedModel

External Imports

```
import java.util.ArrayList
```

```
import java.util.List
```

```
import java.util.Objects
```

Detalle de la clase: EntityResponse

Package: com.bpm.engine.dto

Class type: class

Class Signature Line: public class EntityResponse implements Serializable

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

EntityResponse

Attributes:

(-) error : String

(-) mensaje : String

Methods:

(+) public String getError() : String

(+) public void setError(String error) : void

(+) public String getMensaje() : String

(+) public void setMensaje(String mensaje) : void

(+) public void setEntidades(List<Object> entidades) : void

Relations:

Implement

-Serializable

Detaille de la classe: ProcessDTO

Package: com.bpm.engine.dto

Class type: class

Class Signature Line: public class ProcessDTO implements Serializable

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class Constructors

Constructors

+ public ProcessDTO(ProcessModel process)

Class UML:

ProcessDTO

Attributes:

(-) id : Long

(-) name : String

(-) Title : String

(-) state : String

(-) Code : String

(-) visible : Boolean

(-) global : Boolean

(-) userCreate : String

(-) instanceOf : String

Methods:

Relations:

Implement

-Serializable

Project Imports

Project Imports

```
import com.bpm.engine.models.ProcessModel
```

```
import com.bpm.engine.models.StageModel
```

```
import com.bpm.engine.utility.InstanOf
```

External Imports

```
import java.io.Serializable
```

```
import java.util.ArrayList
```

```
import java.util.List
```

```
import lombok.AllArgsConstructor
```

```
import lombok.Builder
```

```
import lombok.Data
```

```
import lombok.NoArgsConstructor
```

Class Anotations

```
@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,
```

Detalle de la clase: ResponseAssignedDTO

Package: com.bpm.engine.dto

Class type: class

Class Signature Line: public class ResponseAssignedDTO

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class UML:

ResponseAssignedDTO

Attributes:

(-) error : String

(-) mensaje : String

Methods:

(+) public String getError() : String

(+) public void setError(String error) : void

(+) public String getMensaje() : String

(+) public void setMensaje(String mensaje) : void

(+) public void setEntidades(List<AssignedDTO> entidades) : void

(+) public int hashCode() : int

(+) public boolean equals(Object obj) : boolean

Relations:

Association static or patter Build

-Objects

Detaille de la classe: RoleDTO

Package: com.bpm.engine.dto

Class type: class

Class Signature Line:public class RoleDTO implements Serializable

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class Constructors

Constructors

+ public RoleDTO() public RoleDTO(Long id, String code, String name, String description) public RoleDTO(RoleModel ro)

Class UML:

RoleDTO

Attributes:

(-) idRole : Long
(-) description : String
(-) name : String
(-) codeRole : String

Methods:

(+) public Long getId() : Long
(+) public void setId(Long id) : void
(+) public String getCode() : String
(+) public void setCode(String code) : void
(+) public String getName() : String
(+) public void setName(String name) : void
(+) public String getDescription() : String
(+) public void setDescription(String description) : void

Relations:

Implement

-Serializable

Project Imports

Project Imports

```
import com.bpm.engine.models.RoleModel
```

External Imports

```
import java.io.Serializable
```

```
import com.google.gson.annotations.SerializedName
```

Detaille de la classe: RulerDTO

Package: com.bpm.engine.dto

Class type: class

Class Signature Line: public class RulerDTO implements Serializable

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class Constructors

Constructors

+ public RulerDTO() public RulerDTO(Long id, String condition, Integer action, String codeOFTask) public RulerDTO(RulerModel ruler)

Class UML:

RulerDTO

Attributes:

(-) id : Long
(-) condition : String
(-) action : Integer
(-) CodeOFTask : String

Methods:

(+) public Long getId() : Long
(+) public void setId(Long id) : void
(+) public String getCodeOFTask() : String
(+) public void setCodeOFTask(String codeOFTask) : void
(+) public String getCondition() : String
(+) public void setCondition(String condition) : void
(+) public Integer getAction() : Integer
(+) public void setAction(Integer action) : void

Relations:

Implement

-Serializable

Project Imports

Project Imports

```
import com.bpm.engine.models.RulerModel
```

External Imports

```
import java.io.Serializable
```

Detaille de la classe: StageDTO

Package: com.bpm.engine.dto

Class type: class

Class Signature Line: public class StageDTO implements Serializable

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class Constructors

Constructors

+ public StageDTO(StageModel stageModel) public StageDTO(StageModel stageModel, String children)

Class UML:

StageDTO

Attributes:

(-) id : Long

(-) Code : String

(-) name : String

(-) title : String

(-) type : String

(-) instanceOf : String

Methods:

Relations:

Implement

-Serializable

Project Imports

Project Imports

import com.bpm.engine.models.RoleModel

import com.bpm.engine.models.StageModel


```
import com.bpm.engine.models.TaskModel
```

```
import com.bpm.engine.utility.InstanOf
```

External Imports

```
import lombok.AllArgsConstructor
```

```
import lombok.Builder
```

```
import lombok.Data
```

```
import lombok.NoArgsConstructor
```

```
import java.io.Serializable
```

```
import java.util.ArrayList
```

```
import java.util.Date
```

```
import java.util.List
```

Class Anotations

```
@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,
```

Detalle de la clase: SystemRequest

Package: com.bpm.engine.dto

Class type: class

Class Signature Line: public class SystemRequest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class Constructors

Constructors

+ public SystemRequest()

Class UML:

SystemRequest

Attributes:

(-) codeEmployee : String
(-) processCode : String
(-) codeTask : String

Methods:

(+) public Boolean checkAssigned(String codeTask) : Boolean
(+) public String getCodeEmployee() : String
(+) public void setCodeEmployee(String codeEmployee) : void
(+) public String getProcessCode() : String
(+) public void setProcessCode(String processCode) : void
(+) public String getCodeTask() : String
(+) public void setCodeTask(String codeTask) : void
(+) public void setAssigned(Map<String, List<String>> assigned) : void

Detalle de la clase: TaskDTO

Package: com.bpm.engine.dto

Class type: class

Class Signature Line: public class TaskDTO implements Serializable

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\c

Class Constructors

Constructors

+ public TaskDTO(TaskModel taskModel) public TaskDTO(Long id, String title, String name, String codeProcess, String url, String serviceUrl, String codeOfTask, TaskTypeModel type)

Class UML:

TaskDTO

Attributes:

(-) id : Long
(-) title : String
(-) name : String
(-) codeProcess : String
(-) url : String
(-) serviceUrl : String
(-) codeOfTask : String
(-) type : TaskTypeModel
(-) userCode : String
(-) status : String
(-) response : String
(-) instanceOf : String

Methods:

Relations:

Implement

-Serializable

Project Imports

Project Imports

import com.bpm.engine.models.RoleModel

import com.bpm.engine.models.RulerModel

import com.bpm.engine.models.TaskModel

import com.bpm.engine.models.TaskTypeModel

import com.bpm.engine.utility.InstanOf

External Imports

import lombok.AllArgsConstructor

import lombok.Builder

import lombok.Data

import lombok.NoArgsConstructor

import java.io.Serializable

import java.util.ArrayList

import java.util.Date

import java.util.List

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,

Detalle de la clase: EngineBpmApplication

Package: com.bpm.engine

Class type: class

Class Signature Line: public class EngineBpmApplication

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\EngineBpmApplication.class

Class UML:

EngineBpmApplication

Attributes:

Methods:

(+) public static void main(String[] args) : void

Class Anotations

@SpringBootApplication ,

Detalle de la clase: ApprovedProcess

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class ApprovedProcess

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\ApprovedProcess.java

Class UML:

ApprovedProcess

Attributes:

(-) idApprovedProcess : Long

(-) processCode : String

(-) idProcess : Long

(-) granted : Boolean

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table
(name = "bpm_approved_process") ,

Detalle de la clase: Assigned

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class Assigned

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\Assigned.java

Class UML:

Assigned

Attributes:

(-) id : Long

(-) name : String

(-) codeEmployee : String

(-) mail : String

(-) employeeRole : Role

(-) active : Boolean

Methods:

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

import com.bpm.engine.models.AssignedModel

External Imports

import java.io.Serializable

import java.util.List

import java.util.Date

import java.util.ArrayList

import java.util.Objects

import lombok.AllArgsConstructor

import lombok.Builder

```
import lombok.Data
```

```
import lombok.NoArgsConstructor
```

Class Annotations

```
@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table  
(name = "bpm_assigned") ,
```


Detalle de la clase: BpmAssigned

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class BpmAssigned

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys

Class UML:

BpmAssigned

Attributes:

(-) idBpmAssigned : Long
(-) idAssigned : Long
(-) taskCode : String
(-) instanciaProccesId : Long
(-) active : Boolean
(-) codeEmployee : String
(-) proccesId : Long

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table
(name = "bpm_bpm_Assigned") ,

Detaille de la classe: ControlProcessReferent

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line:public class ControlProcessReferent

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\ControlProcessReferent.java

Class Constructors

Constructors

```
+ public ControlProcessReferent(String code, String name, String title, String status, String type, Long idReference, Boolean active, Date dateCreate)
```

Class UML:

ControlProcessReferent

Attributes:

(-) id : Long

(-) code : String

(-) name : String

(-) title : String

(-) status : String

(-) type : String

(-) idReference : Long

(-) active : Boolean

(-) dateCreate : Date

(-) dateClose : Date

Methods:

Project Imports

Project Imports

```
import com.bpm.engine.models.BpmAssignedModel
```

External Imports

```
import lombok.AllArgsConstructor
```

```
import lombok.Builder
```

```
import lombok.Data
```

```
import lombok.NoArgsConstructor
```

```
import java.util.ArrayList
```

```
import java.util.Date
```

```
import java.util.List
```

```
import java.util.Objects
```

Class Anotations

```
@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table  
(name = "bpm_control_process_referent") ,
```

Detaille de la classe: InstanceAbstraction

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class InstanceAbstraction

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\InstanceAbstraction.java

Class UML:

InstanceAbstraction

Attributes:

- (-) idInstance : Long
- (-) instanOf : String
- (-) name : String
- (-) title : String
- (-) type : TaskType
- (-) idProcess : Long
- (-) idRefenet : Long
- (-) idParent : Long
- (-) idInstanceOfProcess : Long
- (-) codeProcess : String
- (-) codeReferent : String
- (-) apprubeType : Integer
- (-) isParallel : Boolean
- (-) status : String
- (-) active : Boolean
- (-) dateCreate : Date
- (-) dateClose : Date
- (-) userCreateInstance : String
- (-) userWorked : String
- (-) response : String
- (-) level : Integer
- (-) abstractField0 : String
- (-) abstractField1 : String
- (-) abstractField2 : String
- (-) abstractField3 : String
- (-) abstractField4 : String
- (-) abstractField5 : String
- (-) abstractField6 : String
- (-) abstractField7 : String
- (-) abstractFieldNumber0 : Integer

(-) abstractFieldNumber1 : Integer
(-) abstractFieldNumber2 : Integer
(-) abstractFieldNumber3 : Integer
(-) abstractFieldNumber4 : Integer
(-) abstractFieldNumber5 : Integer

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table
(name = "bpm_instance_Abstraction") ,

Detaille de la classe: InstanceTaskEmail

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class InstanceTaskEmail

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\InstanceTaskEmail

Class UML:

InstanceTaskEmail

Attributes:

Methods:

(+) public Long getId() : Long
(+) public void setId(Long id) : void
(+) public String getEmailTo() : String
(+) public void setEmailTo(String emailTo) : void
(+) public String getEmailCC() : String
(+) public void setEmailCC(String emailCC) : void
(+) public String getEmailFrom() : String
(+) public void setEmailFrom(String emailFrom) : void
(+) public String getNota() : String
(+) public void setNota(String nota) : void
(+) public String getTempleCode() : String
(+) public void setTempleCode(String templeCode) : void
(+) public Date getDateCreate() : Date
(+) public void setDateCreate(Date dateCreate) : void
(+) public Date getDateEnd() : Date
(+) public void setDateEnd(Date dateEnd) : void
(+) public Date getDateSent() : Date
(+) public void setDateSent(Date dateSent) : void
(+) public Boolean getRepete() : Boolean
(+) public void setRepete(Boolean repete) : void
(+) public Integer getNumberRepete() : Integer
(+) public void setNumberRepete(Integer numberRepete) : void
(+) public boolean equals(Object o) : boolean

Relations:

Association static or patter Build

-Objects

Class Anotations

@Entity ,@Table(name = "bpm_instancetaskemail") ,

Detaille de la classe: Parameters

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line:public class Parameters

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\Parameters.java

Class Constructors

Constructors

+ public Parameters()

Class UML:

Parameters

Attributes:

(-) idParameter : Long
(-) key : String
(-) value : String
(-) description : String
(-) note : String
(-) active : Boolean

Methods:

(+) public Long getIdParameter() : Long
(+) public void setIdParameter(Long idParameter) : void
(+) public String getKey() : String
(+) public void setKey(String key) : void
(+) public String getValue() : String
(+) public void setValue(String value) : void
(+) public String getDescription() : String
(+) public void setDescription(String description) : void
(+) public String getNote() : String
(+) public void setNote(String note) : void
(+) public Boolean getActive() : Boolean
(+) public void setActive(Boolean active) : void
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Class Anotations

@Entity ,@Table(name = "bpm_parameters") ,

Detalle de la clase: Process

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class Process

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\Process.java

Class UML:

Process

Attributes:

(-) id_process : Long
(-) name : String
(-) createDate : Date
(-) userCreate : String
(-) procesTitle : String
(-) state : String
(-) procesCode : String
(-) visible : Boolean
(-) global : Boolean
(-) activo : Boolean

Methods:

Project Imports

Project Imports

import com.bpm.engine.entitys.Stage

import com.bpm.engine.models.ProcessModel

import com.bpm.engine.models.RoleModel

External Imports

import java.io.Serializable

import java.util.List

import java.util.Date

```
import java.util.ArrayList
```

```
import java.util.Objects
```

```
import lombok.AllArgsConstructor
```

```
import lombok.Builder
```

```
import lombok.Data
```

```
import lombok.NoArgsConstructor
```

Class Anotations

```
@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table  
(name = "bpm_process") ,
```

Detalle de la clase: Role

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line:public class Role

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\Role.java

Class UML:

Role

Attributes:

(-) idRole : Long

(-) description : String

(-) name : String

(-) codeRole : String

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table
(name = "bpm_role") ,

Detalle de la clase: Ruler

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class Ruler

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\Ruler.java

Class UML:

Ruler

Attributes:

(-) idRuler : Long
(-) condition : String
(-) action : Integer
(-) taskCode : String
(-) taskNumber : Integer

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table
(name = "bpm_ruler") ,

Detaille de la classe: Stage

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line:public class Stage

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\Stage.java

Class UML:

Stage

Attributes:

(-) idStage : Long

(-) stageCode : String

(-) name : String

(-) title : String

(-) dateCreate : Date

(-) type : String

(-) stageNumber : Integer

Methods:

Project Imports

Project Imports

import com.bpm.engine.entitys.Stage

import com.bpm.engine.entitys.Role

import com.bpm.engine.entitys.Task

External Imports

import java.io.Serializable

import java.util.List

import java.util.Date

import java.util.ArrayList

import java.util.Objects

```
import lombok.AllArgsConstructor
```

```
import lombok.Builder
```

```
import lombok.Data
```

```
import lombok.NoArgsConstructor
```

Class Anotations

```
@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table  
(name = "bpm_stage") ,
```

Detalle de la clase: State

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line:public class State

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\State.java

Class Constructors

Constructors

+ public State() public State(String theState) public State(String theState, String code)

Class UML:

State

Attributes:

(-) idState : Long

(-) theState : String

(-) code : String

Methods:

(+) public String getCode() : String

(+) public void setCode(String code) : void

(+) public Long getIdState() : Long

(+) public void setIdState(Long idState) : void

(+) public String getTheState() : String

(+) public void setTheState(String theState) : void

(+) public boolean equals(Object o) : boolean

(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Class Anotations


```
@Entity ,@Table(name = "bpm_state") ,
```

Detaille de la classe: SystemResponse

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line:public class SystemResponse

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\SystemResponse.java

Class UML:

SystemResponse

Attributes:

(-) id : Long

(-) response : String

Methods:

(+) public Long getId() : Long

(+) public void setId(Long id) : void

(+) public String getResponse() : String

(+) public void setResponse(String response) : void

(+) public boolean equals(Object o) : boolean

(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Class Anotations

@Entity ,@Table(name = "bpm_system_response") ,

Detalle de la clase: Task

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class Task

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\Task.java

Class UML:

Task

Attributes:

(-) idTask : Long
(-) title : String
(-) name : String
(-) dateCreate : Date
(-) taskEnd : Date
(-) taskDueTime : Integer
(-) procesCode : String
(-) taskUrl : String
(-) urlService : String
(-) code : String
(-) type : TaskType
(-) taskNumber : Integer
(-) apprubeType : Integer
(-) isParallel : Boolean
(-) parallelWithTaskNumber : Integer

Methods:

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskType

External Imports

import java.io.Serializable

import java.util.List

import java.util.ArrayList

import java.util.Date

import java.util.Objects

import lombok.AllArgsConstructor

import lombok.Builder

import lombok.Data

import lombok.NoArgsConstructor

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table
(name = "bpm_task") ,

Detalle de la clase: TaskAssigned

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class TaskAssigned

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\TaskAssigned.java

Class UML:

TaskAssigned

Attributes:

(-) idTaskAssigned : Long

(-) idBpmAssigned : Long

(-) taskId : Long

(-) actionExecuted : String

(-) dateExecuted : Date

(-) stateOfTask : String

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table
(name = "bpm_task_assigned") ,

Detalle de la clase: TaskEmail

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class TaskEmail

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\TaskEmail.java

Class UML:

TaskEmail

Attributes:

Methods:

(+) public Long getIdEmail() : Long
(+) public void setIdEmail(Long idEmail) : void
(+) public String getEmailFrom() : String
(+) public void setEmailFrom(String emailFrom) : void
(+) public String getNota() : String
(+) public void setNota(String nota) : void
(+) public String getTempleCode() : String
(+) public void setTempleCode(String templeCode) : void
(+) public String getEmailTo() : String
(+) public void setEmailTo(String emailTo) : void
(+) public String getEmailCC() : String
(+) public void setEmailCC(String emailCC) : void
(+) public Integer getNumberRepete() : Integer
(+) public void setNumberRepete(Integer numberRepete) : void
(+) public Boolean getRepete() : Boolean
(+) public void setRepete(Boolean repete) : void
(+) public boolean equals(Object o) : boolean

Relations:

Association static or patter Build

-Objects

Class Anotations

@Entity ,@Table(name = "bpm_task_email") ,

Detalle de la clase: TaskType

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line:public class TaskType

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys\TaskType.class

Class UML:

TaskType

Attributes:

(-) idTaskType : Long

(-) type : String

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table
(name = "bpm_task_type") ,

Detalle de la clase: Template

Package: com.bpm.engine.entitys

Class type: class

Class Signature Line: public class Template

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\entitys

Class Constructors

Constructors

+ public Template() public Template(String template, boolean active, String descripcion, String tipo, String codeTemplate)

Class UML:

Template

Attributes:

(-) idTemplate : Long
(-) template : String
(-) active : boolean
(-) descripcion : String
(-) tipo : String
(-) codeTemplate : String
(-) company : String

Methods:

(+) public Long getIdTemplate() : Long
(+) public void setIdTemplate(Long idTemplate) : void
(+) public String getTemplate() : String
(+) public void setTemplate(String template) : void
(+) public boolean isActive() : boolean
(+) public void setActive(boolean active) : void
(+) public String getDescripcion() : String
(+) public void setDescripcion(String descripcion) : void
(+) public String getTipo() : String
(+) public void setTipo(String tipo) : void
(+) public String getCodeTemplate() : String
(+) public void setCodeTemplate(String codeTemplate) : void
(+) public String getCompany() : String
(+) public void setCompany(String company) : void

(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Class Anotations

@Entity ,@Table(name = "bpm_template") ,

Detalle de la clase: IBaseModel

Package: com.bpm.engine.interfaces

Class type: interface

Class Signature Line: public interface IBaseModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\i

Class UML:

IBaseModel

Attributes:

Methods:

(+) public String path(List<String> paths) : String

(+) public String stringEnsamble(List<String> stringPaths) : String

Detalle de la clase: RadomCode

Package: com.bpm.engine.interfaces

Class type: interface

Class Signature Line: public interface RadomCode

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engineNi

Class UML:

RadomCode

Attributes:

Methods:

(+) default String generateCode(String cod) : String

(+) default String generateCodeLikeNumber(int len) : String

(+) default Integer generateRandomNumber(Integer minNumber, Integer
maxNumber) : Integer

(+) default long generatePositiveRandomLong() : long

(+) default String stringEnsamble(String... stringPaths) : String

Detaille de la classe: AssignmentTaskManager

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class AssignmentTaskManager

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public AssignmentTaskManager(ServiceBpmAndAssignedFacade service, ConectBpmToEmployeeService conectBpmToEmployeeService)

Class UML:

AssignmentTaskManager

Attributes:

(-) assignedService : AssignedService

(-) conectBpmToEmployeeService : ConectBpmToEmployeeService

(-) service : ServiceBpmAndAssignedFacade

Methods:

(+) public BpmAssignedModel getOneUserDirectAssigned(String codeEmployee, Long instanceProccesId, Long idProcess) : BpmAssignedModel

(+) public BpmAssignedModel getOneAssigned(String taskCode, String codeEmployee, Long instanceProccesId, Long idProcess, Integer router) : BpmAssignedModel

(+) public BpmAssignedModel getTaskAssigned(AssignedModel assigned, String taskCode, Long instanceProccesId, Long idProcess) : BpmAssignedModel

(+) public void saveAndCreteBpmAssigned(String taskCode, AssignedModel assigned, Long instanceProccesId) : void

(+) public AssignedModel changeRoleAssigned(String codeEmployee, RoleModel newRole) : AssignedModel

(+) public AssignedModel changeRoleAssigned2(String codeEmployee, RoleModel newRole) : AssignedModel

(-) private AssignedModel getAssignedFromExternalService(String codeEmployee, String codeRole) : AssignedModel

(-) private AssignedModel getEmployeeFromExternalService(String codeEmployee) : AssignedModel

(+) public AssignedModel getAssignedModel(String codeEmployee) : AssignedModel

```
(+) public AssignedModel saveAssigned(AssignedModel assigned) :  
AssignedModel  
(+) public AssignedModel getAssignedOrCreateAssignedInBpmSystem(String  
codeEmployee) : AssignedModel
```

Relations:

Strong Association

```
-BpmAssignedModel  
-IllegalArgumentException
```

Project Imports

Project Imports

```
import com.bpm.engine.dto.SystemRequest  
import com.bpm.engine.managers.facades.ServiceBpmAndAssignedFacade  
import com.bpm.engine.models.AssignedModel  
import com.bpm.engine.models.BpmAssignedModel  
import com.bpm.engine.models.RoleModel  
import com.bpm.engine.service.AssignedService  
import com.bpm.engine.service.BpmAssignedService
```

External Imports

```
import java.util.ArrayList  
import java.util.List  
import java.util.Optional  
import org.apache.logging.log4j.LogManager  
import org.apache.logging.log4j.Logger  
import org.springframework.beans.factory.annotation.Autowired  
import org.springframework.dao.DataAccessException
```

```
import org.springframework.stereotype.Component
```

Class Anotations

```
@Component ,
```

Detaille de la classe: BpmAssignedManager

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class BpmAssignedManager

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public BpmAssignedManager(ServiceBpmAndAssignedFacade service)

Class UML:

BpmAssignedManager

Attributes:

(-) service : ServiceBpmAndAssignedFacade

(-) element : Boolean

Methods:

(+) public Boolean desactiveBpmAssigned(String codeEmployee) : Boolean

(+) public Boolean replaceUserAssignedForUserReliefInBpmAssigned(String codeEmployee, String codeEmployeeRelief, Long idAssignedRelief) : Boolean

(+) public Boolean updateUserAssignedForUserReliefInBpmAssigned(String codeEmployee, String codeEmployeeRelief, Long idAssignedRelief) : Boolean

(+) public Boolean saveOrUpdateBpmAssigned(BpmAssignedDTO assignedBPM) : Boolean

(+) public BpmAssignedModel saveAndCreteNewBpmAssigned(String taskCode, AssignedModel assignedSave, Long instanceProccesId) : BpmAssignedModel

(+) public Boolean getElement() : Boolean

(+) public void setElement(Boolean element) : void

Relations:

Strong Association

-BpmAssignedModel

Association static or patter Build

-ElementBoolean

Project Imports

Project Imports

import com.bpm.engine.dto.BpmAssignedDTO

import com.bpm.engine.managers.facades.ServiceBpmAndAssignedFacade

import com.bpm.engine.models.AssignedModel

import com.bpm.engine.models.BpmAssignedModel

import com.bpm.engine.models.SystemReferentModel

import com.bpm.engine.service.AssignedService

import com.bpm.engine.service.BpmAssignedService

External Imports

import java.util.ArrayList

import java.util.List

import java.util.stream.Collectors

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: ControlProcessReferentManager

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class ControlProcessReferentManager

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

ControlProcessReferentManager

Attributes:

(-) controlProcessReferentService : ControlProcessReferentService

(-) assignmentTaskManager : AssignmentTaskManager

Methods:

(+) public ControlProcessReferentModel createFromInstanceProcess
(InstanceAbstractionModel instanceProcess) : ControlProcessReferentModel

(+) public ControlProcessReferentModel createFromInstanceTask
(InstanceAbstractionModel taskModel, SystemRequest systemRequest, Long
instanceProcesId) : ControlProcessReferentModel

Relations:

loc

-ControlProcessReferentService

-AssignmentTaskManager

Strong Association

-Date

Association static or patter Build

-ControlProcessReferentModel

-ACTIVE

Project Imports

Project Imports
import com.bpm.engine.dto.SystemRequest
import com.bpm.engine.models.BpmAssignedModel
import com.bpm.engine.models.ControlProcessReferentModel
import com.bpm.engine.models.InstanceAbstractionModel
import com.bpm.engine.models.TaskAssignedModel
import com.bpm.engine.service.ControlProcessReferentService
import com.bpm.engine.utility.Constants
import com.bpm.engine.utility.SystemSate
External Imports
import java.util.ArrayList
import java.util.Date
import java.util.List
import org.springframework.beans.factory.annotation.Autowired
import org.springframework.stereotype.Component
Class Anotations
@Component ,

Detaille de la classe: NoReliefFacade

Package: com.bpm.engine.managers.facades

Class type: class

Class Signature Line: public class NoReliefFacade

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

```
+ public NoReliefFacade(BpmAssignedManager bpmAssignedManager,  
AssignmentTaskManager assignmentTaskManager,  
ProcessAndInstanceFacade services)
```

Class UML:

NoReliefFacade

Attributes:

(-) bpmAssignedManager : BpmAssignedManager

(-) assignmentTaskManager : AssignmentTaskManager

(-) services : ProcessAndInstanceFacade

Methods:

(+) public Boolean execute(ReliefAssignedModel reliefModel) : Boolean

Relations:

Association static or patter Build

-INSTANCE_STAGE

Project Imports

Project Imports

```
import com.bpm.engine.managers.AssignmentTaskManager
```

```
import com.bpm.engine.managers.BpmAssignedManager
```

```
import com.bpm.engine.models.AssignedModel
```

```
import com.bpm.engine.models.BpmAssignedModel
```

```
import com.bpm.engine.models.InstanceAbstractionModel
```

```
import com.bpm.engine.relief.model.ReliefAssignedModel
```

```
import com.bpm.engine.utility.InstanOf
```

External Imports

```
import java.util.List
```

```
import org.apache.logging.log4j.LogManager
```

```
import org.apache.logging.log4j.Logger
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detaille de la classe: ProcessAndInstanceFacade

Package: com.bpm.engine.managers.facades

Class type: class

Class Signature Line: public class ProcessAndInstanceFacade

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public ProcessAndInstanceFacade(InstanceManager instanceManager,
ProcessManager processManager)

Class UML:

ProcessAndInstanceFacade

Attributes:

(-) instanceManager : InstanceManager

(-) processManager : ProcessManager

Methods:

(+) public InstanceManager instanceManager() : InstanceManager

(+) public ProcessManager processManager() : ProcessManager

Project Imports

Project Imports

import com.bpm.engine.managers.InstanceManager

import com.bpm.engine.managers.ProcessManager

External Imports

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: ServiceBpmAndAssignedFacade

Package: com.bpm.engine.managers.facades

Class type: class

Class Signature Line: public class ServiceBpmAndAssignedFacade

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

```
+ public ServiceBpmAndAssignedFacade(AssignedService assignedService,  
BpmAssignedService bpmAssignedService)
```

Class UML:

ServiceBpmAndAssignedFacade

Attributes:

(-) assignedService : AssignedService

(-) bpmAssignedService : BpmAssignedService

Methods:

(+) public AssignedService getAssignedService() : AssignedService

(+) public BpmAssignedService getBpmAssignedService() :
BpmAssignedService

Project Imports

Project Imports

```
import com.bpm.engine.service.AssignedService
```

```
import com.bpm.engine.service.BpmAssignedService
```

External Imports

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```


Class Anotations

@Service ,

Detaille de la classe: InstanceManager

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class InstanceManager

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public InstanceManager(InstanceAbstractionService
instanceAbstractionService, AssignmentTaskManager
assignmentTaskManager)

Class UML:

InstanceManager

Attributes:

(-) instanceAbstractionService : InstanceAbstractionService

(-) assignmentTaskManager : AssignmentTaskManager

Methods:

(+) public InstanceAbstractionService getInstanceAbstractionService() :
InstanceAbstractionService

(+) public InstanceAbstractionModel saveCompliteInstance
(InstanceAbstractionModel instance) : InstanceAbstractionModel

(+) public InstanceAbstractionModel createFromProcess(ProcessModel
processModel, String userCreateInstance) : InstanceAbstractionModel

(+) public InstanceAbstractionModel createFromStage
(InstanceAbstractionModel parent, StageModel stage) :
InstanceAbstractionModel

(+) public InstanceAbstractionModel createFromTask(InstanceAbstractionModel
parent, TaskModel task, String userwork) : InstanceAbstractionModel

Relations:

Strong Association

-Date

Association static or patter Build

-InstanceAbstractionModel

-INSTANCE_PROCESS

-CREATE

-INSTANCE_STAGE

-INSTANCE_TASK

Project Imports

Project Imports

import com.bpm.engine.dto.SystemRequest

import com.bpm.engine.models.AssignedModel

import com.bpm.engine.models.BpmAssignedModel

import com.bpm.engine.models.InstanceAbstractionModel

import com.bpm.engine.models.ProcessModel

import com.bpm.engine.models.StageModel

import com.bpm.engine.models.TaskModel

import com.bpm.engine.service.InstanceAbstractionService

import com.bpm.engine.utility.InstanOf

import com.bpm.engine.utility.SystemSate

External Imports

import java.util.ArrayList

import java.util.Date

import java.util.List

import java.util.stream.Collectors

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.stereotype.Component

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Component ,
```

Detaille de la classe: InstanceProcessManager

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class InstanceProcessManager

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public InstanceProcessManager(ProcessAndInstanceFacade services)

Class UML:

InstanceProcessManager

Attributes:

(-) services : ProcessAndInstanceFacade

Methods:

(+) public EntityResponse createProcess(ProcessModel processModel) : EntityResponse

(+) public InstanceAbstractionModel createInstanceProcess(SystemRequest systemRequest) : InstanceAbstractionModel

Project Imports

Project Imports

import com.bpm.engine.dto.EntityResponse

import com.bpm.engine.dto.SystemRequest

import com.bpm.engine.managers.facades.ProcessAndInstanceFacade

import com.bpm.engine.models.InstanceAbstractionModel

import com.bpm.engine.models.ProcessModel

External Imports

import org.apache.logging.log4j.LogManager

```
import org.apache.logging.log4j.Logger
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detaille de la classe: InstanceProcessManagerDTO

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class InstanceProcessManagerDTO

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\managers

Class Constructors

Constructors

```
+ public InstanceProcessManagerDTO(ProcessAndInstanceFacade services,  
    ProcessDTOMapper processDTOMapper)
```

Class UML:

InstanceProcessManagerDTO

Attributes:

(-) services : ProcessAndInstanceFacade

Methods:

Project Imports

Project Imports

```
import com.bpm.engine.dto.ProcessDTO
```

```
import com.bpm.engine.dto.SystemRequest
```

```
import com.bpm.engine.managers.facades.ProcessAndInstanceFacade
```

```
import com.bpm.engine.mappers.ProcessDTOMapper
```

```
import com.bpm.engine.models.InstanceAbstractionModel
```

```
import com.bpm.engine.models.ProcessModel
```

External Imports

```
import java.util.ArrayList
```

```
import java.util.List
```

```
import org.apache.logging.log4j.LogManager
```

```
import org.apache.logging.log4j.Logger
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Component
```

Class Anotations

```
@Component ,
```


Detalle de la clase: NotificationManager

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class NotificationManager

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public NotificationManager(NotificationService service)

Class UML:

NotificationManager

Attributes:

Methods:

Project Imports

Project Imports

import com.bpm.engine.models.InstanceAbstractionModel

import com.bpm.engine.notification.services.NotificationService

External Imports

import java.util.concurrent.ConcurrentHashMap

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.stereotype.Component

Class Anotations

@Component ,

Detaille de la classe: ProcessManager

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class ProcessManager implements RadomCode

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

```
+ public ProcessManager(ProcessService processService, ProcessValidation  
processValidationService, ProcessMapper processMapper,  
MapperEntityResponse mapperEntityResponse, ControlProcessReferentService  
controlProcessReferent, AssignmentTaskManager assignmentTaskManager)
```

Class UML:

ProcessManager

Attributes:

- (-) processService : ProcessService
- (-) processValidationService : ProcessValidation
- (-) processMapper : ProcessMapper
- (-) mapperEntityResponse : MapperEntityResponse
- (-) controlProcessReferent : ControlProcessReferentService
- (-) assignmentTaskManager : AssignmentTaskManager

Methods:

- (+) public EntityResponse createProcess(ProcessModel processModel) : EntityResponse
- (-) private String getCode() : String
- (+) public ProcessModel findByProcesCode(String procesCode) : ProcessModel

Relations:

Implement

-RadomCode

Strong Association

-Date

Association static or patter Build

-CREATE

Project Imports

Project Imports

import com.bpm.engine.dto.EntityResponse

import com.bpm.engine.dto.ProcessDTO

import com.bpm.engine.entitys.ControlProcessReferent

import com.bpm.engine.interfaces.RadomCode

import com.bpm.engine.mappers.MapperEntityResponse

import com.bpm.engine.mappers.ProcessMapper

import com.bpm.engine.models.AssignedModel

import com.bpm.engine.models.ControlProcessReferentModel

import com.bpm.engine.models.InstanceAbstractionModel

import com.bpm.engine.models.ProcessModel

import com.bpm.engine.models.StageModel

import com.bpm.engine.models.SystemInternalResponseModel

import com.bpm.engine.models.TaskModel

import com.bpm.engine.service.ControlProcessReferentService

import com.bpm.engine.service.ProcessService

import com.bpm.engine.utility.Constants

import com.bpm.engine.validation.ProcessValidation

External Imports

import java.awt.Point

```
import java.util.ArrayList
```

```
import java.util.Date
```

```
import java.util.List
```

```
import java.util.Objects
```

```
import java.util.stream.Collectors
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detaille de la classe: StackMemory

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class StackMemory

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

```
+ public StackMemory(@Value("${deque.maxSize:15}") int maxQueueSize,  
StackMemoryReferentManager referentManager)
```

Class UML:

StackMemory

Attributes:

(-) executor : ThreadPoolExecutor

(-) referentManager : StackMemoryReferentManager

Methods:

(+) public void startProcessing() : void

(+) public void processQueue() : void

(-) private void managerError(InstanceAbstractionModel element) : void

(+) public boolean isInDeque(Long idInstance, InstanceAbstractionModel element) : boolean

(+) public Boolean addElement(InstanceAbstractionModel newElement, String type) : Boolean

(-) private void threadPoolSize() : void

(+) public void shutdown() : void

(+) public void increasePoolSize(int newSize) : void

(+) public void decreasePoolSize(int newSize) : void

(+) public void impruvdThreadPoolExecutor() : void

(-) private void setImpruvdThreadPoolExecutor() : void

(-) private void resetFlat() : void

Relations:

Strong Association

-ThreadPoolExecutor

Association static or patter Build

-ThreadPoolExecutor

-Thread

Project Imports

Project Imports

import com.bpm.engine.models.InstanceAbstractionModel

External Imports

import java.util.concurrent.ArrayBlockingQueue

import java.util.concurrent.BlockingQueue

import java.util.concurrent.ConcurrentLinkedDeque

import java.util.concurrent.ThreadPoolExecutor

import java.util.concurrent.TimeUnit

import java.util.concurrent.atomic.AtomicBoolean

import javax.annotation.PostConstruct

import javax.annotation.PreDestroy

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.beans.factory.annotation.Value

import org.springframework.stereotype.Component

import com.google.gson.Gson

Class Anotations

@Component ,

Detalle de la clase: StackMemorylistas

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class StackMemorylistas

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\managers\StackMemorylistas.class

Class Constructors

Constructors

+ public StackMemorylistas()

Class UML:

StackMemorylistas

Attributes:

Methods:

(+) public Boolean addTask(InstanceAbstractionModel instance, String type) : Boolean

(+) public InstanceAbstractionModel getTask(String type) : InstanceAbstractionModel

(+) public Integer getSizeQueueTask(String type) : Integer

Project Imports

Project Imports

import com.bpm.engine.models.InstanceAbstractionModel

External Imports

import java.util.HashMap

import java.util.LinkedList

import java.util.Map

import java.util.Queue

import org.springframework.stereotype.Component

Class Anotations
@Component ,

Detalle de la clase: StackMemoryReferentManager

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class StackMemoryReferentManager

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

StackMemoryReferentManager

Attributes:

Methods:

Project Imports

Project Imports

import com.bpm.engine.models.InstanceAbstractionModel

External Imports

import java.util.concurrent.ConcurrentHashMap

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: ApprovedProcessMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class ApprovedProcessMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\ApprovedProcessMapper.class

Class UML:

ApprovedProcessMapper

Attributes:

Methods:

(+) public ApprovedProcessModel entityToPojo(ApprovedProcess entity) :
ApprovedProcessModel

(+) public ApprovedProcess pojoToEntity(ApprovedProcessModel pojo) :
ApprovedProcess

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entities.ApprovedProcess

import com.bpm.engine.models.ApprovedProcessModel

External Imports

import org.modelmapper.ModelMapper

import org.springframework.stereotype.Component

Class Anotations

@Component ,

Detaille de la classe: AssignedMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class AssignedMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\AssignedMapper.class

Class UML:

AssignedMapper

Attributes:

(-) rolemapper : RoleMapper

Methods:

(+) public AssignedModel entityToPojo(Assigned entity) : AssignedModel

(+) public Assigned pojoToEntity(AssignedModel pojo) : Assigned

Relations:

loc

-RoleMapper

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.Assigned

import com.bpm.engine.entitys.Role

import com.bpm.engine.models.AssignedModel

import com.bpm.engine.models.RoleModel

External Imports

```
import org.springframework.stereotype.Component
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```

Detaille de la classe: BpmAssignedMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class BpmAssignedMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\BpmAssignedMapper.class

Class UML:

BpmAssignedMapper

Attributes:

Methods:

(+) public BpmAssignedModel entityToPojo(BpmAssigned entity) :
BpmAssignedModel

(+) public BpmAssigned pojoToEntity(BpmAssignedModel pojo) : BpmAssigned

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.BpmAssigned

import com.bpm.engine.models.BpmAssignedModel

External Imports

import java.util.ArrayList

import java.util.List

import java.util.stream.Collectors

import org.modelmapper.ModelMapper

import org.springframework.stereotype.Component

Class Anotations
@Component ,

Detaille de la classe: ControlProcessReferentMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class ControlProcessReferentMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\ControlProcessReferentMapper.class

Class UML:

ControlProcessReferentMapper

Attributes:

Methods:

(+) public ControlProcessReferentModel entityToPojo(ControlProcessReferent entity) : ControlProcessReferentModel

(+) public ControlProcessReferent pojoToEntity(ControlProcessReferentModel pojo) : ControlProcessReferent

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entities.ControlProcessReferent

import com.bpm.engine.models.ControlProcessReferentModel

External Imports

import org.springframework.stereotype.Component

import org.modelmapper.ModelMapper

Class Anotations

@Component ,

Detaille de la classe: InstanceAbstractionMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class InstanceAbstractionMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\InstanceAbstractionMapper.class

Class UML:

InstanceAbstractionMapper

Attributes:

Methods:

(+) public InstanceAbstractionModel entityToPojo(InstanceAbstraction entity) : InstanceAbstractionModel

(+) public InstanceAbstraction pojoToEntity(InstanceAbstractionModel pojo) : InstanceAbstraction

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entities.InstanceAbstraction

import com.bpm.engine.models.InstanceAbstractionModel

External Imports

import java.util.ArrayList

import java.util.List

import org.modelmapper.ModelMapper

import org.springframework.stereotype.Component

Class Anotations

@Component ,

Detaille de la classe: InstanceTaskEmailMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class InstanceTaskEmailMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\InstanceTaskEmailMapper.class

Class UML:

InstanceTaskEmailMapper

Attributes:

Methods:

(+) public InstanceTaskEmailModel entityToPojo(InstanceTaskEmail entity) : InstanceTaskEmailModel

(+) public InstanceTaskEmail pojoToEntity(InstanceTaskEmailModel pojo) : InstanceTaskEmail

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entities.InstanceTaskEmail

import com.bpm.engine.models.InstanceTaskEmailModel

External Imports

import org.springframework.stereotype.Component

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

```
import java.util.ArrayList
```

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```

Detalle de la clase: MapperEntityResponse

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class MapperEntityResponse

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\MapperEntityResponse.class

Class UML:

MapperEntityResponse

Attributes:

Methods:

Project Imports

Project Imports

import com.bpm.engine.dto.EntityResponse

External Imports

import org.springframework.stereotype.Component

import java.util.ArrayList

import java.util.List

Class Anotations

@Component ,

Detaille de la classe: ParametersMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class ParametersMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\ParametersMapper.class

Class UML:

ParametersMapper

Attributes:

Methods:

(+) public Parameters pojoToEntity(ParametersModel pojo) : Parameters

(+) public ParametersModel entityToPojo(Parameters entity) : ParametersModel

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.Parameters

import com.bpm.engine.models.ParametersModel

External Imports

import org.modelmapper.ModelMapper

import org.springframework.stereotype.Component

Class Anotations

@Component ,

Detaille de la classe: ProcessDTOMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line:public class ProcessDTOMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\ProcessDTOMapper.class

Class UML:

ProcessDTOMapper
Attributes:
Methods: (+) public ProcessDTO instanceAbstractionModelToDTO (InstanceAbstractionModel instance) : ProcessDTO (+) public StageDTO getStageDTO(InstanceAbstractionModel instanceStage) : StageDTO (+) public TaskDTO getTask(InstanceAbstractionModel instanceTask) : TaskDTO

Relations:

Association static or patter Build
-INSTANCE_PROCESS
-ProcessDTO
-StageDTO
-INSTANCE_STAGE
-TaskDTO
-INSTANCE_TASK

Project Imports

Project Imports
import com.bpm.engine.dto.ProcessDTO
import com.bpm.engine.dto.StageDTO

```
import com.bpm.engine.dto.TaskDTO
```

```
import com.bpm.engine.models.InstanceAbstractionModel
```

```
import com.bpm.engine.utility.InstanOf
```

External Imports

```
import java.util.ArrayList
```

```
import java.util.List
```

```
import org.springframework.stereotype.Component
```

Class Anotations

```
@Component ,
```

Detaille de la classe: ProcessMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class ProcessMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\ProcessMapper.class

Class UML:

ProcessMapper

Attributes:

Methods:

(+) public ProcessModel entityToPojo(Process entity) : ProcessModel

(+) public Process pojoToEntity(ProcessModel pojo) : Process

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.InstanceAbstraction

import com.bpm.engine.entitys.Process

import com.bpm.engine.entitys.Stage

import com.bpm.engine.models.InstanceAbstractionModel

import com.bpm.engine.models.ProcessModel

import com.bpm.engine.models.StageModel

External Imports

import org.springframework.stereotype.Component

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```

Detaille de la classe: ProcessToInstanceAbstractionMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class ProcessToInstanceAbstractionMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\ProcessToInstanceAbstractionMapper.class

Class UML:

ProcessToInstanceAbstractionMapper

Attributes:

Methods:

(+) public InstanceAbstractionModel createFromProcess(ProcessModel processModel, String userCreateInstance) : InstanceAbstractionModel

Relations:

Strong Association

-Date

Association static or patter Build

-InstanceAbstractionModel

-INSTANCE_PROCESS

-CREATE

Project Imports

Project Imports

import com.bpm.engine.models.InstanceAbstractionModel

import com.bpm.engine.models.ProcessModel

import com.bpm.engine.utility.InstanOf

import com.bpm.engine.utility.SystemSate

External Imports

```
import java.util.Date
```

```
import org.springframework.stereotype.Component
```

Class Annotations

```
@Component ,
```

Detaille de la classe: RoleMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class RoleMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mapper

Class UML:

RoleMapper

Attributes:

Methods:

(+) public RoleModel entityToPojo(Role entity) : RoleModel

(+) public Role pojoToEntity(RoleModel pojo) : Role

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

import com.bpm.engine.models.RoleModel

External Imports

import org.springframework.stereotype.Component

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

import java.util.ArrayList

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```


Detaille de la classe: RulerMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line:public class RulerMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\RulerMapper.class

Class UML:

RulerMapper

Attributes:

Methods:

(+) public RulerModel entityToPojo(Ruler entity) : RulerModel

(+) public Ruler pojoToEntity(RulerModel pojo) : Ruler

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

import com.bpm.engine.entitys.Ruler

import com.bpm.engine.models.RoleModel

import com.bpm.engine.models.RulerModel

External Imports

import org.modelmapper.ModelMapper

Detaille de la classe: StageMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class StageMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\StageMapper.class

Class UML:

StageMapper

Attributes:

Methods:

(+) public StageModel entityToPojo(Stage entity) : StageModel

(+) public Stage pojoToEntity(StageModel pojo) : Stage

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.Stage

import com.bpm.engine.entitys.Stage

import com.bpm.engine.entitys.Role

import com.bpm.engine.entitys.Task

import com.bpm.engine.models.RoleModel

import com.bpm.engine.models.StageModel

import com.bpm.engine.models.TaskModel

External Imports

```
import org.springframework.stereotype.Component
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```

Detaille de la classe: StateMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class StateMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\StateMapper.class

Class UML:

StateMapper

Attributes:

Methods:

(+) public StateModel entityToPojo(State entity) : StateModel

(+) public State pojoToEntity(StateModel pojo) : State

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.State

import com.bpm.engine.models.StateModel

External Imports

import org.springframework.stereotype.Component

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

import java.util.ArrayList

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```

Detaille de la classe: SystemResponseMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class SystemResponseMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\SystemResponseMapper.class

Class UML:

SystemResponseMapper

Attributes:

Methods:

(+) public SystemResponseModel entityToPojo(SystemResponse entity) :
SystemResponseModel

(+) public SystemResponse pojoToEntity(SystemResponseModel pojo) :
SystemResponse

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entities.SystemResponse

import com.bpm.engine.models.SystemResponseModel

External Imports

import org.springframework.stereotype.Component

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

```
import java.util.ArrayList
```

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```

Detaille de la classe: TaskAssignedMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class TaskAssignedMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\TaskAssignedMapper.class

Class UML:

TaskAssignedMapper

Attributes:

Methods:

(+) public TaskAssignedModel entityToPojo(TaskAssigned entity) : TaskAssignedModel

(+) public TaskAssigned pojoToEntity(TaskAssignedModel pojo) : TaskAssigned

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskAssigned

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.models.TaskAssignedModel

import com.bpm.engine.models.TaskTypeModel

External Imports

import org.modelmapper.ModelMapper

import org.springframework.stereotype.Component

import java.util.ArrayList


```
import java.util.List
```

Class Anotations

```
@Component ,
```

Detaille de la classe: TaskEmailMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class TaskEmailMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\TaskEmailMapper.class

Class UML:

TaskEmailMapper

Attributes:

Methods:

(+) public TaskEmailModel entityToPojo(TaskEmail entity) : TaskEmailModel

(+) public TaskEmail pojoToEntity(TaskEmailModel pojo) : TaskEmail

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskEmail

import com.bpm.engine.models.TaskEmailModel

External Imports

import org.springframework.stereotype.Component

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

import java.util.ArrayList

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```

Detaille de la classe: TaskMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class TaskMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\TaskMapper.class

Class UML:

TaskMapper

Attributes:

Methods:

(+) public TaskModel entityToPojo(Task entity) : TaskModel

(+) public Task pojoToEntity(TaskModel pojo) : Task

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.Task

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.models.TaskModel

import com.bpm.engine.models.TaskTypeModel

External Imports

import org.springframework.stereotype.Component

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```

Detaille de la classe: TaskTypeMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class TaskTypeMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\TaskTypeMapper.class

Class UML:

TaskTypeMapper

Attributes:

Methods:

(+) public TaskTypeModel entityToPojo(TaskType entity) : TaskTypeModel

(+) public TaskType pojoToEntity(TaskTypeModel pojo) : TaskType

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.models.TaskTypeModel

External Imports

import org.springframework.stereotype.Component

import org.springframework.beans.factory.annotation.Autowired

import java.util.List

import java.util.Date

import java.util.ArrayList

```
import org.modelmapper.ModelMapper
```

Class Anotations

```
@Component ,
```

Detaille de la classe: TemplateMapper

Package: com.bpm.engine.mappers

Class type: class

Class Signature Line: public class TemplateMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\mappers\

Class UML:

TemplateMapper

Attributes:

Methods:

(+) public Template pojoToEntity(TemplateModel pojo) : Template

(+) public TemplateModel entityToPojo(Template entity) : TemplateModel

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.Template

import com.bpm.engine.models.TemplateModel

External Imports

import org.modelmapper.ModelMapper

import org.springframework.stereotype.Component

Class Anotations

@Component ,

Detaille de la classe: ApprovedProcessModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class ApprovedProcessModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public ApprovedProcessModel()

Class UML:

ApprovedProcessModel

Attributes:

(-) idApprovedProcess : Long
(-) processCode : String
(-) idProcess : Long
(-) granted : Boolean

Methods:

(+) public Long getIdApprovedProcess() : Long
(+) public void setIdApprovedProcess(Long idApprovedProcess) : void
(+) public String getProcessCode() : String
(+) public void setProcessCode(String processCode) : void
(+) public Long getIdProcess() : Long
(+) public void setIdProcess(Long idProcess) : void
(+) public Boolean getGranted() : Boolean
(+) public void setGranted(Boolean granted) : void
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Detaille de la classe: AssignedModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class AssignedModel

Class ClassPath: C:

\\REPOSITORYES\\BPM_work_flow_engine\\EngineBpm\\src\\main\\java\\com\\bpm\\engine\\r

Class Constructors

Constructors

```
+ public AssignedModel(String name, String codeEmployee, RoleModel  
employeeRole, String mail, List<ApprovedProcessModel> approvedProcess)  
public AssignedModel(String name, String codeEmployee, RoleModel  
employeeRole, String mail)
```

Class UML:

AssignedModel

Attributes:

(-) id : Long
(-) name : String
(-) codeEmployee : String
(-) employeeRole : RoleModel
(-) mail : String
(-) active : Boolean

Methods:

(+) public Boolean getActive() : Boolean
(+) public void setActive(Boolean active) : void
(+) public Long getId() : Long
(+) public void setId(Long id) : void
(+) public String getName() : String
(+) public void setName(String name) : void
(+) public String getCodeEmployee() : String
(+) public void setCodeEmployee(String codeEmployee) : void
(+) public RoleModel getemployeeRole() : RoleModel
(+) public void setemployeeRole(RoleModel employeeRole) : void
(+) public void setApprovedProcess(List<ApprovedProcessModel>
approvedProcess) : void
(+) public String getMail() : String
(+) public void setMail(String mail) : void

```
(+) public boolean equals(Object o) : boolean  
(+) public int hashCode() : int  
(+) public void updateThis(AssignedModel newAssignedModel) : void
```

Relations:

Association static or patter Build

-Objects

Project Imports

Project Imports

```
import com.bpm.engine.entitys.ApprovedProcess
```

```
import com.bpm.engine.entitys.Assigned
```

```
import com.bpm.engine.entitys.Role
```

External Imports

```
import java.util.ArrayList
```

```
import java.util.List
```

```
import java.util.Objects
```

```
import lombok.AllArgsConstructor
```

```
import lombok.Builder
```

```
import lombok.Data
```

```
import lombok.NoArgsConstructor
```

Class Anotations

```
@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,
```

Detalle de la clase: BpmAssignedModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class BpmAssignedModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

```
+ public BpmAssignedModel(Long idAssigned, String taskCode, Long
instanciaProcesId) public BpmAssignedModel(Long idAssigned, String
taskCode, Long instanciaProcesId, String codeEmployee) public
BpmAssignedModel(Long idAssigned, String taskCode, Long
instanciaProcesId, String codeEmployee, Long procesId) public
BpmAssignedModel(Long idAssigned, String taskCode)
```

Class UML:

BpmAssignedModel

Attributes:

- (-) idBpmAssigned : Long
- (-) idAssigned : Long
- (-) taskCode : String
- (-) instanciaProcesId : Long
- (-) active : Boolean
- (-) codeEmployee : String
- (-) procesId : Long

Methods:

- (+) public void setBpmAssignedModel(BpmAssignedModel assignedBpm) : void
- (+) public boolean equals(Object obj) : boolean
- (+) public int hashCode() : int
- (+) public void updateThis(BpmAssignedModel other) : void

Relations:

Association static or patter Build

-Objects

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,

Detaille de la classe: ControlProcessReferentModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class ControlProcessReferentModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\new

Class Constructors

Constructors

```
+ public ControlProcessReferentModel(String code, String name, String title,  
String status, String type, Long idReference)
```

Class UML:

ControlProcessReferentModel

Attributes:

- (-) id : Long
- (-) code : String
- (-) name : String
- (-) title : String
- (-) status : String
- (-) type : String
- (-) idReference : Long
- (-) active : Boolean
- (-) dateCreate : Date
- (-) dateClose : Date

Methods:

- (+) public void clean() : void

Project Imports

Project Imports

```
import com.bpm.engine.entitys.TaskAssigned
```

External Imports

import java.util.ArrayList

import java.util.Date

import java.util.List

import java.util.Objects

import lombok.AllArgsConstructor

import lombok.Builder

import lombok.Data

import lombok.NoArgsConstructor

Class Annotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,

Detaille de la classe: InstanceAbstractionModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class InstanceAbstractionModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

InstanceAbstractionModel

Attributes:

- (-) idInstance : Long
- (-) instanOf : String
- (-) name : String
- (-) title : String
- (-) type : TaskTypeModel
- (-) idProcess : Long
- (-) idRefenet : Long
- (-) idParent : Long
- (-) idInstanceOfProcess : Long
- (-) codeProcess : String
- (-) codeReferent : String
- (-) apprubeType : Integer
- (-) isParallel : Boolean
- (-) status : String
- (-) active : Boolean
- (-) dateCreate : Date
- (-) dateClose : Date
- (-) userCreateInstance : String
- (-) userWorked : String
- (-) response : String
- (-) level : Integer
- (-) abstractField0 : String
- (-) abstractField1 : String
- (-) abstractField2 : String
- (-) abstractField3 : String
- (-) abstractField4 : String
- (-) abstractField5 : String
- (-) abstractField6 : String
- (-) abstractField7 : String
- (-) abstractFieldNumber0 : Integer

(-) abstractFieldNumber1 : Integer
(-) abstractFieldNumber2 : Integer
(-) abstractFieldNumber3 : Integer
(-) abstractFieldNumber4 : Integer
(-) abstractFieldNumber5 : Integer

Methods:

(+) public void addInstanceAbstractionModel(InstanceAbstractionModel instance) : void
(+) public void addAllInstanceAbstractionModel(List<InstanceAbstractionModel> instances) : void

Project Imports

Project Imports

import com.bpm.engine.entitys.InstanceAbstraction

import com.bpm.engine.entitys.TaskType

External Imports

import java.util.ArrayList

import java.util.Date

import java.util.List

import javax.persistence.Column

import lombok.AllArgsConstructor

import lombok.Builder

import lombok.Data

import lombok.NoArgsConstructor

Class Annotations

@Data , @AllArgsConstructor , @NoArgsConstructor , @Builder ,

Detaille de la classe: InstanceDataInfoModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class InstanceDataInfoModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public InstanceDataInfoModel()

Class UML:

InstanceDataInfoModel

Attributes:

(-) id : Long
(-) instanceID : Long
(-) instanceTitle : String
(-) instanceName : String
(-) instanceCode : String
(-) instanceUserAssigned : String
(-) instanceUserAssignedEmployeeCode : String
(-) instanceDescription : String
(-) state : String
(-) isProcess : Boolean
(-) Type : String

Methods:

(+) public String getType() : String
(+) public void setType(String type) : void
(+) public Boolean getProcess() : Boolean
(+) public void setProcess(Boolean process) : void
(+) public String getInstanceUserAssignedEmployeeCode() : String
(+) public void setInstanceUserAssignedEmployeeCode(String instanceUserAssignedEmployeeCode) : void
(+) public Long getId() : Long
(+) public void setId(Long id) : void
(+) public Long getInstanceID() : Long
(+) public void setInstanceID(Long instanceID) : void

```
(+) public String getInstanceTitle() : String
(+) public void setInstanceTitle(String instanceTitle) : void
(+) public String getInstanceName() : String
(+) public void setInstanceName(String instanceName) : void
(+) public String getInstanceCode() : String
(+) public void setInstanceCode(String instanceCode) : void
(+) public String getInstanceUserAssigned() : String
(+) public void setInstanceUserAssigned(String instanceUserAssigned) : void
(+) public String getInstanceDescription() : String
(+) public void setInstanceDescription(String instanceDescription) : void
(+) public String getState() : String
(+) public void setState(String state) : void
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int
```

Relations:

Association static or patter Build

-Objects

Detalle de la clase: InstanceTaskEmailModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class InstanceTaskEmailModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

InstanceTaskEmailModel

Attributes:

(-) id : Long
(-) emailTo : String
(-) emailCC : String
(-) emailFrom : String
(-) nota : String
(-) templeCode : String
(-) dateCreate : Date
(-) dateEnd : Date
(-) dateSent : Date
(-) repete : Boolean
(-) numberRepete : Integer

Methods:

(+) public Long getId() : Long
(+) public void setId(Long id) : void
(+) public String getEmailTo() : String
(+) public void setEmailTo(String emailTo) : void
(+) public String getEmailCC() : String
(+) public void setEmailCC(String emailCC) : void
(+) public String getEmailFrom() : String
(+) public void setEmailFrom(String emailFrom) : void
(+) public String getNota() : String
(+) public void setNota(String nota) : void
(+) public String getTempleCode() : String
(+) public void setTempleCode(String templeCode) : void
(+) public Date getDateCreate() : Date
(+) public void setDateCreate(Date dateCreate) : void
(+) public Date getDateEnd() : Date
(+) public void setDateEnd(Date dateEnd) : void
(+) public Date getDateSent() : Date

(+) public void setDateSent(Date dateSent) : void
(+) public Boolean getRepete() : Boolean
(+) public void setRepete(Boolean repete) : void
(+) public Integer getNumberRepete() : Integer
(+) public void setNumberRepete(Integer numberRepete) : void
(+) public boolean equals(Object o) : boolean

Relations:

Association static or patter Build

-Objects

Detaille de la classe: ParametersModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class ParametersModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public ParametersModel()

Class UML:

ParametersModel

Attributes:

(-) idParameter : Long
(-) key : String
(-) value : String
(-) description : String
(-) note : String
(-) active : Boolean

Methods:

(+) public Long getIdParameter() : Long
(+) public void setIdParameter(Long idParameter) : void
(+) public String getKey() : String
(+) public void setKey(String key) : void
(+) public String getValue() : String
(+) public void setValue(String value) : void
(+) public String getDescription() : String
(+) public void setDescription(String description) : void
(+) public String getNote() : String
(+) public void setNote(String note) : void
(+) public Boolean getActive() : Boolean
(+) public void setActive(Boolean active) : void
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Detalle de la clase: ProcessModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class ProcessModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public ProcessModel()

Class UML:

ProcessModel

Attributes:

(-) id_process : Long
(-) name : String
(-) createDate : Date
(-) userCreate : String
(-) procesTitle : String
(-) state : String
(-) procesCode : String
(-) visible : Boolean
(-) global : Boolean
(-) activo : Boolean

Methods:

(+) public Long getId_process() : Long
(+) public void setId_process(Long id_process) : void
(+) public String getName() : String
(+) public void setName(String name) : void
(+) public Date getCreateDate() : Date
(+) public void setCreateDate(Date createDate) : void
(+) public String getUserCreate() : String
(+) public void setUserCreate(String userCreate) : void
(+) public String getProcesTitle() : String
(+) public void setProcesTitle(String procesTitle) : void
(+) public String getState() : String
(+) public void setState(String state) : void

```
(+) public String getProcesCode() : String
(+) public void setProcesCode(String procesCode) : void
(+) public Boolean getVisible() : Boolean
(+) public void setVisible(Boolean visible) : void
(+) public Boolean getGlobal() : Boolean
(+) public void setGlobal(Boolean global) : void
(+) public Boolean getActivo() : Boolean
(+) public void setActivo(Boolean activo) : void
(+) public void setstages(List<StageModel> stages) : void
(+) public void setRoles(List<RoleModel> roles) : void
(+) public int hashCode() : int
(+) public boolean equals(Object obj) : boolean
(+) public Boolean codeExitStagesIsNotEmpty() : Boolean
```

Relations:

Association static or patter Build
-Objects

Detaille de la classe: RoleModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line:public class RoleModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public RoleModel(String description, String name, String codeRole)

Class UML:

RoleModel

Attributes:

(-) idRole : Long

(-) description : String

(-) name : String

(-) codeRole : String

Methods:

(+) public boolean equals(Object obj) : boolean

(+) public int hashCode() : int

(+) public void updatethis(RoleModel other) : void

Relations:

Association static or patter Build

-Objects

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

External Imports

import java.util.Objects

import lombok.AllArgsConstructor

import lombok.Builder

import lombok.Data

import lombok.NoArgsConstructor

Class Annotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,

Detaille de la classe: RulerModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class RulerModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public RulerModel()

Class UML:

RulerModel

Attributes:

(-) idRuler : Long
(-) condition : String
(-) action : Integer
(-) taskCode : String
(-) taskNumber : Integer

Methods:

(+) public String getTaskCode() : String
(+) public void setTaskCode(String taskCode) : void
(+) public Long getIdRuler() : Long
(+) public void setIdRuler(Long idRuler) : void
(+) public String getCondition() : String
(+) public void setCondition(String condition) : void
(+) public Integer getAction() : Integer
(+) public void setAction(Integer action) : void
(+) public Integer getTaskNumber() : Integer
(+) public void setTaskNumber(Integer taskNumber) : void
(+) public int hashCode() : int
(+) public boolean equals(Object obj) : boolean

Relations:

Association static or patter Build

-Objects

Detaille de la classe: StageModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class StageModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public StageModel()

Class UML:

StageModel

Attributes:

(-) idStage : Long
(-) stageCode : String
(-) name : String
(-) title : String
(-) dateCreate : Date
(-) type : String
(-) nextStageCode : String
(-) stageNumber : Integer

Methods:

(+) public Boolean stagesIsNoEmpty() : Boolean
(+) public Integer getStageNumber() : Integer
(+) public void setStageNumber(Integer stageNumber) : void
(+) public Long getIdStage() : Long
(+) public void setIdStage(Long idStage) : void
(+) public String getStageCode() : String
(+) public void setStageCode(String stageCode) : void
(+) public String getName() : String
(+) public void setName(String name) : void
(+) public String getTitle() : String
(+) public void setTitle(String title) : void
(+) public Date getDateCreate() : Date
(+) public void setDateCreate(Date dateCreate) : void
(+) public String getType() : String

```
(+) public void setType(String type) : void
(+) public String getNextStageCode() : String
(+) public void setNextStageCode(String nextStageCode) : void
(+) public void setstages(List<StageModel> stages) : void
(+) public void setroles(List<RoleModel> roles) : void
(+) public void settasks(List<TaskModel> tasks) : void
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int
```

Relations:

Association static or patter Build

-Objects

Detaille de la classe: StateModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class StateModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public StateModel() public StateModel(String theState) public StateModel
(String theState, String code)

Class UML:

StateModel

Attributes:

(-) idState : Long

(-) theState : String

(-) code : String

Methods:

(+) public String getCode() : String

(+) public void setCode(String code) : void

(+) public Long getIdState() : Long

(+) public void setIdState(Long idState) : void

(+) public String getTheState() : String

(+) public void setTheState(String theState) : void

(+) public boolean equals(Object o) : boolean

(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Detalle de la clase: SystemInternalResponseModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class SystemInternalResponseModel implements Serializable

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public SystemInternalResponseModel() public SystemInternalResponseModel (Boolean condition, String mensaje) public SystemInternalResponseModel (Boolean condition) public SystemInternalResponseModel(Boolean condition, String mensaje, Object objectCarrier, List<Object> objectCarrierList)

Class UML:

SystemInternalResponseModel

Attributes:

(-) condition : Boolean
(-) mensaje : String
(-) objectCarrier : Object

Methods:

(+) public Boolean getCondition() : Boolean
(+) public void setCondition(Boolean condition) : void
(+) public String getMensaje() : String
(+) public void setMensaje(String mensaje) : void
(+) public Object getObjectCarrier() : Object
(+) public void setObjectCarrier(Object objectCarrier) : void
(+) public void setObjectCarrierList(List<Object> objectCarrierList) : void
(+) public String toString() : String
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int

Relations:

Implement

-Serializable

Association static or patter Build
-Objects

Detaille de la classe: SystemReferentModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class SystemReferentModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

SystemReferentModel

Attributes:

(-) referent0 : String
(-) referent1 : String
(-) referent2 : String
(-) referent3 : String
(-) referent4 : String
(-) referentLong0 : Long
(-) referentLong1 : Long
(-) referentLong2 : Long
(-) referentLong3 : Long

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,

Detaille de la classe: SystemResponseModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class SystemResponseModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

SystemResponseModel

Attributes:

(-) id : Long

(-) response : String

Methods:

(+) public Long getId() : Long

(+) public void setId(Long id) : void

(+) public String getResponse() : String

(+) public void setResponse(String response) : void

(+) public boolean equals(Object o) : boolean

Relations:

Association static or patter Build

-Objects

Detaille de la classe: TaskAssignedModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class TaskAssignedModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public TaskAssignedModel() public TaskAssignedModel(Long idBpmAssigned)

Class UML:

TaskAssignedModel

Attributes:

(-) idTaskAssigned : Long
(-) taskId : Long
(-) idBpmAssigned : Long
(-) actionExecuted : String
(-) dateExecuted : Date
(-) stateOfTask : String

Methods:

(+) public Long getIdTaskAssigned() : Long
(+) public void setIdTaskAssigned(Long idTaskAssigned) : void
(+) public Long getTaskId() : Long
(+) public void setTaskId(Long taskId) : void
(+) public Long getIdBpmAssigned() : Long
(+) public void setIdBpmAssigned(Long idBpmAssigned) : void
(+) public String getActionExecuted() : String
(+) public void setActionExecuted(String actionExecuted) : void
(+) public Date getDateExecuted() : Date
(+) public void setDateExecuted(Date dateExecuted) : void
(+) public String getStateOfTask() : String
(+) public void setStateOfTask(String stateOfTask) : void
(+) public int hashCode() : int
(+) public boolean equals(Object obj) : boolean

Detaille de la classe: TaskEmailModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class TaskEmailModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

TaskEmailModel

Attributes:

(-) idEmail : Long
(-) emailFrom : String
(-) nota : String
(-) templeCode : String
(-) emailTo : String
(-) emailCC : String
(-) numberRepete : Integer
(-) repete : Boolean

Methods:

(+) public Long getIdEmail() : Long
(+) public void setIdEmail(Long idEmail) : void
(+) public String getEmailFrom() : String
(+) public void setEmailFrom(String emailFrom) : void
(+) public String getNota() : String
(+) public void setNota(String nota) : void
(+) public String getTempleCode() : String
(+) public void setTempleCode(String templeCode) : void
(+) public String getEmailTo() : String
(+) public void setEmailTo(String emailTo) : void
(+) public String getEmailCC() : String
(+) public void setEmailCC(String emailCC) : void
(+) public Integer getNumberRepete() : Integer
(+) public void setNumberRepete(Integer numberRepete) : void
(+) public Boolean getRepete() : Boolean
(+) public void setRepete(Boolean repete) : void
(+) public boolean equals(Object o) : boolean

Relations:

Association static or patter Build

-Objects

Detalle de la clase: TaskModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class TaskModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

TaskModel

Attributes:

(-) idTask : Long
(-) title : String
(-) name : String
(-) dateCreate : Date
(-) taskEnd : Date
(-) taskDueTime : Integer
(-) procesCode : String
(-) taskUrl : String
(-) urlService : String
(-) code : String
(-) type : TaskTypeModel
(-) taskNumber : Integer
(-) apprubeType : Integer
(-) isParallel : Boolean
(-) parallelWithTaskNumber : Integer

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,

Detalle de la clase: TaskTypeModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class TaskTypeModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

TaskTypeModel

Attributes:

(-) idTaskType : Long

(-) type : String

Methods:

(+) public Long getIdTaskType() : Long

(+) public void setIdTaskType(Long idTaskType) : void

(+) public String getType() : String

(+) public void setType(String type) : void

(+) public boolean equals(Object o) : boolean

Relations:

Association static or patter Build

-Objects

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,

Detaille de la classe: TemplateFlexibleDataModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class TemplateFlexibleDataModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public TemplateFlexibleDataModel() public TemplateFlexibleDataModel
(String field, String value)

Class UML:

TemplateFlexibleDataModel

Attributes:

(-) idTemplateFlexible : Long

(-) field : String

(-) value : String

Methods:

(+) public Long getIdTemplateFlexible() : Long

(+) public void setIdTemplateFlexible(Long idTemplateFlexible) : void

(+) public String getField() : String

(+) public void setField(String field) : void

(+) public String getValue() : String

(+) public void setValue(String value) : void

(+) public boolean equals(Object o) : boolean

(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Detalle de la clase: TemplateModel

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class TemplateModel

Class ClassPath: C:

\\REPOSITORYES\\BPM_work_flow_engine\\EngineBpm\\src\\main\\java\\com\\bpm\\engine\\r

Class Constructors

Constructors

+ public TemplateModel()
+ public TemplateModel(String template, boolean active, String descripcion, String tipo, String codeTemplate)
+ public TemplateModel(String company, String descripcion, String tipo, String codeTemplate, String template)

Class UML:

TemplateModel

Attributes:

(-) idTemplate : Long
(-) template : String
(-) active : Boolean
(-) descripcion : String
(-) tipo : String
(-) codeTemplate : String
(-) company : String

Methods:

(+) public String getCompany() : String
(+) public void setCompany(String company) : void
(+) public Long getIdTemplate() : Long
(+) public void setIdTemplate(Long idTemplate) : void
(+) public String getTemplate() : String
(+) public void setTemplate(String template) : void
(+) public boolean isActive() : boolean
(+) public void setActive(boolean active) : void
(+) public String getDescripcion() : String
(+) public void setDescripcion(String descripcion) : void
(+) public String getTipo() : String
(+) public void setTipo(String tipo) : void

```
(+) public String getCodeTemplate() : String  
(+) public void setCodeTemplate(String codeTemplate) : void  
(+) public boolean equals(Object o) : boolean  
(+) public int hashCode() : int
```

Relations:

Association static or patter Build

-Objects

Project Imports

Project Imports

```
import com.bpm.engine.entitys.Template
```

External Imports

```
import java.util.Objects
```

Detaille de la classe: SystemTemplateFlexibleDataComponet

Package: com.bpm.engine.notification.componet

Class type: class

Class Signature Line: public class SystemTemplateFlexibleDataComponet

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

SystemTemplateFlexibleDataComponet

Attributes:

Methods:

(-) private TemplateFlexibleDataModel getBodyForTemplate(String state, String Type, String instanceTitle, String instanceID) : TemplateFlexibleDataModel

Relations:

Association static or patter Build

-CREATE

Project Imports

Project Imports

import com.bpm.engine.models.InstanceDataInfoModel

import com.bpm.engine.models.TemplateFlexibleDataModel

import com.bpm.engine.utility.Constants

import com.bpm.engine.utility.SystemSate

External Imports

import org.springframework.stereotype.Component

import java.util.ArrayList

import java.util.List

Class Anotations

@Component ,

Detaille de la classe: TemplateFilling

Package: com.bpm.engine.notification.componet

Class type: class

Class Signature Line:public class TemplateFilling

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

TemplateFilling

Attributes:

(-) templateService : TemplateService

Methods:

(+) public String fillTemplate(String templateCode,
List<TemplateFlexibleDataModel> objectFlexible) : String

Relations:

loc

-TemplateService

Project Imports

Project Imports

import com.bpm.engine.models.TemplateFlexibleDataModel

import com.bpm.engine.service.TemplateService

External Imports

import java.util.List

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.stereotype.Component

Class Anotations

@Component ,

Detaille de la classe: TemplateFlexibleDataManager

Package: com.bpm.engine.notification.componet

Class type: class

Class Signature Line:public class TemplateFlexibleDataManager

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

TemplateFlexibleDataManager

Attributes:

(-) systemTemplateFlexibleDataComponet :
SystemTemplateFlexibleDataComponet

Methods:

Relations:

loc

-SystemTemplateFlexibleDataComponet

Project Imports

Project Imports

import com.bpm.engine.models.InstanceDataInfoModel

import com.bpm.engine.models.TemplateFlexibleDataModel

import com.bpm.engine.notification.componet.
SystemTemplateFlexibleDataComponet

External Imports

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.stereotype.Component

import java.util.List

Class Anotations

@Component ,

Detaille de la classe: AttachmentModel

Package: com.bpm.engine.notification.model

Class type: class

Class Signature Line: public class AttachmentModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public AttachmentModel() public AttachmentModel(byte[] fileAttachment, String fileName) public AttachmentModel(Long idAttachment, byte[] fileAttachment, String fileName)

Class UML:

AttachmentModel

Attributes:

(-) idAttachment : Long

(-) fileName : String

Methods:

(+) public Long getIdAttachment() : Long

(+) public void setIdAttachment(Long idAttachment) : void

(+) public void setFileAttachment(byte[] fileAttachment) : void

(+) public String getFileName() : String

(+) public void setFileName(String fileName) : void

(+) public boolean equals(Object o) : boolean

(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

-Arrays

Detaille de la classe: EmailDataConfigModel

Package: com.bpm.engine.notification.model

Class type: class

Class Signature Line: public class EmailDataConfigModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public EmailDataConfigModel()

Class UML:

EmailDataConfigModel

Attributes:

(-) host : String
(-) idEmailConfig : Long
(-) port : String
(-) mailUsername : String
(-) mailPassword : String

Methods:

(+) public String getHost() : String
(+) public void setHost(String host) : void
(+) public Long getIdEmailConfig() : Long
(+) public void setIdEmailConfig(Long idEmailConfig) : void
(+) public String getPort() : String
(+) public void setPort(String port) : void
(+) public String getMailUsername() : String
(+) public void setMailUsername(String mailUsername) : void
(+) public String getMailPassword() : String
(+) public void setMailPassword(String mailPassword) : void
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Detalle de la clase: EmailsModel

Package: com.bpm.engine.notification.model

Class type: class

Class Signature Line: public class EmailsModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public EmailsModel() public EmailsModel(List<String> to, List<String> cc, List<String> bcc, String from, String subject, String content, String body, byte[] adjunto)

Class UML:

EmailsModel

Attributes:

(-) from : String
(-) subject : String
(-) content : String
(-) body : String

Methods:

(+) public void setTo(List<String> to) : void
(+) public void setCc(List<String> cc) : void
(+) public void setBcc(List<String> bcc) : void
(+) public String getFrom() : String
(+) public void setFrom(String from) : void
(+) public String getSubject() : String
(+) public void setSubject(String subject) : void
(+) public String getContent() : String
(+) public void setContent(String content) : void
(+) public String getBody() : String
(+) public void setBody(String body) : void
(+) public void setAdjunto(byte[] adjunto) : void
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int

Relations:

Association static or patter Build
-Objects
-Arrays

Detaille de la classe: MailSenderModel

Package: com.bpm.engine.notification.model

Class type: class

Class Signature Line: public class MailSenderModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class Constructors

Constructors

+ public MailSenderModel() public MailSenderModel(String template, String email) public MailSenderModel(String template, String email, String attachments) public MailSenderModel(String port, String template, String email, String attachments, Date createDay, EmailsModel emailsModel, List<AttachmentModel> listAttachments)

Class UML:

MailSenderModel

Attributes:

(-) port : String
(-) template : String
(-) active : Boolean
(-) wasSend : String
(-) email : String
(-) attachments : String
(-) createDay : Date
(-) emailsModel : EmailsModel
(-) company : String
(-) Emailconfiguration : EmailDataConfigModel

Methods:

(+) public String getPort() : String
(+) public void setPort(String port) : void
(+) public String getTemplate() : String
(+) public void setTemplate(String template) : void
(+) public Boolean getActive() : Boolean
(+) public void setActive(Boolean active) : void
(+) public String getWasSend() : String
(+) public void setWasSend(String wasSend) : void
(+) public String getEmail() : String

(+) public void setEmail(String email) : void
(+) public String getAttachments() : String
(+) public void setAttachments(String attachments) : void
(+) public Date getCreateDay() : Date
(+) public void setCreateDay(Date createDay) : void
(+) public EmailsModel getEmailsModel() : EmailsModel
(+) public void setEmailsModel(EmailsModel emailsModel) : void
(+) public String getCompany() : String
(+) public void setCompany(String company) : void
(+) public void setListAttachments(List<AttachmentModel> listAttachments) : void
(+) public EmailDataConfigModel getEmailconfiguration() : EmailDataConfigModel
(+) public void setEmailconfiguration(EmailDataConfigModel emailconfiguration) : void
(+) public boolean equals(Object o) : boolean
(+) public int hashCode() : int

Relations:

Association static or patter Build

-Objects

Detaille de la classe: NotificationServiceImpl

Package: com.bpm.engine.notification.serviceImplement

Class type: class

Class Signature Line: public class NotificationServiceImpl implements NotificationService, IBaseModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\src

Class Constructors

Constructors

+ public NotificationServiceImpl(TemplateFilling templateFilling, TemplateFlexibleDataManager templateFlexibleDataManager, ParametersServices parametersServices, RestTemplateService templateService, AssignedService assignedService)

Class UML:

NotificationServiceImpl

Attributes:

(-) templateFilling : TemplateFilling
(-) templateFlexibleDataManager : TemplateFlexibleDataManager
(-) parametersServices : ParametersServices
(-) templateService : RestTemplateService
(-) assignedService : AssignedService

Methods:

(+) public void taskNotification(InstanceAbstractionModel instanceTask, String errorStatus) : void
(-) private EmailsModel generateEmailsModel(InstanceDataInfoModel instanceDataInfo, AssignedModel assigned, String errorStatus) : EmailsModel
(-) private String buildMail(InstanceDataInfoModel instanceDataInfo, AssignedModel assigned, String errorStatus) : String
(-) private void handlerResponse(ResponseEntity<String> responseEntity, InstanceAbstractionModel instanceTask) : void

Relations:

Implement

-NotificationService

- IBaseModel

Strong Association

-InstanceDataInfoModel

-EmailsModel

-Gson

-MailSenderModel

Project Imports

Project Imports

import com.bpm.engine.interfaces.IBaseModel

import com.bpm.engine.models.AssignedModel

import com.bpm.engine.models.InstanceAbstractionModel

import com.bpm.engine.models.InstanceDataInfoModel

import com.bpm.engine.models.TemplateFlexibleDataModel

import com.bpm.engine.notification.componet.TemplateFilling

import com.bpm.engine.notification.componet.TemplateFlexibleDataManager

import com.bpm.engine.notification.model.EmailsModel

import com.bpm.engine.notification.model.MailSenderModel

import com.bpm.engine.notification.services.NotificationService

import com.bpm.engine.service.AssignedService

import com.bpm.engine.service.ParametersServices

import com.bpm.engine.serviceImplement.RestTemplateService

import com.bpm.engine.utility.Constants

External Imports

import java.util.Arrays

```
import java.util.List
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.http.ResponseEntity
```

```
import org.springframework.stereotype.Service
```

```
import com.google.gson.Gson
```

Class Anotations

```
@Service ,
```

Detalle de la clase: NotificationService

Package: com.bpm.engine.notification.services

Class type: interface

Class Signature Line: public interface NotificationService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

NotificationService

Attributes:

Methods:

(+) public void taskNotification(InstanceAbstractionModel instanceTask, String errorStatus) : void

Project Imports

Project Imports

import com.bpm.engine.models.InstanceAbstractionModel

Detalle de la clase: ReliefDTO

Package: com.bpm.engine.relief.dto

Class type: class

Class Signature Line: public class ReliefDTO implements Serializable

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\dto\

Class UML:

ReliefDTO

Attributes:

(-) id : Long
(-) userCode : String
(-) userReliefCode : String
(-) userCreateCode : String
(-) permanent : Boolean
(-) temporary : Boolean
(-) returnCommand : Boolean
(-) time : Integer
(-) unsubscribe : Boolean
(-) type : Integer
(-) delegateAll : Boolean

Methods:

Relations:

Implement

-Serializable

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,

Detaille de la classe: ReliefAssigned

Package: com.bpm.engine.relief.entity

Class type: class

Class Signature Line: public class ReliefAssigned

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\entity\ReliefAssigned.class

Class UML:

ReliefAssigned

Attributes:

(-) idRelief : Long
(-) userCode : String
(-) userCreateCode : String
(-) permanent : Boolean
(-) temporary : Boolean
(-) returnCommand : Boolean
(-) active : Boolean
(-) time : Integer
(-) timeActive : Integer
(-) unsubscribe : Boolean
(-) type : Integer
(-) delegateAll : Boolean
(-) createDate : Date
(-) endDate : Date
(-) dateChangeUserForRelief : Date
(-) dateChangeReliefForUser : Date

Methods:

Class Anotations

@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,@Entity ,@Table
(name = "bpm_relief_assigned") ,

Detaille de la classe: IReliefStrategy

Package: com.bpm.engine.relief.interfaces

Class type: interface

Class Signature Line:public interface IReliefStrategy

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief

Class UML:

IReliefStrategy

Attributes:

Methods:

(+) public Boolean executeRelief(ReliefDTO reliefDTO) : Boolean

Project Imports

Project Imports

import com.bpm.engine.relief.dto.ReliefDTO

Detaille de la classe: ReliefAssignedMapper

Package: com.bpm.engine.relief.mapper

Class type: class

Class Signature Line: public class ReliefAssignedMapper

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\mapper\ReliefAssignedMapper.class

Class UML:

ReliefAssignedMapper

Attributes:

Methods:

(+) public ReliefAssignedModel toModel(ReliefAssigned entity) : ReliefAssignedModel

(+) public ReliefAssigned toEntity(ReliefAssignedModel model) : ReliefAssigned

(+) public ReliefAssignedModel toModel(ReliefDTO dto) : ReliefAssignedModel

Relations:

Strong Association

-ModelMapper

Project Imports

Project Imports

import com.bpm.engine.entities.Process

import com.bpm.engine.models.ProcessModel

import com.bpm.engine.relief.dto.ReliefDTO

import com.bpm.engine.relief.entity.ReliefAssigned

import com.bpm.engine.relief.model.ReliefAssignedModel

External Imports

import java.util.ArrayList

```
import java.util.List
```

```
import org.modelmapper.ModelMapper
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Component
```

Class Anotations

```
@Component ,
```

Detaille de la classe: ReliefAssignedModel

Package: com.bpm.engine.relief.model

Class type: class

Class Signature Line: public class ReliefAssignedModel

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\

Class Constructors

Constructors

+ public ReliefAssignedModel(ReliefDTO dto)

Class UML:

ReliefAssignedModel

Attributes:

(-) idRelief : Long
(-) userCode : String
(-) userReliefCode : String
(-) userCreateCode : String
(-) permanent : Boolean
(-) temporary : Boolean
(-) returnCommand : Boolean
(-) active : Boolean
(-) time : Integer
(-) timeActive : Integer
(-) unsubscribe : Boolean
(-) type : Integer
(-) delegateAll : Boolean
(-) createDate : Date
(-) endDate : Date
(-) dateChangeUserForRelief : Date
(-) dateChangeReliefForUser : Date

Methods:

(+) public boolean equals(Object obj) : boolean
(+) public int hashCode() : int

Relations:

Association static or patter Build
-Objects

Project Imports									
<table border="1"><tr><td>Project Imports</td></tr><tr><td> import com.bpm.engine.relief.dto.ReliefDTO </td></tr><tr><td>External Imports</td></tr><tr><td> import java.util.Date </td></tr><tr><td> import java.util.Objects </td></tr><tr><td> import lombok.AllArgsConstructor </td></tr><tr><td> import lombok.Builder </td></tr><tr><td> import lombok.Data </td></tr><tr><td> import lombok.NoArgsConstructor </td></tr></table>	Project Imports	import com.bpm.engine.relief.dto.ReliefDTO	External Imports	import java.util.Date	import java.util.Objects	import lombok.AllArgsConstructor	import lombok.Builder	import lombok.Data	import lombok.NoArgsConstructor
Project Imports									
import com.bpm.engine.relief.dto.ReliefDTO									
External Imports									
import java.util.Date									
import java.util.Objects									
import lombok.AllArgsConstructor									
import lombok.Builder									
import lombok.Data									
import lombok.NoArgsConstructor									
<table border="1"><tr><td>Class Anotations</td></tr><tr><td> @Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder , </td></tr></table>	Class Anotations	@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,							
Class Anotations									
@Data ,@AllArgsConstructor ,@NoArgsConstructor ,@Builder ,									

Detaille de la classe: ReliefManager

Package: com.bpm.engine.relief

Class type: class

Class Signature Line: public class ReliefManager

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief

Class Constructors

Constructors

+ public ReliefManager(IReliefAssignedService service, Unsubscribe unsubscribe, TemporaryChange changePermissions, ChangeBpmRole changeBpmRole)

Class UML:

ReliefManager

Attributes:

(-) service : IReliefAssignedService

(-) unsubscribe : Unsubscribe

(-) temporaryChange : TemporaryChange

(-) changeBpmRole : ChangeBpmRole

Methods:

(+) public boolean executeRelelief(Integer strategy, ReliefDTO reliefDTO) : boolean

Project Imports

Project Imports

import com.bpm.engine.relief.dto.ReliefDTO

import com.bpm.engine.relief.interfaces.IReliefStrategy

import com.bpm.engine.relief.mapper.ReliefAssignedMapper

import com.bpm.engine.relief.model.ReliefAssignedModel

import com.bpm.engine.relief.service.IReliefAssignedService

import com.bpm.engine.relief.strategys.ChangeBpmRole

```
import com.bpm.engine.relief.strategys.TemporaryChange
```

```
import com.bpm.engine.relief.strategys.Unsubscribe
```

External Imports

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```


Detaille de la classe: ReliefAssignedRepository

Package: com.bpm.engine.relief.repository

Class type: interface

Class Signature Line: public interface ReliefAssignedRepository extends

CrudRepository<ReliefAssigned, Long>

Class ClassPath: C:

\\REPOSITORYES\\BPM_work_flow_engine\\EngineBpm\\src\\main\\java\\com\\bpm\\engine\\r

Class UML:

ReliefAssignedRepository

Attributes:

Methods:

(+) public List<ReliefAssigned> findByActive(Boolean Active) : List<ReliefAssigned>
(+) public List<ReliefAssigned> findByUserCodeAndActive(String userCode, Boolean Active) : List<ReliefAssigned>
(+) public List<ReliefAssigned> findByUserReliefCodeAndActive(String userReliefCode, Boolean Active) : List<ReliefAssigned>
(+) public List<ReliefAssigned> findByTemporaryAndActive(Boolean temporary, Boolean Active) : List<ReliefAssigned>
(+) public List<ReliefAssigned> findByPermanentAndActive(Boolean permanent, Boolean Active) : List<ReliefAssigned>
(+) public List<ReliefAssigned> findByTemporaryAndReturnCommandAndActive(Boolean temporary, Boolean returnCommand, Boolean Active) : List<ReliefAssigned>
(+) public List<ReliefAssigned> findByReturnCommandAndActive(Boolean returnCommand, Boolean Active) : List<ReliefAssigned>
(+) public List<ReliefAssigned> findByUserReliefCodeLike(String userReliefCode) : List<ReliefAssigned>
(+) public List<ReliefAssigned> finBySearch(@Param("keyword") String keyword) : List<ReliefAssigned>
(+) public List<ReliefAssigned> getReliefreturnCommand() : List<ReliefAssigned>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

```
import com.bpm.engine.relief.entity.ReliefAssigned
```

External Imports

```
import java.util.List
```

```
import javax.transaction.Transactional
```

```
import org.springframework.data.jpa.repository.Modifying
```

```
import org.springframework.data.jpa.repository.Query
```

```
import org.springframework.data.repository.CrudRepository
```

```
import org.springframework.data.repository.query.Param
```

```
import org.springframework.stereotype.Repository
```

Class Annotations

```
@Repository ,
```

Detaille de la classe: IReliefAssignedService

Package: com.bpm.engine.relief.service

Class type: interface

Class Signature Line: public interface IReliefAssignedService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\service

Class UML:

IReliefAssignedService

Attributes:

Methods:

```
(+) public void updateTimeActive(Integer timeActive, Long idRelief) : void
(+) public void updateActive(Boolean active, Long idRelief) : void
(+) public ReliefAssignedModel createReliefAssigned(ReliefAssignedModel model) : ReliefAssignedModel
(+) public ReliefAssignedModel updateReliefAssigned(ReliefAssignedModel model) : ReliefAssignedModel
(+) public List<ReliefAssignedModel> findByActive(Boolean active) : List<ReliefAssignedModel>
(+) public List<ReliefAssignedModel> findByUserCodeAndActive(String userCode, Boolean active) : List<ReliefAssignedModel>
(+) public List<ReliefAssignedModel> findByUserReliefCodeAndActive(String userReliefCode, Boolean active) : List<ReliefAssignedModel>
(+) public List<ReliefAssignedModel> findByTemporaryAndActive(Boolean temporary, Boolean active) : List<ReliefAssignedModel>
(+) public List<ReliefAssignedModel> findByPermanentAndActive(Boolean permanent, Boolean active) : List<ReliefAssignedModel>
(+) public List<ReliefAssignedModel> findByTemporaryAndReturnCommandAndActive(Boolean temporary, Boolean returnCommand, Boolean active) : List<ReliefAssignedModel>
(+) public List<ReliefAssignedModel> findByReturnCommandAndActive(Boolean returnCommand, Boolean active) : List<ReliefAssignedModel>
(+) public List<ReliefAssignedModel> findByUserReliefCodeLike(String userReliefCode) : List<ReliefAssignedModel>
(+) public ReliefAssignedModel createReliefAssigned(ReliefDTO reliefDTO) : ReliefAssignedModel
(+) public List<ReliefAssignedModel> getReliefreturnCommand() : List<ReliefAssignedModel>
```

Project Imports

Project Imports

import com.bpm.engine.relief.dto.ReliefDTO

import com.bpm.engine.relief.entity.ReliefAssigned

import com.bpm.engine.relief.model.ReliefAssignedModel

External Imports

import java.util.List

import java.util.Optional

Detaille de la classe: ReliefAssignedServiceImpl

Package: com.bpm.engine.relief.service

Class type: class

Class Signature Line: public class ReliefAssignedServiceImpl implements
IReliefAssignedService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\service\ReliefAssignedServiceImpl.class

Class UML:

ReliefAssignedServiceImpl

Attributes:

(-) reliefAssignedRepository : ReliefAssignedRepository

(-) reliefAssignedMapper : ReliefAssignedMapper

Methods:

(+) public ReliefAssignedModel createReliefAssigned(ReliefDTO reliefDTO) :
ReliefAssignedModel

(+) public ReliefAssignedModel createReliefAssigned(ReliefAssignedModel
model) : ReliefAssignedModel

(+) public ReliefAssignedModel updateReliefAssigned(ReliefAssignedModel
model) : ReliefAssignedModel

(+) public void updateTimeActive(Integer timeActive, Long idRelief) : void

(+) public void updateActive(Boolean active, Long idRelief) : void

Relations:

Implement

-IReliefAssignedService

loc

-ReliefAssignedRepository

-ReliefAssignedMapper

Project Imports

Project Imports

```
import com.bpm.engine.relief.dto.ReliefDTO
```

```
import com.bpm.engine.relief.entity.ReliefAssigned
```

```
import com.bpm.engine.relief.mapper.ReliefAssignedMapper
```

```
import com.bpm.engine.relief.model.ReliefAssignedModel
```

```
import com.bpm.engine.relief.repository.ReliefAssignedRepository
```

External Imports

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

```
import org.springframework.transaction.annotation.Transactional
```

```
import java.util.List
```

```
import java.util.Optional
```

```
import java.util.stream.Collectors
```

Class Anotations

```
@Service ,
```

Detaille de la classe: ReturnCommandService

Package: com.bpm.engine.relief.service

Class type: class

Class Signature Line: public class ReturnCommandService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\service\ReturnCommandService.class

Class Constructors

Constructors

+ public ReturnCommandService(IReliefAssignedService reliefAssignedService, TemporaryChange temporaryChanges)

Class UML:

ReturnCommandService

Attributes:

(-) reliefAssignedService : IReliefAssignedService

(-) temporaryChanges : TemporaryChange

Methods:

(+) public void scheduleTaskCheckReturnCommand() : void

(+) public Integer dateDifference(Date startDate, Date endDate) : Integer

Relations:

Association static or patter Build

-Instant

-ZoneId

-DAYS

Project Imports

Project Imports

import com.bpm.engine.relief.ReliefManager

```
import com.bpm.engine.relief.entity.ReliefAssigned
```

```
import com.bpm.engine.relief.model.ReliefAssignedModel
```

```
import com.bpm.engine.relief.strategys.TemporaryChange
```

External Imports

```
import java.time.Instant
```

```
import java.time.LocalDate
```

```
import java.time.ZoneId
```

```
import java.time.temporal.ChronoUnit
```

```
import java.util.ArrayList
```

```
import java.util.Date
```

```
import java.util.HashMap
```

```
import java.util.List
```

```
import java.util.Map
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.beans.factory.annotation.Value
```

```
import org.springframework.scheduling.annotation.Scheduled
```

```
import org.springframework.stereotype.Component
```

Class Annotations

```
@Component ,
```


Detaille de la classe: ChangeBpmRole

Package: com.bpm.engine.relief.strategys

Class type: class

Class Signature Line: public class ChangeBpmRole implements IReliefStrategy

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\strategys\ChangeBpmRole.class

Class Constructors

Constructors

```
+ public ChangeBpmRole(ProcessAndInstanceFacade services,
AssignmentTaskManager assignmentTaskManager, BpmAssignedManager
bpmAssignedManager, NoReliefFacade noRelief, IReliefAssignedService
serviceRelief)
```

Class UML:

ChangeBpmRole

Attributes:

- (-) services : ProcessAndInstanceFacade
- (-) assignmentTaskManager : AssignmentTaskManager
- (-) bpmAssignedManager : BpmAssignedManager
- (-) noRelief : NoReliefFacade
- (-) serviceRelief : IReliefAssignedService

Methods:

- (+) public Boolean executeRelief(ReliefDTO reliefDTO) : Boolean
- (-) private Boolean execute(ReliefAssignedModel reliefModel) : Boolean
- (+) public Boolean execute(ReliefAssignedModel reliefModel, List<Long> idInstances) : Boolean

Relations:

Implement

-IReliefStrategy

Project Imports

Project Imports

import com.bpm.engine.managers.AssignmentTaskManager

import com.bpm.engine.managers.BpmAssignedManager

import com.bpm.engine.managers.facades.NoReliefFacade

import com.bpm.engine.managers.facades.ProcessAndInstanceFacade

import com.bpm.engine.models.AssignedModel

import com.bpm.engine.models.BpmAssignedModel

import com.bpm.engine.models.InstanceAbstractionModel

import com.bpm.engine.relief.dto.ReliefDTO

import com.bpm.engine.relief.interfaces.IReliefStrategy

import com.bpm.engine.relief.mapper.ReliefAssignedMapper

import com.bpm.engine.relief.model.ReliefAssignedModel

import com.bpm.engine.relief.service.IReliefAssignedService

import com.bpm.engine.utility.InstanOf

External Imports

import java.util.List

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.dao.DataAccessException

import org.springframework.stereotype.Component

Class Anotations

@Component ,

Detaille de la classe: TemporaryChange

Package: com.bpm.engine.relief.strategys

Class type: class

Class Signature Line: public class TemporaryChange implements IReliefStrategy

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\strategys\TemporaryChange.class

Class Constructors

Constructors

+ public TemporaryChange(IReliefAssignedService serviceRelief, AssignmentTaskManager assignmentTaskManager, BpmAssignedManager bpmAssignedManager, ProcessAndInstanceFacade services)

Class UML:

TemporaryChange

Attributes:

(-) mapper : ReliefAssignedMapper
(-) serviceRelief : IReliefAssignedService
(-) assignmentTaskManager : AssignmentTaskManager
(-) bpmAssignedManager : BpmAssignedManager
(-) services : ProcessAndInstanceFacade

Methods:

(+) public Boolean executeRelief(ReliefDTO reliefDTO) : Boolean
(+) public Boolean executeTemporaryChanges(String userReliefCode, String userCode) : Boolean

Relations:

Implement

-IReliefStrategy

Project Imports

Project Imports

import com.bpm.engine.managers.AssignmentTaskManager

import com.bpm.engine.managers.BpmAssignedManager

import com.bpm.engine.managers.facades.ProcessAndInstanceFacade

import com.bpm.engine.models.AssignedModel

import com.bpm.engine.relief.dto.ReliefDTO

import com.bpm.engine.relief.interfaces.IReliefStrategy

import com.bpm.engine.relief.mapper.ReliefAssignedMapper

import com.bpm.engine.relief.model.ReliefAssignedModel

import com.bpm.engine.relief.service.IReliefAssignedService

External Imports

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.stereotype.Component

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: Unsuscribe

Package: com.bpm.engine.relief.strategys

Class type: class

Class Signature Line: public class Unsuscribe implements IReliefStrategy

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\strategys\Unsuscribe.class

Class UML:

Unsuscribe

Attributes:

- (-) mapper : ReliefAssignedMapper
- (-) serviceFacade : ServiceBpmAndAssignedFacade
- (-) noRelief : NoReliefFacade
- (-) serviceRelief : IReliefAssignedService

Methods:

- (+) public Boolean executeRelief(ReliefDTO reliefDTO) : Boolean

Relations:

Implement

-IReliefStrategy

Project Imports

Project Imports

import com.bpm.engine.managers.facades.NoReliefFacade

import com.bpm.engine.managers.facades.ServiceBpmAndAssignedFacade

import com.bpm.engine.models.AssignedModel

import com.bpm.engine.models.BpmAssignedModel

import com.bpm.engine.relief.dto.ReliefDTO

import com.bpm.engine.relief.interfaces.IReliefStrategy

import com.bpm.engine.relief.mapper.ReliefAssignedMapper

```
import com.bpm.engine.relief.model.ReliefAssignedModel
```

```
import com.bpm.engine.relief.service.IReliefAssignedService
```

External Imports

```
import java.util.List
```

```
import org.apache.logging.log4j.LogManager
```

```
import org.apache.logging.log4j.Logger
```

```
import org.springframework.stereotype.Component
```

Class Annotations

```
@Component ,
```

Detaille de la classe: ReliefAssignedValidation

Package: com.bpm.engine.relief.validation
Class type: class
Class Signature Line: public class ReliefAssignedValidation
Class ClassPath: C:\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\validation\ReliefAssignedValidation.class

Class UML:

ReliefAssignedValidation

Attributes:

Methods:

(+) public ReliefAssignedModel valid(ReliefAssignedModel relief) : ReliefAssignedModel
(+) public Long valida_id(String poder) : Long

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.relief.model.ReliefAssignedModel

External Imports

import java.util.regex.Pattern

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: ReliefDTOValidation

Package: com.bpm.engine.relief.validation
Class type: class
Class Signature Line: public class ReliefDTOValidation
Class ClassPath: C:\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\relief\validation\ReliefDTOValidation.class

Class UML:

ReliefDTOValidation

Attributes:

Methods:

(+) public ReliefDTO valid(ReliefDTO relief) : ReliefDTO
(+) public Long valida_id(String poder) : Long

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.relief.dto.ReliefDTO

External Imports

import java.util.regex.Pattern

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: ApprovedProcessRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface ApprovedProcessRepository extends
CrudRepository<ApprovedProcess, Long>

Class ClassPath: C:

\\REPOSITORYES\\BPM_work_flow_engine\\EngineBpm\\src\\main\\java\\com\\bpm\\engine\\r

Class UML:

ApprovedProcessRepository

Attributes:

Methods:

(+) public Optional<ApprovedProcess> findByIdApprovedProcess(String id) :
Optional<ApprovedProcess>

(+) public List<ApprovedProcess> findByProcessCodeContaining(String
processCode) : List<ApprovedProcess>

(+) public List<ApprovedProcess> findByIdProcessContaining(String idProcess)
: List<ApprovedProcess>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.ApprovedProcess


import com.bpm.engine.entitys.Assigned

External Imports

import org.springframework.data.repository.CrudRepository

import java.util.List

import java.util.Optional



Detaille de la classe: AssignedRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line:public interface AssignedRepository extends

CrudRepository<Assigned, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\repository\AssignedRepository.java

Class UML:

AssignedRepository

Attributes:

Methods:

(+) public Assigned save(Assigned assigned) : Assigned
(+) public Optional<Assigned> findByName(String name) : Optional<Assigned>
(+) public List<Assigned> findByNameContaining(String name) : List<Assigned>
(+) public Optional<Assigned> findByCodeEmployee(String codeEmployee) : Optional<Assigned>
(+) public List<Assigned> findByCodeEmployeeContaining(String codeEmployee) : List<Assigned>
(+) public List<Assigned> findByEmployeeRole(Role role) : List<Assigned>
(+) public Optional<Assigned> findByCodeEmployeeAndActive(String codeEmployee, Boolean active) : Optional<Assigned>
(+) public Integer checkCodeEmployeeExists(@Param("codeEmployee") String codeEmployee) : Integer

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

import com.bpm.engine.entitys.Assigned

External Imports

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.Optional
```

```
import org.springframework.data.jpa.repository.Query
```

```
import org.springframework.data.repository.CrudRepository
```

```
import org.springframework.data.repository.query.Param
```

Detalle de la clase: BpmAssignedRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface BpmAssignedRepository extends
CrudRepository<BpmAssigned, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

BpmAssignedRepository

Attributes:

Methods:

(+) public BpmAssigned save(BpmAssigned bpmAssigned) : BpmAssigned
(+) public List<BpmAssigned> findByIdAssigned(Long idAssigned) :
List<BpmAssigned>
(+) public List<BpmAssigned> findByIdAssignedContaining(Long idAssigned) :
List<BpmAssigned>
(+) public List<BpmAssigned> findByTaskCode(String taskCode) :
List<BpmAssigned>
(+) public List<BpmAssigned> findByTaskCodeContaining(String taskCode) :
List<BpmAssigned>
(+) public BpmAssigned findByIdBpmAssigned(Long id) : BpmAssigned
(+) public List<BpmAssigned> findByIdInstanciaProcesId(Long
instanciaProcesId) : List<BpmAssigned>
(+) public List<BpmAssigned> findByTaskCodeAndInstanciaProcesId(String
taskCode, Long instanciaProcesId) : List<BpmAssigned>
(+) public List<BpmAssigned> findByTaskCodeAndInstanciaProcesIdNull
(String taskCode) : List<BpmAssigned>
(+) public List<BpmAssigned>
findByTaskCodeAndActiveAndInstanciaProcesIdNull(String taskCode, Boolean
active) : List<BpmAssigned>
(+) public List<BpmAssigned> findByTaskCodeAndActive(String taskCode,
Boolean active) : List<BpmAssigned>
(+) public List<BpmAssigned> findByCodeEmployee(String codeEmployee) :
List<BpmAssigned>
(+) public BpmAssigned findByCodeEmployeeAndTaskCode(String
codeEmployee, String taskCode) : BpmAssigned
(+) public List<BpmAssigned> findByProcesIdAndCodeEmployeeAndActive
(Long procesId, String codeEmployee, Boolean active) : List<BpmAssigned>
(+) public List<BpmAssigned> findByCodeEmployeeAndActive (String
codeEmployee, Boolean active) : List<BpmAssigned>

Relations:**Extends**

-CrudRepository

Project Imports**Project Imports**

import com.bpm.engine.entitys.BpmAssigned

import com.bpm.engine.models.BpmAssignedModel

External Imports

import org.springframework.data.jpa.repository.Modifying

import org.springframework.data.jpa.repository.Query

import org.springframework.data.repository.CrudRepository

import org.springframework.stereotype.Repository

import java.util.List

import javax.transaction.Transactional

Class Anotations

@Repository ,

Detaille de la classe: ControlProcessReferentRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface ControlProcessReferentRepository extends CrudRepository<ControlProcessReferent, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

ControlProcessReferentRepository

Attributes:

Methods:

(+) public ControlProcessReferent save(ControlProcessReferent controlProcessReferent) : ControlProcessReferent

(+) public Optional<ControlProcessReferent> findByCode(String code) : Optional<ControlProcessReferent>

(+) public List<ControlProcessReferent> findByCodeContaining(String code) : List<ControlProcessReferent>

(+) public Optional<ControlProcessReferent> findByName(String name) : Optional<ControlProcessReferent>

(+) public List<ControlProcessReferent> findByNameContaining(String name) : List<ControlProcessReferent>

(+) public Optional<ControlProcessReferent> findByTitle(String title) : Optional<ControlProcessReferent>

(+) public List<ControlProcessReferent> findByTitleContaining(String title) : List<ControlProcessReferent>

(+) public Optional<ControlProcessReferent> findByStatus(String status) : Optional<ControlProcessReferent>

(+) public List<ControlProcessReferent> findByStatusContaining(String status) : List<ControlProcessReferent>

(+) public Optional<ControlProcessReferent> findByType(String type) : Optional<ControlProcessReferent>

(+) public List<ControlProcessReferent> findByTypeContaining(String type) : List<ControlProcessReferent>

(+) public Optional<ControlProcessReferent> findByIdReference(Long idReference) : Optional<ControlProcessReferent>

(+) public List<ControlProcessReferent> findByIdReferenceContaining(Long idReference) : List<ControlProcessReferent>

(+) public Optional<ControlProcessReferent> findByActive(Boolean active) : Optional<ControlProcessReferent>

(+) public List<ControlProcessReferent> findByActiveContaining(Boolean active) : List<ControlProcessReferent>

```
(+) public Optional<ControlProcessReferent> findByDateCreate(Date  
dateCreate) : Optional<ControlProcessReferent>  
(+) public List<ControlProcessReferent> findByDateCreateContaining(Date  
dateCreate) : List<ControlProcessReferent>  
(+) public Optional<ControlProcessReferent> findByDateClose(Date dateClose)  
: Optional<ControlProcessReferent>  
(+) public List<ControlProcessReferent> findByDateCloseContaining(Date  
dateClose) : List<ControlProcessReferent>
```

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.ControlProcessReferent

External Imports

import java.util.List

import java.util.Date

import java.util.Optional

import org.springframework.data.repository.CrudRepository

Detaille de la classe: InstanceAbstractionRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface InstanceAbstractionRepository extends CrudRepository<InstanceAbstraction, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

InstanceAbstractionRepository

Attributes:

Methods:

(+) public List<InstanceAbstraction> findByCodeReferent(String codeReferent) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByUserWorked(String userWorked) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByUserCreateInstance(String userCreateInstance) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByInstanOfAndIdInstance(String instanOf, Long idInstance) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByInstanOfAndIdInstanceOfProcess(String instanOf, Long idInstanceOfProcess) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByInstanOfAndIdInstanceOfProcessAndLevel(String instanOf, Long idInstanceOfProcess, Integer level) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByIdInstanceOfProcess(Long idInstanceOfProcess) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByIdInstanceIn(List<Long> idInstances) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByUserCreateInstanceAndIdInstanceOfProcessIsNull(String userCreateInstance) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByUserCreateInstanceAndIdInstanceOfProcessIsNullAndActive(String userCreateInstance, Boolean active) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByUserWorkedAndActive(String userWorked, Boolean active) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByUserCreateInstanceAndActive(String userCreateInstance, Boolean active) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> finBySearch2(String keyword) : List<InstanceAbstraction>

(+) public List<Long> findIdInstanceProcessFromUserWorked(@Param("userWorked") String userWorked) : List<Long>

```
(+) public List<InstanceAbstraction> findInstancesByIdInstanceOfProcess
(@Param("idInstanceOfProcess") List<Integer> idInstanceOfProcess) :
List<InstanceAbstraction>
(+) public Integer checkInstanceExists(@Param("userWorked") String
userWorked, @Param("idInstance") Long idInstance) : Integer
(+) public Integer checkInstanceExistsByuserCreate(@Param
("userCreateInstance") String userCreateInstance, @Param("idInstance") Long
idInstance) : Integer
(+) public Integer checkInstanceExistsByuserCreate( @Param("idInstance")
Long idInstance) : Integer
```

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.InstanceAbstraction

External Imports

import java.util.List

import javax.transaction.Transactional

import org.springframework.data.jpa.repository.Modifying

import org.springframework.data.jpa.repository.Query

import org.springframework.data.repository.CrudRepository

import org.springframework.data.repository.query.Param

import org.springframework.stereotype.Repository

Class Anotations

@Repository ,

Detaille de la classe: InstanceTaskEmailRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface InstanceTaskEmailRepository extends

CrudRepository< InstanceTaskEmail, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

InstanceTaskEmailRepository

Attributes:

Methods:

(+) public Optional<InstanceTaskEmail> findByEmailTo(String emailTo) :
Optional<InstanceTaskEmail>
(+) public List<InstanceTaskEmail> findByEmailToContaining(String emailTo) :
List<InstanceTaskEmail>
(+) public Optional<InstanceTaskEmail> findByEmailCC(String emailCC) :
Optional<InstanceTaskEmail>
(+) public List<InstanceTaskEmail> findByEmailCCContaining(String emailCC) :
List<InstanceTaskEmail>
(+) public Optional<InstanceTaskEmail> findByEmailFrom(String emailFrom) :
Optional<InstanceTaskEmail>
(+) public List<InstanceTaskEmail> findByEmailFromContaining(String
emailFrom) : List<InstanceTaskEmail>
(+) public Optional<InstanceTaskEmail> findByNota(String nota) :
Optional<InstanceTaskEmail>
(+) public List<InstanceTaskEmail> findByNotaContaining(String nota) :
List<InstanceTaskEmail>
(+) public Optional<InstanceTaskEmail> findByTempleCode(String templeCode)
: Optional<InstanceTaskEmail>
(+) public List<InstanceTaskEmail> findByTempleCodeContaining(String
templeCode) : List<InstanceTaskEmail>
(+) public Optional<InstanceTaskEmail> findByDateCreate(Date dateCreate) :
Optional<InstanceTaskEmail>
(+) public List<InstanceTaskEmail> findByDateCreateContaining(Date
dateCreate) : List<InstanceTaskEmail>
(+) public Optional<InstanceTaskEmail> findByDateEnd(Date dateEnd) :
Optional<InstanceTaskEmail>
(+) public List<InstanceTaskEmail> findByDateEndContaining(Date dateEnd) :
List<InstanceTaskEmail>
(+) public Optional<InstanceTaskEmail> findByDateSent(Date dateSent) :
Optional<InstanceTaskEmail>

```
(+) public List<InstanceTaskEmail> findByDateSentContaining(Date dateSent) :  
List<InstanceTaskEmail>  
(+) public Optional<InstanceTaskEmail> findByRepete(Boolean repete) :  
Optional<InstanceTaskEmail>  
(+) public List<InstanceTaskEmail> findByRepeteContaining(Boolean repete) :  
List<InstanceTaskEmail>  
(+) public Optional<InstanceTaskEmail> findByNumberRepete(Integer  
numberRepete) : Optional<InstanceTaskEmail>  
(+) public List<InstanceTaskEmail> findByNumberRepeteContaining(Integer  
numberRepete) : List<InstanceTaskEmail>
```

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.InstanceTaskEmail

External Imports

import java.util.List

import java.util.Date

import java.util.Optional

import org.springframework.data.repository.CrudRepository

Detalle de la clase: ParametersRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface ParametersRepository extends
CrudRepository<Parameters, Long>

Class ClassPath: C:

\\REPOSITORYES\\BPM_work_flow_engine\\EngineBpm\\src\\main\\java\\com\\bpm\\engine\\r

Class UML:

ParametersRepository

Attributes:

Methods:

(+) public Parameters findByKey(String key) : Parameters

(+) public Parameters findByKeyAndActive(String key, Boolean active) :
Parameters

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.Parameters

External Imports

import org.springframework.data.repository.CrudRepository

import org.springframework.stereotype.Repository

Class Anotations

@Repository ,

Detalle de la clase: ProcessRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface ProcessRepository extends

CrudRepository<Process, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

ProcessRepository

Attributes:

Methods:

(+) public Optional<Process> findByName(String name) : Optional<Process>
(+) public List<Process> findByNameContaining(String name) : List<Process>
(+) public Optional<Process> findByCreateDate(Date createDate) :
Optional<Process>
(+) public List<Process> findByCreateDateContaining(Date createDate) :
List<Process>
(+) public Optional<Process> findByUserCreate(String userCreate) :
Optional<Process>
(+) public List<Process> findByUserCreateContaining(String userCreate) :
List<Process>
(+) public Optional<Process> findByProcesTitle(String procesTitle) :
Optional<Process>
(+) public List<Process> findByProcesTitleContaining(String procesTitle) :
List<Process>
(+) public Optional<Process> findByState(String state) : Optional<Process>
(+) public List<Process> findByStateContaining(String state) : List<Process>
(+) public Optional<Process> findByProcesCode(String procesCode) :
Optional<Process>
(+) public List<Process> findByProcesCodeContaining(String procesCode) :
List<Process>
(+) public Optional<Process> findByVisible(Boolean visible) : Optional<Process>
(+) public List<Process> findByVisibleContaining(Boolean visible) :
List<Process>
(+) public Optional<Process> findByGlobal(Boolean global) : Optional<Process>
(+) public List<Process> findByGlobalContaining(Boolean global) :
List<Process>
(+) public Optional<Process> findByActivo(Boolean activo) : Optional<Process>
(+) public List<Process> findByActivoContaining(Boolean activo) : List<Process>
(+) public Process save(Process process) : Process


```
(+) public List<Process> findAllByRoleCodeRole(@Param("codeRole") String  
codeRole) : List<Process>
```

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.Process

External Imports

import java.util.List

import java.util.Date

import java.util.Optional

import org.springframework.data.jpa.repository.Query

import org.springframework.data.repository.CrudRepository

import org.springframework.data.repository.query.Param

Detaille de la classe: RoleRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface RoleRepository extends CrudRepository< Role, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\repository

Class UML:

RoleRepository

Attributes:

Methods:

(+) public Optional<Role> findByDescription(String description) : Optional<Role>

(+) public List<Role> findByDescriptionContaining(String description) : List<Role>

(+) public Optional<Role> findByName(String name) : Optional<Role>

(+) public List<Role> findByNameContaining(String name) : List<Role>

(+) public Optional<Role> findByCodeRole(String codeRole) : Optional<Role>

(+) public List<Role> findByCodeRoleContaining(String codeRole) : List<Role>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

External Imports

import java.util.List

import java.util.Date

import java.util.Optional

```
import org.springframework.data.repository.CrudRepository
```

Detaille de la classe: RulerRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line:public interface RulerRepository extends

CrudRepository<Ruler, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\repository

Class UML:

RulerRepository

Attributes:

Methods:

(+) public Optional<Ruler> findByIdRuler(String id) : Optional<Ruler>
(+) public List<Ruler> findByCondition(String condition) : List<Ruler>
(+) public List<Ruler> findByAction(Integer action) : List<Ruler>
(+) public List<Ruler> findByTaskCode(String taskCode) : List<Ruler>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.Ruler

External Imports

import java.util.List

import java.util.Optional

import org.springframework.data.repository.CrudRepository

Detaille de la classe: StageRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface StageRepository extends CrudRepository<Stage, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\repository

Class UML:

StageRepository

Attributes:

Methods:

(+) public Optional<Stage> findByStageCode(String stageCode) : Optional<Stage>
(+) public List<Stage> findByStageCodeContaining(String stageCode) : List<Stage>
(+) public Optional<Stage> findByName(String name) : Optional<Stage>
(+) public List<Stage> findByNameContaining(String name) : List<Stage>
(+) public Optional<Stage> findByTitle(String title) : Optional<Stage>
(+) public List<Stage> findByTitleContaining(String title) : List<Stage>
(+) public Optional<Stage> findByDateCreate(Date dateCreate) : Optional<Stage>
(+) public List<Stage> findByDateCreateContaining(Date dateCreate) : List<Stage>
(+) public Optional<Stage> findByType(String type) : Optional<Stage>
(+) public List<Stage> findByTypeContaining(String type) : List<Stage>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.Stage

External Imports

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.Optional
```

```
import org.springframework.data.repository.CrudRepository
```

Detaille de la classe: StateRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface StateRepository extends CrudRepository<State, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\repository

Class UML:

StateRepository

Attributes:

Methods:

(+) public Optional<State> findByTheState(String theState) : Optional<State>

(+) public List<State> findByTheStateContaining(String theState) : List<State>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.State

External Imports

import java.util.List

import java.util.Date

import java.util.Optional

import org.springframework.data.repository.CrudRepository

Detalle de la clase: SystemResponseRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface SystemResponseRepository extends
CrudRepository< SystemResponse, Long>

Class ClassPath: C:

\\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\repository

Class UML:

SystemResponseRepository

Attributes:

Methods:

(+) public Optional<SystemResponse> findByResponse(String response) :
Optional<SystemResponse>

(+) public List<SystemResponse> findByResponseContaining(String response) :
List<SystemResponse>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.SystemResponse

External Imports

import java.util.List

import java.util.Date

import java.util.Optional

import org.springframework.data.repository.CrudRepository

Detaille de la classe: TaskAssignedRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface TaskAssignedRepository extends
CrudRepository<TaskAssigned, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\repository

Class UML:

TaskAssignedRepository

Attributes:

Methods:

(+) public List<TaskAssigned> findByIdBpmAssigned(Long idBpmAssigned) :
List<TaskAssigned>

(+) public TaskAssigned save(TaskAssigned taskAssigned) : TaskAssigned

(+) public List<TaskAssigned> findByTaskId(Long taskId) : List<TaskAssigned>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskAssigned

External Imports

import org.springframework.data.repository.CrudRepository

import org.springframework.stereotype.Repository

import java.util.List

Detalle de la clase: TaskEmailRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface TaskEmailRepository extends CrudRepository<TaskEmail, Long>

Class ClassPath: C:

\\REPOSITORYES\\BPM_work_flow_engine\\EngineBpm\\src\\main\\java\\com\\bpm\\engine\\r

Class UML:

TaskEmailRepository

Attributes:

Methods:

(+) public Optional<TaskEmail> findByEmailFrom(String emailFrom) : Optional<TaskEmail>
(+) public List<TaskEmail> findByEmailFromContaining(String emailFrom) : List<TaskEmail>
(+) public Optional<TaskEmail> findByNota(String nota) : Optional<TaskEmail>
(+) public List<TaskEmail> findByNotaContaining(String nota) : List<TaskEmail>
(+) public Optional<TaskEmail> findByTempleCode(String templeCode) : Optional<TaskEmail>
(+) public List<TaskEmail> findByTempleCodeContaining(String templeCode) : List<TaskEmail>
(+) public Optional<TaskEmail> findByEmailTo(String emailTo) : Optional<TaskEmail>
(+) public List<TaskEmail> findByEmailToContaining(String emailTo) : List<TaskEmail>
(+) public Optional<TaskEmail> findByEmailCC(String emailCC) : Optional<TaskEmail>
(+) public List<TaskEmail> findByEmailCCContaining(String emailCC) : List<TaskEmail>
(+) public Optional<TaskEmail> findByNumberRepete(Integer numberRepete) : Optional<TaskEmail>
(+) public List<TaskEmail> findByNumberRepeteContaining(Integer numberRepete) : List<TaskEmail>
(+) public Optional<TaskEmail> findByRepete(Boolean repete) : Optional<TaskEmail>
(+) public List<TaskEmail> findByRepeteContaining(Boolean repete) : List<TaskEmail>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskEmail

External Imports

import java.util.List

import java.util.Date

import java.util.Optional

import org.springframework.data.repository.CrudRepository

Detalle de la clase: TaskRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface TaskRepository extends CrudRepository<Task, Long>

Class ClassPath: C:

\\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\repository

Class UML:

TaskRepository

Attributes:

Methods:

(+) public Optional<Task> findByTitle(String title) : Optional<Task>
(+) public List<Task> findByTitleContaining(String title) : List<Task>
(+) public Optional<Task> findByName(String name) : Optional<Task>
(+) public List<Task> findByNameContaining(String name) : List<Task>
(+) public Optional<Task> findByDateCreate(Date dateCreate) : Optional<Task>
(+) public List<Task> findByDateCreateContaining(Date dateCreate) : List<Task>
(+) public Optional<Task> findByProcesCode(String procesCode) : Optional<Task>
(+) public List<Task> findByProcesCodeContaining(String procesCode) : List<Task>
(+) public Optional<Task> findByTaskUrl(String taskUrl) : Optional<Task>
(+) public List<Task> findByTaskUrlContaining(String taskUrl) : List<Task>
(+) public Optional<Task> findByUrlService(String urlService) : Optional<Task>
(+) public List<Task> findByUrlServiceContaining(String urlService) : List<Task>
(+) public Optional<Task> findByCode(String code) : Optional<Task>
(+) public List<Task> findByCodeContaining(String code) : List<Task>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

```
import com.bpm.engine.entitys.Task
```

External Imports

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.Optional
```

```
import org.springframework.data.repository.CrudRepository
```

Detaille de la classe: TaskTypeRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface TaskTypeRepository extends CrudRepository<TaskType, Long>

Class ClassPath: C:

\\REPOSITORYES\\BPM_work_flow_engine\\EngineBpm\\src\\main\\java\\com\\bpm\\engine\\r

Class UML:

TaskTypeRepository

Attributes:

Methods:

(+) public Optional<TaskType> findByType(String type) : Optional<TaskType>

(+) public List<TaskType> findByTypeContaining(String type) : List<TaskType>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskType

External Imports

import java.util.List

import java.util.Date

import java.util.Optional

import org.springframework.data.repository.CrudRepository

Detaille de la classe: TemplateRepository

Package: com.bpm.engine.repository

Class type: interface

Class Signature Line: public interface TemplateRepository extends

CrudRepository<Template, Long>

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\repository\

Class UML:

TemplateRepository

Attributes:

Methods:

(+) public Template findByCodeTemplate(String codeTemplate) : Template

(+) public Template findByCodeTemplateAndCompany(String codeTemplate, String company) : Template

(+) public List<Template> findByCodeTemplateContaining(String codeTemplate) : List<Template>

(+) public List<Template> findByActive(Boolean active) : List<Template>

Relations:

Extends

-CrudRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.Template

External Imports

import org.springframework.data.jpa.repository.Modifying

import org.springframework.data.jpa.repository.Query

import org.springframework.data.repository.CrudRepository

import org.springframework.stereotype.Repository

```
import org.springframework.transaction.annotation.Transactional
```

```
import java.util.List
```

Class Anotations

```
@Repository ,
```


Detaille de la classe: ApprovedProcessService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface ApprovedProcessService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

ApprovedProcessService

Attributes:

Methods:

(+) public ApprovedProcessModel findByIdApprovedProcess(String id) :
ApprovedProcessModel

(+) public List<ApprovedProcessModel> findByProcessCodeContaining(String
processCode) : List<ApprovedProcessModel>

(+) public List<ApprovedProcessModel> findByIdProcessContaining(String
idProcess) : List<ApprovedProcessModel>

Project Imports

Project Imports

import com.bpm.engine.entitys.ApprovedProcess

import com.bpm.engine.models.ApprovedProcessModel

External Imports

import java.util.List

import java.util.Optional

Detalle de la clase: AssignedService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface AssignedService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpml\engine\service

Class UML:

AssignedService

Attributes:

Methods:

```
(+) public boolean saveAssigned(AssignedModel assigned) : boolean
(+) public List<AssignedModel> getAllAssigned() : List<AssignedModel>
(+) public AssignedModel saveOrUpdateAssigned(AssignedModel
AssignedModel) : AssignedModel
(+) public AssignedModel findByName(String name) : AssignedModel
(+) public AssignedModel findByCodeEmployee(String codeEmployee) :
AssignedModel
(+) public List<AssignedModel> findByNameContaining(String name) :
List<AssignedModel>
(+) public List<AssignedModel> findByCodeEmployeeContaining(String
codeEmployee) : List<AssignedModel>
(+) public AssignedModel findById(Long id) : AssignedModel
(+) public List<AssignedModel> findByRelacionRole(Role role) :
List<AssignedModel>
(+) public AssignedModel findByCodeEmployeeAndActive(String
codeEmployee, Boolean active) : AssignedModel
(+) public List<AssignedModel> findByTaskAssignedModel
(List<TaskAssignedModel> taskAssignedList) : List<AssignedModel>
(+) public Boolean checkCodeEmployeeExists(String codeEmployee) : Boolean
(+) public List<String> getCodeProces(String codeEmployee) : List<String>
```

Project Imports

Project Imports

```
import com.bpm.engine.entitys.Assigned
```

```
import com.bpm.engine.entitys.Role
```

```
import com.bpm.engine.models.AssignedModel
```

```
import com.bpm.engine.models.TaskAssignedModel
```

External Imports

```
import java.util.List
```

```
import java.util.Optional
```

```
import org.springframework.data.repository.query.Param
```

Detalle de la clase: BpmAssignedService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface BpmAssignedService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\s

Class UML:

BpmAssignedService

Attributes:

Methods:

```
(+) public BpmAssignedModel instanceBpmAssigned(Long idAssigned, String
taskCode, Long instanciaProccesId) : BpmAssignedModel
(+) public BpmAssignedModel findByIdBpmAssigned(Long id) :
BpmAssignedModel
(+) public BpmAssignedModel findByCodeEmployeeAndTaskCode(String
codeEmployee, String taskCode) : BpmAssignedModel
(+) public List<BpmAssignedModel> findByCodeEmployee(String
codeEmployee) : List<BpmAssignedModel>
(+) public List<BpmAssignedModel> findByCodeEmployeeActive (String
codeEmployee) : List<BpmAssignedModel>
(+) public List<BpmAssignedModel> findByIdAssigned(Long idAssigned) :
List<BpmAssignedModel>
(+) public List<BpmAssignedModel> findByIdAssignedContaining(Long
idAssigned) : List<BpmAssignedModel>
(+) public List<BpmAssignedModel> findByTaskCode(String taskCode) :
List<BpmAssignedModel>
(+) public List<BpmAssignedModel> findByTaskCodeContaining(String
taskCode) : List<BpmAssignedModel>
(+) public BpmAssignedModel saveOrUpdateBpmAssigned(BpmAssignedModel
assigned) : BpmAssignedModel
(+) public List<BpmAssignedModel> findByInstanciaProccesId(Long
instanciaProccesId) : List<BpmAssignedModel>
(+) public List<BpmAssignedModel> findByTaskCodeAndInstanciaProccesId
(String taskCode, Long instanciaProccesId) : List<BpmAssignedModel>
(+) public List<BpmAssignedModel> findByTaskCodeAndInstanciaProccesIdNull
(String taskCode) : List<BpmAssignedModel>
(+) public List<BpmAssignedModel> findByTaskCodeAndInstanciaProccesIdNull
(String taskCode, Boolean active) : List<BpmAssignedModel>
(+) public List<BpmAssignedModel> findByTaskCodeActive(String taskCode,
Boolean active) : List<BpmAssignedModel>
```

```
(+) public List<BpmAssignedModel>  
findByProccesIdAndCodeEmployeeAndActive (Long proccesId, String  
codeEmployee) : List<BpmAssignedModel>  
(+) public List<BpmAssignedModel> findByCodeEmployeeAndActive (String  
codeEmployee, Boolean active) : List<BpmAssignedModel>  
(+) public void updateBpmAssignedActive(Boolean active, Long idBpmAssigned)  
: void
```

Project Imports

Project Imports

```
import com.bpm.engine.entitys.BpmAssigned
```

```
import com.bpm.engine.models.BpmAssignedModel
```

External Imports

```
import java.util.List
```

Detaille de la classe: ControlProcessReferentService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface ControlProcessReferentService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

ControlProcessReferentService

Attributes:

Methods:

(+) public ControlProcessReferentModel saveOrUpdateInternalControlProcess
(ControlProcessReferentModel controlprocess) : ControlProcessReferentModel

(+) public ControlProcessReferentModel findByCode(String code) :
ControlProcessReferentModel

(+) public ControlProcessReferentModel findByName(String name) :
ControlProcessReferentModel

(+) public ControlProcessReferentModel findByTitle(String title) :
ControlProcessReferentModel

(+) public ControlProcessReferentModel findByStatus(String status) :
ControlProcessReferentModel

(+) public ControlProcessReferentModel findByType(String type) :
ControlProcessReferentModel

(+) public ControlProcessReferentModel findByIdReference(Long idReference) :
ControlProcessReferentModel

(+) public ControlProcessReferentModel findByActive(Boolean active) :
ControlProcessReferentModel

(+) public ControlProcessReferentModel findByDateCreate(Date dateCreate) :
ControlProcessReferentModel

(+) public ControlProcessReferentModel findByDateClose(Date dateClose) :
ControlProcessReferentModel

(+) public List<ControlProcessReferentModel> findByCodeContaining(String
code) : List<ControlProcessReferentModel>

(+) public List<ControlProcessReferentModel> findByNameContaining(String
name) : List<ControlProcessReferentModel>

(+) public List<ControlProcessReferentModel> findByTitleContaining(String title)
: List<ControlProcessReferentModel>

(+) public List<ControlProcessReferentModel> findByStatusContaining(String
status) : List<ControlProcessReferentModel>

(+) public List<ControlProcessReferentModel> findByTypeContaining(String
type) : List<ControlProcessReferentModel>

```

(+) public List<ControlProcessReferentModel> findByIdReferenceContaining
(Long idReference) : List<ControlProcessReferentModel>
(+) public List<ControlProcessReferentModel> findByActiveContaining(Boolean
active) : List<ControlProcessReferentModel>
(+) public List<ControlProcessReferentModel> findByDateCreateContaining
(Date dateCreate) : List<ControlProcessReferentModel>
(+) public List<ControlProcessReferentModel> findByDateCloseContaining(Date
dateClose) : List<ControlProcessReferentModel>
(+) public ControlProcessReferentModel findById(Long id) :
ControlProcessReferentModel
(+) public boolean saveControlProcess(ControlProcessReferent controlprocess)
: boolean
(+) public List<ControlProcessReferentModel> getAllControlProcess() :
List<ControlProcessReferentModel>
(+) public boolean updateControlProcess(ControlProcessReferent
controlprocess) : boolean
(+) public boolean saveOrUpdateControlProcess(ControlProcessReferent
controlprocess) : boolean

```

Project Imports

Project Imports

```
import com.bpm.engine.entitys.ControlProcessReferent
```

```
import com.bpm.engine.models.ControlProcessReferentModel
```

External Imports

```
import java.util.Date
```

```
import java.util.List
```

Detaille de la classe: InstanceAbstractionService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface InstanceAbstractionService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

InstanceAbstractionService

Attributes:

Methods:

(+) public InstanceAbstractionModel findByIdInstance(Long idInstance) : InstanceAbstractionModel

(+) public List<InstanceAbstractionModel> findByCodeReferent(String codeReferent) : List<InstanceAbstractionModel>

(+) public List<InstanceAbstractionModel> findByUserWorked(String userWorked) : List<InstanceAbstractionModel>

(+) public List<InstanceAbstractionModel> findByUserCreateInstance(String userCreateInstance) : List<InstanceAbstractionModel>

(+) public List<InstanceAbstractionModel> findByInstanOfAndIdInstance(String instanOf, Long idInstance) : List<InstanceAbstractionModel>

(+) public List<InstanceAbstractionModel> findByIdInstanceOfProcess(String instanOf, Long idInstanceOfProcess) : List<InstanceAbstractionModel>

(+) public List<InstanceAbstractionModel> findByIdInstanceOfProcessAndLevel(String instanOf, Long idInstanceOfProcess, Integer level) : List<InstanceAbstractionModel>

(+) public InstanceAbstractionModel save(InstanceAbstractionModel instance) : InstanceAbstractionModel

(+) public InstanceAbstractionModel saveInitial(InstanceAbstractionModel instance) : InstanceAbstractionModel

(+) public List<InstanceAbstractionModel> finBySearch(String keyword) : List<InstanceAbstractionModel>

(+) public List<InstanceAbstractionModel> findByUser(String userWorked) : List<InstanceAbstractionModel>

(+) public List<InstanceAbstraction> findByUserWorkedAndActive(String userWorked, Boolean active) : List<InstanceAbstraction>

(+) public List<InstanceAbstraction> findByUserCreateInstanceAndActive(String userCreateInstance, Boolean active) : List<InstanceAbstraction>

(+) public Boolean changeUserWorked(String userWorked, String newUserWorked) : Boolean


```
(+) public Boolean changeUserCreateInstance(String userCreateInstance, String
newUserCreateInstance) : Boolean
(+) public Boolean changeUserCreateInstance(ReliefAssignedModel reliefModel,
List<Long> idInstances) : Boolean
(+) public List<InstanceAbstractionModel> findByUserWorked(String
userWorked, Boolean active) : List<InstanceAbstractionModel>
```

Project Imports

Project Imports

```
import com.bpm.engine.entitys.InstanceAbstraction
```

```
import com.bpm.engine.models.InstanceAbstractionModel
```

```
import com.bpm.engine.relief.model.ReliefAssignedModel
```

External Imports

```
import java.util.List
```

Detaille de la classe: InstanceTaskEmailService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface InstanceTaskEmailService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

InstanceTaskEmailService

Attributes:

Methods:

(+) public InstanceTaskEmailModel findByEmailTo(String emailTo) : InstanceTaskEmailModel
(+) public InstanceTaskEmailModel findByEmailCC(String emailCC) : InstanceTaskEmailModel
(+) public InstanceTaskEmailModel findByEmailFrom(String emailFrom) : InstanceTaskEmailModel
(+) public InstanceTaskEmailModel findByNota(String nota) : InstanceTaskEmailModel
(+) public InstanceTaskEmailModel findByTempleCode(String templeCode) : InstanceTaskEmailModel
(+) public InstanceTaskEmailModel findByDateCreate(Date dateCreate) : InstanceTaskEmailModel
(+) public InstanceTaskEmailModel findByDateEnd(Date dateEnd) : InstanceTaskEmailModel
(+) public InstanceTaskEmailModel findByDateSent(Date dateSent) : InstanceTaskEmailModel
(+) public InstanceTaskEmailModel findByRepete(Boolean repete) : InstanceTaskEmailModel
(+) public InstanceTaskEmailModel findByNumberRepete(Integer numberRepete) : InstanceTaskEmailModel
(+) public List<InstanceTaskEmailModel> findByEmailToContaining(String emailTo) : List<InstanceTaskEmailModel>
(+) public List<InstanceTaskEmailModel> findByEmailCCContaining(String emailCC) : List<InstanceTaskEmailModel>
(+) public List<InstanceTaskEmailModel> findByEmailFromContaining(String emailFrom) : List<InstanceTaskEmailModel>
(+) public List<InstanceTaskEmailModel> findByNotaContaining(String nota) : List<InstanceTaskEmailModel>
(+) public List<InstanceTaskEmailModel> findByTempleCodeContaining(String templeCode) : List<InstanceTaskEmailModel>

```

(+) public List<InstanceTaskEmailModel> findByDateCreateContaining(Date
dateCreate) : List<InstanceTaskEmailModel>
(+) public List<InstanceTaskEmailModel> findByDateEndContaining(Date
dateEnd) : List<InstanceTaskEmailModel>
(+) public List<InstanceTaskEmailModel> findByDateSentContaining(Date
dateSent) : List<InstanceTaskEmailModel>
(+) public List<InstanceTaskEmailModel> findByRepeteContaining(Boolean
repete) : List<InstanceTaskEmailModel>
(+) public List<InstanceTaskEmailModel> findByNumberRepeteContaining
(Integer numberRepete) : List<InstanceTaskEmailModel>
(+) public InstanceTaskEmailModel findById(Long id) : InstanceTaskEmailModel
(+) public boolean saveInstanceTaskEmail(InstanceTaskEmail
instancetaskemail) : boolean
(+) public List<InstanceTaskEmailModel> getAllInstanceTaskEmail() :
List<InstanceTaskEmailModel>
(+) public boolean updateInstanceTaskEmail(InstanceTaskEmail
instancetaskemail) : boolean
(+) public boolean saveOrUpdateInstanceTaskEmail(InstanceTaskEmail
instancetaskemail) : boolean

```

Project Imports

Project Imports

```
import com.bpm.engine.entitys.InstanceTaskEmail
```

```
import com.bpm.engine.models.InstanceTaskEmailModel
```

External Imports

```
import java.util.Optional
```

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import java.util.List
```

Detalle de la clase: ParametersServices

Package: com.bpm.engine.service

Class type: interface

Class Signature Line:public interface ParametersServices

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\s

Class UML:

ParametersServices

Attributes:

Methods:

(+) public String findValue(String key) : String

(+) public boolean saveOfFrom(Parameters parameters) : boolean

(+) public boolean save(Parameters parameters) : boolean

(+) public boolean delete(Long id) : boolean

(+) public ParametersModel findByKey(String key) : ParametersModel

Project Imports

Project Imports

import com.bpm.engine.entitys.Parameters

import com.bpm.engine.models.ParametersModel

Detalle de la clase: ProcessService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface ProcessService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

ProcessService

Attributes:

Methods:

(+) public ProcessModel save(Process process) : ProcessModel
(+) public ProcessModel save(ProcessModel process) : ProcessModel
(+) public ProcessModel findByName(String name) : ProcessModel
(+) public ProcessModel findByCreateDate(Date createDate) : ProcessModel
(+) public ProcessModel findByProcesTitle(String procesTitle) : ProcessModel
(+) public ProcessModel findByProcesCode(String procesCode) : ProcessModel
(+) public ProcessModel findByActivo(Boolean activo) : ProcessModel
(+) public List<ProcessModel> findByNameContaining(String name) : List<ProcessModel>
(+) public List<ProcessModel> findByCreateDateContaining(Date createDate) : List<ProcessModel>
(+) public List<ProcessModel> findByUserCreateContaining(String userCreate) : List<ProcessModel>
(+) public List<ProcessModel> findByProcesTitleContaining(String procesTitle) : List<ProcessModel>
(+) public List<ProcessModel> findByStateContaining(String state) : List<ProcessModel>
(+) public List<ProcessModel> findByProcesCodeContaining(String procesCode) : List<ProcessModel>
(+) public List<ProcessModel> findByVisibleContaining(Boolean visible) : List<ProcessModel>
(+) public List<ProcessModel> findByGlobalContaining(Boolean global) : List<ProcessModel>
(+) public List<ProcessModel> findByActivoContaining(Boolean activo) : List<ProcessModel>
(+) public ProcessModel findById(Long id) : ProcessModel
(+) public boolean saveProcess(Process process) : boolean
(+) public List<ProcessModel> getAllProcess() : List<ProcessModel>
(+) public boolean updateProcess(Process process) : boolean
(+) public ProcessModel update(Process process) : ProcessModel

```
(+) public boolean saveOrUpdateProcess(Process process) : boolean
(+) public List<ProcessModel> findByStageContaining(Stage stages) :
List<ProcessModel>
(+) public List<ProcessModel> findAllByRoleCodeRole(String codeRole) :
List<ProcessModel>
```

Project Imports

Project Imports

```
import com.bpm.engine.entitys.Process
```

```
import com.bpm.engine.entitys.Stage
```

```
import com.bpm.engine.models.ProcessModel
```

External Imports

```
import java.util.Date
```

```
import java.util.List
```

Detaille de la classe: RoleService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line:public interface RoleService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

RoleService

Attributes:

Methods:

```
(+) public RoleModel findByDescription(String description) : RoleModel
(+) public RoleModel findByName(String name) : RoleModel
(+) public RoleModel findByCodeRole(String codeRole) : RoleModel
(+) public List<RoleModel> findByDescriptionContaining(String description) :
List<RoleModel>
(+) public List<RoleModel> findByNameContaining(String name) :
List<RoleModel>
(+) public List<RoleModel> findByCodeRoleContaining(String codeRole) :
List<RoleModel>
(+) public RoleModel findById(Long id) : RoleModel
(+) public boolean saveRole(Role role) : boolean
(+) public List<RoleModel> getAllRole() : List<RoleModel>
(+) public boolean updateRole(Role role) : boolean
(+) public boolean saveOrUpdateRole(Role role) : boolean
```

Project Imports

Project Imports

```
import com.bpm.engine.entitys.Role
```

```
import com.bpm.engine.models.RoleModel
```

External Imports

```
import java.util.Optional
```

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import java.util.List
```


Detaille de la classe: RulerService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface RulerService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\s

Class UML:

RulerService

Attributes:

Methods:

(+) public RulerModel findByIdRuler(Long id) : RulerModel

(+) public List<RulerModel> findByCondition(String condition) :
List<RulerModel>

(+) public List<RulerModel> findByAction(Integer action) : List<RulerModel>

(+) public List<RulerModel> findByTaskCode(String taskCode) :
List<RulerModel>

Project Imports

Project Imports

import com.bpm.engine.models.RulerModel

External Imports

import java.util.List

Detalle de la clase: StageService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface StageService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

StageService

Attributes:

Methods:

(+) public StageModel findByStageCode(String stageCode) : StageModel
(+) public StageModel findByName(String name) : StageModel
(+) public StageModel findByTitle(String title) : StageModel
(+) public StageModel findByDateCreate(Date dateCreate) : StageModel
(+) public StageModel findByType(String type) : StageModel
(+) public List<StageModel> findByStageCodeContaining(String stageCode) : List<StageModel>
(+) public List<StageModel> findByNameContaining(String name) : List<StageModel>
(+) public List<StageModel> findByTitleContaining(String title) : List<StageModel>
(+) public List<StageModel> findByDateCreateContaining(Date dateCreate) : List<StageModel>
(+) public List<StageModel> findByTypeContaining(String type) : List<StageModel>
(+) public StageModel findById(Long id) : StageModel
(+) public boolean saveStage(Stage stage) : boolean
(+) public List<StageModel> getAllStage() : List<StageModel>
(+) public boolean updateStage(Stage stage) : boolean
(+) public boolean saveOrUpdateStage(Stage stage) : boolean
(+) public List<StageModel> findByStageContaining(Stage stages) : List<StageModel>
(+) public List<StageModel> findByRoleContaining(Role roles) : List<StageModel>
(+) public List<StageModel> findByTaskContaining(Task tasks) : List<StageModel>

Project Imports

Project Imports
import com.bpm.engine.entitys.Stage
import com.bpm.engine.entitys.Stage
import com.bpm.engine.entitys.Role
import com.bpm.engine.entitys.Task
import com.bpm.engine.models.StageModel
External Imports
import java.util.Optional
import java.util.Date
import java.util.ArrayList
import java.util.List

Detaille de la classe: StateService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line:public interface StateService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

StateService

Attributes:

Methods:

(+) public StateModel findByTheState(String theState) : StateModel

(+) public List<StateModel> findByTheStateContaining(String theState) : List<StateModel>

(+) public StateModel findById(Long id) : StateModel

(+) public boolean saveState(State state) : boolean

(+) public List<StateModel> getAllState() : List<StateModel>

(+) public boolean updateState(State state) : boolean

(+) public boolean saveOrUpdateState(State state) : boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.State

import com.bpm.engine.models.StateModel

External Imports

import java.util.Optional

import java.util.Date

import java.util.ArrayList

import java.util.List

Detaille de la classe: SystemResponseService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line:public interface SystemResponseService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\s

Class UML:

SystemResponseService

Attributes:

Methods:

(+) public SystemResponseModel findByResponse(String response) : SystemResponseModel

(+) public List<SystemResponseModel> findByResponseContaining(String response) : List<SystemResponseModel>

(+) public SystemResponseModel findById(Long id) : SystemResponseModel

(+) public boolean saveSystemResponse(SystemResponse systemresponse) : boolean

(+) public List<SystemResponseModel> getAllSystemResponse() : List<SystemResponseModel>

(+) public boolean updateSystemResponse(SystemResponse systemresponse) : boolean

(+) public boolean saveOrUpdateSystemResponse(SystemResponse systemresponse) : boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.SystemResponse

import com.bpm.engine.models.SystemResponseModel

External Imports

import java.util.List

Detaille de la classe: TaskAssignedService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface TaskAssignedService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

TaskAssignedService

Attributes:

Methods:

```
(+) public List<TaskAssignedModel> findByIdBpmAssigned(Long  
idBpmAssigned) : List<TaskAssignedModel>  
(+) public TaskAssignedModel findById(Long id) : TaskAssignedModel  
(+) public TaskAssignedModel save(TaskAssigned taskAssigned) :  
TaskAssignedModel  
(+) public void deliteTaskAssigned(Long id) : void  
(+) public List<TaskAssignedModel> findByIdTaskId(Long taskId) :  
List<TaskAssignedModel>
```

Project Imports

Project Imports

```
import com.bpm.engine.entitys.TaskAssigned
```

```
import com.bpm.engine.models.TaskAssignedModel
```

External Imports

```
import java.util.List
```

Detalle de la clase: TaskEmailService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface TaskEmailService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

TaskEmailService

Attributes:

Methods:

(+) public TaskEmailModel findByEmailFrom(String emailFrom) : TaskEmailModel
(+) public TaskEmailModel findByNota(String nota) : TaskEmailModel
(+) public TaskEmailModel findByTempleCode(String templeCode) : TaskEmailModel
(+) public TaskEmailModel findByEmailTo(String emailTo) : TaskEmailModel
(+) public TaskEmailModel findByEmailCC(String emailCC) : TaskEmailModel
(+) public TaskEmailModel findByNumberRepete(Integer numberRepete) : TaskEmailModel
(+) public TaskEmailModel findByRepete(Boolean repete) : TaskEmailModel
(+) public List<TaskEmailModel> findByEmailFromContaining(String emailFrom) : List<TaskEmailModel>
(+) public List<TaskEmailModel> findByNotaContaining(String nota) : List<TaskEmailModel>
(+) public List<TaskEmailModel> findByTempleCodeContaining(String templeCode) : List<TaskEmailModel>
(+) public List<TaskEmailModel> findByEmailToContaining(String emailTo) : List<TaskEmailModel>
(+) public List<TaskEmailModel> findByEmailCCContaining(String emailCC) : List<TaskEmailModel>
(+) public List<TaskEmailModel> findByNumberRepeteContaining(Integer numberRepete) : List<TaskEmailModel>
(+) public List<TaskEmailModel> findByRepeteContaining(Boolean repete) : List<TaskEmailModel>
(+) public TaskEmailModel findById(Long id) : TaskEmailModel
(+) public boolean saveTaskEmail(TaskEmail taskemail) : boolean
(+) public List<TaskEmailModel> getAllTaskEmail() : List<TaskEmailModel>
(+) public boolean updateTaskEmail(TaskEmail taskemail) : boolean
(+) public boolean saveOrUpdateTaskEmail(TaskEmail taskemail) : boolean

Project Imports

Project Imports

```
import com.bpm.engine.entitys.TaskEmail
```

```
import com.bpm.engine.models.TaskEmailModel
```

External Imports

```
import java.util.Optional
```

```
import java.util.Date
```

```
import java.util.ArrayList
```

```
import java.util.List
```


Detalle de la clase: TaskService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface TaskService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

TaskService

Attributes:

Methods:

```
(+) public TaskModel findByTitle(String title) : TaskModel
(+) public TaskModel findByName(String name) : TaskModel
(+) public TaskModel findByDateCreate(Date dateCreate) : TaskModel
(+) public TaskModel findByProcesCode(String procesCode) : TaskModel
(+) public TaskModel findByTaskUrl(String taskUrl) : TaskModel
(+) public TaskModel findByUrlService(String urlService) : TaskModel
(+) public TaskModel findByCode(String code) : TaskModel
(+) public List<TaskModel> findByTitleContaining(String title) : List<TaskModel>
(+) public List<TaskModel> findByNameContaining(String name) :
List<TaskModel>
(+) public List<TaskModel> findByDateCreateContaining(Date dateCreate) :
List<TaskModel>
(+) public List<TaskModel> findByProcesCodeContaining(String procesCode) :
List<TaskModel>
(+) public List<TaskModel> findByTaskUrlContaining(String taskUrl) :
List<TaskModel>
(+) public List<TaskModel> findByUrlServiceContaining(String urlService) :
List<TaskModel>
(+) public List<TaskModel> findByCodeContaining(String code) :
List<TaskModel>
(+) public TaskModel findById(Long id) : TaskModel
(+) public boolean saveTask(Task task) : boolean
(+) public List<TaskModel> getAllTask() : List<TaskModel>
(+) public boolean updateTask(Task task) : boolean
(+) public boolean saveOrUpdateTask(Task task) : boolean
(+) public List<TaskModel> findByRelacionTaskType(TaskType tasktype) :
List<TaskModel>
```

Project Imports

Project Imports

import com.bpm.engine.entitys.Task

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.models.TaskModel

External Imports

import java.util.Optional

import java.util.Date

import java.util.ArrayList

import java.util.List

Detaille de la classe: TaskTypeService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line:public interface TaskTypeService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\s

Class UML:

TaskTypeService

Attributes:

Methods:

(+) public TaskTypeModel findByType(String type) : TaskTypeModel

(+) public List<TaskTypeModel> findByTypeContaining(String type) :
List<TaskTypeModel>

(+) public TaskTypeModel findById(Long id) : TaskTypeModel

(+) public boolean saveTaskType(TaskType tasktype) : boolean

(+) public List<TaskTypeModel> getAllTaskType() : List<TaskTypeModel>

(+) public boolean updateTaskType(TaskType tasktype) : boolean

(+) public boolean saveOrUpdateTaskType(TaskType tasktype) : boolean

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.models.TaskTypeModel

External Imports

import java.util.Optional

import java.util.Date

import java.util.ArrayList

import java.util.List

Detalle de la clase: TemplateService

Package: com.bpm.engine.service

Class type: interface

Class Signature Line: public interface TemplateService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\service

Class UML:

TemplateService

Attributes:

Methods:

```
(+) public Boolean saveNewTemplate(Template template) : Boolean
(+) public List<TemplateModel> findBycodeTemplateContaining(String
codeTemplate) : List<TemplateModel>
(+) public TemplateModel findBycodeTemplateAndCompany(String
codeTemplate, String company) : TemplateModel
(+) public TemplateModel findByCodeTemplate(String codeTemplate) :
TemplateModel
(+) public boolean deleteTemplete(Long id) : boolean
(+) public List<Template> findByActive(Boolean active) : List<Template>
(+) public Boolean uploadTemplate(String codeTemplate, String typeTemplate,
String company, String TemplateDescription, MultipartFile file) : Boolean
(+) public String getFileOfTemplateFromFile(MultipartFile multipartFile) : String
(+) public Boolean save(Template template) : Boolean
(+) public Boolean save2(Template template) : Boolean
(+) public String getFileOfTemplate(String archivo) : String
```

Project Imports

Project Imports

```
import com.bpm.engine.entitys.Template
```

```
import com.bpm.engine.models.TemplateModel
```

External Imports

```
import org.springframework.web.multipart.MultipartFile
```

```
import java.io.File
```

```
import java.util.List
```

Detaille de la classe: ApprovedProcessServiceImpl

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line:public class ApprovedProcessServiceImpl implements
ApprovedProcessService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

ApprovedProcessServiceImpl

Attributes:

(-) repository : ApprovedProcessRepository

(-) mapper : ApprovedProcessMapper

Methods:

(+) public ApprovedProcessModel findByIdApprovedProcess(String id) :
ApprovedProcessModel

Relations:

Implement

-ApprovedProcessService

loc

-ApprovedProcessRepository

-ApprovedProcessMapper

Project Imports

Project Imports

import com.bpm.engine.mappers.ApprovedProcessMapper

import com.bpm.engine.models.ApprovedProcessModel

import com.bpm.engine.repository.ApprovedProcessRepository

import com.bpm.engine.service.ApprovedProcessService

External Imports
import org.apache.commons.logging.Log
import org.apache.commons.logging.LogFactory
import org.apache.logging.log4j.LogManager
import org.apache.logging.log4j.Logger
import org.springframework.beans.factory.annotation.Autowired
import org.springframework.dao.DataAccessException
import org.springframework.stereotype.Service
import java.util.ArrayList
import java.util.List

Class Anotations
@Service ,

Detaille de la classe: AssignedServiceImplement

Package: com.bpm.engine.serviceImplement

Class type: class

Class Signature Line: public class AssignedServiceImplement implements AssignedService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

AssignedServiceImplement

Attributes:

- (-) assignedrepository : AssignedRepository
- (-) assignedMapper : AssignedMapper
- (-) bpmAssignedService : BpmAssignedService

Methods:

- (+) public AssignedModel findById(Long id) : AssignedModel
- (+) public AssignedModel findByName(String name) : AssignedModel
- (+) public AssignedModel findByCodeEmployee(String codeEmployee) : AssignedModel
- (+) public boolean saveAssigned(AssignedModel assigned) : boolean
- (+) public AssignedModel saveOrUpdateAssigned(AssignedModel assigned) : AssignedModel
- (-) private AssignedModel saveAndFormat(AssignedModel model) : AssignedModel
- (+) public AssignedModel findByCodeEmployeeAndActive(String codeEmployee, Boolean active) : AssignedModel
- (+) public Boolean checkCodeEmployeeExists(String codeEmployee) : Boolean

Relations:

Implement

-AssignedService

loc

-AssignedRepository

-AssignedMapper

-BpmAssignedService

Strong Association
-Assigned

Project Imports											
<table border="1"><tr><td>Project Imports</td></tr><tr><td>import com.bpm.engine.service.AssignedService</td></tr><tr><td>import com.bpm.engine.repository.AssignedRepository</td></tr><tr><td>import com.bpm.engine.service.BpmAssignedService</td></tr><tr><td>import com.bpm.engine.service.TaskAssignedService</td></tr><tr><td>import com.bpm.engine.entitys.Assigned</td></tr><tr><td>import com.bpm.engine.entitys.Role</td></tr><tr><td>import com.bpm.engine.mappers.AssignedMapper</td></tr><tr><td>import com.bpm.engine.models.ApprovedProcessModel</td></tr><tr><td>import com.bpm.engine.models.AssignedModel</td></tr><tr><td>import com.bpm.engine.models.TaskAssignedModel</td></tr></table>	Project Imports	import com.bpm.engine.service.AssignedService	import com.bpm.engine.repository.AssignedRepository	import com.bpm.engine.service.BpmAssignedService	import com.bpm.engine.service.TaskAssignedService	import com.bpm.engine.entitys.Assigned	import com.bpm.engine.entitys.Role	import com.bpm.engine.mappers.AssignedMapper	import com.bpm.engine.models.ApprovedProcessModel	import com.bpm.engine.models.AssignedModel	import com.bpm.engine.models.TaskAssignedModel
Project Imports											
import com.bpm.engine.service.AssignedService											
import com.bpm.engine.repository.AssignedRepository											
import com.bpm.engine.service.BpmAssignedService											
import com.bpm.engine.service.TaskAssignedService											
import com.bpm.engine.entitys.Assigned											
import com.bpm.engine.entitys.Role											
import com.bpm.engine.mappers.AssignedMapper											
import com.bpm.engine.models.ApprovedProcessModel											
import com.bpm.engine.models.AssignedModel											
import com.bpm.engine.models.TaskAssignedModel											
<table border="1"><tr><td>External Imports</td></tr><tr><td>import java.util.Optional</td></tr><tr><td>import java.util.ArrayList</td></tr><tr><td>import java.util.Collections</td></tr><tr><td>import java.util.List</td></tr><tr><td>import java.util.stream.Collectors</td></tr><tr><td>import org.apache.commons.logging.Log</td></tr><tr><td>import org.apache.commons.logging.LogFactory</td></tr><tr><td>import org.apache.logging.log4j.LogManager</td></tr><tr><td>import org.apache.logging.log4j.Logger</td></tr></table>	External Imports	import java.util.Optional	import java.util.ArrayList	import java.util.Collections	import java.util.List	import java.util.stream.Collectors	import org.apache.commons.logging.Log	import org.apache.commons.logging.LogFactory	import org.apache.logging.log4j.LogManager	import org.apache.logging.log4j.Logger	
External Imports											
import java.util.Optional											
import java.util.ArrayList											
import java.util.Collections											
import java.util.List											
import java.util.stream.Collectors											
import org.apache.commons.logging.Log											
import org.apache.commons.logging.LogFactory											
import org.apache.logging.log4j.LogManager											
import org.apache.logging.log4j.Logger											

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detaille de la classe: BpmAssignedServiceImplement

Package: com.bpm.engine.serviceImplement

Class type: class

Class Signature Line: public class BpmAssignedServiceImplement implements BpmAssignedService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\services

Class UML:

BpmAssignedServiceImplement

Attributes:

(-) repository : BpmAssignedRepository

(-) mapper : BpmAssignedMapper

Methods:

(+) public BpmAssignedModel findByIdBpmAssigned(Long id) : BpmAssignedModel

(+) public BpmAssignedModel saveOrUpdateBpmAssigned(BpmAssignedModel assigned) : BpmAssignedModel

(+) public BpmAssignedModel instanceBpmAssigned(Long idAssigned, String taskCode, Long instanciaProccesId) : BpmAssignedModel

(+) public BpmAssignedModel findByCodeEmployeeAndTaskCode(String codeEmployee, String taskCode) : BpmAssignedModel

(+) public void updateBpmAssignedActive(Boolean active, Long idBpmAssigned) : void

Relations:

Implement

-BpmAssignedService

loc

-BpmAssignedRepository

-BpmAssignedMapper

Strong Association

-BpmAssignedModel

Project Imports

Project Imports

import com.bpm.engine.entitys.BpmAssigned

import com.bpm.engine.mappers.BpmAssignedMapper

import com.bpm.engine.models.BpmAssignedModel

import com.bpm.engine.repository.BpmAssignedRepository

import com.bpm.engine.service.BpmAssignedService

External Imports

import java.util.List

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.dao.DataAccessException

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: ControlProcessReferentServiceImplement

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line: public class ControlProcessReferentServiceImplement
implements ControlProcessReferentService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

ControlProcessReferentServiceImplement

Attributes:

- (-) controlprocessrepository : ControlProcessReferentRepository
- (-) controlprocessMapper : ControlProcessReferentMapper

Methods:

- (+) public ControlProcessReferentModel findById(Long id) :
ControlProcessReferentModel
- (+) public boolean saveControlProcess(ControlProcessReferent controlprocess)
: boolean
- (+) public boolean updateControlProcess(ControlProcessReferent
controlprocess) : boolean
- (+) public boolean saveOrUpdateControlProcess(ControlProcessReferent
controlprocess) : boolean
- (+) public ControlProcessReferentModel saveOrUpdateInternalControlProcess
(ControlProcessReferentModel controlprocess) : ControlProcessReferentModel
- (+) public ControlProcessReferentModel findByCode(String code) :
ControlProcessReferentModel
- (+) public ControlProcessReferentModel findByName(String name) :
ControlProcessReferentModel
- (+) public ControlProcessReferentModel findByTitle(String title) :
ControlProcessReferentModel
- (+) public ControlProcessReferentModel findByStatus(String status) :
ControlProcessReferentModel
- (+) public ControlProcessReferentModel findByType(String type) :
ControlProcessReferentModel
- (+) public ControlProcessReferentModel findByIdReference(Long idReference) :
ControlProcessReferentModel
- (+) public ControlProcessReferentModel findByActive(Boolean active) :
ControlProcessReferentModel
- (+) public ControlProcessReferentModel findByDateCreate(Date dateCreate) :
ControlProcessReferentModel
- (+) public ControlProcessReferentModel findByDateClose(Date dateClose) :
ControlProcessReferentModel

Relations:**Implement**

-ControlProcessReferentService

loc

-ControlProcessReferentRepository

-ControlProcessReferentMapper

Strong Association

-ControlProcessReferent

Project Imports**Project Imports**

import com.bpm.engine.service.ControlProcessReferentService

import com.bpm.engine.repository.ControlProcessReferentRepository

import com.bpm.engine.entitys.ControlProcessReferent

import com.bpm.engine.mappers.ControlProcessReferentMapper

import com.bpm.engine.models.ControlProcessReferentModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

import org.apache.commons.logging.Log

import org.apache.commons.logging.LogFactory

import org.apache.logging.log4j.LogManager

```
import org.apache.logging.log4j.Logger
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detaille de la classe: InstanceAbstractionServiceImplement

Package: com.bpm.engine.serviceImplement

Class type: class

Class Signature Line: public class InstanceAbstractionServiceImplement implements InstanceAbstractionService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

InstanceAbstractionServiceImplement

Attributes:

(-) repository : InstanceAbstractionRepository

(-) mapper : InstanceAbstractionMapper

Methods:

(+) public InstanceAbstractionModel findByIdInstance(Long idInstance) : InstanceAbstractionModel

(+) public void updateStatus(String status, Long idInstance) : void

(+) public void updateActive(Boolean active, Long idInstance) : void

(+) public void updateUserWorked(String userWorked, Long idInstance) : void

(+) public void updateInstances(List<InstanceAbstraction> instances, Long idInstance) : void

(+) public void updateUserWorked(Long idParent, Long idInstance) : void

(+) public InstanceAbstractionModel save(InstanceAbstractionModel instance) : InstanceAbstractionModel

(+) public InstanceAbstractionModel saveInitial(InstanceAbstractionModel instance) : InstanceAbstractionModel

(+) public Boolean changeUserWorked(String userWorked, String newUserWorked) : Boolean

(+) public Boolean changeUserCreateInstance(String userCreateInstance, String newUserCreateInstance) : Boolean

(+) public Boolean changeUserCreateInstance(ReliefAssignedModel reliefModel, List<Long> idInstances) : Boolean

(+) public void updateUserCreateInstance(String userCreateInstance, Long idInstance) : void

Relations:

Implement

-InstanceAbstractionService

loc
-InstanceAbstractionRepository
-InstanceAbstractionMapper
Project Imports
Project Imports
import com.bpm.engine.entitys.InstanceAbstraction
import com.bpm.engine.mappers.InstanceAbstractionMapper
import com.bpm.engine.models.InstanceAbstractionModel
import com.bpm.engine.relief.model.ReliefAssignedModel
import com.bpm.engine.repository.InstanceAbstractionRepository
import com.bpm.engine.service.InstanceAbstractionService
External Imports
import java.util.ArrayList
import java.util.Collections
import java.util.List
import java.util.Optional
import java.util.concurrent.atomic.AtomicBoolean
import org.apache.logging.log4j.LogManager
import org.apache.logging.log4j.Logger
import org.springframework.beans.factory.annotation.Autowired
import org.springframework.dao.DataAccessException
import org.springframework.stereotype.Service
Class Anotations
@Service ,



Detaille de la classe: InstanceTaskEmailServiceImpl

Package: com.bpm.engine.serviceImplement

Class type: class

Class Signature Line: public class InstanceTaskEmailServiceImpl implements InstanceTaskEmailService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\src

Class UML:

InstanceTaskEmailServiceImpl

Attributes:

(-) instancetaskemailrepository : InstanceTaskEmailRepository

Methods:

(+) public boolean saveInstanceTaskEmail(InstanceTaskEmail instancetaskemail) : boolean

(+) public boolean updateInstanceTaskEmail(InstanceTaskEmail instancetaskemail) : boolean

(+) public boolean saveOrUpdateInstanceTaskEmail(InstanceTaskEmail instancetaskemail) : boolean

Relations:

Implement

-InstanceTaskEmailService

loc

-InstanceTaskEmailRepository

Project Imports

Project Imports

import com.bpm.engine.service.InstanceTaskEmailService

import com.bpm.engine.repository.InstanceTaskEmailRepository

import com.bpm.engine.entitys.InstanceTaskEmail

```
import com.bpm.engine.mappers.InstanceTaskEmailMapper
```

```
import com.bpm.engine.models.InstanceTaskEmailModel
```

External Imports

```
import java.util.Optional
```

```
import java.util.ArrayList
```

```
import java.util.List
```

```
import java.util.Date
```

```
import org.apache.commons.logging.Log
```

```
import org.apache.commons.logging.LogFactory
```

```
import org.apache.logging.log4j.LogManager
```

```
import org.apache.logging.log4j.Logger
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detalle de la clase: GenerateJsonStringFromXMLString

Package: com.bpm.engine.serviceImplement.jsomxml.run

Class type: class

Class Signature Line: public class GenerateJsonStringFromXMLString

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\services\

Class UML:

GenerateJsonStringFromXMLString

Attributes:

Methods:

(+) public static void main(String[] args) : void

Project Imports

Project Imports

```
import com.bpm.engine.serviceImplement.jsomxml.services.  
GenerateJsonFromXml
```

Detalle de la clase: GenerateXmlFromFileJson

Package: com.bpm.engine.serviceImplement.jsomxml.run

Class type: class

Class Signature Line: public class GenerateXmlFromFileJson

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

GenerateXmlFromFileJson

Attributes:

Methods:

(+) public static void main(String[] args) : void

Project Imports

Project Imports

```
import com.bpm.engine.serviceImplement.jsomxml.services.  
JsontoXmlConverter
```

Detalle de la clase: GenerateXmlFromJsonString

Package: com.bpm.engine.serviceImplement.jsomxml.run

Class type: class

Class Signature Line: public class GenerateXmlFromJsonString

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

GenerateXmlFromJsonString

Attributes:

Methods:

(+) public static void main(String[] args) : void

Project Imports

Project Imports

```
import com.bpm.engine.serviceImplement.jsomxml.services.  
JsontoXmlConverter
```

Detalle de la clase: FileToString

Package: com.bpm.engine.serviceImplement.jsomxml.services

Class type: class

Class Signature Line: public class FileToString

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\s

Class UML:

FileToString

Attributes:

Methods:

Detaille de la classe: GenerateJsonFromXml

Package: com.bpm.engine.serviceImplement.jsomxml.services

Class type: class

Class Signature Line:public class GenerateJsonFromXml

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\services\jsomxml\services\GenerateJsonFromXml.class

Class Constructors

Constructors

+ public GenerateJsonFromXml()

Class UML:

GenerateJsonFromXml

Attributes:

Methods:

(+) public String generateFromFile(String xmlPath) : String

(+) public String generateFromString(String xml) : String

(-) private String generate(String xml) : String

Relations:

Strong Association

-XmlToJsonWithJackson

Association static or patter Build

-FileToString

-XmlToJson

Detaille de la classe: JsontoXmlConverter

Package: com.bpm.engine.serviceImplement.jsomxml.services

Class type: class

Class Signature Line:public class JsontoXmlConverter

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\services\jsomxml\services\JsontoXmlConverter.class

Class Constructors

Constructors

+ public JsontoXmlConverter()
+ public JsontoXmlConverter(String jsonInputPath, String xmlOutputPath)

Class UML:

JsontoXmlConverter

Attributes:

(-) jsonInputPath : String

(-) xmlOutputPath : String

Methods:

(-) private void useDefaultConfigurationOfFile() : void

(+) public void convertJsonToXml() : void

(+) public void convertJsonToXml(String customRootName, String jsonString) : void

(+) public void convertJsonToXml(String customRootName) : void

Relations:

Strong Association

-ObjectMapper

-File

-XmlMapper

Detalle de la clase: ReplaceObjectNodeInFile

Package: com.bpm.engine.serviceImplement.jsomxml.services

Class type: class

Class Signature Line: public class ReplaceObjectNodeInFile

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\s

Class UML:

ReplaceObjectNodeInFile

Attributes:

Methods:

Detaille de la classe: XmlToJsonWithJackson

Package: com.bpm.engine.serviceImplement.jsomxml.services

Class type: class

Class Signature Line:public class XmlToJsonWithJackson

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\services

Class Constructors

Constructors

+ public XmlToJsonWithJackson() public XmlToJsonWithJackson(String xml)

Class UML:

XmlToJsonWithJackson

Attributes:

(-) xml : String

Methods:

(+) public String XmlToJson() : String

Relations:

Strong Association

-XmlMapper

-ObjectMapper

Detaille de la classe: ParametersServicesImplement

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line:public class ParametersServicesImplement implements
ParametersServices

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\services

Class UML:

ParametersServicesImplement

Attributes:

(-) repository : ParametersRepository

(-) mapper : ParametersMapper

Methods:

(+) public boolean save(Parameters parameters) : boolean

(+) public boolean saveOfFrom(Parameters parameters) : boolean

(+) public boolean delete(Long id) : boolean

(+) public ParametersModel findBykey(String key) : ParametersModel

(+) public String findValue(String key) : String

Relations:

Implement

-ParametersServices

loc

-ParametersRepository

-ParametersMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.Parameters

import com.bpm.engine.mappers.ParametersMapper

```
import com.bpm.engine.models.ParametersModel
```

```
import com.bpm.engine.repository.ParametersRepository
```

```
import com.bpm.engine.service.ParametersServices
```

External Imports

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detalle de la clase: ProcessServiceImpl

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line: public class ProcessServiceImpl implements
ProcessService, RadomCode

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

ProcessServiceImpl

Attributes:

- (-) processrepository : ProcessRepository
- (-) processMapper : ProcessMapper

Methods:

- (+) public ProcessModel findByName(String name) : ProcessModel
- (+) public ProcessModel findByCreateDate(Date createDate) : ProcessModel
- (+) public ProcessModel findByProcesTitle(String procesTitle) : ProcessModel
- (+) public ProcessModel findByProcesCode(String procesCode) : ProcessModel
- (+) public ProcessModel findByActivo(Boolean activo) : ProcessModel
- (+) public boolean saveProcess(Process process) : boolean
- (+) public ProcessModel save(Process process) : ProcessModel
- (+) public ProcessModel save(ProcessModel process) : ProcessModel
- (+) public boolean updateProcess(Process process) : boolean
- (+) public ProcessModel update(Process process) : ProcessModel
- (+) public ProcessModel findById(Long id) : ProcessModel
- (+) public boolean saveOrUpdateProcess(Process process) : boolean

Relations:

Implement

-ProcessService

- RadomCode

loc

-ProcessRepository

-ProcessMapper

Strong Association

-Process

Project Imports

Project Imports

import com.bpm.engine.interfaces.RadomCode

import com.bpm.engine.mappers.ProcessMapper

import com.bpm.engine.models.ProcessModel

import com.bpm.engine.models.StageModel

import com.bpm.engine.service.ProcessService

import com.bpm.engine.repository.ProcessRepository

import com.bpm.engine.entityys.Process

import com.bpm.engine.entityys.Stage

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

import org.apache.commons.logging.Log

import org.apache.commons.logging.LogFactory

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.dao.DataAccessException

import org.springframework.stereotype.Service

Class Anotations
@Service ,

Detalle de la clase: ResponseAssignedDTOService

Package: com.bpm.engine.serviceImplement

Class type: class

Class Signature Line: public class ResponseAssignedDTOService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\serviceImplement

Class UML:

ResponseAssignedDTOService

Attributes:

Methods:

Project Imports

Project Imports

import com.bpm.engine.dto.AssignedDTO

import com.bpm.engine.dto.ResponseAssignedDTO

import com.bpm.engine.models.AssignedModel

import com.bpm.engine.models.RoleModel

External Imports

import com.google.gson.Gson

import com.google.gson.reflect.TypeToken

import java.lang.reflect.Type

import java.util.ArrayList

import java.util.List

import org.springframework.stereotype.Service

Class Anotations

@Service ,



Detaille de la classe: RestTemplateService

Package: com.bpm.engine.serviceImplement

Class type: class

Class Signature Line: public class RestTemplateService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\serviceImplement\RestTemplateService

Class Constructors

Constructors

+ public RestTemplateService(RestTemplate restTemplate)

Class UML:

RestTemplateService

Attributes:

Methods:

(+) public EntityResponse sendGetRequest2(Map<String, String> uriVariables, String url) : EntityResponse

Relations:

Strong Association

-HttpHeaders

Project Imports

Project Imports

import com.bpm.engine.dto.EntityResponse

External Imports

import org.springframework.stereotype.Service

import org.apache.logging.log4j.LogManager

```
import org.apache.logging.log4j.Logger
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

```
import org.springframework.web.client.RestTemplate
```

```
import org.springframework.web.util.UriComponentsBuilder
```

```
import java.util.HashMap
```

```
import java.util.Map
```

Class Anotations

```
@Service ,
```

Detaille de la classe: RoleServiceImplent

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line:public class RoleServiceImplent implements RoleService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

RoleServiceImplent

Attributes:

(-) rolerepository : RoleRepository

(-) roleMapper : RoleMapper

Methods:

(+) public RoleModel findByDescription(String description) : RoleModel

(+) public RoleModel findByName(String name) : RoleModel

(+) public RoleModel findByCodeRole(String codeRole) : RoleModel

(+) public boolean saveRole(Role role) : boolean

(+) public boolean updateRole(Role role) : boolean

(+) public RoleModel findById(Long id) : RoleModel

(+) public boolean saveOrUpdateRole(Role role) : boolean

Relations:

Implement

-RoleService

loc

-RoleRepository

-RoleMapper

Strong Association

-Role

Project Imports

Project Imports

import com.bpm.engine.service.RoleService

import com.bpm.engine.repository.RoleRepository

import com.bpm.engine.entitys.Role

import com.bpm.engine.mappers.RoleMapper

import com.bpm.engine.models.RoleModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import org.apache.commons.logging.Log

import org.apache.commons.logging.LogFactory

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.dao.DataAccessException

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: RulerServiceImplemet

Package: com.bpm.engine.serviceImplement

Class type: class

Class Signature Line: public class RulerServiceImplemet implements RulerService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\serviceImplement

Class Constructors

Constructors

+ public RulerServiceImplemet(RulerRepository repository, RulerMapper mapper)

Class UML:

RulerServiceImplemet

Attributes:

(-) repository : RulerRepository

(-) mapper : RulerMapper

Methods:

(+) public RulerModel findByIdRuler(Long id) : RulerModel

Relations:

Implement

-RulerService

loc

-RulerRepository

-RulerMapper

Project Imports

Project Imports

import com.bpm.engine.mappers.RulerMapper
import com.bpm.engine.models.RulerModel
import com.bpm.engine.repository.RulerRepository
import com.bpm.engine.service.RulerService
External Imports
import java.util.ArrayList
import java.util.List
import org.apache.logging.log4j.LogManager
import org.apache.logging.log4j.Logger
import org.springframework.beans.factory.annotation.Autowired

Detaille de la classe: StageServiceImpl

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line: public class StageServiceImpl implements StageService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

StageServiceImpl

Attributes:

(-) stagerepository : StageRepository

(-) stageMapper : StageMapper

Methods:

(+) public StageModel findByStageCode(String stageCode) : StageModel

(+) public StageModel findByName(String name) : StageModel

(+) public StageModel findByTitle(String title) : StageModel

(+) public StageModel findByDateCreate(Date dateCreate) : StageModel

(+) public StageModel findByType(String type) : StageModel

(+) public boolean saveStage(Stage stage) : boolean

(+) public boolean updateStage(Stage stage) : boolean

(+) public StageModel findById(Long id) : StageModel

(+) public boolean saveOrUpdateStage(Stage stage) : boolean

Relations:

Implement

-StageService

loc

-StageRepository

-StageMapper

Strong Association

-Stage

Project Imports

Project Imports

import com.bpm.engine.service.StageService

import com.bpm.engine.repository.StageRepository

import com.bpm.engine.entitys.Stage

import com.bpm.engine.entitys.Role

import com.bpm.engine.entitys.Task

import com.bpm.engine.mappers.StageMapper

import com.bpm.engine.models.RoleModel

import com.bpm.engine.models.StageModel

import com.bpm.engine.models.TaskModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

import org.apache.commons.logging.Log

import org.apache.commons.logging.LogFactory

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.dao.DataAccessException

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: StateServiceImpl

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line: public class StateServiceImpl implements StateService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

StateServiceImpl

Attributes:

(-) staterepository : StateRepository

(-) stateMapper : StateMapper

Methods:

(+) public StateModel findByTheState(String theState) : StateModel

(+) public boolean saveState(State state) : boolean

(+) public boolean updateState(State state) : boolean

(+) public StateModel findById(Long id) : StateModel

(+) public boolean saveOrUpdateState(State state) : boolean

Relations:

Implement

-StateService

loc

-StateRepository

-StateMapper

Strong Association

-State

Project Imports

Project Imports

```
import com.bpm.engine.service.StateService
```

```
import com.bpm.engine.repository.StateRepository
```

```
import com.bpm.engine.entitys.State
```

```
import com.bpm.engine.mappers.StateMapper
```

```
import com.bpm.engine.models.StateModel
```

External Imports

```
import java.util.Optional
```

```
import java.util.ArrayList
```

```
import java.util.List
```

```
import org.apache.commons.logging.Log
```

```
import org.apache.commons.logging.LogFactory
```

```
import org.apache.logging.log4j.LogManager
```

```
import org.apache.logging.log4j.Logger
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.dao.DataAccessException
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detaille de la classe: SystemResponseServiceImpl

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line:public class SystemResponseServiceImpl implements SystemResponseService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\src

Class UML:

SystemResponseServiceImpl

Attributes:

(-) systemresponserepository : SystemResponseRepository

(-) systemresponseMapper : SystemResponseMapper

Methods:

(+) public SystemResponseModel findByResponse(String response) : SystemResponseModel

(+) public boolean saveSystemResponse(SystemResponse systemresponse) : boolean

(+) public boolean updateSystemResponse(SystemResponse systemresponse) : boolean

(+) public SystemResponseModel findById(Long id) : SystemResponseModel

(+) public boolean saveOrUpdateSystemResponse(SystemResponse systemresponse) : boolean

Relations:

Implement

-SystemResponseService

loc

-SystemResponseRepository

-SystemResponseMapper

Strong Association

-SystemResponse

Project Imports

Project Imports

import com.bpm.engine.service.SystemResponseService

import com.bpm.engine.repository.SystemResponseRepository

import com.bpm.engine.entitys.SystemResponse

import com.bpm.engine.mappers.SystemResponseMapper

import com.bpm.engine.models.SystemResponseModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import org.apache.commons.logging.Log

import org.apache.commons.logging.LogFactory

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.dao.DataAccessException

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: TaskAssignedServiceImplemet

Package: com.bpm.engine.serviceImplement

Class type: class

Class Signature Line: public class TaskAssignedServiceImplemet implements TaskAssignedService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\src

Class UML:

TaskAssignedServiceImplemet

Attributes:

(-) repository : TaskAssignedRepository

(-) mapper : TaskAssignedMapper

Methods:

(+) public TaskAssignedModel findById(Long id) : TaskAssignedModel

(-) private TaskAssignedModel byId(Long id) : TaskAssignedModel

(+) public TaskAssignedModel save(TaskAssigned taskAssigned) : TaskAssignedModel

(+) public void deliteTaskAssigned(Long id) : void

Relations:

Implement

-TaskAssignedService

loc

-TaskAssignedRepository

-TaskAssignedMapper

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskAssigned

import com.bpm.engine.mappers.TaskAssignedMapper

```
import com.bpm.engine.models.TaskAssignedModel
```

```
import com.bpm.engine.repository.TaskAssignedRepository
```

```
import com.bpm.engine.service.TaskAssignedService
```

External Imports

```
import org.apache.logging.log4j.LogManager
```

```
import org.apache.logging.log4j.Logger
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

```
import java.util.List
```

```
import java.util.Optional
```

Class Anotations

```
@Service ,
```

Detaille de la classe: TaskEmailServiceImpl

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line: public class TaskEmailServiceImpl implements TaskEmailService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

TaskEmailServiceImpl

Attributes:

(-) taskemailrepository : TaskEmailRepository
(-) taskemailMapper : TaskEmailMapper

Methods:

(+) public TaskEmailModel findByEmailFrom(String emailFrom) : TaskEmailModel
(+) public TaskEmailModel findByNota(String nota) : TaskEmailModel
(+) public TaskEmailModel findByTempleCode(String templeCode) : TaskEmailModel
(+) public TaskEmailModel findByEmailTo(String emailTo) : TaskEmailModel
(+) public TaskEmailModel findByEmailCC(String emailCC) : TaskEmailModel
(+) public TaskEmailModel findByNumberRepete(Integer numberRepete) : TaskEmailModel
(+) public TaskEmailModel findByRepete(Boolean repete) : TaskEmailModel
(+) public boolean saveTaskEmail(TaskEmail taskemail) : boolean
(+) public boolean updateTaskEmail(TaskEmail taskemail) : boolean
(+) public TaskEmailModel findById(Long id) : TaskEmailModel
(+) public boolean saveOrUpdateTaskEmail(TaskEmail taskemail) : boolean

Relations:

Implement

-TaskEmailService

loc

-TaskEmailRepository

-TaskEmailMapper

Strong Association

-TaskEmail

Project Imports

Project Imports

import com.bpm.engine.service.TaskEmailService

import com.bpm.engine.repository.TaskEmailRepository

import com.bpm.engine.entitys.TaskEmail

import com.bpm.engine.mappers.TaskEmailMapper

import com.bpm.engine.models.TaskEmailModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import org.apache.commons.logging.Log

import org.apache.commons.logging.LogFactory

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.dao.DataAccessException

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: TaskServiceImplement

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line: public class TaskServiceImplement implements TaskService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

TaskServiceImplement

Attributes:

(-) taskrepository : TaskRepository

(-) taskMapper : TaskMapper

Methods:

(+) public TaskModel findByTitle(String title) : TaskModel

(+) public TaskModel findByName(String name) : TaskModel

(+) public TaskModel findByDateCreate(Date dateCreate) : TaskModel

(+) public TaskModel findByProcesCode(String procesCode) : TaskModel

(+) public TaskModel findByTaskUrl(String taskUrl) : TaskModel

(+) public TaskModel findByUrlService(String urlService) : TaskModel

(+) public TaskModel findByCode(String code) : TaskModel

(+) public boolean saveTask(Task task) : boolean

(+) public boolean updateTask(Task task) : boolean

(+) public TaskModel findById(Long id) : TaskModel

(+) public boolean saveOrUpdateTask(Task task) : boolean

Relations:

Implement

-TaskService

loc

-TaskRepository

-TaskMapper

Strong Association

-Task

Project Imports

Project Imports

import com.bpm.engine.service.TaskService

import com.bpm.engine.repository.TaskRepository

import com.bpm.engine.entitys.Task

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.mappers.TaskMapper

import com.bpm.engine.models.TaskModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

import org.apache.commons.logging.Log

import org.apache.commons.logging.LogFactory

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.dao.DataAccessException

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: TaskTypeServiceImpl

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line: public class TaskTypeServiceImpl implements TaskTypeService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\s

Class UML:

TaskTypeServiceImpl

Attributes:

(-) taskTypeRepository : TaskTypeRepository

(-) taskTypeMapper : TaskTypeMapper

Methods:

(+) public TaskTypeModel findByType(String type) : TaskTypeModel

(+) public boolean saveTaskType(TaskType tasktype) : boolean

(+) public boolean updateTaskType(TaskType tasktype) : boolean

(+) public TaskTypeModel findById(Long id) : TaskTypeModel

(+) public boolean saveOrUpdateTaskType(TaskType tasktype) : boolean

Relations:

Implement

-TaskTypeService

loc

-TaskTypeRepository

-TaskTypeMapper

Strong Association

-TaskType

Project Imports

Project Imports

import com.bpm.engine.service.TaskTypeService

import com.bpm.engine.repository.TaskTypeRepository

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.mappers.TaskTypeMapper

import com.bpm.engine.models.TaskTypeModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import org.apache.commons.logging.Log

import org.apache.commons.logging.LogFactory

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.dao.DataAccessException

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detalle de la clase: TemplateServiceImpl

Package: com.bpm.engine.servicelImplement

Class type: class

Class Signature Line: public class TemplateServiceImpl implements
TemplateService

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

TemplateServiceImpl

Attributes:

- (-) templateMapper : TemplateMapper
- (-) templateService : TemplateService
- (-) templateRepository : TemplateRepository

Methods:

- (+) public Boolean uploadTemplate(String codeTemplate,String typeTemplate, String company,String TemplateDescription,MultipartFile file) : Boolean
- (-) private File convertMultipartFileToFile(MultipartFile multipartFile) : File
- (+) public Boolean saveNewTemplate(Template template) : Boolean
- (+) public boolean deleteTemplate(Long id) : boolean
- (+) public TemplateModel findByCodeTemplateAndCompany(String codeTemplate, String company) : TemplateModel
- (+) public TemplateModel findByCodeTemplate(String codeTemplate) : TemplateModel
- (+) public String getFileOfTemplateFromFile(MultipartFile multipartFile) : String
- (+) public FileReader convertMultipartFileToFileReader(MultipartFile multipartFile) : FileReader
- (+) public String getFileOfTemplate(String archivo) : String
- (+) public Boolean save2(Template template) : Boolean
- (+) public Boolean save(Template template) : Boolean

Relations:

Implement

-TemplateService

loc

-TemplateMapper

-TemplateService

-TemplateRepository

Strong Association

-TemplateModel

-StringBuilder

-BufferedReader

-String

Association static or patter Build

-TemplateModel

-Files

Project Imports

Project Imports

import com.bpm.engine.utility.Constants

import com.bpm.engine.entitys.Template

import com.bpm.engine.mappers.TemplateMapper

import com.bpm.engine.models.TemplateModel

import com.bpm.engine.repository.TemplateRepository

import com.bpm.engine.service.TemplateService

External Imports

import org.apache.commons.logging.Log

import org.apache.commons.logging.LogFactory

import org.apache.logging.log4j.LogManager

import org.apache.logging.log4j.Logger

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

```
import java.io.BufferedReader
```

```
import java.io.FileNotFoundException
```

```
import java.io.FileReader
```

```
import java.io.IOException
```

```
import java.nio.file.Files
```

```
import java.nio.file.Paths
```

```
import java.util.ArrayList
```

```
import java.util.List
```

```
import org.springframework.web.multipart.MultipartFile
```

```
import java.io.File
```

Class Anotations

```
@Service ,
```

Detalle de la clase: ServletInitializer

Package: com.bpm.engine

Class type: class

Class Signature Line: public class ServletInitializer extends
SpringBootServletInitializer

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\

Class UML:

ServletInitializer

Attributes:

Methods:

(#) protected SpringApplicationBuilder configure(SpringApplicationBuilder
application) : SpringApplicationBuilder

Relations:

Extends

-SpringBootServletInitializer

Detalle de la clase: Constants

Package: com.bpm.engine.utility

Class type: class

Class Signature Line: public class Constants

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\utility

Class UML:

Constants

Attributes:

Methods:

Detaille de la classe: AssignedValidation

Package: com.bpm.engine.validation


Class type: class

Class Signature Line: public class AssignedValidation


Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\AssignedValidation.class


Class UML:

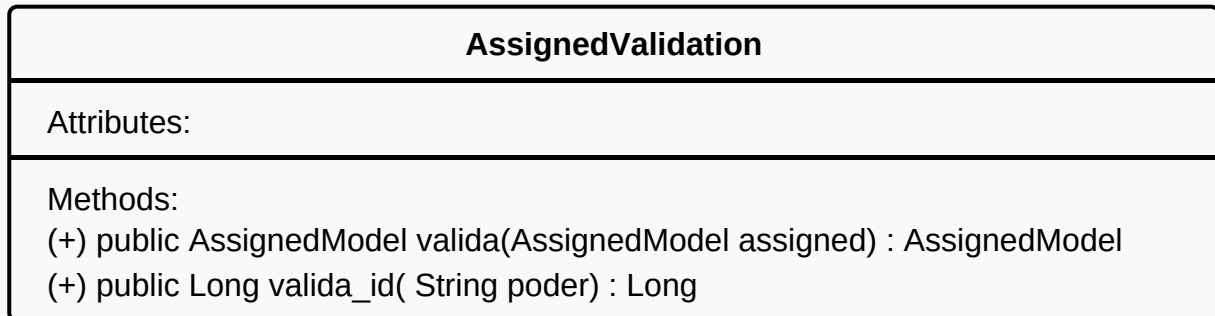

Relations:

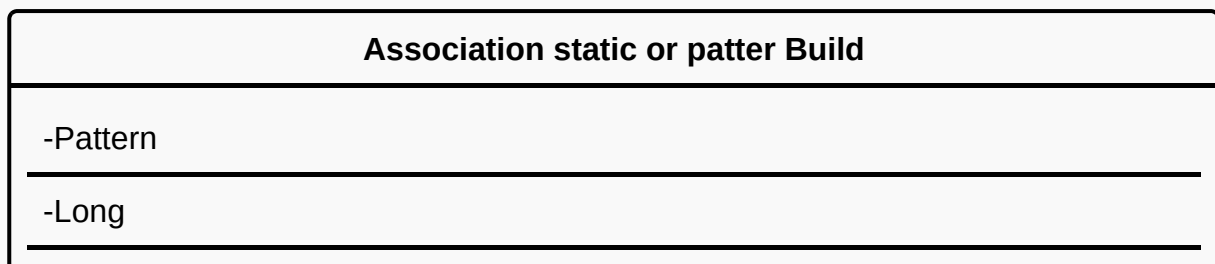

Project Imports

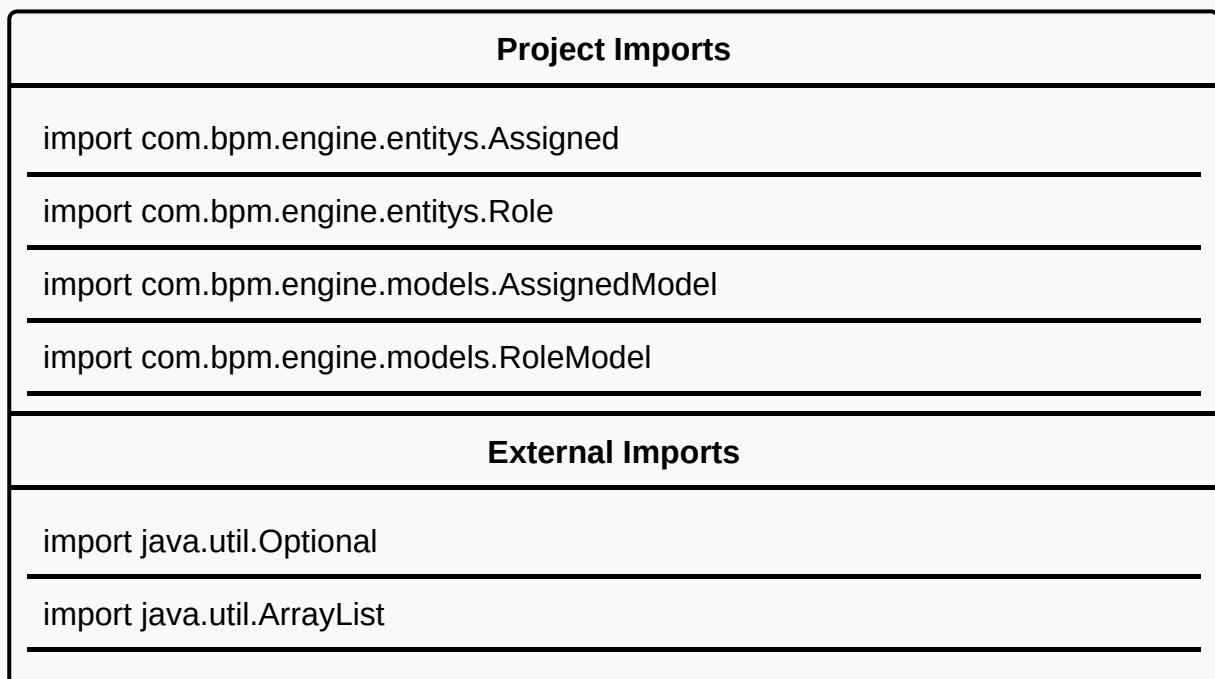

```
import java.util.List
```

```
import java.util.Date
```

```
import java.util.regex.Pattern
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detalle de la clase: ControlProcessReferentValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line: public class ControlProcessReferentValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\

Class UML:

ControlProcessReferentValidation

Attributes:

Methods:

(+) public ControlProcessReferentModel valida(ControlProcessReferentModel controlprocess) : ControlProcessReferentModel

(+) public Long valida_id(String poder) : Long

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.models.ControlProcessReferentModel

External Imports

import java.util.regex.Pattern

import org.springframework.stereotype.Service

Class Anotations

@Service ,

Detaille de la classe: InstanceTaskEmailValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line:public class InstanceTaskEmailValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\

Class UML:

InstanceTaskEmailValidation

Attributes:

Methods:

(+) public InstanceTaskEmailModel valida(InstanceTaskEmailModel instancetaskemail) : InstanceTaskEmailModel

(+) public Long valida_id(String poder) : Long

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.entitys.InstanceTaskEmail

import com.bpm.engine.models.InstanceTaskEmailModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

```
import java.util.regex.Pattern
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detalle de la clase: ParametersValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line: public class ParametersValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\ParametersValidation.class

Class UML:

ParametersValidation

Attributes:

Methods:

(+) public Long valida_id(String poder) : Long

(+) public ParametersModel validationP(ParametersModel t) : ParametersModel

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.models.ParametersModel

External Imports

import org.springframework.stereotype.Service

import java.util.regex.Pattern

Class Anotations

@Service ,

Detalle de la clase: ProcessValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line: public class ProcessValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation

Class UML:

ProcessValidation

Attributes:

(-) stageValidationService : StageValidation

Methods:

(+) public SystemInternalResponseModel isValid(ProcessModel process) : SystemInternalResponseModel

(+) public ProcessModel valida(ProcessModel process) : ProcessModel

(-) private Boolean checkNameTitleUserCreate(ProcessModel process) : Boolean

(-) private Boolean validVisibility(ProcessModel process) : Boolean

(-) private boolean validationStagesTraksContent(ProcessModel process) : boolean

(+) public Long valida_id(String poder) : Long

Relations:

loc

-StageValidation

Strong Association

-SystemInternalResponseModel

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

```
import com.bpm.engine.utility.Constants
```

External Imports

```
import java.util.ArrayList
```

```
import java.util.List
```

```
import java.util.regex.Pattern
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

Class Annotations

```
@Service ,
```

Detaille de la classe: RoleValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line:public class RoleValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\

Class UML:

RoleValidation

Attributes:

Methods:

(+) public RoleModel valida(RoleModel role) : RoleModel

(+) public Long valida_id(String poder) : Long

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

import com.bpm.engine.models.RoleModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

```
import java.util.regex.Pattern
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```


Detaille de la classe: StageValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line: public class StageValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\

Class UML:

StageValidation

Attributes:

(-) taskValidationService : TaskValidation

Methods:

(+) public SystemInternalResponseModel validStage(StageModel stage) : SystemInternalResponseModel

(-) private Boolean checkNameTitleType(StageModel stage) : Boolean

(+) public StageModel valida(StageModel stage) : StageModel

(-) private Boolean validStagesChildren(StageModel stage) : Boolean

(-) private Boolean validRulerStageOrTask(StageModel stage) : Boolean

(+) public boolean validTask(TaskModel task) : boolean

(+) public Long valida_id(String poder) : Long

Relations:

loc

-TaskValidation

Strong Association

-SystemInternalResponseModel

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

```
import com.bpm.engine.utility.Constants
```

External Imports

```
import java.util.regex.Pattern
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detaille de la classe: StateValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line:public class StateValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\

Class UML:

StateValidation

Attributes:

Methods:

(+) public StateModel valida(StateModel state) : StateModel

(+) public Long valida_id(String poder) : Long

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.entityts.State

import com.bpm.engine.models.StateModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

```
import java.util.regex.Pattern
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detalle de la clase: SystemResponseValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line: public class SystemResponseValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\

Class UML:

SystemResponseValidation

Attributes:

Methods:

(+) public SystemResponseModel valida(SystemResponseModel systemresponse) : SystemResponseModel

(+) public Long valida_id(String poder) : Long

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.entitys.SystemResponse

import com.bpm.engine.models.SystemResponseModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

```
import java.util.regex.Pattern
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detaille de la classe: TaskEmailValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line: public class TaskEmailValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\TaskEmailValidation.class

Class UML:

TaskEmailValidation

Attributes:

Methods:

(+) public TaskEmailModel valida(TaskEmailModel taskemail) : TaskEmailModel

(+) public Long valida_id(String poder) : Long

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskEmail

import com.bpm.engine.models.TaskEmailModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

```
import java.util.regex.Pattern
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```


Detalle de la clase: TaskTypeValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line: public class TaskTypeValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\TaskTypeValidation.class

Class UML:

TaskTypeValidation

Attributes:

Methods:

(+) public TaskTypeModel valida(TaskTypeModel tasktype) : TaskTypeModel

(+) public Long valida_id(String poder) : Long

Relations:

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.models.TaskTypeModel

External Imports

import java.util.Optional

import java.util.ArrayList

import java.util.List

import java.util.Date

```
import java.util.regex.Pattern
```

```
import org.springframework.stereotype.Service
```

Class Anotations

```
@Service ,
```

Detalle de la clase: TaskValidation

Package: com.bpm.engine.validation

Class type: class

Class Signature Line: public class TaskValidation

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\main\java\com\bpm\engine\validation\TaskValidation.class

Class UML:

TaskValidation

Attributes:

Methods:

(+) public SystemInternalResponseModel validTask(TaskModel task) : SystemInternalResponseModel

(+) public TaskModel valida(TaskModel task) : TaskModel

(+) public Long valida_id(String poder) : Long

Relations:

Strong Association

-SystemInternalResponseModel

Association static or patter Build

-Pattern

-Long

Project Imports

Project Imports

import com.bpm.engine.utility.Constants

External Imports

import java.util.regex.Pattern

import org.springframework.stereotype.Service

Class Anotations
@Service ,

Detaille de la classe: TaskAssignedRepositoryTest

Package: com.bpm.engine.instanceProcessrepositoryTest

Class type: class

Class Signature Line: public class TaskAssignedRepositoryTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\in:

Class UML:

TaskAssignedRepositoryTest

Attributes:

(-) taskAssignedRepository : TaskAssignedRepository

Methods:

(-) private TaskAssigned getOneTaskAssigned() : TaskAssigned

(+) public void saveTaskAssignedAndReturnTaskAssigned() : void

(+) public void findByTaskIdAnReturnAListOfTaskAssigned() : void

Relations:

loc

-TaskAssignedRepository

Association static or patter Build

-TaskAssigned

-Assertions

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskAssigned

import com.bpm.engine.repository.TaskAssignedRepository

External Imports

import org.assertj.core.api.Assertions

```
import org.junit.jupiter.api.Test
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.boot.jdbc.EmbeddedDatabaseConnection
```

```
import org.springframework.boot.test.autoconfigure.jdbc.  
AutoConfigureTestDatabase
```

```
import org.springframework.boot.test.autoconfigure.orm.jpa.DataJpaTest
```

```
import java.util.List
```

Class Anotations

```
@DataJpaTest ,@AutoConfigureTestDatabase(connection =  
EmbeddedDatabaseConnection.H2) ,
```

Detaille de la classe: StackMemoryTest

Package: com.bpm.engine.managers

Class type: class

Class Signature Line: public class StackMemoryTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\m

Class UML:

StackMemoryTest

Attributes:

(-) referentManager : StackMemoryReferentManager

(-) instanceAbstractionModel : InstanceAbstractionModel

(-) stackMemory : StackMemory

Methods:

Project Imports

Project Imports

import com.bpm.engine.models.InstanceAbstractionModel

import com.bpm.engine.models.TaskTypeModel

External Imports

import java.util.Date

import org.junit.jupiter.api.BeforeEach

import org.junit.jupiter.api.Test

import org.junit.jupiter.api.extension.ExtendWith

import org.mockito.junit.jupiter.MockitoExtension

Class Anotations

@ExtendWith(MockitoExtension.class) ,

Detaille de la classe: AssignedModelTest

Package: com.bpm.engine.models

Class type: class

Class Signature Line: public class AssignedModelTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\m

Class UML:

AssignedModelTest

Attributes:

(-) assignedModel : AssignedModel

(-) employeeRole : RoleModel

(-) approvedProcessModel : ApprovedProcessModel

Methods:

(-) private void setAssignedModelInitial() : void

(-) private AssignedModel getAssignedModeUpdate() : AssignedModel

(+) public void testUpdateThis_AllFieldsUpdated() : void

(+) public void testUpdateThis_NoChanges() : void

Relations:

Strong Association

-AssignedModel

Association static or patter Build

-AssignedModel

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

External Imports

import java.util.ArrayList


```
import java.util.List
```

```
import org.junit.jupiter.api.Test
```

```
import org.junit.jupiter.api.extension.ExtendWith
```

```
import org.mockito.InjectMocks
```

```
import org.mockito.Mock
```

```
import org.mockito.junit.jupiter.MockitoExtension
```

Class Anotations

```
@ExtendWith(MockitoExtension.class) ,
```

Detaille de la classe: ApprovedProcessRepositoryTest

Package: com.bpm.engine.processrepositoriesTest

Class type: class

Class Signature Line: public class ApprovedProcessRepositoryTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\pr

Class UML:

ApprovedProcessRepositoryTest

Attributes:

(-) approvedProcessRepository : ApprovedProcessRepository

Methods:

Relations:

loc

-ApprovedProcessRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.ApprovedProcess

import com.bpm.engine.entitys.Role

import com.bpm.engine.repository.ApprovedProcessRepository

External Imports

import org.assertj.core.api.Assertions

import org.junit.jupiter.api.Test

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.boot.jdbc.EmbeddedDatabaseConnection

```
import org.springframework.boot.test.autoconfigure.jdbc.  
AutoConfigureTestDatabase
```

```
import org.springframework.boot.test.autoconfigure.orm.jpa.DataJpaTest
```

Class Annotations

```
@DataJpaTest ,@AutoConfigureTestDatabase(connection =  
EmbeddedDatabaseConnection.H2) ,
```

Detaille de la classe: AssignedRepositoryTest

Package: com.bpm.engine.processrepositoriesTest

Class type: class

Class Signature Line: public class AssignedRepositoryTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\pr

Class Constructors

Constructors

```
+ public AssignedRepositoryTest(AssignedRepository assignedRepository,  
ApprovedProcessRepository approvedProcessRepository)
```

Class UML:

AssignedRepositoryTest

Attributes:

(-) assignedRepository : AssignedRepository

(-) approvedProcessRepository : ApprovedProcessRepository

Methods:

Project Imports

Project Imports

```
import com.bpm.engine.entitys.ApprovedProcess
```

```
import com.bpm.engine.entitys.Assigned
```

```
import com.bpm.engine.entitys.Role
```

```
import com.bpm.engine.repository.ApprovedProcessRepository
```

```
import com.bpm.engine.repository.AssignedRepository
```

External Imports

```
import org.assertj.core.api.Assertions
```

```
import org.junit.jupiter.api.Test
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.boot.jdbc.EmbeddedDatabaseConnection
```

```
import org.springframework.boot.test.autoconfigure.jdbc.  
AutoConfigureTestDatabase
```

```
import org.springframework.boot.test.autoconfigure.orm.jpa.DataJpaTest
```

```
import java.util.Arrays
```

```
import java.util.List
```

Class Anotations

```
@DataJpaTest ,@AutoConfigureTestDatabase(connection =  
EmbeddedDatabaseConnection.H2) ,
```

Detaille de la classe: ProcessRespositoriyTest

Package: com.bpm.engine.processrepositoriesTest

Class type: class

Class Signature Line: public class ProcessRespositoriyTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\pr

Class Constructors

Constructors

+ public ProcessRespositoriyTest(ProcessRepository processRepository)

Class UML:

ProcessRespositoriyTest

Attributes:

(-) processRepository : ProcessRepository

(-) dateCreate : Date

Methods:

(-) private Stage getAStage() : Stage

(-) private Task getTask() : Task

(-) private Process getProcess() : Process

(+) public void saveProcessAndReturnProcess() : void

Relations:

Strong Association

-Ruler

-TaskType

Association static or patter Build

-Stage

-Arrays

-Task

-Ruler

-TaskType

-Process

-CREATE

-Assertions

Project Imports

Project Imports

import com.bpm.engine.entitys.Process

import com.bpm.engine.repository.ProcessRepository

import com.bpm.engine.utility.SystemSate

External Imports

import org.assertj.core.api.Assertions

import org.junit.jupiter.api.Test

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.boot.jdbc.EmbeddedDatabaseConnection

import org.springframework.boot.test.autoconfigure.jdbc.
AutoConfigureTestDatabase

import org.springframework.boot.test.autoconfigure.orm.jpa.DataJpaTest

import java.util.ArrayList

import java.util.Arrays

import java.util.Date

import java.util.List

Class Anotations

@DataJpaTest ,@AutoConfigureTestDatabase(connection =
EmbeddedDatabaseConnection.H2) ,



Detalle de la clase: RoleRepositorytest

Package: com.bpm.engine.processrepositoriesTest


Class type: class

Class Signature Line: public class RoleRepositorytest


Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\pr


Class UML:

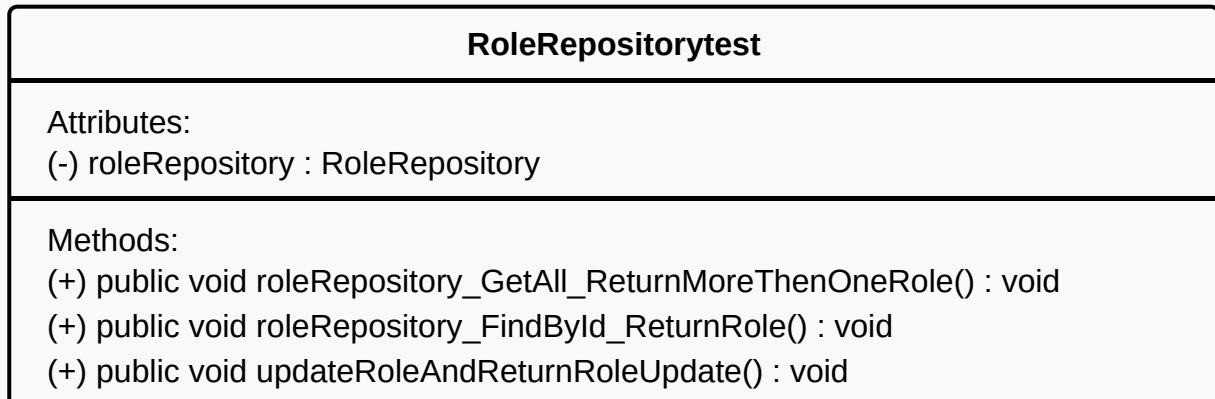

Relations:

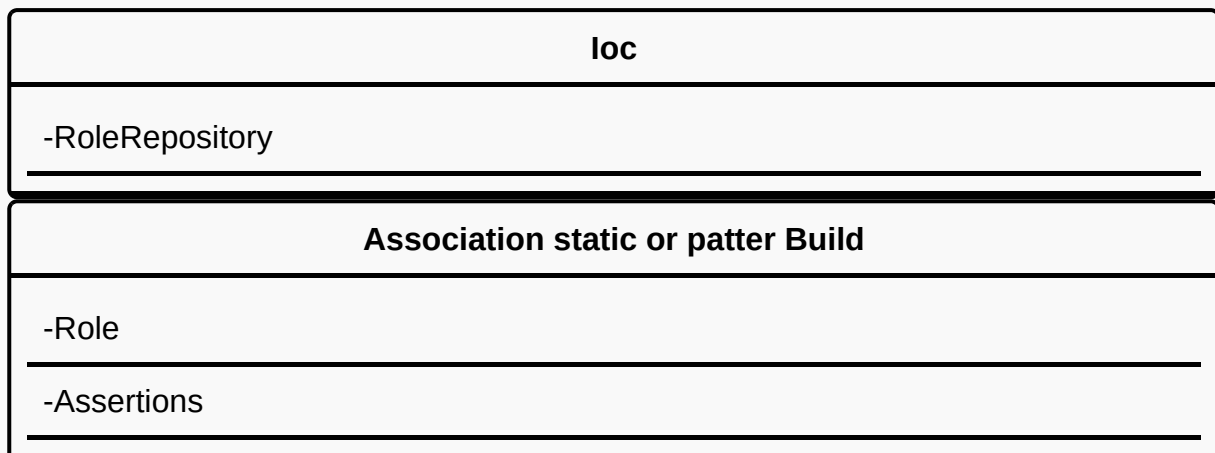

Project Imports

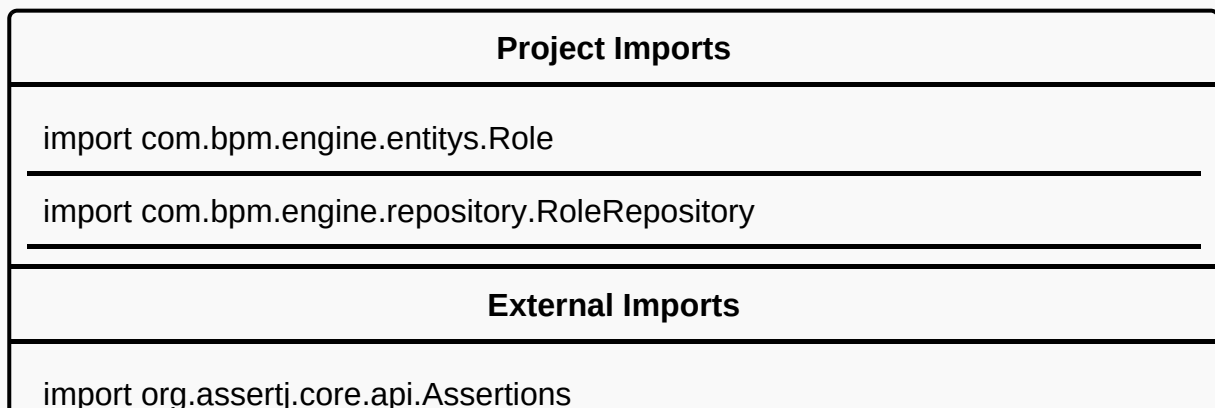

```
import org.junit.jupiter.api.Test
```

```
import org.springframework.beans.factory.annotation.Autowired
```

```
import org.springframework.boot.jdbc.EmbeddedDatabaseConnection
```

```
import org.springframework.boot.test.autoconfigure.jdbc.  
AutoConfigureTestDatabase
```

```
import org.springframework.boot.test.autoconfigure.orm.jpa.DataJpaTest
```

```
import java.util.ArrayList
```

```
import java.util.Collection
```

```
import java.util.List
```

Class Annotations

```
@DataJpaTest ,@AutoConfigureTestDatabase(connection =  
EmbeddedDatabaseConnection.H2) ,
```

Detaille de la classe: RulerRepositoryTest

Package: com.bpm.engine.processrepositoriesTest

Class type: class

Class Signature Line: public class RulerRepositoryTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\pr

Class UML:

RulerRepositoryTest

Attributes:

(-) rulerRepository : RulerRepository

Methods:

Relations:

loc

-RulerRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.Ruler

import com.bpm.engine.repository.RulerRepository

External Imports

import org.assertj.core.api.Assertions

import org.junit.jupiter.api.Test

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.boot.jdbc.EmbeddedDatabaseConnection

import org.springframework.boot.test.autoconfigure.jdbc.
AutoConfigureTestDatabase

```
import org.springframework.boot.test.autoconfigure.orm.jpa.DataJpaTest
```

```
import java.util.List
```

Class Anotations

```
@DataJpaTest ,@AutoConfigureTestDatabase(connection =  
EmbeddedDatabaseConnection.H2) ,
```

Detaille de la classe: StageRepositoryTest

Package: com.bpm.engine.processrepositoriesTest

Class type: class

Class Signature Line: public class StageRepositoryTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\pr

Class UML:

StageRepositoryTest

Attributes:

(-) stageRepository : StageRepository

(-) dateCreate : Date

Methods:

(-) private Stage getAStage() : Stage

(-) private Task getTask() : Task

(+) public void saveStageAndReturnStage() : void

Relations:

loc

-StageRepository

Strong Association

-Date

-Role

-Ruler

-TaskType

Association static or patter Build

-Arrays

-Role

-Stage

-Task

-Ruler

-TaskType

-Assertions

Project Imports

Project Imports

import com.bpm.engine.repository.StageRepository

External Imports

import org.assertj.core.api.Assertions

import org.junit.jupiter.api.Test

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.boot.jdbc.EmbeddedDatabaseConnection

import org.springframework.boot.test.autoconfigure.jdbc.
AutoConfigureTestDatabase

import org.springframework.boot.test.autoconfigure.orm.jpa.DataJpaTest

import java.util.ArrayList

import java.util.Arrays

import java.util.Date

import java.util.List

Class Annotations

@DataJpaTest ,@AutoConfigureTestDatabase(connection =
EmbeddedDatabaseConnection.H2) ,

Detaille de la classe: TaskRepositoryTest

Package: com.bpm.engine.processrepositoriesTest

Class type: class

Class Signature Line: public class TaskRepositoryTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\pr

Class UML:

TaskRepositoryTest

Attributes:

(-) taskRepository : TaskRepository

(-) dateCreate : Date

Methods:

(-) private Task getTask() : Task

Relations:

loc

-TaskRepository

Strong Association

-Date

-Ruler

-Role

-TaskType

Association static or patter Build

-Task

-Arrays

-Ruler

-Role

-TaskType

Project Imports

Project Imports

import com.bpm.engine.entitys.Role

import com.bpm.engine.entitys.Ruler

import com.bpm.engine.entitys.Task

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.repository.TaskRepository

External Imports

import org.assertj.core.api.Assertions

import org.junit.jupiter.api.Test

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.boot.jdbc.EmbeddedDatabaseConnection

import org.springframework.boot.test.autoconfigure.jdbc.
AutoConfigureTestDatabase

import org.springframework.boot.test.autoconfigure.orm.jpa.DataJpaTest

import java.util.Arrays

import java.util.Date

import java.util.List

Class Anotations

@DataJpaTest ,@AutoConfigureTestDatabase(connection =
EmbeddedDatabaseConnection.H2) ,

Detaille de la classe: TaskTypeRepositoryTest

Package: com.bpm.engine.processrepositoriesTest

Class type: class

Class Signature Line: public class TaskTypeRepositoryTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\pr

Class UML:

TaskTypeRepositoryTest

Attributes:

(-) taskTypeRepository : TaskTypeRepository

Methods:

Relations:

loc

-TaskTypeRepository

Project Imports

Project Imports

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.repository.TaskTypeRepository

External Imports

import org.assertj.core.api.Assertions

import org.junit.jupiter.api.Test

import org.springframework.beans.factory.annotation.Autowired

import org.springframework.boot.jdbc.EmbeddedDatabaseConnection

import org.springframework.boot.test.autoconfigure.jdbc.
AutoConfigureTestDatabase

```
import org.springframework.boot.test.autoconfigure.orm.jpa.DataJpaTest
```

Class Anotations

```
@DataJpaTest ,@AutoConfigureTestDatabase(connection =  
EmbeddedDatabaseConnection.H2) ,
```

Detaille de la classe: ReliefAssignedServiceImplTestError

Package: com.bpm.engine.relief.service

Class type: class

Class Signature Line: public class ReliefAssignedServiceImplTestError

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\re

Class UML:

ReliefAssignedServiceImplTestError

Attributes:

(-) reliefAssignedService : ReliefAssignedServiceImpl
(-) reliefAssignedRepository : ReliefAssignedRepository
(-) mapper : ReliefAssignedMapper

Methods:

(+) public ReliefAssigned getReliefAssigned() : ReliefAssigned
(+) public ReliefAssignedModel getReliefAssignedModel() :
ReliefAssignedModel

Relations:

Association static or patter Build

-ReliefAssigned

-ReliefAssignedModel

Project Imports

Project Imports

import com.bpm.engine.relief.entity.ReliefAssigned

import com.bpm.engine.relief.mapper.ReliefAssignedMapper

import com.bpm.engine.relief.model.ReliefAssignedModel

import com.bpm.engine.relief.repository.ReliefAssignedRepository

import com.bpm.engine.relief.service.ReliefAssignedServiceImpl

External Imports

```
import org.junit.jupiter.api.BeforeEach
```

```
import org.junit.jupiter.api.Test
```

```
import org.junit.jupiter.api.extension.ExtendWith
```

```
import org.mockito.InjectMocks
```

```
import org.mockito.Mock
```

```
import org.mockito.MockitoAnnotations
```

```
import org.mockito.junit.jupiter.MockitoExtension
```

```
import org.springframework.dao.DataAccessException
```

Class Annotations

```
@ExtendWith(MockitoExtension.class) ,
```

Detalle de la clase: ChangeBpmRoleTest

Package: com.bpm.engine.relief.strategys

Class type: class

Class Signature Line: public class ChangeBpmRoleTest

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\re

Class UML:

ChangeBpmRoleTest

Attributes:

Methods:

Detaille de la classe: DataBaseprovider

Package: com.bpm.engine.utilitis

Class type: class

Class Signature Line: public class DataBaseprovider implements RadomCode

Class ClassPath: C:

\REPOSITORYES\BPM_work_flow_engine\EngineBpm\src\test\java\com\bpm\engine\ut

Class UML:

DataBaseprovider

Attributes:

Methods:

(-) private Stage getAStage() : Stage

(-) private Task getTask() : Task

(+) public Process getProcess(String name, String title, String user , Boolean global, Boolean visible) : Process

Relations:

Implement

-RadomCode

Strong Association

-Date

-Ruler

-TaskType

Association static or patter Build

-Stage

-Arrays

-Task

-Ruler

-TaskType

-Process

-CREATE

Project Imports

Project Imports

import com.bpm.engine.entitys.Process

import com.bpm.engine.entitys.Role

import com.bpm.engine.entitys.Ruler

import com.bpm.engine.entitys.Stage

import com.bpm.engine.entitys.Task

import com.bpm.engine.entitys.TaskType

import com.bpm.engine.interfaces.RadomCode

import com.bpm.engine.utility.SystemSate

External Imports

import java.util.ArrayList

import java.util.Arrays

import java.util.Date

import java.util.List

Project Directory Tree

- |__ .classpath
- |__ .factorypath
- |__ .mvn
 - |__ wrapper
 - |__ maven-wrapper.properties
 - |__ MavenWrapperDownloader.java
- |__ .project
- |__ .settings
 - |__ org.eclipse.core.resources.prefs
 - |__ org.eclipse.jdt.apt.core.prefs
 - |__ org.eclipse.jdt.core.prefs
 - |__ org.eclipse.m2e.core.prefs
 - |__ org.springframework.ide.eclipse.prefs
- |__ gitignore
- |__ HELP.md
- |__ mvnw
- |__ mvnw.cmd
- |__ pom.xml
- |__ src
 - |__ main
 - |__ java
 - |__ com
 - |__ bpm
 - |__ engine
 - |__ configurations
 - |__ RestTemplateConfig.java
 - |__ schedule
 - |__ AppScheduleProperties.java
 - |__ AsyncConfig.java
 - |__ SchedulerConfig.java
 - |__ ScheduleTasks.java
 - |__ SwaggerConfig.java
 - |__ controller
 - |__ AssignedController.java
 - |__ client
 - |__ EngineBpmController.java
 - |__ ControlProcessReferentController.java
 - |__ InstanceTaskEmailController.java
 - |__ PageController.java
 - |__ ProcessController.java

- |__ RoleController.java
- |__ StageController.java
- |__ StateController.java
- |__ SystemResponseController.java
- |__ TaskController.java
- |__ TaskEmailController.java
- |__ TaskTypeController.java
- |__ TemplateController.java
- |__ dto
 - |__ AssignedDTO.java
 - |__ BpmAssignedDTO.java
 - |__ EntityResponse.java
 - |__ ProcessDTO.java
 - |__ ResponseAssignedDTO.java
 - |__ RoleDTO.java
 - |__ RulerDTO.java
 - |__ StageDTO.java
 - |__ SystemRequest.java
 - |__ TaskDTO.java
- |__ EngineBpmApplication.java
- |__ entitys
 - |__ ApprovedProcess.java
 - |__ Assigned.java
 - |__ BpmAssigned.java
 - |__ ControlProcessReferent.java
 - |__ InstanceAbstraction.java
 - |__ InstanceTaskEmail.java
 - |__ Parameters.java
 - |__ Process.java
 - |__ Role.java
 - |__ Ruler.java
 - |__ Stage.java
 - |__ State.java
 - |__ SystemResponse.java
 - |__ Task.java
 - |__ TaskAssigned.java
 - |__ TaskEmail.java
 - |__ TaskType.java
 - |__ Template.java
- |__ interfaces
 - |__ IBaseModel.java
 - |__ RadomCode.java

|__ managers

- |__ AssignmentTaskManager.java
- |__ BpmAssignedManager.java
- |__ ConectBpmToEmployeeService.java
- |__ ControlProcessReferentManager.java
- |__ facades
 - |__ NoReliefFacade.java
 - |__ ProcessAndInstanceFacade.java
 - |__ ServiceBpmAndAssignedFacade.java
- |__ InstanceManager.java
- |__ InstanceProcessManager.java
- |__ InstanceProcessManagerDTO.java
- |__ NotificationManager.java
- |__ ProcessManager.java
- |__ StackMemory.java
- |__ StackMemorylistas.java
- |__ StackMemoryReferentManager.java

|__ mappers

- |__ ApprovedProcessMapper.java
- |__ AssignedMapper.java
- |__ BpmAssignedMapper.java
- |__ ControlProcessReferentMapper.java
- |__ InstanceAbstractionMapper.java
- |__ InstanceTaskEmailMapper.java
- |__ MapperEntityResponse.java
- |__ ParametersMapper.java
- |__ ProcessDTOMapper.java
- |__ ProcessMapper.java
- |__ ProcessToInstanceAbstractionMapper.java
- |__ RoleMapper.java
- |__ RulerMapper.java
- |__ StageMapper.java
- |__ StateMapper.java
- |__ SystemResponseMapper.java
- |__ TaskAssignedMapper.java
- |__ TaskEmailMapper.java
- |__ TaskMapper.java
- |__ TaskTypeMapper.java
- |__ TemplateMapper.java

|__ models

- |__ ApprovedProcessModel.java
- |__ AssignedModel.java

- |__ BpmAssignedModel.java
- |__ ControlProcessReferentModel.java
- |__ InstanceAbstractionModel.java
- |__ InstanceDataInfoModel.java
- |__ InstanceTaskEmailModel.java
- |__ ParametersModel.java
- |__ ProcessModel.java
- |__ RoleModel.java
- |__ RulerModel.java
- |__ StageModel.java
- |__ StateModel.java
- |__ SystemInternalResponseModel.java
- |__ SystemReferentModel.java
- |__ SystemResponseModel.java
- |__ TaskAssignedModel.java
- |__ TaskEmailModel.java
- |__ TaskModel.java
- |__ TaskTypeModel.java
- |__ TemplateFlexibleDataModel.java
- |__ TemplateModel.java
- |__ notification
 - |__ componet
 - |__ SystemTemplateFlexibleDataComponet.java
 - |__ TemplateFilling.java
 - |__ TemplateFlexibleDataManager.java
 - |__ model
 - |__ AttachmentModel.java
 - |__ EmailDataConfigModel.java
 - |__ EmailsModel.java
 - |__ MailSenderModel.java
 - |__ serviceImplement
 - |__ NotificationServiceImplement.java
 - |__ services
 - |__ NotificationService.java
- |__ relief
 - |__ dto
 - |__ ReliefDTO.java
 - |__ entity
 - |__ ReliefAssigned.java
 - |__ interfaces
 - |__ IReliefStrategy.java
 - |__ mapper

- |__ ReliefAssignedMapper.java
- |__ model
 - |__ ReliefAssignedModel.java
- |__ ReliefManager.java
- |__ repository
 - |__ ReliefAssignedRepository.java
- |__ service
 - |__ IReliefAssignedService.java
 - |__ ReliefAssignedServiceImpl.java
 - |__ ReturnCommandService.java
- |__ strategys
 - |__ ChangeBpmRole.java
 - |__ TemporaryChange.java
 - |__ Unsubscribe.java
- |__ validation
 - |__ ReliefAssignedValidation.java
 - |__ ReliefDTOValidation.java
- |__ repository
 - |__ ApprovedProcessRepository.java
 - |__ AssignedRepository.java
 - |__ BpmAssignedRepository.java
 - |__ ControlProcessReferentRepository.java
 - |__ InstanceAbstractionRepository.java
 - |__ InstanceTaskEmailRepository.java
 - |__ ParametersRepository.java
 - |__ ProcessRepository.java
 - |__ RoleRepository.java
 - |__ RulerRepository.java
 - |__ StageRepository.java
 - |__ StateRepository.java
 - |__ SystemResponseRepository.java
 - |__ TaskAssignedRepository.java
 - |__ TaskEmailRepository.java
 - |__ TaskRepository.java
 - |__ TaskTypeRepository.java
 - |__ TemplateRepository.java
- |__ service
 - |__ ApprovedProcessService.java
 - |__ AssignedService.java
 - |__ BpmAssignedService.java
 - |__ ControlProcessReferentService.java
 - |__ InstanceAbstractionService.java

- |__ InstanceTaskEmailService.java
- |__ ParametersServices.java
- |__ ProcessService.java
- |__ RoleService.java
- |__ RulerService.java
- |__ StageService.java
- |__ StateService.java
- |__ SystemResponseService.java
- |__ TaskAssignedService.java
- |__ TaskEmailService.java
- |__ TaskService.java
- |__ TaskTypeService.java
- |__ TemplateService.java
- |__ serviceImplement
 - |__ ApprovedProcessServiceImplement.java
 - |__ AssignedServiceImplement.java
 - |__ BpmAssignedServiceImplement.java
 - |__ ControlProcessReferentServiceImplement.java
 - |__ InstanceAbstractionServiceImplement.java
 - |__ InstanceTaskEmailServiceImplement.java
- |__ jsomxml
 - |__ run
 - |__ GenerateJsonStringFromXMLString.java
 - |__ GenerateXmlFromFileJson.java
 - |__ GenerateXmlFromJsonString.java
- |__ services
 - |__ FileToString.java
 - |__ GenerateJsonFromXml.java
 - |__ JsontoXmlConverter.java
 - |__ ReplaceObjectNodeInFile.java
 - |__ XmlToJsonWithJackson.java
- |__ ParametersServicesImplement.java
- |__ ProcessServiceImplement.java
- |__ ResponseAssignedDTOService.java
- |__ RestTemplateService.java
- |__ RoleServiceImplement.java
- |__ RulerServiceImplemet.java
- |__ StageServiceImplement.java
- |__ StateServiceImplement.java
- |__ SystemResponseServiceImplement.java
- |__ TaskAssignedServiceImplemet.java
- |__ TaskEmailServiceImplement.java

- |__ TaskServiceImplement.java
- |__ TaskTypeServiceImplement.java
- |__ TemplateServiceImplement.java
- |__ ServletInitializer.java
- |__ utility
 - |__ ApprubeType.java
 - |__ Constants.java
 - |__ InstanOf.java
 - |__ SystemSate.java
- |__ validation
 - |__ AssignedValidation.java
 - |__ ControlProcessReferentValidation.java
 - |__ InstanceTaskEmailValidation.java
 - |__ ParametersValidation.java
 - |__ ProcessValidation.java
 - |__ RoleValidation.java
 - |__ StageValidation.java
 - |__ StateValidation.java
 - |__ SystemResponseValidation.java
 - |__ TaskEmailValidation.java
 - |__ TaskTypeValidation.java
 - |__ TaskValidation.java
- |__ resources
 - |__ application.properties
 - |__ banner.txt
 - |__ json
 - |__ createNewProcess.json
 - |__ systemRequest.json
 - |__ test.json
 - |__ META-INF
 - |__ additional-spring-configuration-metadata.json
 - |__ templates
 - |__ systemNotificatioTemplate.html
 - |__ templateForm.html
- |__ test
 - |__ java
 - |__ com
 - |__ bpm
 - |__ engine
 - |__ EngineBpmApplicationTests.java
 - |__ instanceProcessrepositoryTest
 - |__ TaskAssignedRepositoryTest.java

- |__ managers
 - |__ StackMemoryTest.java
- |__ models
 - |__ AssignedModelTest.java
- |__ processrepositoriesTest
 - |__ ApprovedProcessRepositoryTest.java
 - |__ AssignedRepositoryTest.java
 - |__ ProcessRespositoryTest.java
 - |__ RoleRepositorytest.java
 - |__ RulerRepositoryTest.java
 - |__ StageRepositoryTest.java
 - |__ TaskRepositoryTest.java
 - |__ TaskTypeRepositoryTest.java
- |__ relief
 - |__ repository
 - |__ ReliefAssignedRepositoryTest.java
 - |__ service
 - |__ ReliefAssignedServiceImplTest.java
 - |__ ReliefAssignedServiceImplTestError.java
 - |__ strategys
 - |__ ChangeBpmRoleTest.java
- |__ utilitis
 - |__ DataBaseprovider.java

Project Class Tree

- ___ EngineBpm\\Application
- ___ EngineBpm\\Controller
- ___ EngineBpm\\\.mvn\wrapper\MavenWrapperDownloader
- ___ EngineBpm\\src\main\java\com\bpm\engine\ServletInitializer
- ___ EngineBpm\\src\main\java\com\bpm\engine\configurations\RestTemplateConfig
- ___ EngineBpm\\src\main\java\com\bpm\engine\configurations\SwaggerConfig
- ___ EngineBpm\\src\main\java\com\bpm\engine\configurations\schedule\AppScheduleProperties

- ___ EngineBpm\\src\main\java\com\bpm\engine\configurations\schedule\AsyncConfig
- ___ EngineBpm\\src\main\java\com\bpm\engine\configurations\schedule\ScheduleTasks
- ___ EngineBpm\\src\main\java\com\bpm\engine\configurations\schedule\SchedulerConfig
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\AssignedController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\ControlProcessReferentController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\InstanceTaskEmailController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\PageController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\ProcessController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\RoleController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\StageController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\StateController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\SystemResponseController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\TaskController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\TaskEmailController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\TaskTypeController
- ___ EngineBpm\\src\main\java\com\bpm\engine\controller\TemplateController
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\AssignedDTO
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\BpmAssignedDTO
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\EntityResponse
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\ProcessDTO
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\ResponseAssignedDTO
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\RoleDTO
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\RulerDTO
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\StageDTO
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\SystemRequest
- ___ EngineBpm\\src\main\java\com\bpm\engine\dto\TaskDTO
- ___ EngineBpm\\src\main\java\com\bpm\engine\entitys\ApprovedProcess
- ___ EngineBpm\\src\main\java\com\bpm\engine\entitys\Assigned
- ___ EngineBpm\\src\main\java\com\bpm\engine\entitys\BpmAssigned
- ___ EngineBpm\\src\main\java\com\bpm\engine\entitys\ControlProcessReferent
- ___ EngineBpm\\src\main\java\com\bpm\engine\entitys\InstanceAbstraction
- ___ EngineBpm\\src\main\java\com\bpm\engine\entitys\InstanceTaskEmail

- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\Parameters
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\Process
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\Role
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\Ruler
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\Stage
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\State
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\SystemResponse
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\Task
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\TaskAssigned
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\TaskEmail
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\TaskType
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\entitys\\Template
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\interfaces\\IBaseModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\interfaces\\RadomCode
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\AssignmentTaskManager
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\BpmAssignedManager
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\ControlProcessReferentManager
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\InstanceManager
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\InstanceProcessManager
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\InstanceProcessManagerDTO
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\NotificationManager
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\ProcessManager
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\StackMemory
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\StackMemoryReferentManager
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\StackMemorylistas
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\facades\\NoReliefFacade
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\facades\\ProcessAndInstanceFacade
- ___
- EngineBpm\\src\\main\\java\\com\\bpm\\engine\\managers\\facades\\ServiceBpmAndAssignedFacade
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\ApprovedProcessMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\AssignedMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\BpmAssignedMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\ControlProcessReferentMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\InstanceAbstractionMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\InstanceTaskEmailMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\MapperEntityResponse
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\ParametersMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\ProcessDTOMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\ProcessMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\ProcessToInstanceAbstractionMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\RoleMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\RulerMapper

- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\StageMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\StateMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\SystemResponseMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\TaskAssignedMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\TaskEmailMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\TaskMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\TaskTypeMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\mappers\\TemplateMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\ApprovedProcessModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\AssignedModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\BpmAssignedModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\ControlProcessReferentModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\InstanceAbstractionModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\InstanceDataInfoModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\InstanceTaskEmailModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\ParametersModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\ProcessModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\RoleModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\RulerModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\StageModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\StateModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\SystemInternalResponseModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\SystemReferentModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\SystemResponseModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\TaskAssignedModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\TaskEmailModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\TaskModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\TaskTypeModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\TemplateFlexibleDataModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\models\\TemplateModel

EngineBpm\\src\\main\\java\\com\\bpm\\engine\\notification\\componet\\SystemTemplateFlexibleDataC
omponet

- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\notification\\componet\\TemplateFilling
- ___

EngineBpm\\src\\main\\java\\com\\bpm\\engine\\notification\\componet\\TemplateFlexibleDataManager

- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\notification\\model\\AttachmentModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\notification\\model\\EmailDataConfigModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\notification\\model\\EmailsModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\notification\\model\\MailSenderModel

EngineBpm\\src\\main\\java\\com\\bpm\\engine\\notification\\serviceImplement\\NotificationServiceImpl

ement

- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\notification\\services\\NotificationService
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\ReliefManager
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\dto\\ReliefDTO
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\entity\\ReliefAssigned
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\interfaces\\IReliefStrategy
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\mapper\\ReliefAssignedMapper
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\model\\ReliefAssignedModel
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\repository\\ReliefAssignedRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\service\\IReliefAssignedService
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\service\\ReliefAssignedServiceImpl
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\service\\ReturnCommandService
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\strategys\\ChangeBpmRole
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\strategys\\TemporaryChange
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\strategys\\Unsubscribe
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\validation\\ReliefAssignedValidation
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\relief\\validation\\ReliefDTOValidation
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\ApprovedProcessRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\AssignedRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\BpmAssignedRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\ControlProcessReferentRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\InstanceAbstractionRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\InstanceTaskEmailRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\ParametersRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\ProcessRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\RoleRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\RulerRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\StageRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\StateRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\SystemResponseRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\TaskAssignedRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\TaskEmailRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\TaskRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\TaskTypeRepository
- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\repository\\TemplateRepository
- ___

EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\ApprovedProcessServiceImplement
t

- ___ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\AssignedServiceImplement
- ___

EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\BpmAssignedServiceImplement

EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\ControlProcessReferentServiceImplement
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\InstanceAbstractionServiceImplement
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\InstanceTaskEmailServiceImplement
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\ParametersServicesImplement
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\ProcessServiceImplement
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\ResponseAssignedDTOService
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\RestTemplateService
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\RoleServiceImplement
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\RulerServiceImplement
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\StageServiceImplement
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\StateServiceImplement
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\SystemResponseServiceImplement
t
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\TaskAssignedServiceImplement
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\TaskEmailServiceImplement
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\TaskServiceImplement
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\TaskTypeServiceImplement
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\TemplateServiceImplement
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\jsomxml\\run\\GenerateJsonStringFromXMLString
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\jsomxml\\run\\GenerateXmlFromFileJson
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\jsomxml\\run\\GenerateXmlFromJsonString
|__ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\jsomxml\\services\\FileToString
|__
EngineBpm\\src\\main\\java\\com\\bpm\\engine\\serviceImplement\\jsomxml\\services\\GenerateJsonFromXml
|__

EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\Implement\\jsomxml\\services\\JsontoXmlConverter

└─

EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\Implement\\jsomxml\\services\\ReplaceObjectNodeInFile

└─

EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\Implement\\jsomxml\\services\\XmlToJsonWithJackson

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\ApprovedProcessService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\AssignedService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\BpmAssignedService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\ControlProcessReferentService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\InstanceAbstractionService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\InstanceTaskEmailService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\ParametersServices

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\ProcessService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\RoleService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\RulerService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\StageService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\StateService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\SystemResponseService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\TaskAssignedService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\TaskEmailService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\TaskService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\TaskTypeService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\service\\TemplateService

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\utility\\Constants

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\AssignedValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\ControlProcessReferentValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\InstanceTaskEmailValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\ParametersValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\ProcessValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\RoleValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\StageValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\StateValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\SystemResponseValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\TaskEmailValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\TaskTypeValidation

└─ EngineBpm\\src\\main\\java\\com\\bpm\\engine\\validation\\TaskValidation

└─

EngineBpm\\src\\test\\java\\com\\bpm\\engine\\instanceProcessrepositoryTest\\TaskAssignedRepositoryTest

___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\managers\\StackMemoryTest
___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\models\\AssignedModelTest

EngineBpm\\src\\test\\java\\com\\bpm\\engine\\processrepositoriesTest\\ApprovedProcessRepositoryTest
___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\processrepositoriesTest\\AssignedRepositoryTest
___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\processrepositoriesTest\\ProcessRepositoryTest

___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\processrepositoriesTest\\RoleRepositoryTest
___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\processrepositoriesTest\\RuleRepositoryTest
___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\processrepositoriesTest\\StageRepositoryTest
___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\processrepositoriesTest\\TaskRepositoryTest
___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\processrepositoriesTest\\TaskTypeRepositoryTest

___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\reliefservice\\ReliefAssignedServiceImplTestError

___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\reliefs\\strategies\\ChangeBpmRoleTest
___ EngineBpm\\src\\test\\java\\com\\bpm\\engine\\utilitis\\DataBaseprovider