

NTNU - NORWEGIAN UNIVERSITY OF SCIENCE AND
TECHNOLOGY

Fordypningsprosjekt

by

Esben Aarseth Aleksander Gisvold

A thesis submitted in partial fulfillment for the
degree of Master of Science
- Computer Science

in the

IME - Faculty of Information Technology, Mathematics and Electrical
Engineering

IDI - Department of Computer and Information Science

September 2013

Declaration of Authorship

I, AUTHOR NAME, declare that this thesis titled, 'THESIS TITLE' and the work presented in it are my own. I confirm that:

- This work was done wholly or mainly while in candidature for a research degree at this University.
- Where any part of this thesis has previously been submitted for a degree or any other qualification at this University or any other institution, this has been clearly stated.
- Where I have consulted the published work of others, this is always clearly attributed.
- Where I have quoted from the work of others, the source is always given. With the exception of such quotations, this thesis is entirely my own work.
- I have acknowledged all main sources of help.
- Where the thesis is based on work done by myself jointly with others, I have made clear exactly what was done by others and what I have contributed myself.

Signed:

Date:

“Gotta Catch ‘Em All”

- Ash Ketchum

NTNU - NORWEGIAN UNIVERSITY OF SCIENCE AND TECHNOLOGY

Abstract

IME - Faculty of Information Technology, Mathematics and Electrical Engineering

IDI - Department of Computer and Information Science

Master of Science

by [Esben Aarseth Aleksander Gisvold](#)

The Thesis Abstract...

Keywords: *BLOPP, Asthma*

Acknowledgements

We would like to thank

Contents

Declaration of Authorship	i
Abstract	iii
Keywords:	iii
Acknowledgements	iv
List of Figures	vii
List of Tables	viii
Abbreviations	ix
1 Introduction	1
1.1 Purpose	1
1.2 Motivation	1
1.3 Research Questions	1
RQ1:	2
RQ2:	2
RQ3:	2
1.4 Research Method	2
2 Background	3
2.1 BLOPP Project	3
2.2 CAPP/GAPP/KAPP	3
2.2.1 CAPP	3
2.2.2 KAPP	4
2.2.3 GAPP	4
2.2.4 Known areas for improvement	6
2.3 Existing products	6
2.3.1 Conclusion and evaluation	6
2.3.2 Assessment of existing applications	8
2.4 Existing Research	8
2.4.1 Monitoring your own decease	8
2.4.2 Children and gestures	9

3 Usability	10
3.1 What is usability?	10
3.2 How to test usability	11
Usability Testing	12
Testing environment	13
3.3 How to test usability on children and toddlers	14
3.4 NSEP Usability Lab	14
3.4.1 The Facility	14
4 Tangible Interfaces	15
4.1 About tangible interfaces	15
4.2 Effects of robots	15
4.3 Gamification	16
5 Results and Discussion	17
5.1 Evaluation	17
5.2 Research Method	17
6 Conclusions	18
A Norwegian SUS form	19
B Further Work	21
B.1 Improvements	21
B.1.1 Rewardsystem	21
B.1.2 Distraction sequence for children	22
B.1.3 User testing of the guardian application	22
B.1.4 Web application	22
B.1.5 Support for more children	23
B.2 Ideas and minor improvements	23
Bibliography	24

List of Figures

2.1	CAPP main menu	4
2.2	Karotz	5
2.3	GAPP main menu	5

List of Tables

2.1	Evaluation of existing products on the market	7
3.1	Methods of user-centered feedback	12

Abbreviations

NTNU	N orwegian U niversity of S cience and T echnology
BLOPP	B arns L egemiddel OP plevelser
CAPP	C hild AP plication
GAPP	G uardian AP plication
GUI	G raphical U ser I nterface
PCHR	P ersonally C ontrolled H ealth R ecord
NAAF	N orges A stma- og A llergi- F orbund

To Pikachu!

Chapter 1

Introduction

This chapter will give an introduction to the study. It will state the purpose, motivation, research questions and the research method for this study.

1.1 Purpose

The goal of this study is to evaluate the CAPP, GAPP and Karotz Applications created by Aaberg, Aarseth, Dale, Gisvold and Svalestuen [1]. The evaluation will be done through usability testing carried out on all three applications. The results of these initial tests will thereafter be used to improve the applications for a newer version. We will also plan a thorough testing of the applications.

1.2 Motivation

According to NAAF, 20% [2] of the Norwegian population has or has had asthma at the age of 10, and 8% of the adult population suffers from asthma. Many of the children find it unpleasant to use their medicine as they often do not understand why the medicine must be taken [Should have a reference]. This may result in parents applying the medication incorrectly, applying the wrong treatment, or even forgetting to give the medicine to their children.

1.3 Research Questions

The main goal for this study is to evaluate the CAPP, GAPP and Karotz application, and identify the usability problems in these systems. Structuring the goal into different

research questions will help this study with the evaluation of the goal. The goal has been composed into these questions:

RQ1: What are the usability problems of the current system?

RQ2: How will guardians of a child react on having a Karotz constantly “watching” over their child?

RQ3: Will the physicians benefit from having detailed logs and information sent by email?

This evaluation should be done through user testing and feedback from future users of the applications. The testing will give information on how well the ...

1.4 Research Method

Chapter 2

Background

This chapter will give a brief introduction to the history behind the BLOPP project [insert reference] and the CAPP, GAPP and Karotz applications.

2.1 BLOPP Project

Barns LegemiddelOPPløvelser is a project group ...

2.2 CAPP/GAPP/KAPP

In the autumn of 2012 Aaberg, Aarseth, Dale, Gisvold and Svalestuen were engaged by the BLOPP Project group through the course “TDT4290 - Customer Driven Project” [3] at NTNU. During the period of August 2012 to December 2012 they developed a prototype of a mobile information system consisting of three applications. One application were developed for guardians of a child (GAPP), and two applications were developed for children (CAPP and KAPP). In this section, we discuss them further in detail, while a full report of their work is available at [Insert Reference].

Their prototype is the foundation for our work in this project.

(Sidenote: The applications have norwegian as their main language)

2.2.1 CAPP

CAPP is an Android application targeted towards the children. It launches the alarms given by parents and guides children during their medication. When the alarm is

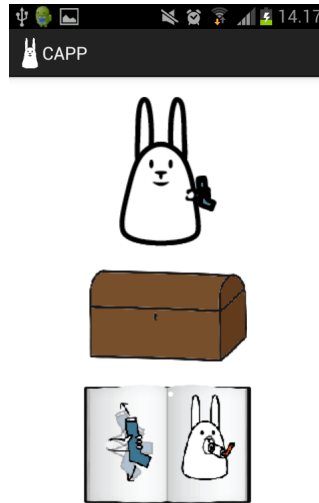


FIGURE 2.1: CAPP main menu

launched, the medication process starts, where the child is taken through the process by a Karotz on the application.

One of the objectives towards CAPP was to introduce a gamification experience to the process. Accordingly, the child gets a golden star in his/her treasure chest once the child is done.

As the target group for the application is children below the age where it is reasonable to assume that they are able to read, this application consists mainly of pictures. Figure 2.1 shows a screen shot of the main page.

2.2.2 KAPP

KAPP is the other application targeted towards children. The application runs on a Karotz[4], which is a small robot bunny (see Figure 2.2). The purpose of the Karotz is similar to CAPP, namely to remind children when it is time to take their asthma medicine and give instructions during treatment. In order to interact with the Karotz, children may use either a Nanoz (a small bunny with an integrated RFID) or by pressing a button on the top of the Karotz' head. In addition, it is possible to interact through the Karotz' ears, but from our part, this has not been experimented with (yet).

2.2.3 GAPP

GAPP is an Android application targeted towards the parents or guardians of the children. Currently, guardians are having problems with remembering how often their



FIGURE 2.2: Karotz

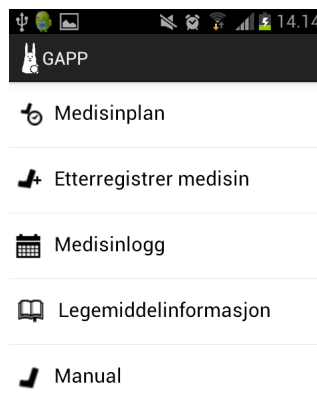


FIGURE 2.3: GAPP main menu

children have taken their medicine the last couple of days, when they should take them and how their child's disease has evolved the last couple of days. The purpose of GAPP is to let guardians monitor their child's medication usage the last couple of days, setting up reminders, etc.

Figure 2.3 shows a screenshot of the main menu of GAPP. The main functionality is separated into *Medical Plan*, *Register medicine*, *Medicine log*, *Medicine information* and *Manual*. Medical Plan gives parents the option to set up reminders at particular times.

The Register medicine-option gives parents possibility to register a medicine that is taken in case the child forgot to go through the process in CAPP or KAPP. This way, children gets their stars in the treasure chest. Medicine information gives general information about different medicines, what they do, and what they help against. Medicine log shows how many times a child has taken their medicine the last couple of days. The manual is to help “newcomers” to medicate children. For instance, if an aunt is watching children with asthma, then they could use the application as a reference on how to do the process.

Its basic functionality is to view logs on how often a child needs medication, how the child has been feeling the last couple of days, according to the asthma traffic light system, and to set up alarms for the child. CAPP and GAPP work together as a pair, so a child may only have one parent and vice versa.

2.2.4 Known areas for improvement

As Aaberg, Aarseth, Dale, Gisvold and Svalestuen finished their work, they commented on several areas of potential improvement for CAPP/GAPP/KAPP. This document is reprinted in its entirety in Appendix B (after permission from Aaberg, Aarseth, Dale, Gisvold and Svalestuen). The main topics for improvement were

- Reward System
- Distraction sequence for children
- Web application
- Support for more children

These comments are used as a basis when we decide what to improve in this project.

2.3 Existing products

On the two biggest application stores, Google Play and iOS AppStore, we have found a couple of applications similar to the one we have in mind. Among the ones we have looked into, is Huff and Puff ¹, Asthma Logger ², Kids Beating Asthma ³ and Asthma Monitor ⁴. Common for all these applications is that they have one specific aim. For instance, Huff and Puff wants to teach children in general about asthma. Asthma Logger logs treatments, and Kids Beating Asthma have some game elements, but the games are not available for playing during treatment. For our product, we want to create a superset of these applications.

2.3.1 Conclusion and evaluation

The main ideas we want to take further in our application are the email-sending system of Asthma Logger and the quiz-aspect of Huff And Puff. In general, it is a good idea to be able to send your journal on email, for instance to yourself. If we combine this

¹Google Play : [Huff And Puff](#)

²Google Play : [Asthma Logger](#)

³Google Play : [Kids Beating Asthma](#)

⁴Google Play : [Asthma Monitor](#)

Application	Positive	Negative	Target Audience
Huff And Puff	<ul style="list-style-type: none"> • Relecant quizzes from introduction to more experienced users • Can play sounds if children cannot read • Has asthma-specific word games, puzzles, etc. 	<ul style="list-style-type: none"> • Poor navigation models • Quiz is too generic, for instance asks what doctors call this and that. • The games are not exactly what we look for, as they cannot be played while undergoing a treatment 	Children
Asthma Logger	<ul style="list-style-type: none"> • Possibility to send journal on email specified by user. May forward the journal to doctor. • Very intuitive application • Shows doses taken the last couple of days 	<ul style="list-style-type: none"> • Only has one generic medicine (does not state which medicine, for instance Ventoline) or dosage (?) 	Adults
Kids Beating Asthma	<ul style="list-style-type: none"> • Informative and simple 	<ul style="list-style-type: none"> • Suffers from software bugs and crashes regularly 	Children
Asthma Monitor	<ul style="list-style-type: none"> • Ability connect Peak Flow to activities • Thorough and “advanced” statistics • Can input symptoms like Cough, Sputum, Wheezing breath and Dyspnea • Can send records via email 	<ul style="list-style-type: none"> • Old fashioned GUI 	Adults

TABLE 2.1: Evaluation of existing products on the market

with possibility to send the journal to a doctor, we have a great time saving tool. To give an example: Ole has been feeling ill for a while, and has been keeping a journal for when he has taken his medicine. He can then schedule an appointment with his doctor, and send his journal on email to the doctor. When he arrives to his appointment, the doctor already knows how many times he has taken his medicine the last days and can give advice based upon these facts.

Asthma Monitor seems like a great application once you get used to it, and it is developed by researchers, which implies that they know what they're doing. However, it seems a bit too complex for the following reasons:

1. If an adult who have no other experience of asthma other than through his/her child, the application contains terminology which they might not be very used to
2. The user interface is not very appealing
3. Forcing information from a child regarding how much they cough once a day seems rather hard

As for the quiz, we have concluded that this is a great way to inform children. Namely by letting them playing around with the application and gathering knowledge on this basis.

2.3.2 Assessment of existing applications

In 2012, Huckvale et. al. [5] conducted an assesment on the existing applications on both Google Play and AppStore. They assessed 103 different apps with english as the native language. Out of these 103, *No apps for people with asthma combined reliable, comprehensive information about the condition with supportive tools for selfmanagement.*(Huckvale et. al., 2012). They concluded that doctors should be careful when recommending apps for people with the purpose of self management.

2.4 Existing Research

2.4.1 Monitoring your own decease

There exists some research on self-management of monitoring your asthma condition. A lot of this research does however work with SMS (Short Messaging System) technology. In 2009, Andhøj and Møldrup et. al.[6] did a feasability study to check how users would react to a SMS-reminder study. Their methodology were to send SMS a couple of times

a day, and have the users respond to their peak flow and answer yes/no questions. Users could then access a web page to see different statistics on peak flows, how they've felt the last couple of days, etc.

Whether the system actually improved the user's awareness of their disease was unanswered (TLDR?)..

Although SMS is a great technology to be used for this purpose, few children in our target group are able to use this technology.

2.4.2 Children and gestures

Abdul Aziz et. al. [7] made a study on what gestures children are able to comprehend when playing with an iPad. He/She tested 33 children's ability to do gestures on a variety of applications suited for children. The children were in the range of 2-12 years old, 3 children per age. The study showed the following restrictions:

- 2 year old children have difficulties with pinching, and are unable to drag-and-drop, spread and rotation of the device, and are not able to focus on the application.
- 3 year old children have difficulties to drag & drop until they are told to do so, in addition to having problems with pinch and spread.
- 4 year old children have difficulties to drag and drop.

Children at age 5 and above are able to do all the normal gestures at a tablet. As CAPP is currently only available for mobile devices, this is reason for some discussion. The main part to notice is pinching and drag and drop. Now, are these difficulties only problems regarding the tablet size, or do they also arise on mobile phones? An iPad is fairly large relative to the size of these children's hands.

Chapter 3

Usability

This chapter will give a brief definition of what usability is, and how user tests can help us improve it. Since the applications are targeted towards both children and adults, we will give a description of how the usability tests for these groups will differ. We will also explain how the user testing is performed at ...

3.1 What is usability?

There are many ways to describe usability.

The International Organization for Standardization(ISO) uses the following definition of the term usability [8]:

Extent to which a system, product or service can be used by specified users to achieve specified goals with effectiveness, efficiency and satisfaction in a specified context of use.

The same document defines the context of use as:

Users, tasks, equipment (hardware, software and materials), and the physical and social environments in which a product is used.

These definitions cover how the system is used, the user's thoughts about the use and the context of the system. This can be broken down further into several subgoals in order to achieve better usability, and to give a better insight as to what usability is. These subgoals are:

1. How precisely is the user able to perform a task by using the application?
2. How much resources(for example time, or number of tries) was used to perform the given task using the application?

3. How many errors occurred?
4. Did the user find the use satisfactory?

User-centered design is a way of designing with the user in mind. By using this technique these goals are achievable. User-centered design is about getting feedback from the users during the design and development process. Always thinking about how the user would solve this problem, and consolidate the users when in doubt is a fundamental part of user-centered design. The user's opinion is the measure of how good the system performs and the user's feedback defines how you score on usability. [Should have reference]

3.2 How to test usability

There are many ways to create a good user experience. Having knowledge of expert opinions is always a good idea, and using user-centered design techniques is also a wise way to go. According to SOME PERSON [Insert Reference] developers should get feedback from users by users tests at different stages of development. According to SOME PERSON [Insert reference], having a user-centered approach will help the developers to address the weakest parts of their system, and give feedback on design decisions.

A user-centered design can be done in many different ways and at different stages of the product life cycle [9], as shown in Table 3.1:

Method	Purpose	Phase of the project life-cycle
Background interviews and questionnaires	To collect data and to understand the user better	When starting the project
Focus groups	Discover design issues and receive feedback	At an early stage
On-site observation	To both collect information of the context the system will be used in, and find the primary problems the users may have	At an early stage
Role playing / simulations	Will give a broader understanding of what the user expects from the system	Early to mid stage of the project
Automated evaluation	Gives feedback on deviations from standards or best practices. This method excludes actual users, but is based on well tested principles	Mid to end of the project
Usability testing	To measure the usability of the system and provide feedback on very specific elements that are badly designed	Abras [9] says it should be at the end of the project while others [10] think it should be done in iterations throughout the project.
Interviews and questionnaires	Gives a qualitative measurement of how good or bad the system is	End of the project

TABLE 3.1: Methods of user-centered feedback

The purpose of this project is to test an existing system, improve the existing product and plan an extensive testing of the improved product. We will focus mainly on WHAT WHAT WHAT?

Usability Testing The purpose of usability testing is to increase the usability of a system. At the same time, performing these usability tests may save the developers some time and reduce the cost of the project by removing errors and poor design at an early stage [11].

The usability testing can be performed in different ways [10]. At the early stages of the project, low-fidelity prototypes are a good option since they will provide feedback and take proportionally little time to make, making it easier to have more iterations of testing. The different testing methods include a potential user of the system performing tasks to provide real data. Observing and recording each usability test may help the developers to analyze their system, and correct the flaws [11].

Before starting the usability tests, the developers should set goals planning what they want to know about the system [12]. This will ensure that the purpose of the test is fulfilled. The developers should then plan tasks according to the desired results. These tasks should allow the user to explore the system, or the parts the developers wish to test, giving the test person some time per task, in order to not stress the test person.

After being planned, the test should be run on a number of different test persons. From figure , you can see that as the number of participants increases, the number of undetected errors decrease.

Nielsen states that after five user tests, 85% of the errors have been found [13]. Molich[14] states that six test persons is the ultimate number.

Testing environment The next thing to consider when performing usability testing is the testing environment. It should resemble the environment in which the system will be used. To make the most of the tests, it is wise to perform videotaping of the tests. This will help when reviewing the results from the test[insert references]. If the test are being recorded, a consent from the test person or his/hers guardian will be required.

Before the test persons arrive, a test leader should be chosen, in order to have a person to guide the test persons through the process. The test leader should be in charge of testing and act as an interviewer to help the participant to “think-aloud”¹. The test leader should answer questions from the participant, but be careful not to give away information that may affect the results of the test.

After the tasks are done, it is necessary to gather loose ends and get answers to all the questions that might be unanswered. A system usability scale(SUS)[15] may be a good way to grade the usability of the system together with the observations made during the test. The SUS scale will reflect on how satisfying the usability is in the eyes of the users. Bangor et al [16] have made a scale based on the SUS-forms from different system usability tests, in order to make it possible to compare the mean score of a system with what is an acceptable level of usability. In our testing, we will make use of a Norwegian version, developed by Svans A.

¹Reference to Thinking aloud

3.3 How to test usability on children and toddlers

While usability testing on children and toddlers have the same basic approach as testing on adults, there are many more precautions to be followed. Hanna et al. [17] lays out some of these precautions. They recommend not using children that are skilled with computers since they may find the tasks too easy and will not produce useful data. Since children these days have a higher skill with computers thanks to the invasion of tablets and smart phones [insert reference?], this may not be as much of a concern.

Since our application is targeted towards children with Asthma, we want to test the system on children suffering from Asthma in addition to children from the same age group, not suffering from Asthma. These children will most likely have a different approach to the system and may give different feedback.

Hanna, Ridsen and Alexander also point out changes that should be made to the testing environment as mentioned in 3.2. They recommend making the testing environment more suitable for children by placing colourful posters on the walls. Children of young age may be afraid of “The Doctor’s Office” and we will need to make adjustments to avoid frightening the children upon their arrival at the test lab.

As mentioned by Donker and Markopoulos [18] talk-aloud is a very useful technique when doing usability testing with children. Talk-aloud is a technique where the children talk about what they are doing instead of what they are thinking.

3.4 NSEP Usability Lab

This section will describe some of the features in the NSEP Usability Lab, used by NTNU to perform usability testing.

3.4.1 The Facility

I made this section Justin Case.

Chapter 4

Tangible Interfaces

This chapter will introduce the reader to Tangible Interfaces, and elaborate on some existing research that has been done on the concept.

4.1 About tangible interfaces

In 1997, Ishii et. al. presented an article called “Tangible Bits: Towards Seamless Interfaces between People, Bits and Atoms”. They established the term “Tangible User Interface” (TUI) as a way to move beyond the dominant model of Graphical User Interfaces. The objective of TUI was explained to *augment the real physical world by coupling digital information to everyday physical objects and environments* [19]. Thus, TUIs are all about giving physical objects a digital meaning.

In our case, a Karotz is an example of a tangible user interface. It lets the user interact with a rabbit instead of a desktop or tablet, which contains digital information about whether it is time to take medicine, and can send digital messages to notify our database that a child has taken their medicine.

4.2 Effects of robots

In 2003, Wada et. al. conducted a study on how robotics affected elderly [20]. They conducted a study at a day service center in Japan, where they placed a robotic seal, named Paro, together with the elderly. The argument supporting this study was that it has been found that animals have a positive effects on blood preassure, depression and loneliness. (Omskriving?). The problems is that animals are not allowed in a lot of hosipitals and care centers, because people may have allergic reactions or get scratch

marks from it. They placed a robotic seal in the care center, and analyzed the reactions from the elderly.

The results showed that their mood was better after interacting with Paro in five weeks, and became worse once Paro was no longer there. In addition, nurses burnout rate decreased during the experiment, which implies that they had easier days whenever Paro was there.

4.3 What is gamification?

“Gamification” as a term was first mentioned by Currier in 2008[?], it did not become a wide-spread term before 2010.

There are many ways to describe gamification. Deterding, Dixon, Khaled and Nacke[?] defines Gamification as:

Gamification is the use of game design elements in non-game contexts.

Huotari and Hamari[?] defines gamification as:

Gamification is a process of enhancing a service with affordances for gameful experiences in order to support user’s overall value creation.

Gamification is a much discussed theme, where there does not seem to be an agreement as to which gamification is a useful or not.

Antin and Churchill[?] argues that gamification may be used for goal setting or instruction. Goal setting challenge the users to meet the mark that is set for them, and is known to be an effective motivator [?].

Bogost goes as far as naming gamification as “bullshit”[?], while

McGonigal’s studies[?] on how rewards are perceived over time show that:

After three hours of consecutive online play, gamers receive 50 percent fewer rewards (and half the fiero) for accomplishing the same amount of work.

Steinung[?] arguments for gamification not being powerful enough to make a task interesting. Simply adding points, badges, a leveling system or similiar, won’t make a task interesting on its own. Since gamification is based on behavioural psychology, poor design may be perceived as interesting, for a shorter period of time [?].

McGonigal’s statement is central to our research, since we aim to research how CAPP/-GAPP/KAPP is perceived by children over a longer period of time.

In order to achieve a meaningful use of gamification Nicholson[?] suggests using a user-centered design approach[?] when developing system with elements of gamification.

Chapter 5

Results and Discussion

This chapter will go through the findings from this study and summarize the results to answer the research questions from Section [1.3](#)

5.1 Evaluation

5.2 Research Method

Chapter 6

Conclusions

Appendix A

Norwegian SUS form

This Norwegian version of the SUS form was developed by Svans, D. in 2006.

Noen spørsmål om systemet du har brukt.

Vennligst sett kryss i kun en rute pr. spørsmål.

	Sterkt uenig						Sterkt enig		
1. Jeg kunne tenke meg å bruke dette systemet ofte.	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5
2. Jeg synes systemet var unødvendig komplisert.	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5
3. Jeg synes systemet var lett å bruke.	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5
4. Jeg tror jeg vil måtte trenge hjelp fra en person med teknisk kunnskap for å kunne bruke dette systemet.	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5
5. Jeg syntes at de forskjellige delene av systemet hang godt sammen.	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5
6. Jeg syntes det var for mye inkonsistens i systemet. (Det virket "ulogisk")	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5
7. Jeg vil anta at folk flest kan lære seg dette systemet veldig raskt.	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5
8. Jeg synes systemet var veldig vanskelig å bruke	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5
9. Jeg følte meg sikker da jeg brukte systemet.	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5
10. Jeg trenger å lære meg mye før jeg kan komme i gang med å bruke dette systemet på egen hånd.	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	1		2		3		4		5

|

Appendix B

Further Work

This chapter gives an overview of some of the ideas both the customer and the developers had for further development of the application. This includes a description of further development, analysis of the user groups and work towards NAAF and the health department. The main part of the work to be done after the end of this project is connected to requirements that has been taken out of this project due to limitation of time and resources. Other issues remaining is connected to the security and privacy of the patient's treatment log and storing sensitive information. Section ?? lists the overall requirements that have not been implemented during the project. These requirements has either been requested early in the process of have been brought up during discussions and meetings with the stakeholders.

B.1 Improvements

The following sections describes the ideas we had for future improvements to the applications. It is parted into subsections for improvements in the fields of database records, the reward system, the distraction and the web application.

B.1.1 Rewardsystem

The children's application (CAPP) is all about changing the children's view of medication to something positive. It shall be a motivation for the children to take their medication. It is therefore an important task to entertain them and give them some form of reward when they take their medication. As for now, we have given stars to the child after completed medication. The stars are in a treasure chest where the child can

see how many stars he or she has. This is a simple reward, but worked fairly well during the user tests. However, it may be boring over time.

The initial idea was to have a shop where the children could buy clothes and other items to their avatar. The stars earned from finishing treatments would serve as credits in the shop. This was not implemented due to time restrictions. It is also possible to take this to the real world, e.g. that the child gets a lollipop for every 10th star, but this would have to be supervised by the parents.

There is an endless line of opportunities for this reward system, and we chose the simplest implementation, so we would have something to test.

B.1.2 Distraction sequence for children

During our workshop, we came up with a lot of ideas for distractions for the children. These would range from simple animation sequences, like what we decided to implement, to more complex things like games that would not require a lot of movement and could therefore help during longer treatments.

The distraction sequence is one of the fields where we feel it has more or less never ending possibilities for improvement, and as more research into what children finds distracting, but not to the point where they can't take their medicine, this distraction sequence can be evolved.

B.1.3 User testing of the guardian application

GAPP has not yet been user tested on actual parents of asthmatic children. This has to be done to get an understanding of how they interact with the system, and to get knowledge about what they think of an application of this type. This is a system to make it easier for the guardians to give their children medications. While it is important that the children likes the system, it is also important that the parents feel it helps them give their children their medicines, without it being a big time waster.

B.1.4 Web application

There is a possibility of making this application as a web application, as a whole. By extracting the functionality and running it on a web service it would make it easier for people to use it across platforms. Done right, it may run on all devices with an internet connection. This may also give an easier integration with external information such as

air pollution forecast, pollen forecast, temperatures, etc. Since our application is written in Java, using Android SDK, it will not run on an internet server as is. Making a web application will require an almost complete refactoring of the source code.

B.1.5 Support for more children

Currently, the application only use one child, but there are implemented support for using more children. Each child has its own id (childId), and support for more children can be implemented without much change of the existing code. There should also be considered using accounts for the guardians connected to the children, in case of the guardians having more than one asthmatic child.

B.2 Ideas and minor improvements

Webinterface The doctors may prefer to set up the users medication plans through a web interface on their computers. This part may be integrated into existing systems.

Other devices The application are fitted for a phone running the Android operating system. For the future it should also be scalable to tablets. There may be more interesting for a child to work on a tablet than a phone. There will also be much more space for content. This extra space gives greater potential of the reward system. It should also be available on other operating systems than Android, e.g. iOS or Windows Phone. This will improve the availability for the users, not limiting them to Android phones.

Overall graphical design The priorities have been to make the major functionality work. We have used lots of time making the applications understandable and easy to use, but there is still a great potential in making the applications interaction design better.

Personalize the system The application may be more personalized. E.g. "It's time to take medication" could be "It's time to take medication, Eric". By involving the users name more in the system, they may feel more appreciated.

Integration of external elements The distraction part of the application may be integrated with a story or other external elements. I. eg. a story where the children will need to take medicine in order to get the next part of the story.

Bibliography

- [1] Dale Gisvold Svalestuen Aaberg, Aarseth. Blopp - development of a prototype for treatment of asthmatic children, using android and karotz. 2012.
- [2] Norges astma- og allergiforbund. URL <http://www.naaf.no/>.
- [3] NTNU. Tdt4290 customer driven project, 2013. URL <http://www.idi.ntnu.no/emner/tdt4290/>.
- [4] Karotz - your smart rabbit. URL http://store.karotz.com/en_GB/.
- [5] Kit Huckvale, Mate Car, Cecily Morrison, and Josip Car. Apps for asthma self-management: a systematic assessment of content and tools. *BMC medicine*, 10(1): 144, 2012.
- [6] Jacob Anhøj and Claus Møldrup. Feasibility of collecting diary data from asthma patients through mobile phones and sms (short message service): response rate analysis and focus group evaluation from a pilot study. *Journal of Medical Internet Research*, 6(4), 2004.
- [7] Nor Azah Abdul Aziz. Childrens interaction with tablet applications: Gestures and interface design. *Children*, 2(03), 2013.
- [8] International Organization for Standardization (ISO). Ergonomics of human system interaction-part 210: Human-centred design for interactive systems (formerly known as 13407). *9241-210*, 2010. URL http://www.iso.org/iso/home/store/catalogue_tc/catalogue_detail.htm?csnumber=52075.
- [9] Maloney-Krichmar D. Preece J Abras, C. User-centered design. *Encyclopedia of Human-Computer Interaction*, 2004.
- [10] Plaisant-C. Cohen M. Jacobs S. Schneiderman, B. Designing the user interface: Strategies for effective human-computer interaction - 5th edition. 2009.
- [11] Joseph S Dumas, Janice C Redish, and KA Schriver. A practical guide to usability testing. *IEEE Transactions on Professional Communications*, 38(1):45–45, 1995.

- [12] International Organization for Standardization (ISO). Iso/iec 25062:2006 software engineering – software product quality requirements and evaluation (square) – common industry format (cif) for usability test reports. 25062, 2006. URL http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=43046.
- [13] J. Nielsen. Why you only need to test with 5 users. 2000. URL <http://www.useit.com/alertbox/20000319.html>.
- [14] Rolf Molich and Henrik Larsen. *Usable web design*. Nyt Teknisk Forlag, 2008.
- [15] J. Brooke. Sus- a quick and dirty usability scale. pages 189–194, 1996.
- [16] Kortum P. Bangor, A. and J. Miller. Determining what individual sus scores mean: Adding an adjective rating scale. *Journal of Usability Studies*, 4:114–123, May 2009.
- [17] Ridsen Hanna and Alexander. Guidelines for usability testing with children. pages 9–14, September + October 1997.
- [18] A Donker and P Markopoulos. A comparison of think-aloud, questionnaires and interviews for testing usability with children. pages 305–316, 2002.
- [19] Hiroshi Ishii and Brygg Ullmer. Tangible bits: towards seamless interfaces between people, bits and atoms. In *Proceedings of the ACM SIGCHI Conference on Human factors in computing systems*, pages 234–241. ACM, 1997.
- [20] Kazuyoshi Wada, Takanori Shibata, Tomoko Saito, and Kazuo Tanie. Effects of robot-assisted activity for elderly people and nurses at a day service center. *Proceedings of the IEEE*, 92(11):1780–1788, 2004.