

Report

	reads_r_olc
# contigs (>= 0 bp)	1
# contigs (>= 1000 bp)	1
# contigs (>= 5000 bp)	0
# contigs (>= 10000 bp)	0
# contigs (>= 25000 bp)	0
# contigs (>= 50000 bp)	0
Total length (>= 0 bp)	1040
Total length (>= 1000 bp)	1040
Total length (>= 5000 bp)	0
Total length (>= 10000 bp)	0
Total length (>= 25000 bp)	0
Total length (>= 50000 bp)	0
# contigs	1
Largest contig	1040
Total length	1040
Reference length	1040
GC (%)	51.25
Reference GC (%)	51.25
N50	1040
NG50	1040
N90	1040
NG90	1040
auN	1040.0
auNG	1040.0
L50	1
LG50	1
L90	1
LG90	1
# misassemblies	0
# misassembled contigs	0
Misassembled contigs length	0
# local misassemblies	0
# scaffold gap ext. mis.	0
# scaffold gap loc. mis.	0
# unaligned mis. contigs	0
# unaligned contigs	0 + 0 part
Unaligned length	0
Genome fraction (%)	100.000
Duplication ratio	1.000
# N's per 100 kbp	0.00
# mismatches per 100 kbp	0.00
# indels per 100 kbp	0.00
Largest alignment	1040
Total aligned length	1040
NA50	1040
NGA50	1040
NA90	1040
NGA90	1040
auNA	1040.0
auNGA	1040.0
LA50	1
LGA50	1
LA90	1
LGA90	1

All statistics are based on contigs of size >= 300 bp, unless otherwise noted (e.g., "# contigs (>= 0 bp)" and "Total length (>= 0 bp)" include all contigs).

## Misassemblies report

	reads_r_olc
# misassemblies	0
# contig misassemblies	0
# c. relocations	0
# c. translocations	0
# c. inversions	0
# scaffold misassemblies	0
# s. relocations	0
# s. translocations	0
# s. inversions	0
# misassembled contigs	0
Misassembled contigs length	0
# local misassemblies	0
# scaffold gap ext. mis.	0
# scaffold gap loc. mis.	0
# unaligned mis. contigs	0
# mismatches	0
# indels	0
# indels (<= 5 bp)	0
# indels (> 5 bp)	0
Indels length	0


All statistics are based on contigs of size  $\geq 300$  bp, unless otherwise noted (e.g., "# contigs ( $\geq 0$  bp)" and "Total length ( $\geq 0$  bp)" include all contigs).

## Unaligned report

	reads_r_olc
# fully unaligned contigs	0
Fully unaligned length	0
# partially unaligned contigs	0
Partially unaligned length	0
# N's	0


All statistics are based on contigs of size  $\geq 300$  bp, unless otherwise noted (e.g., "# contigs ( $\geq 0$  bp)" and "Total length ( $\geq 0$  bp)" include all contigs).

Nx

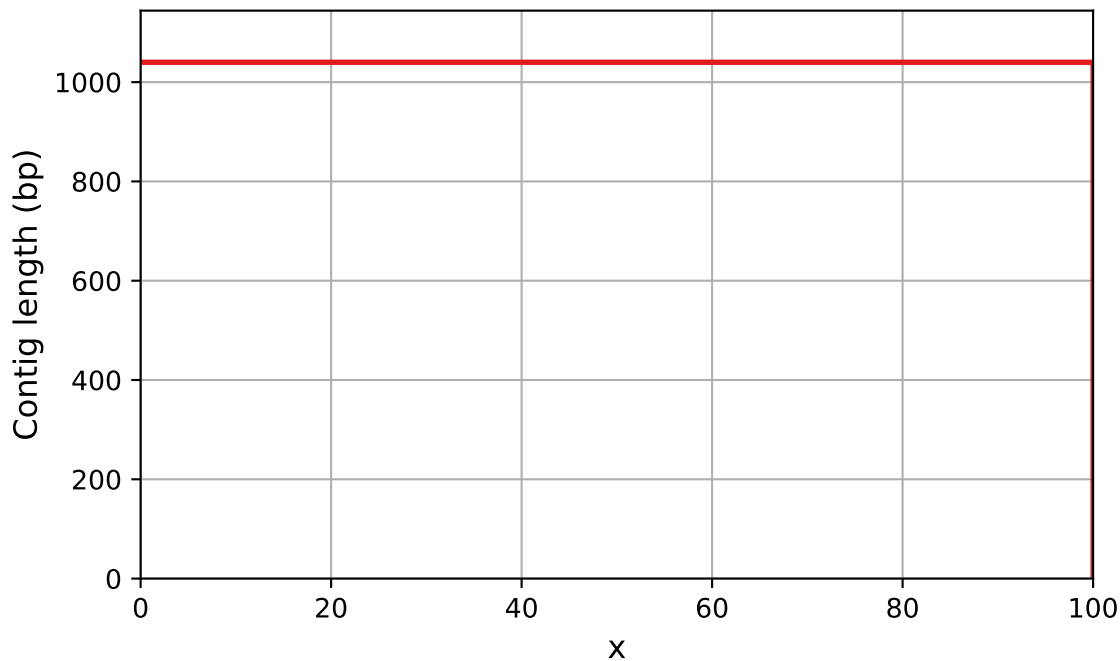


reads\_r\_olc


NGx

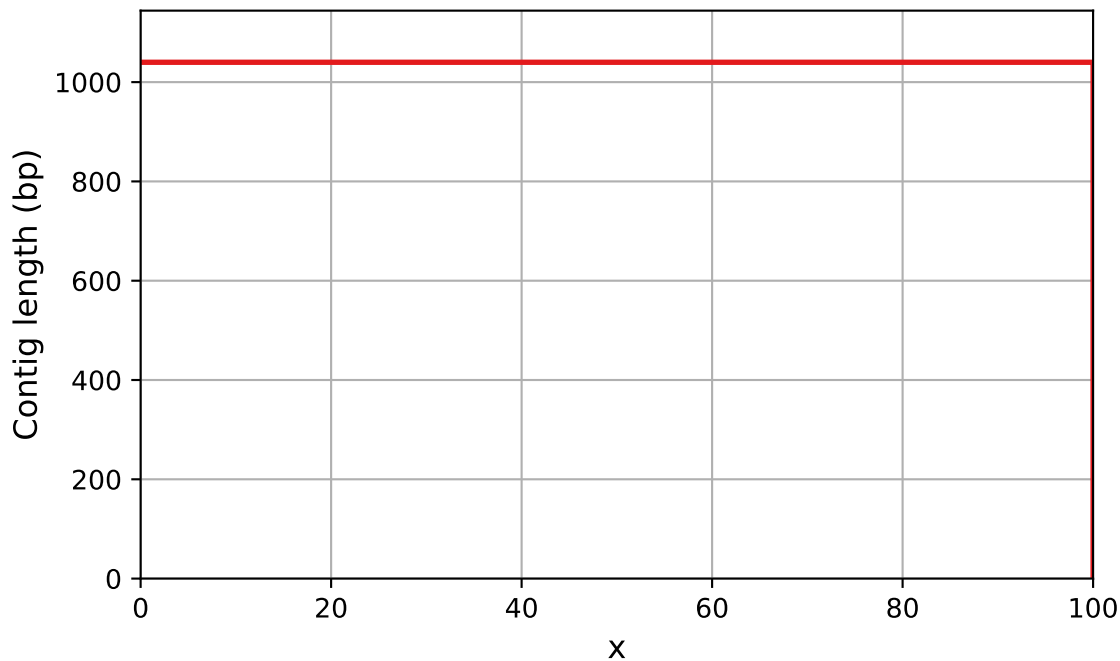

reads\_r\_olc

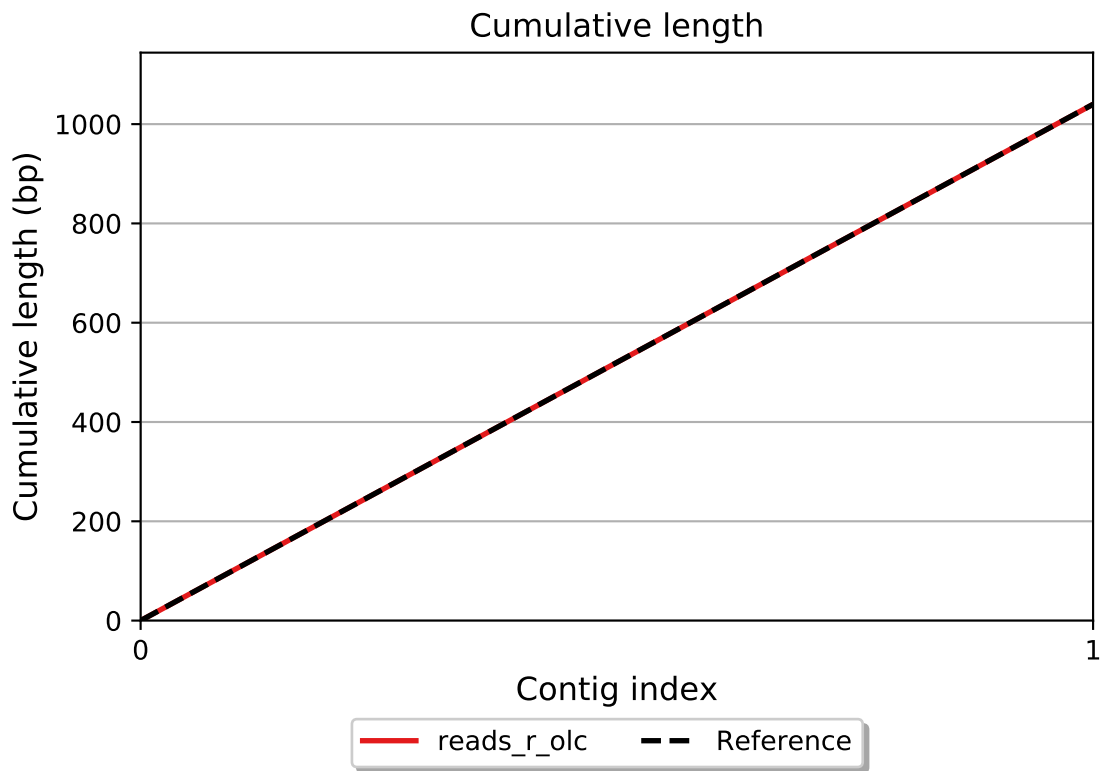


# GC content

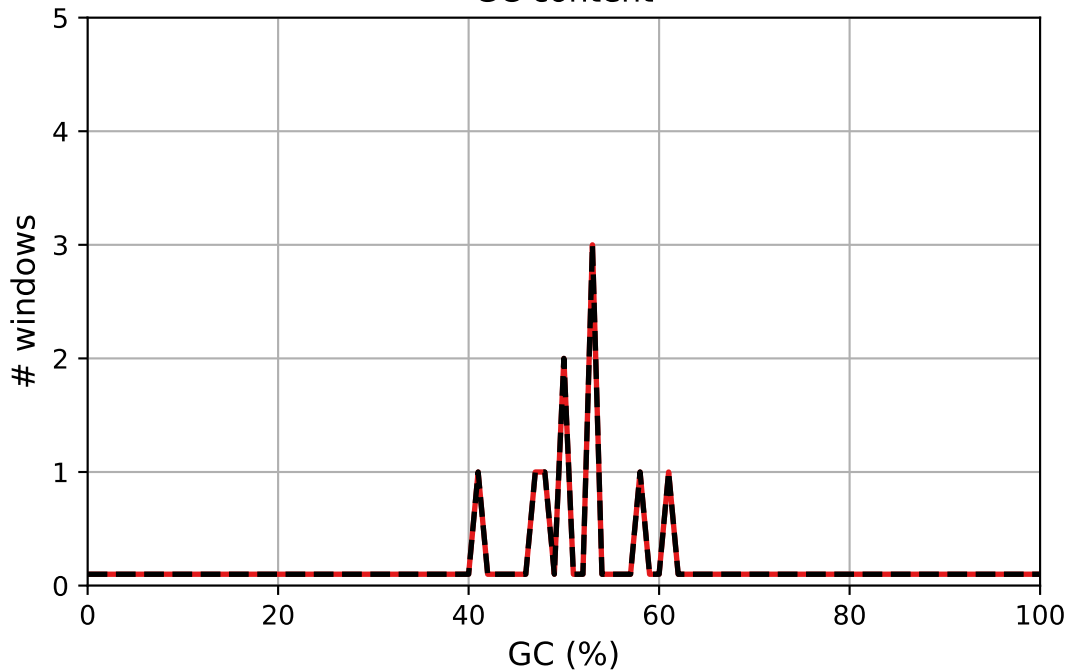

— reads\_r\_olc    - - Reference


reads\_r\_olc GC content

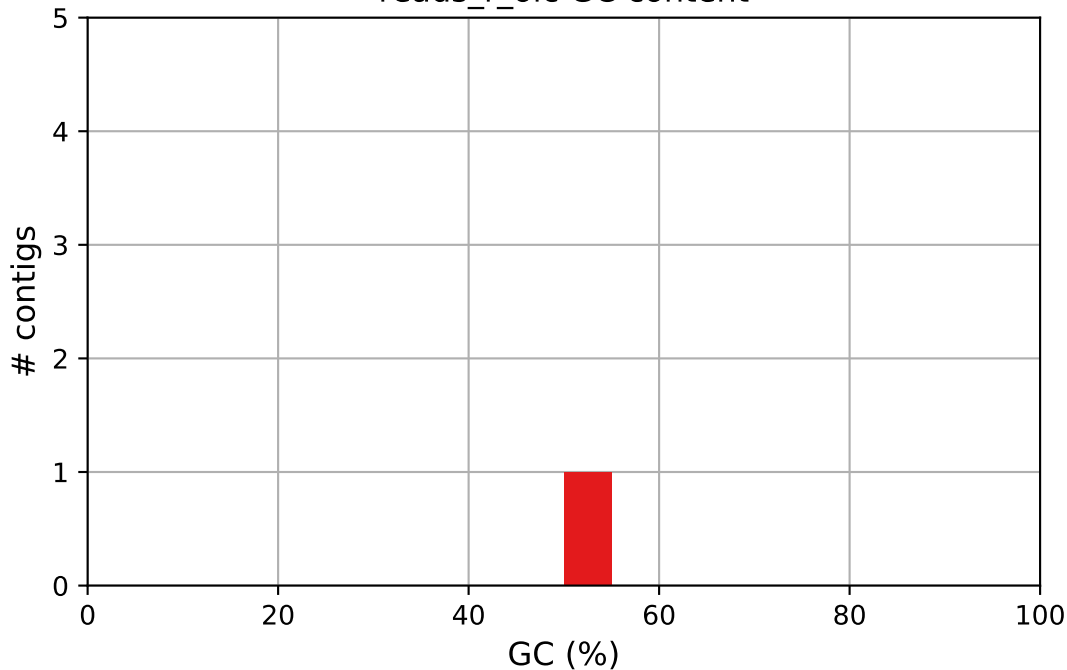


reads\_r\_olc




## Misassemblies

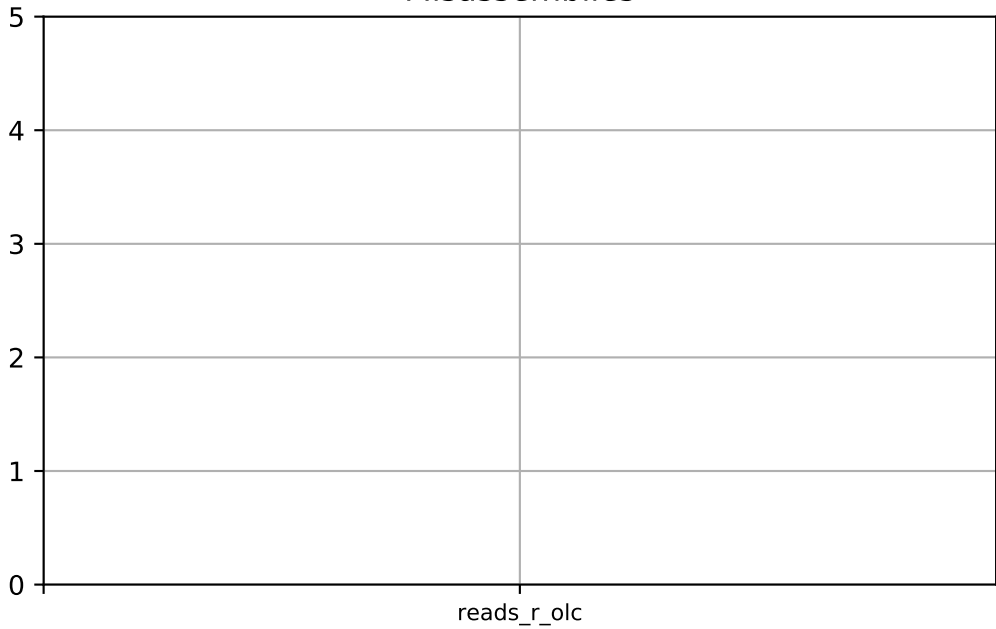


FRCurve (misassemblies)

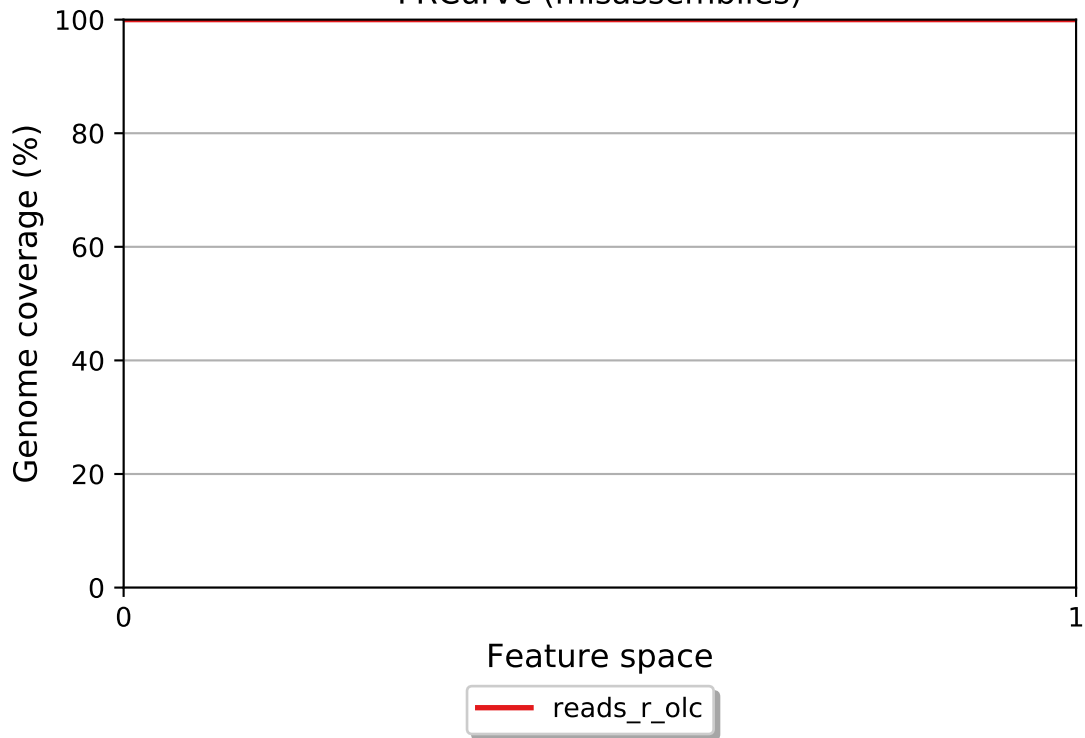

Cumulative length (aligned contigs)

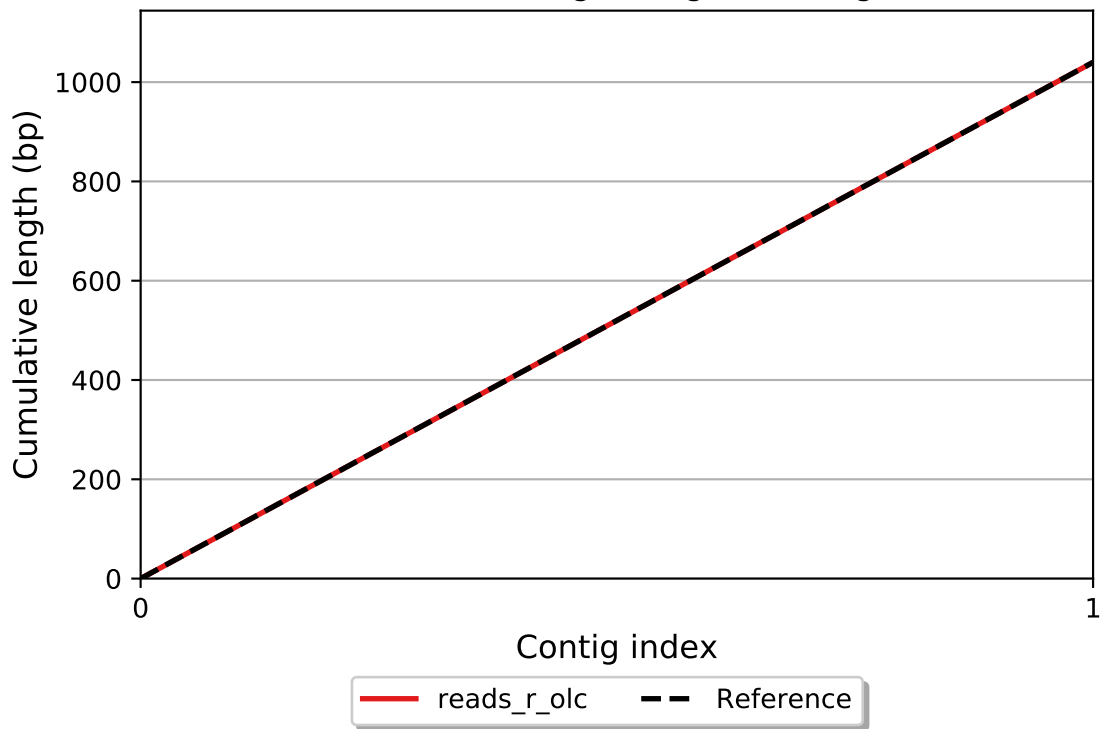


NAx

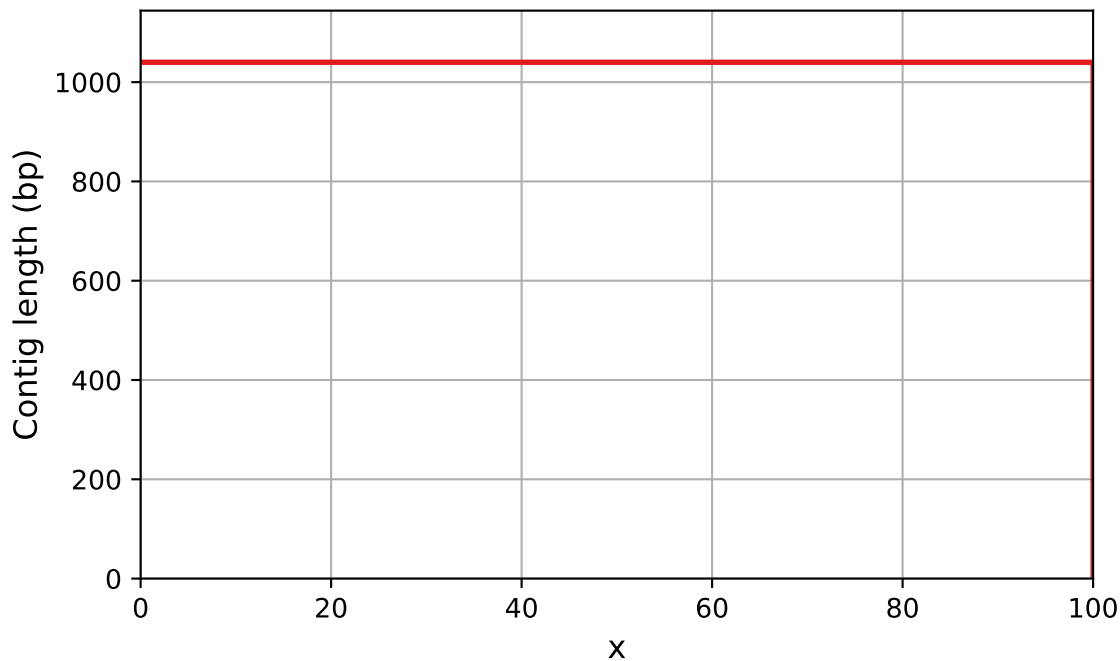

reads\_r\_olc

# NGAx

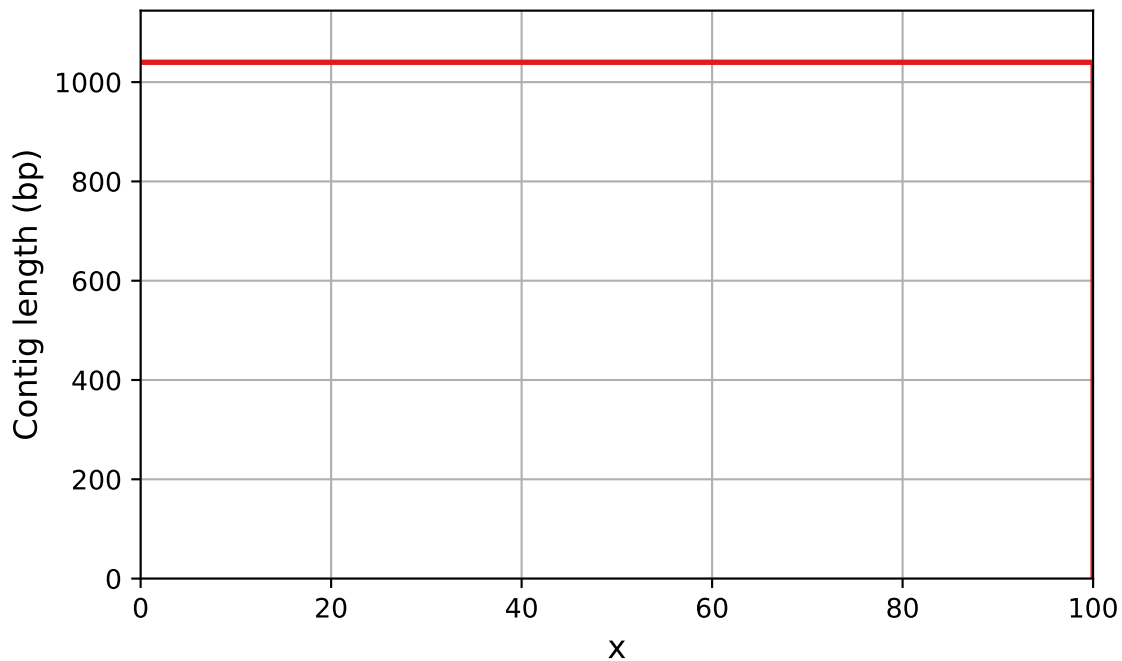

reads\_r\_olc