


## Equivalent Orthogonal Regions Behavior With Miros

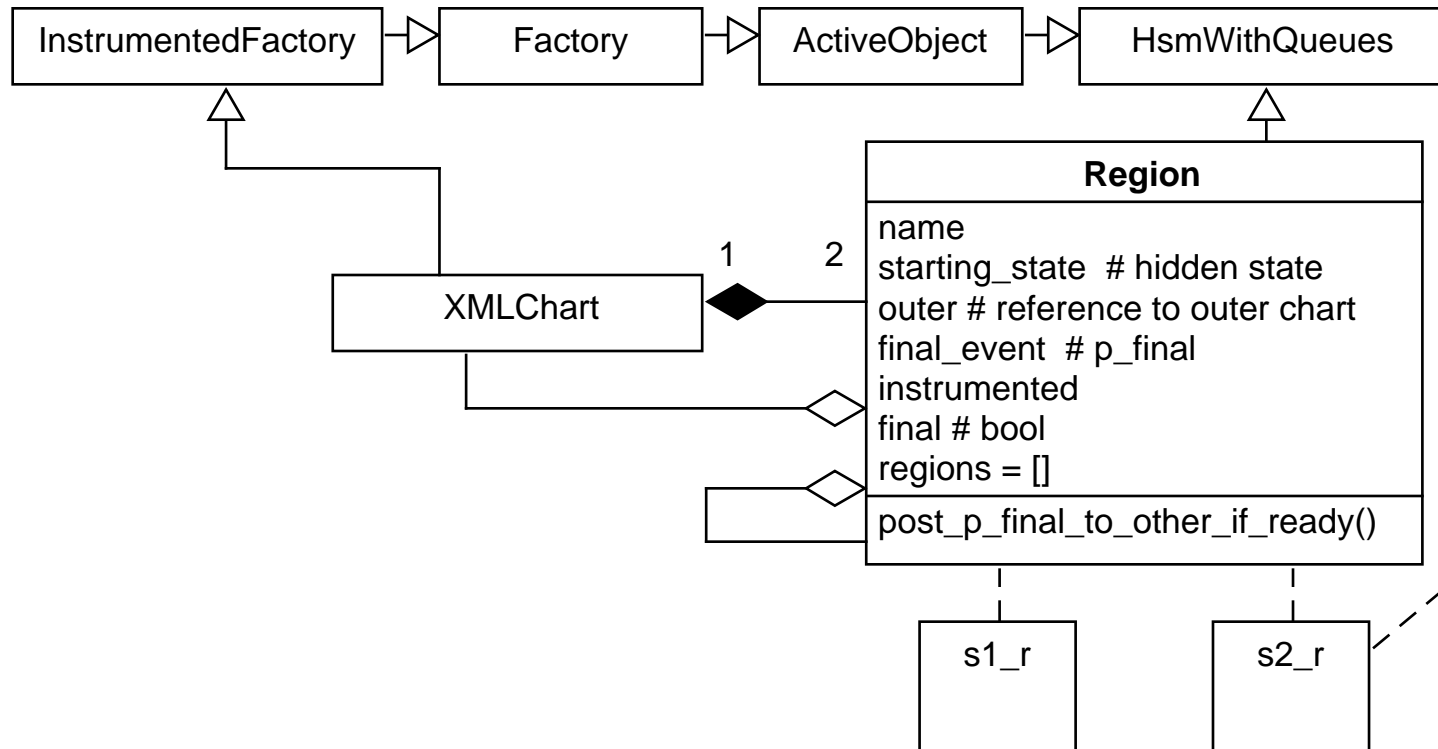

### Example (within XmlChart \_\_init\_\_):

```
self.p_region.append(
    Region(
        name='s2_r',
        starting_state=s2_hidden_state,
        outer=self,
        final_event=Event(signal=signals.p_final)
    ))
```