
To send data to a third-party application using webhooks, you first need to add the application's webhook URL to OnLocation and configure the settings for sending the data.

Add a webhook


- Go to: **Tools > Account**.
- Select **Integrations** from the left-hand menu.
- Select the **Webhooks** integration.
- Click **Settings**.
- Click **Create a New Webhook.

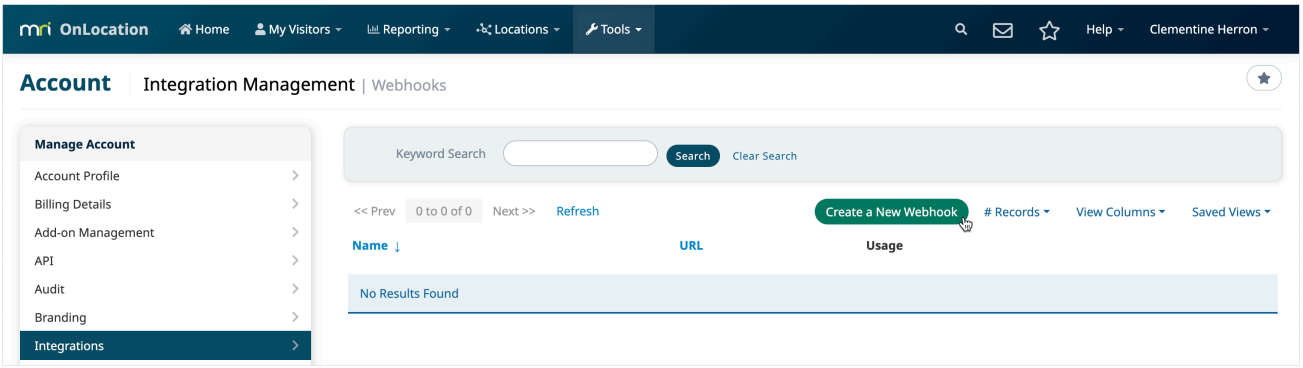

**

- Enter the webhook name. This is used to identify the webhook.
- Paste in the Webhook URL. This is the unique web address of your third-party application that will receive the data.
- Select the method. This is the action to be performed on the URL:
  - **POST** will send information to the application.
  - **GET** will ping the application, instructing it to perform an action, but won't include any information from OnLocation.
- Select the content type: **Form Encoded**, **JSON**, **XML**, or **RAW**. This determines how the information is formatted when sent and is dictated by your third-party application. We recommend the JSON format.
- (Optional) Complete the optional settings (see below).
- (Optional) Complete the trigger settings (see below).

- Click **Save.

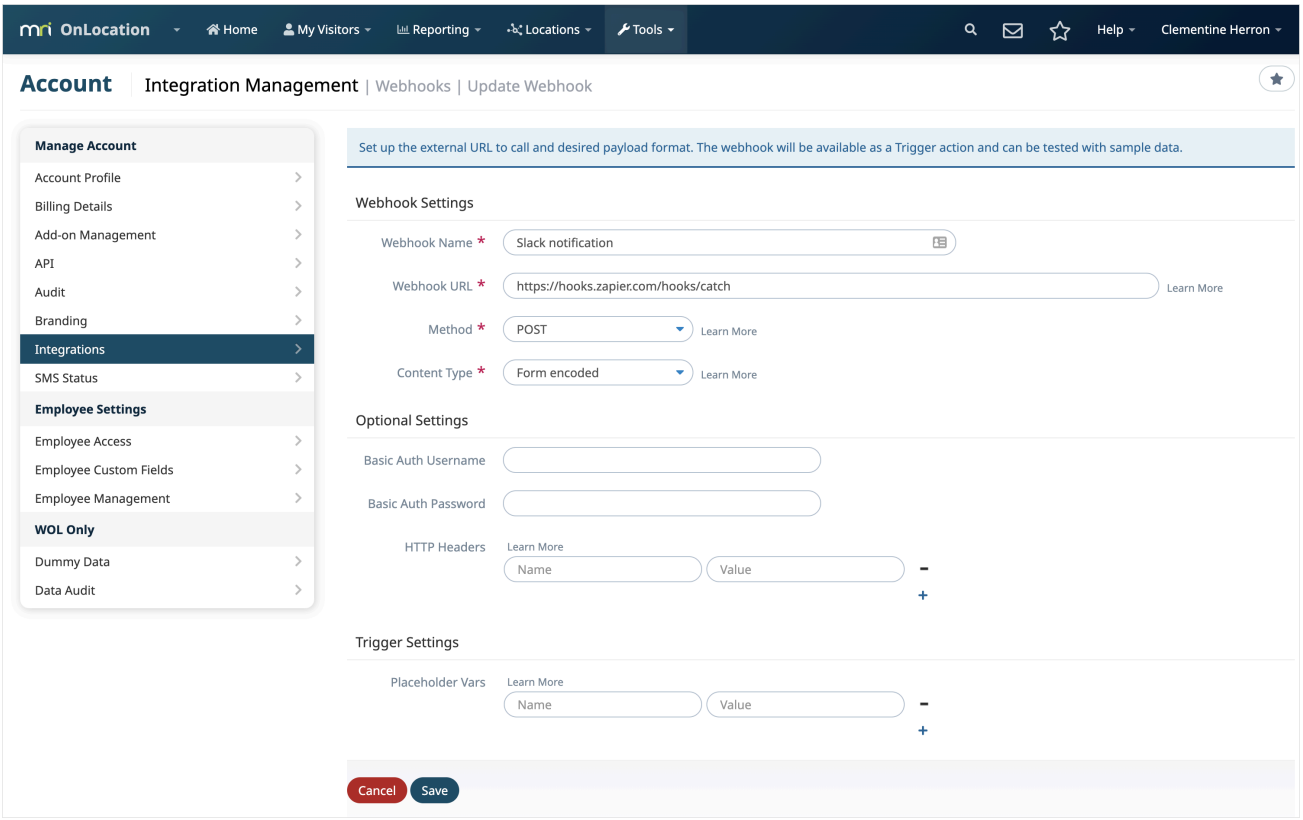

**

Optional settings

These are additional security settings that your third-party application may require. If required, you can enter these security settings here:

- **Basic Auth Username -** Username required to satisfy your security settings.
- **Basic Auth Password -** Password required to fulfil your security settings.
- **HTTP Headers -** Information that will always be included in the URL that is receiving the data. This is generally used as an extra security measure by applications. Click the **+** button to add more.

Trigger settings

You can add static placeholders to create data sent to your webhook when using a custom data packet in your trigger settings. This allows you to use a single value across multiple triggers, which can be easily modified in these settings.


Any placeholders added here can be used in a custom data packet when this webhook is selected. Click the add button to add more.

Enter the name of the trigger placeholder without spaces, e.g. ACS_Username. When using the placeholder in your custom data packet, enter it as {{webhook.PlaceholderName}}, e.g. {{webhook.ACS_Username}}.

Enter the value that will be sent when this placeholder is used, e.g. Admin.

Edit a webhook

- Go to: **Tools > Account**.
- Select **Integrations** from the left-hand menu.
- Select the **Webhooks** integration.
- Click **Settings**.
- Click **View** next to a webhook.

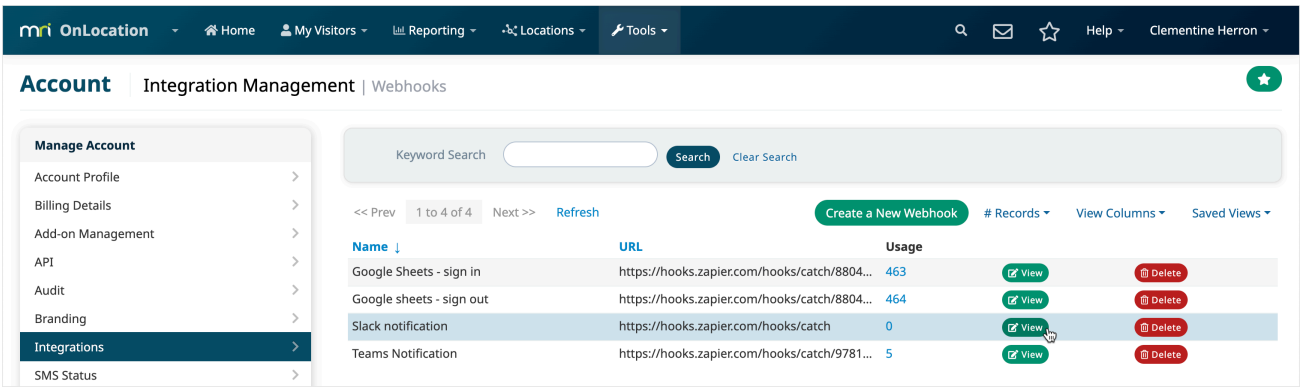


- Update the details.
- Click **Save**.

Delete a webhook

- Go to: **Tools > Account**.
- Select **Integrations** from the left-hand menu.
- Select the **Webhooks** integration.
- Click **Settings**.

- Click **Delete** next to a webhook.

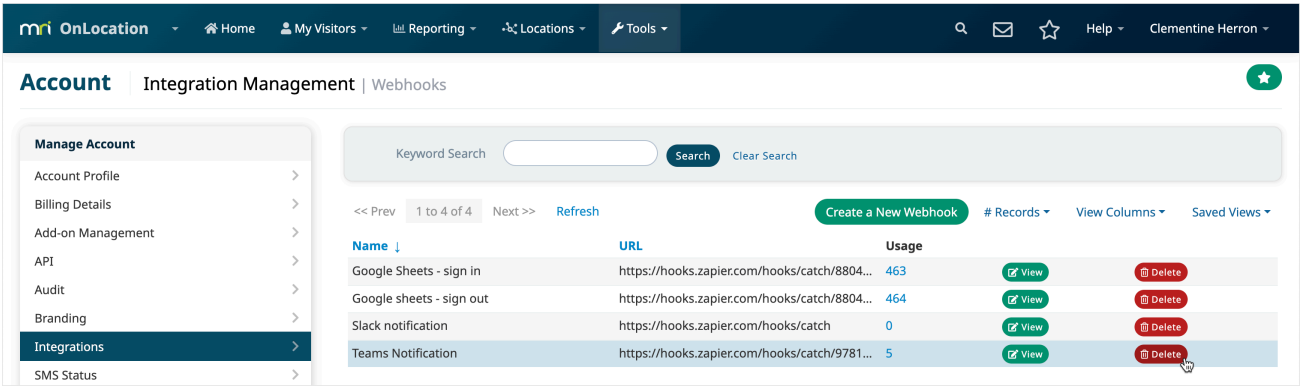

- Click **Remove** to confirm.