



$N = 16$

For Round 1 $M_A = O(N)$ M_L Map Phase $\cdot O(1)$
Reduce Phase $O(\sqrt{N})$

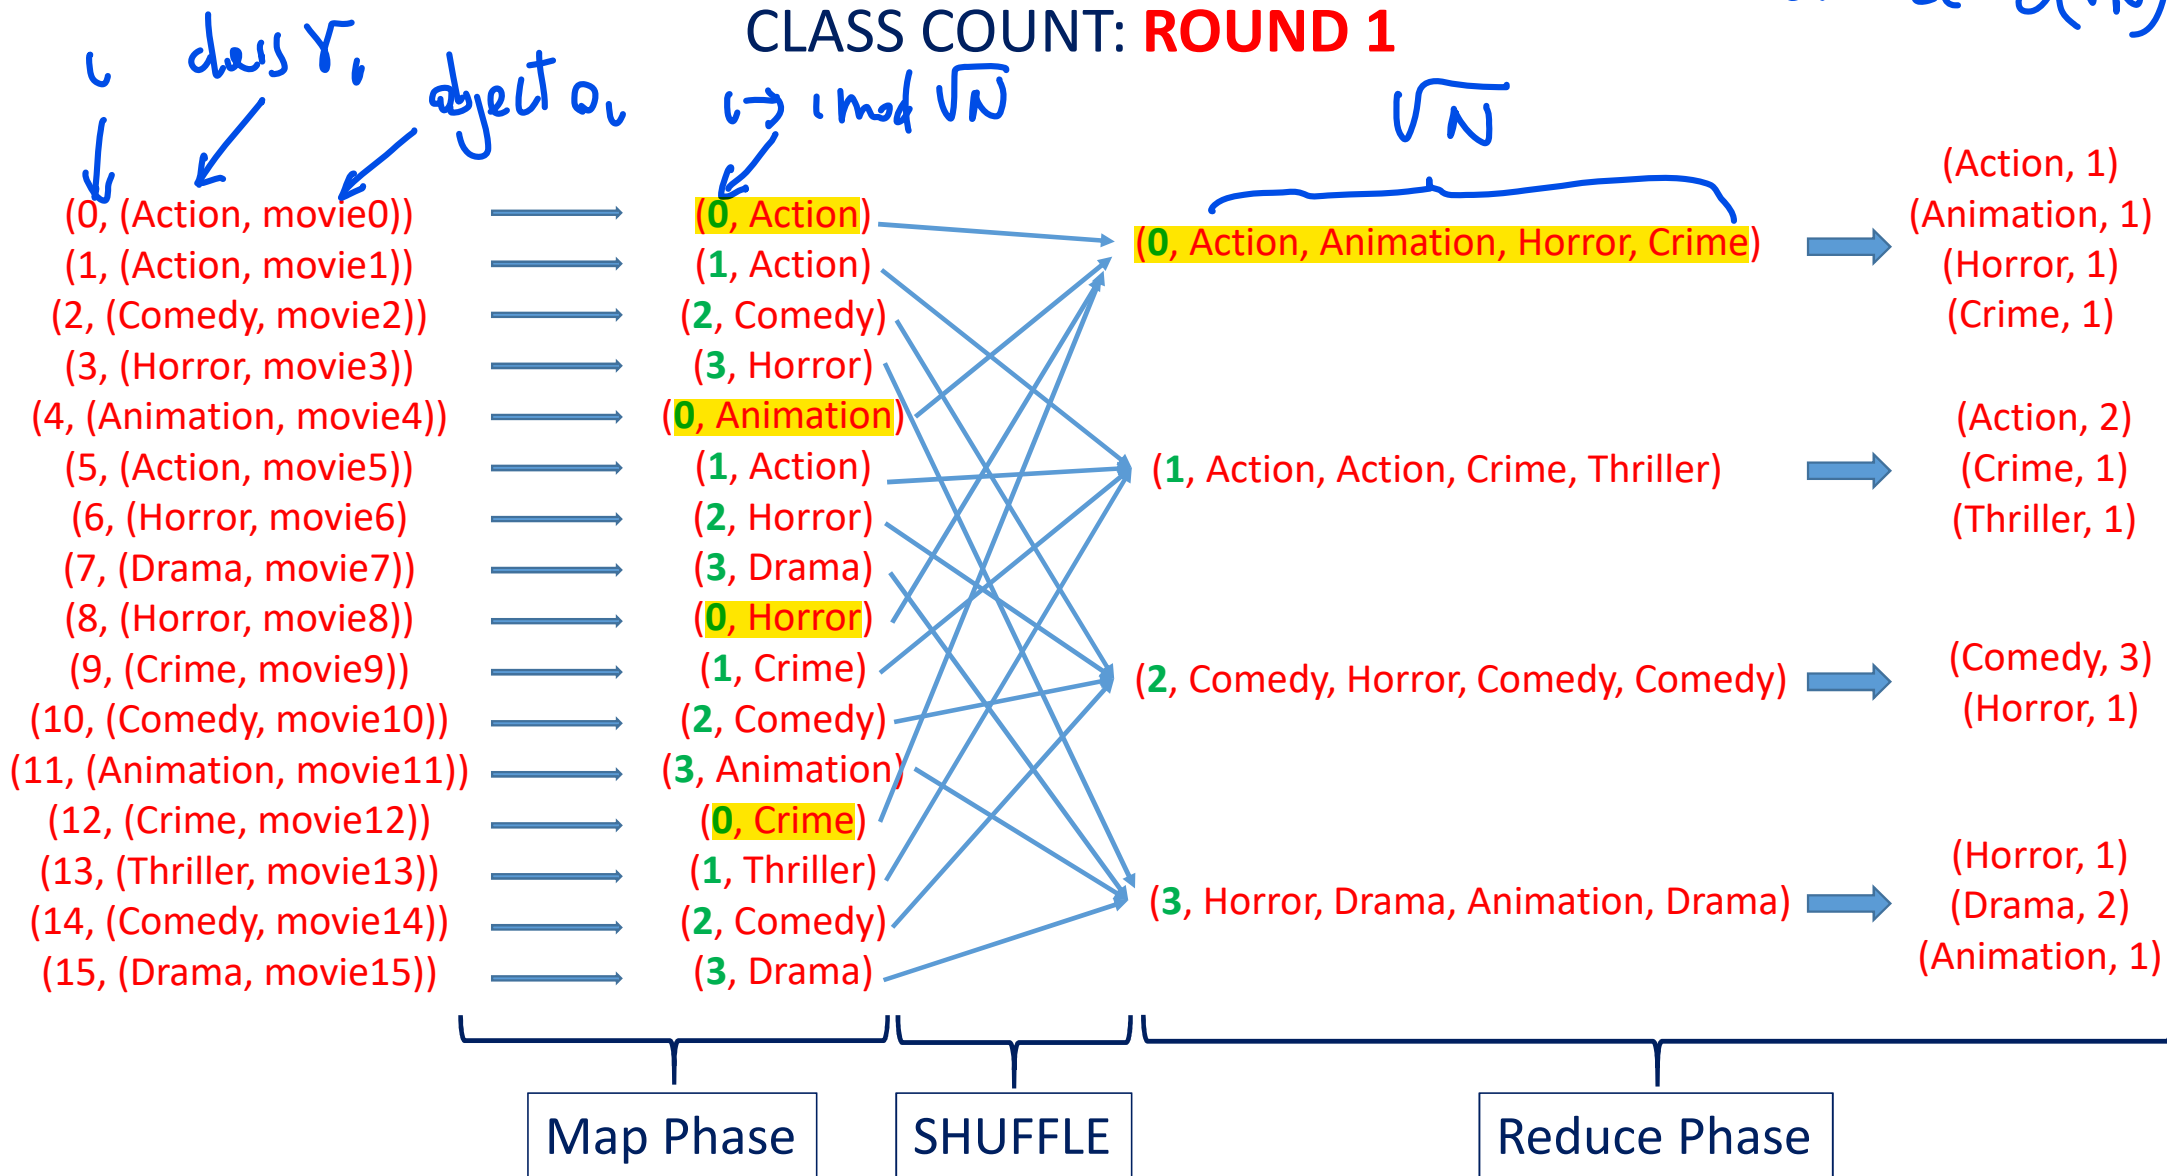

For Round 2 $M_A = O(N)$ $M_L =$ Map Phase : $O(1)$
 Reduce Phase : $O(\sqrt{N})$

CLASS COUNT: **ROUND 2**

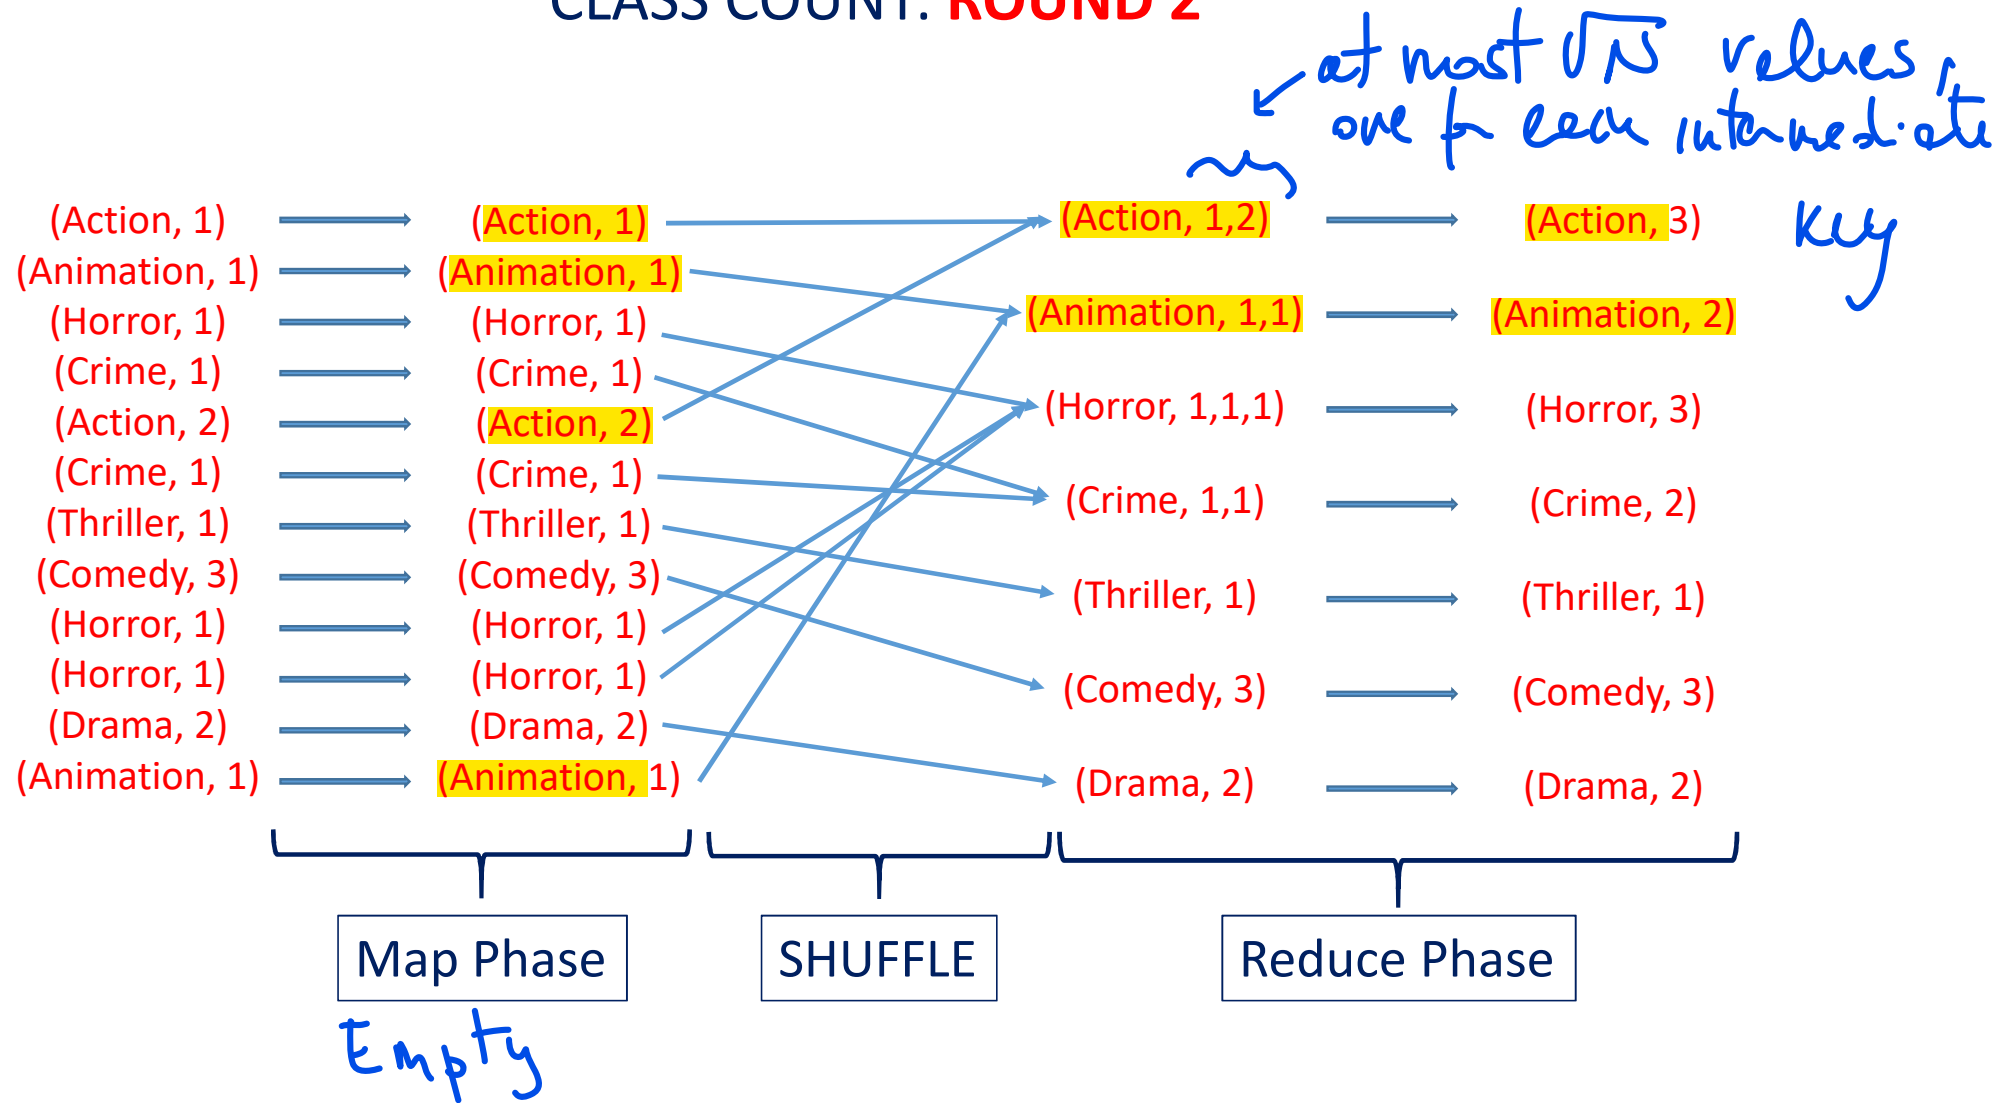

For the whole algorithm $M_L = O(\sqrt{N})$ $M_A = O(N)$