


`/cygdrive/c/Users/Nascimento/workspace/SPCA_GUI/src/GUI/plotter.h`

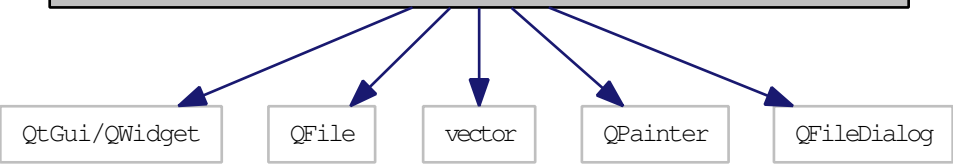

```
graph TD; A["/cygdrive/c/Users/Nascimento/workspace/SPCA_GUI/src/GUI/plotter.h"] --> B["QtGui/QWidget"]; A --> C["QFile"]; A --> D["vector"]; A --> E["QPainter"]; A --> F["QFileDialog"];
```

The diagram illustrates the dependencies of the file `plotter.h`. A central box at the top contains the file path. Five arrows point downwards from this box to five separate boxes below, each representing a dependency: `QtGui/QWidget`, `QFile`, `vector`, `QPainter`, and `QFileDialog`.

`QtGui/QWidget`

`QFile`

`vector`

`QPainter`

`QFileDialog`