
11.Protector Tape

A: INSTALLATION

Apply the protector tape by the following steps.

1. REAR QUARTER PROTECTOR (MODELS WITHOUT SIDE GARNISH)

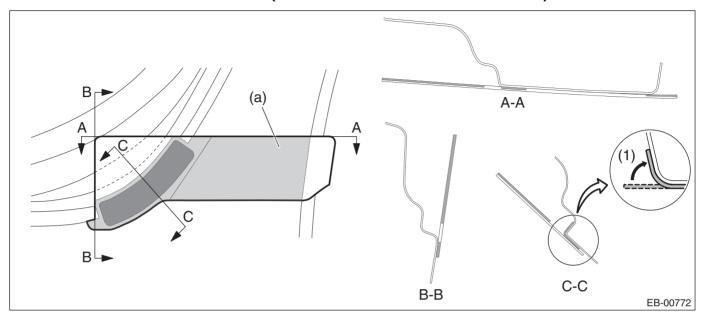

- (1) Apply the protector tape by aligning it to the rounded edge.
- 1) Clean the area around applying position to remove any foreign objects on body.
- 2) Detach the backing paper from the temporary retention area (a) and apply the protector tape after positioning it correctly.
- 3) Detach the backing papers, and moisten the applying area and the backside of protector tape by spraying liquid (mild detergent solution at 3% concentration).
- 4) Apply the protector tape to the vehicle body.

CAUTION:

Remove the water or air bubbles out of the protector tape by using the plastic or rubber spatula.

- 5) Detach the application tape and temporary retention tape.
- 6) Bend the tack-in end and apply it as shown by (1) in the figure.

CRUISE CONTROL SYSTEM



| | | Page |
|-----|-----------------------------------|------|
| 1. | General Description | |
| 2. | Relay and Fuse | 3 |
| 3. | Cruise Control System | 4 |
| 4. | Cruise Control Module | |
| 5. | Cruise Control Command Switch | |
| 6. | Combination Meter | 8 |
| 7. | Stop Light & Brake Switch | 9 |
| 8. | Clutch Switch | |
| 9. | Inhibitor Switch | |
| 10. | Transmission Control Module (TCM) | 12 |
| 11. | Neutral Position Switch | 13 |
| 12. | Hybrid Powertrain Control Module | 14 |
| 13. | Diagnostics with Phenomenon | 15 |