




Same 29 axes, two states of the night — English dreams, within-person deviations

The atlas — all English dreams (n=20,299)

Which axes take a larger share of the coupling

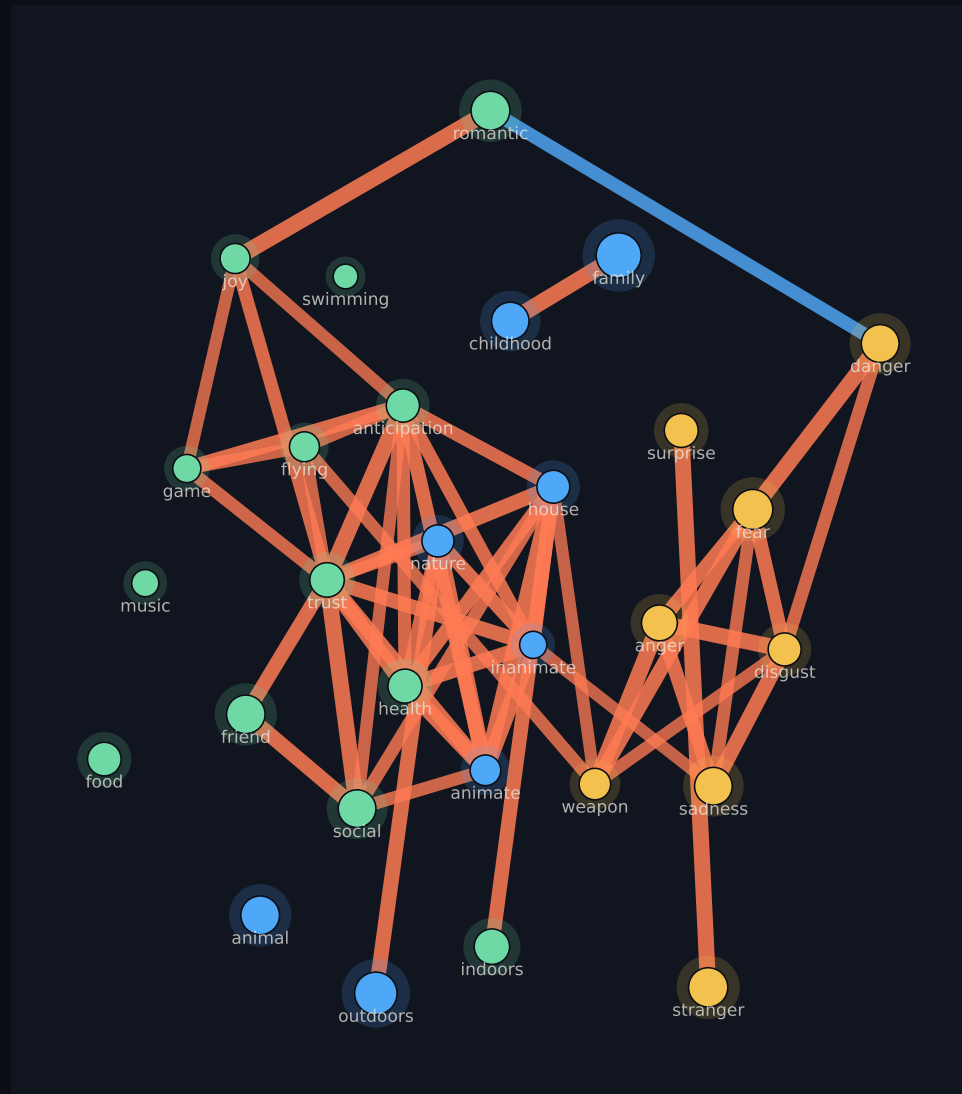

$\Delta\rho$ after a text-lexicon split — 45 strongest of 108 changes beyond the max- $|\Delta\rho|$ threshold 0.082 (406 edges tested)

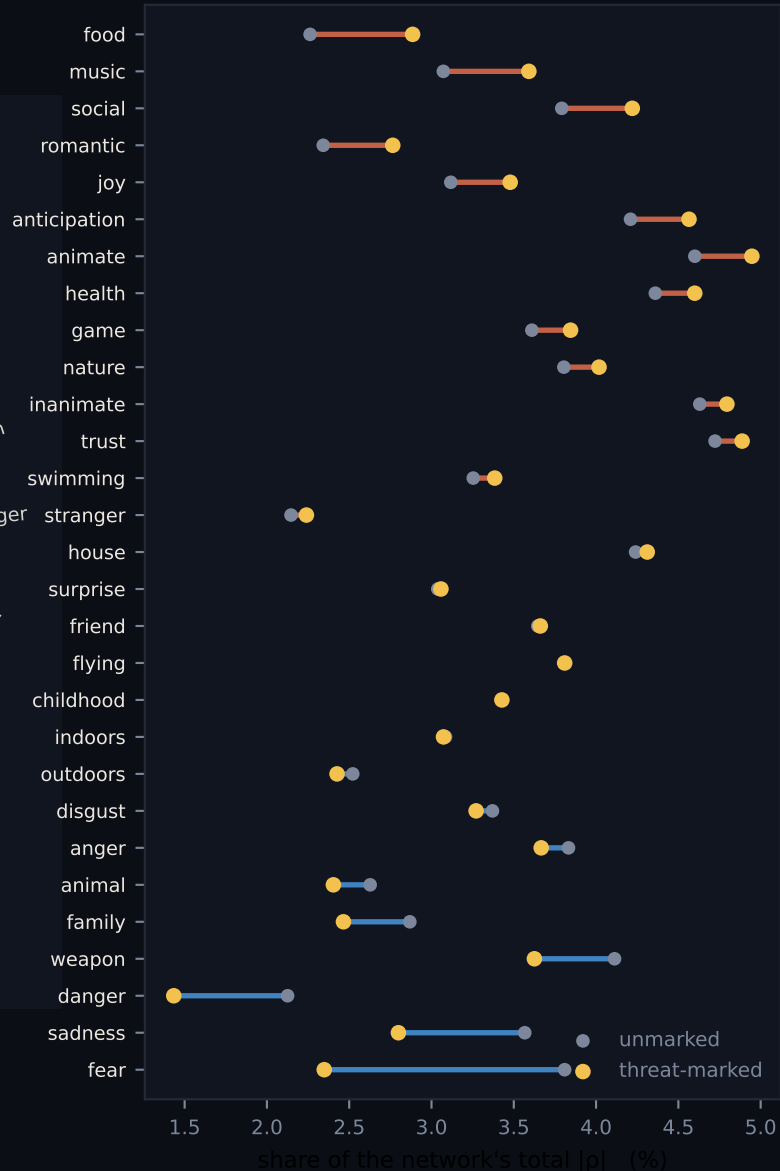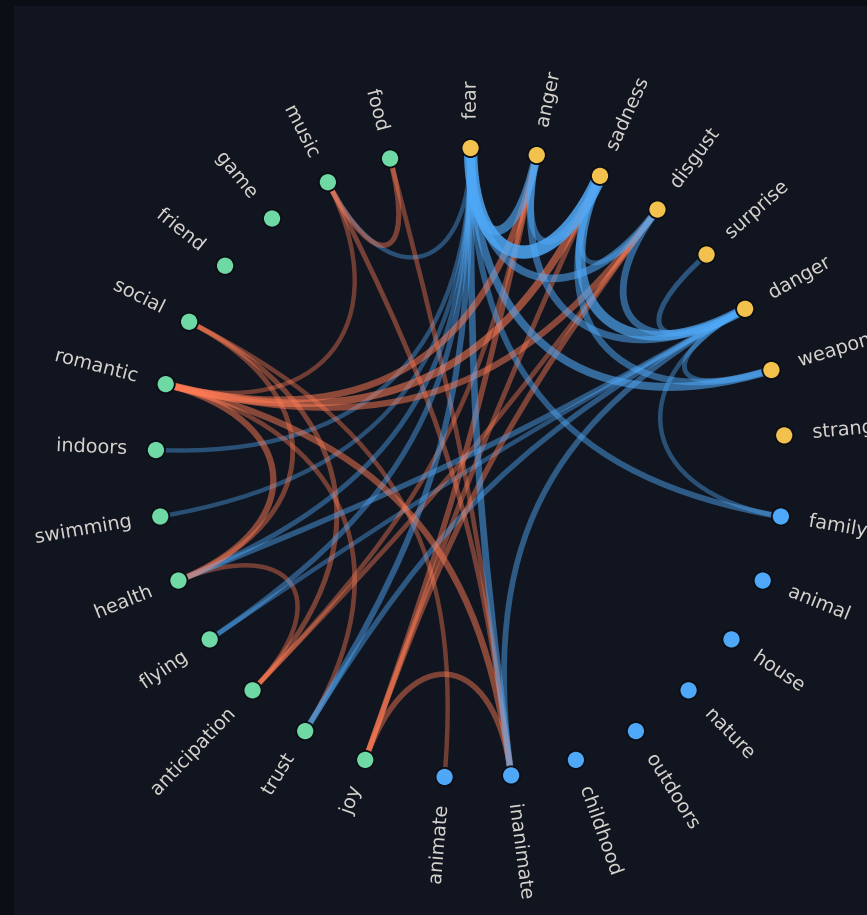

Edges are Spearman correlations of leave-one-out within-person deviations, so a contributor's stable style is removed before anything is correlated. Left: pooled network at 13% density, node colour = Louvain community, node size = mean absolute deviation. Middle: change in edge strength between reports whose text fires the frozen anxiety-or-death lexicon and reports that do not (3,864 each, warm = strengthened on threatening nights, cool = weakened), keeping only edges beyond the 95th percentile of the maximum $|\Delta\rho|$ under 300 month-stratified label permutations. Right: each axis's share of its network's total coupling, so an overall change in correlation magnitude cannot masquerade as rewiring. The splitter is text-derived on purpose: the app's nightmare index is fear, danger and sadness minus joy, so conditioning on it would condition the network on four of its own nodes. Selecting threatening reports still compresses variance in the threat axes, which lowers their correlations mechanically — read the right panel as redistribution of coupling, not as fear disconnecting. The lexicon is an independent code path but not an independent construct: it fires on words the annotator also reads. Unit is the report, not the contributor-night. Descriptive and not pre-registered.