

Open direction does not guarantee near-open NOE agreement

At 1 A, 9 of 10 closed-start traces with open-direction points remain far from both references in at least half of those points.

Open-start control: 18 of 20 meet agreement criterion.

We corrected a source-reader assumption before classification

80 native files match archived identities.

The old margin uses column 3: pseudo-distance violation.

Column 2 measures mean distance violation.


Reproduce old values with column 3; compare using column 2.

Classification depends on a declared tolerance


Tolerance (A)	Closed-start agreement / partial / relative
0.5	0 / 0 / 10
1.0	0 / 1 / 9
2.0	3 / 2 / 5

The other 10 closed-start traces have no open-direction points.

ES15 improves strongly, but the tolerance still matters

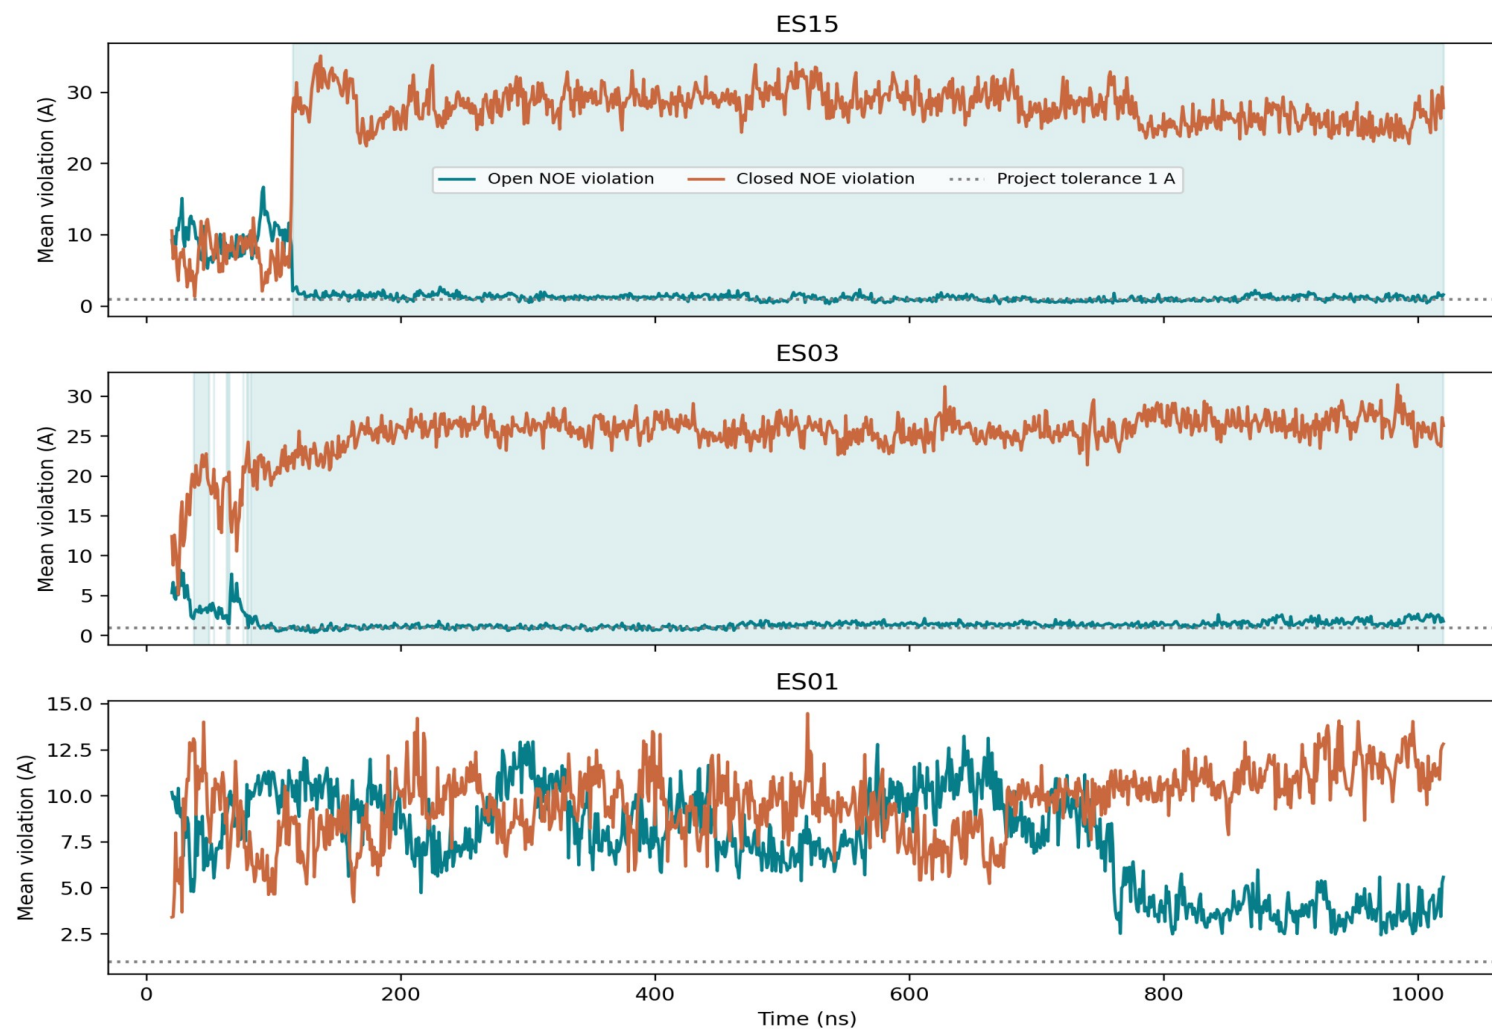

Relative direction and absolute closeness answer different questions

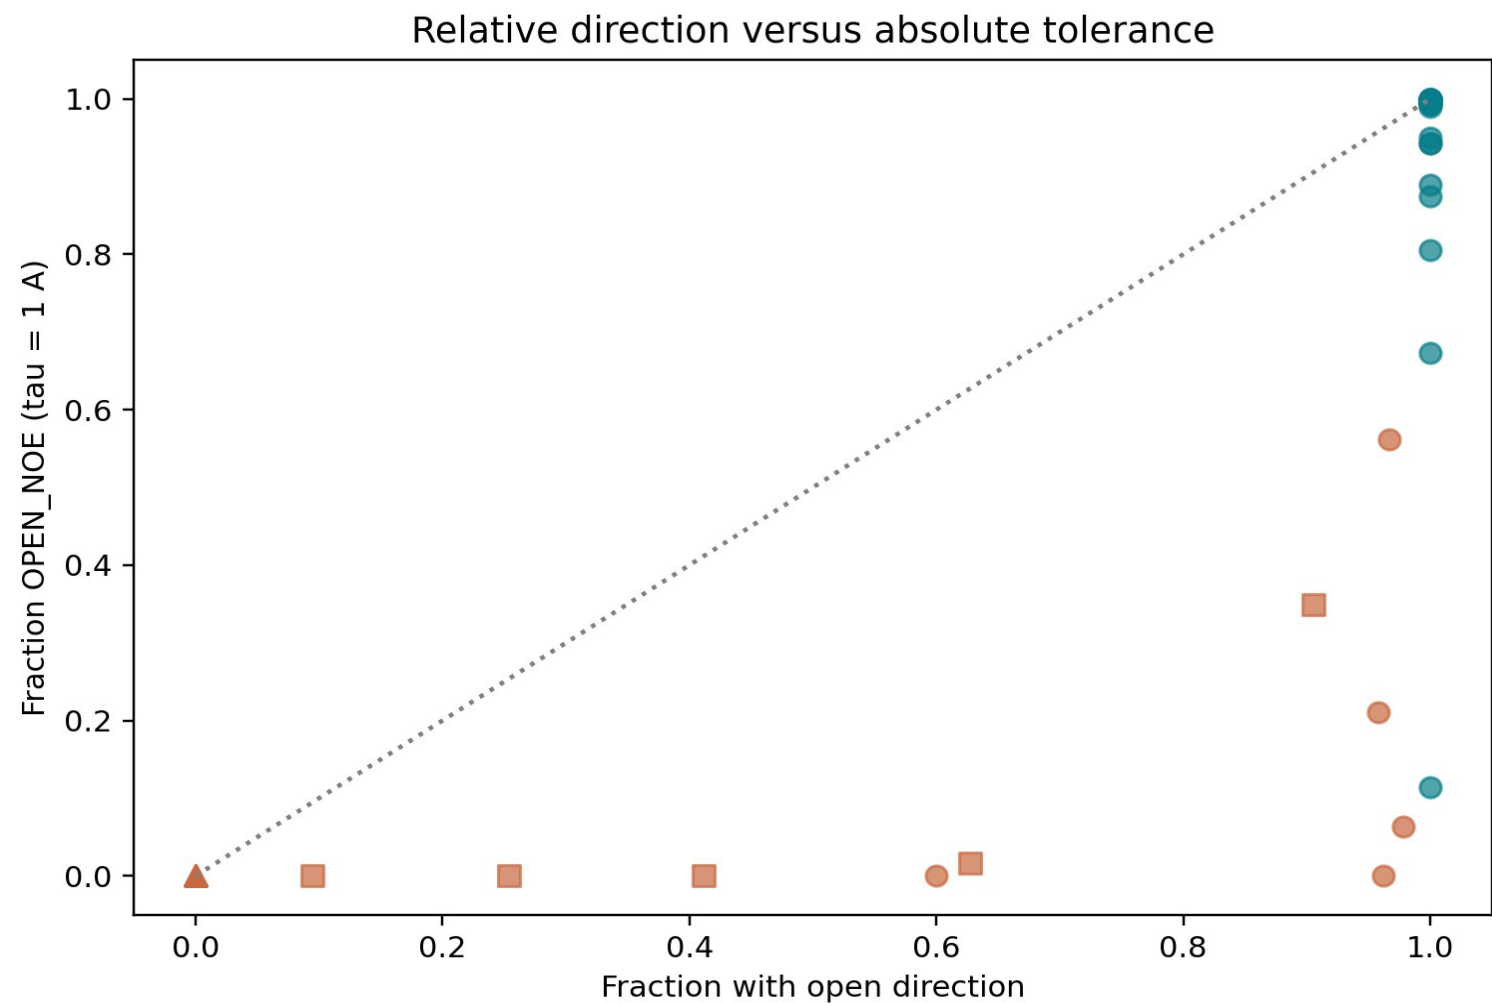

Two closed-start traces enter the open-start reference band

Pooled open-start 95th percentile: 1.32 A.

At least 50 consecutive points below that band:

ES04 from 188 ns; ES15 from 690 ns.

This is an empirical band from the same dataset.

The design implication: keep the observable definition visible

Retain the first-round directional counts.

Add absolute agreement and sensitivity before stronger claims.

40 trajectories, 40,040 rows, 3 figures; no new MD or model calls.

Rules rendering is fixed; second-system agent runs remain blocked.