



Welcome to the jungle!

Go ahead and create an administrator account.


 admin

 abelcota@uas.edu.mx





CREATE ADMIN

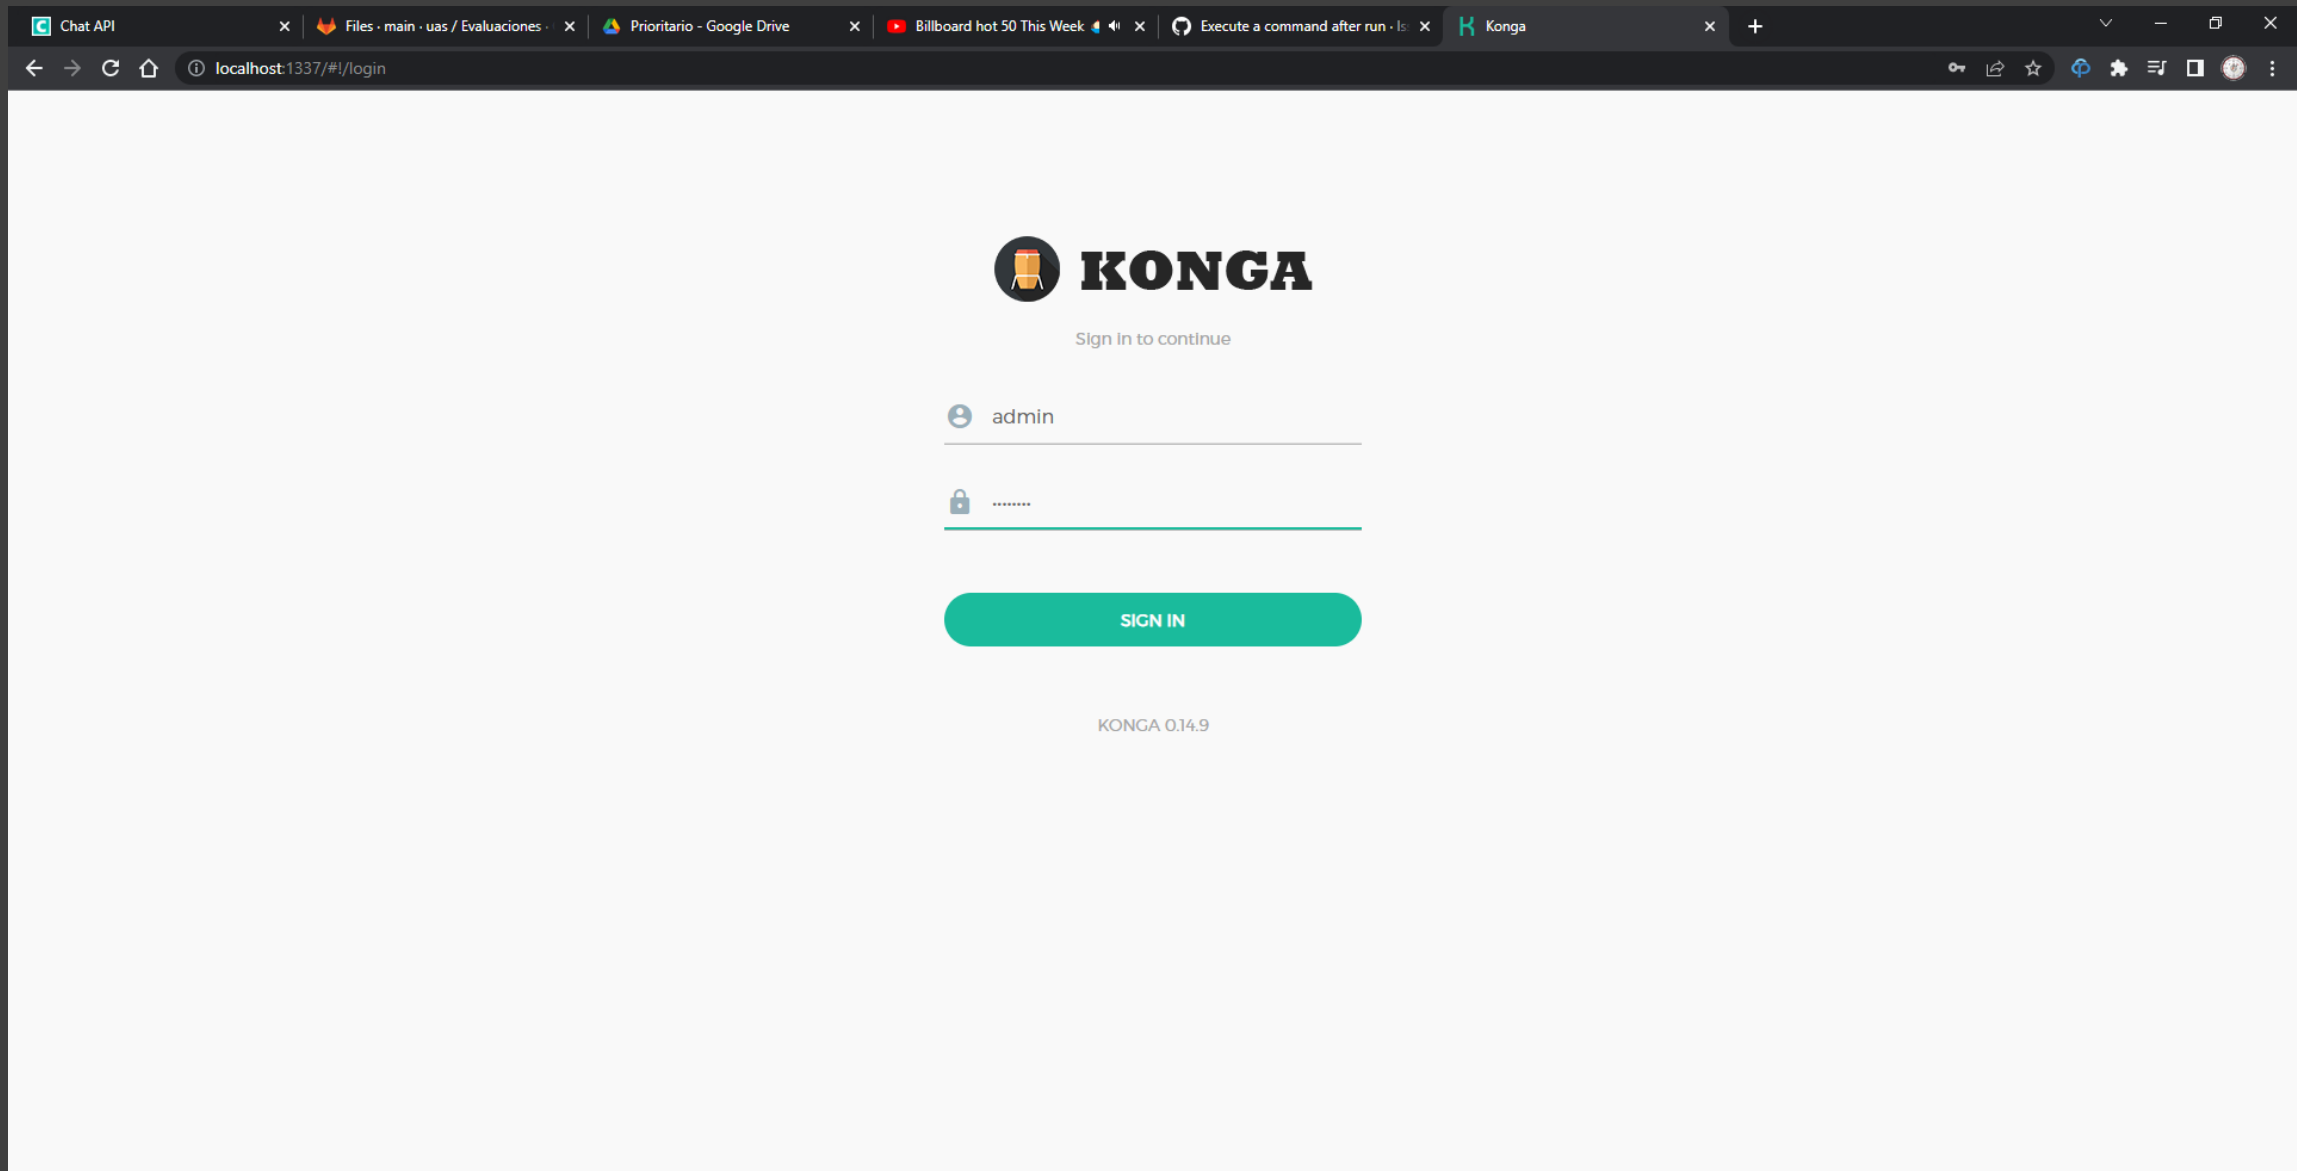

Chat API

Files · main · uas / Evaluaciones ·

Prioritario - Google Drive

Billboard hot 50 This Week

Execute a command after run · ls

Konga

localhost:1337/#/dashboard

KONGA

DASHBOARD

API GATEWAY

INFO

SERVICES

ROUTES

CONSUMERS

PLUGINS

UPSTREAMS

CERTIFICATES

APPLICATION

USERS

CONNECTIONS

SNAPSHOTS

SETTINGS

CONNECTIONS

Total Requests: 15

ACTIVE	READING	WRITING	WAITING	ACCEPTED	HANDLED
3	0	1	2	14	14

NODE INFO

HostName	258326d1e90a
Tag Line	Welcome to kong
Version	2.8.1
LUA Version	LuaJIT 2.1.0-beta3
Admin listen	["0.0.0.0:8001","0.0.0.0:8444 ssl"]

TIMERS

State	Count
Pending	9
Running	1

DATASTORE INFO

Reachable

DBMS	postgres
Host	kong-db
Database	postgres
User	kong
Port	5432

PLUGINS

zipkin jwt acl correlation-id cors oauth2 tcp-log udp-log file-log http-log key-auth hmac-auth basic-auth ip-restriction request-transformer response-transformer request-size-limiting rate-limiting response-ratelimiting syslog loggly datadog ldap-auth statsd bot-detection aws-lambda request-termination prometheus proxy-cache session acme grpc-gateway grpc-web pre-function post-function azure-functions

KONGA 0.14.9

GitHub

Issues

Support the project

Connected to kong

Chat API

Files · main · uas / Evaluaciones

Prioritario - Google Drive

Billboard hot 50 This Week

Execute a command after run · ls

Konga

localhost:1337/#!/services

KONGA

DASHBOARD

API GATEWAY

INFO

SERVICES

ROUTES

CONSUMERS

PLUGINS

UPSTREAMS

CERTIFICATES

APPLICATION

USERS

CONNECTIONS

SNAPSHOTS

SETTINGS

Services

Service entitles, as the name implies, are abstractions of each of your own upstream services. Examples of Services would be a data transformation microservice, a billing API, etc.

+ ADD NEW SERVICE

search...

Results : 25

NAME	HOST	TAGS	CREATED
------	------	------	---------

Chat API

Files · main · uas / Eval

Prioritario - Google Dr

Billboard hot 50 TI

Execute a command a

Konga

Recibidos - abelcota

localhost/apiencuesta

url - Fix "invalid host

localhost:1337/#1/services/2f59907a-739b-4eb1-8178-49faf6ffa888/read

KONGA

DASHBOARD

API GATEWAY

INFO

SERVICES

ROUTES

CONSUMERS

PLUGINS

UPSTREAMS

CERTIFICATES

APPLICATION

USERS

CONNECTIONS

SNAPSHOTS

SETTINGS

Services / SHOW

Service Details

Routes

Plugins

Eligible consumers beta

Service details

Name

(optional)

ApiEncuestas

The service name.

Description

(optional)

An optional service description.

Tags

(optional)

Optionally add tags to the service

Protocol

(semi-optional)

http

The protocol used to communicate with the upstream. It can be one of http or https.

Host

(semi-optional)

ApiEncuestas

The host of the upstream server.

Port

(semi-optional)

8080

The upstream server port. Defaults to 80.

Path

(optional)

/

The path to be used in requests to the upstream server. Empty by default.

Retries

(optional)

5

The number of retries to execute upon failure to proxy. The default is 5.

Connect timeout

60000

KONGA 0.14.9

GitHub

Issues

Support the project

Connected to kong

Chat API

Files · main · uas / Evaluaciones

Prioritario - Google Drive

Billboard hot 50 This Week

Execute a command after run

Konga

Recibidos - abelcota@uas.edu.n

localhost:1337/#!/services/2f59907a-739b-4eb1-8178-49faf6ffa888/read

KONGA

DASHBOARD

API GATEWAY

INFO

SERVICES

ROUTES

CONSUMERS

PLUGINS

UPSTREAMS

CERTIFICATES

APPLICATION

USERS

CONNECTIONS

SNAPSHOTS

SETTINGS

encuestas_route

The name of the Route.

Tags

Optionally add tags to the route

Hosts

localhost 127.0.0.1

A list of domain names that match this Route. For example: example.com. At least one of hosts, paths, or methods must be set.

Paths

/ApiEncuestas /api-encuestas /apiencuestas

A list of paths that match this Route. For example: /my-path. At least one of hosts, paths, or methods must be set.

Headers

One or more lists of values indexed by header name that will cause this Route to match if present in the request. The `Host` header cannot be used with this attribute: hosts should be specified using the `hosts` attribute.
Field values format example: `x-some-header:foo,bar`

Path handling

v1

Controls how the Service path, Route path and requested path are combined when sending a request to the upstream. See above for a detailed description of each behavior. Accepted values are: `"v0"`, `"v1"`. Defaults to `"v1"`.

Https redirect status code

426

The status code Kong responds with when all properties of a Route match except the protocol, i.e. if the protocol of the request is `HTTP` instead of `HTTPS`. `Location` header is injected by Kong if the field is set to 301, 302, 307 or 308. Defaults to `426`.

Regex priority

0

A number used to choose which route resolves a given request when several routes match it using regexes simultaneously. When two routes match the path and have the same `regex_priority`, the older one (lowest `created_at`) is used. Note that the priority for non-regex routes is different (longer non-regex routes are matched before shorter ones). Defaults to `0`.

Methods

GET POST PUT DELETE PATCH OPTIONS

A list of HTTP methods that match this Route. At least one of `hosts`, `paths`, or `methods` must be set.

Hello, admin

+ ADD ROUTE

ex priority Created

Connected to kong

ANGULAR FRONTEND

Chat API

Files · main · uas / Evaluaciones

Prioritario - Google Drive

Billboard hot 50 This Week

Execute a command after run

Konga

Recibidos - abelcota@uas.edu.ri

localhost:1337/#/services

KONGA

DASHBOARD

API GATEWAY

INFO

SERVICES

ROUTES

CONSUMERS

PLUGINS

UPSTREAMS

CERTIFICATES

APPLICATION

USERS

CONNECTIONS

SNAPSHOTS

SETTINGS

Service

+ Add

Service

Results: 25

DELETE

Hello, admin

CREATE SERVICE

Name
(optional)

frontend

The service name.

Description
(optional)

An optional service description.

Tags
(optional)

Optionally add tags to the service

Url
(shorthand-attribute)

Shorthand attribute to set `protocol`, `host`, `port` and `path` at once. This attribute is write-only (the Admin API never "returns" the url).

Protocol
(semi-optional)

http

The protocol used to communicate with the upstream. It can be one of `http` or `https`.

Host
(semi-optional)

frontend

The host of the upstream server.

Port
(semi-optional)

4200

The upstream server port. Defaults to `80`.

Path
(optional)

/

The path to be used in requests to the upstream server. Empty by default.

Retries
(optional)

5

The number of retries to execute upon failure to proxy. The default is `5`.

Connect timeout
(optional)

60000

The timeout in milliseconds for establishing a connection to your upstream server. Defaults to `60000`.

