

lingtree


A syntax-tree package with a neutral tree model

This document mirrors the feature tour of syntree and demonstrates the additional parent-align: "children" layout mode. The default parent-align: "subtree" remains compatible with syntree.

1. Bracket notation and styling

Terminal and nonterminal labels can be styled independently. Horizontal and vertical spacing use the same options as syntree.


Bracket syntax



2. Formulas and rich content

Node labels are arbitrary Typst content, including equations, subscripts, and other inline markup.


Mathematical labels



3. Direct construction

The `tree` function supports programmatic construction and non-textual child content.


Direct tree calls



4. List notation

Indented Typst lists provide a convenient notation for larger trees. A leading caret creates a roof over a phrase.


List syntax

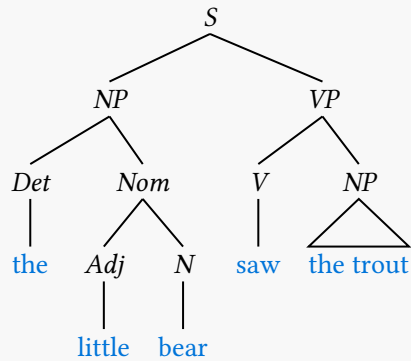

5. Composition

Bracket trees, list trees, and direct tree calls can be nested freely. The enclosing tree lays them out as a single composition.


Mixed construction styles

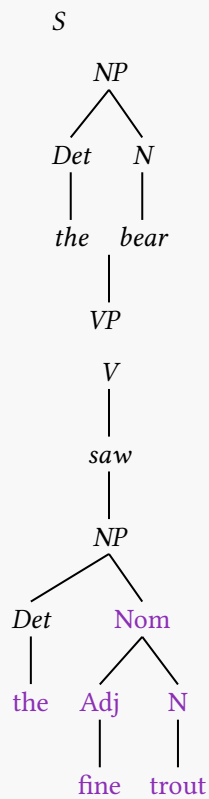

6. Movement and external annotations

Labels inside nodes remain queryable, so external packages such as `larrow` can annotate relationships and movement.

Movement arrow

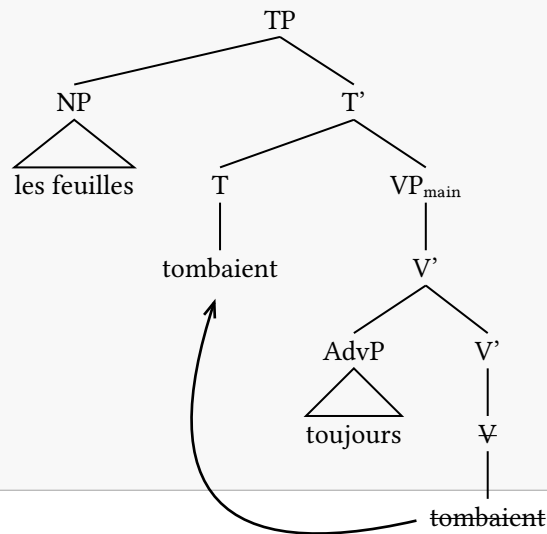


7. Parent alignment

The compatible mode centers a parent over the complete bounding box of its children's subtrees. The new mode centers it between the root nodes of its outermost immediate children, regardless of asymmetric descendant width.


Over the subtree

parent-align: "subtree"



Over child nodes

parent-align: "children"



8. Neutral tree API

Custom parsers and builders can produce presentation-neutral values with `node`. Only `layout-tree` needs to know about visual styling and geometry.

Direct neutral layout

