

Single neuron and population analysis of visual motion direction

Alexandre Lainé ^{*1}, Nicholas J. Priebe ², Guillaume S. Masson ¹, Laurent U. Perrinet ¹

¹ Institut de Neurosciences de la Timone, UMR 7289, CNRS and Aix-Marseille Université, Marseille, 13005, France.


² Section of Neurobiology, School of Biological Sciences, University of Texas at Austin, Austin, TX, USA.

* Correspondence : alexandre.laine@univ-amu.fr



Introduction

Studying the **internal representation** of natural features in the primary visual cortex (V1), like direction or spatial frequency, is crucial to understand how we perceive the external world. Research on 2D motion direction in **non-human primates** in particular when displaying **naturalistic stimuli** like MotionClouds reveals substantial diversity and multiple mechanisms within the neuronal population. The aim of this project is to examine how a large population of V1 neurons encodes stimulus direction and how this representation is modulated by the uncertainty using classical and decoding methods.

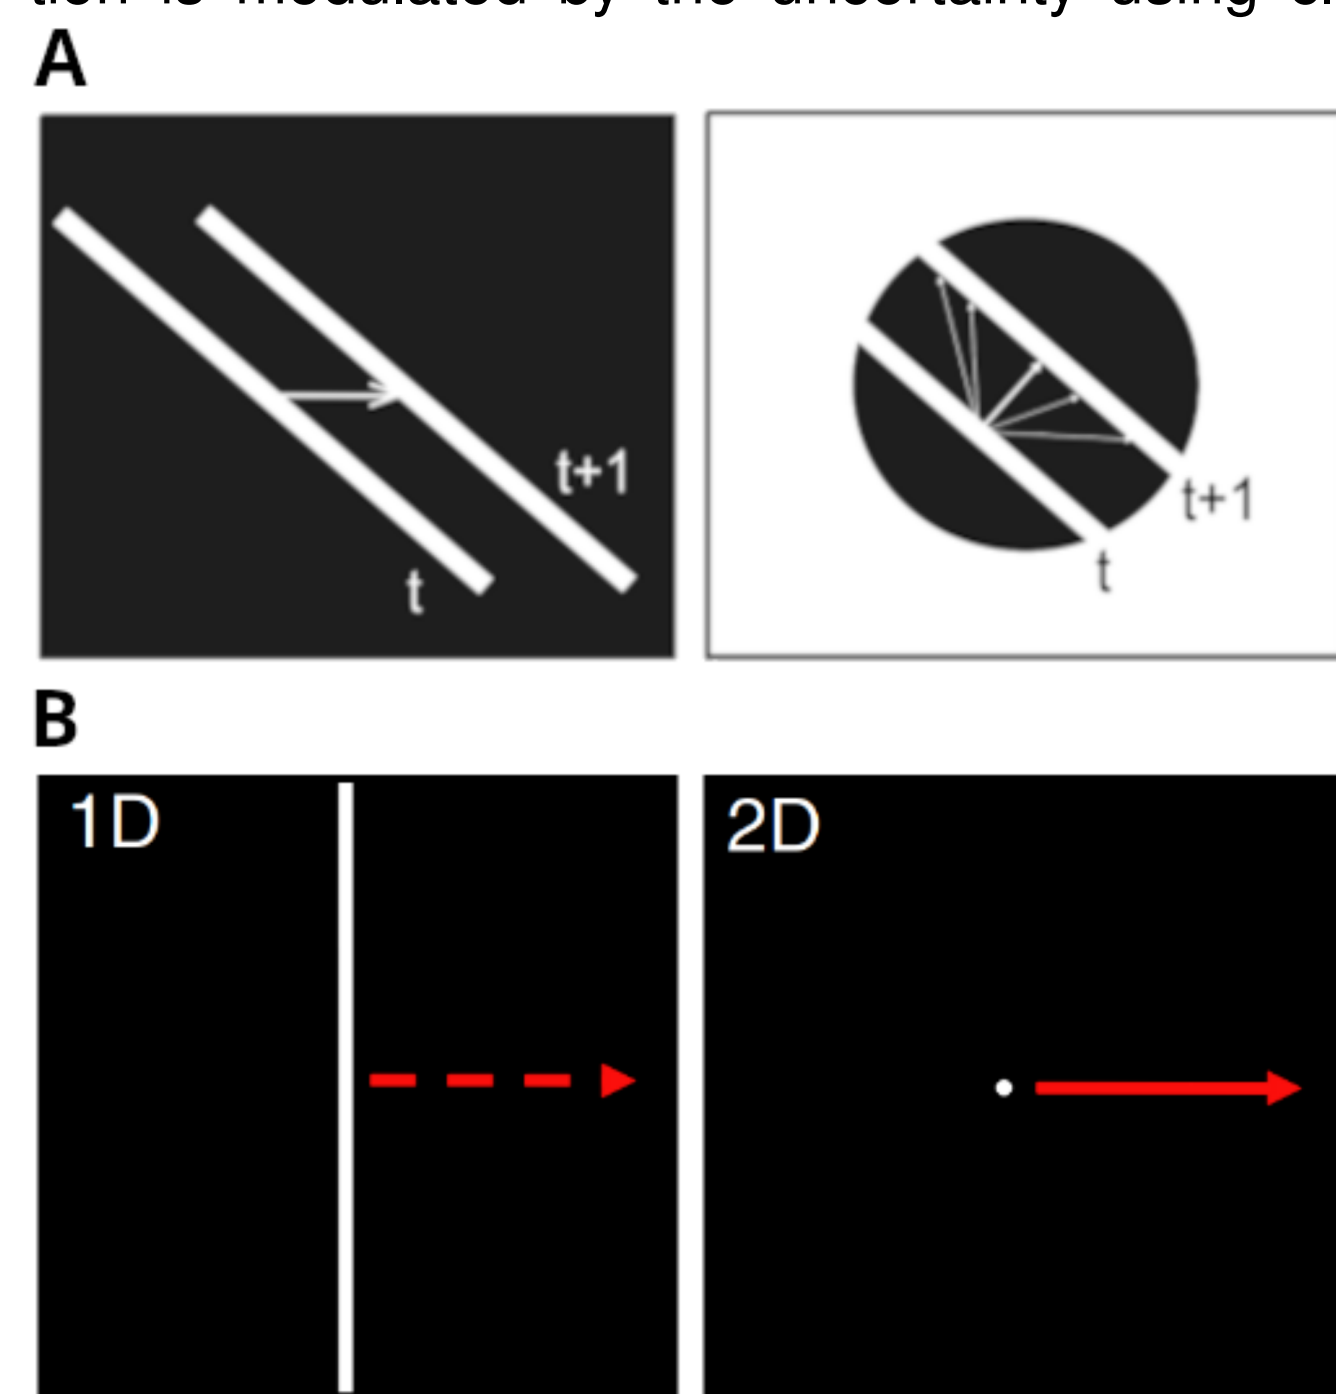

Acknowledgements

This work was supported by ANR-NSF CRCNS grant "PrioSens" N° ANR-20-NEUC-0002 attributed to G.S.M, N.J.P. and L.U.P. and by a doctoral grant from the French Ministry of Higher Education and Research, awarded by the Doctoral School 62 of Aix-Marseille University to A.L.

Methods

Neuronal recordings were made in V1 of one marmoset monkey using the Neuropixel technology during 2D motion presentation in twelve directions (θ) from 0° to 375° , four levels of orientation bandwidth (B_θ ; 0° , 15° , 30° and 45°) and 4 levels of spatial frequency bandwidth (B_{sf} ; 0.01, 0.175, 0.7 and 2.8 cpd) from the MotionClouds python library.

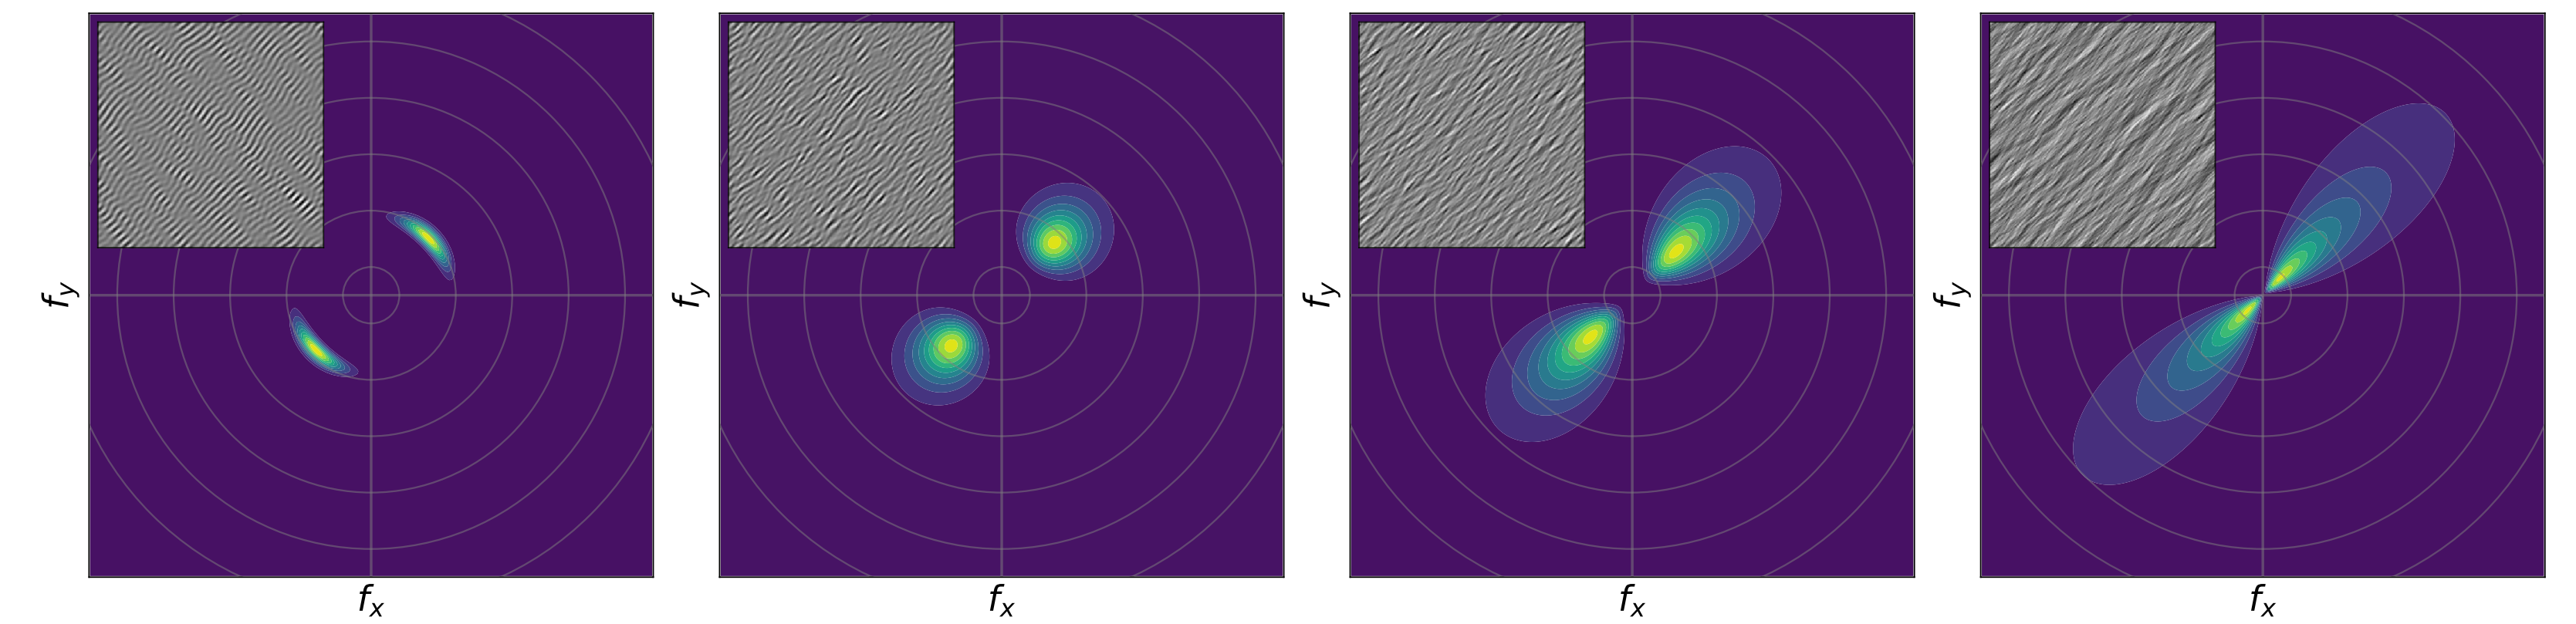


Figure 1: Fourier space representation of MotionClouds stimuli. The image is generated by the inverse fourier transform after the application of an random phase.

The classical tuning curve analysis is based on the optimization of the following equations parameters (κ_ϕ , κ_θ , θ_0 ,...) in order to predicted the activity (A) of each neuron in each condition.

$$\begin{aligned} A_\theta &= \kappa_\theta \times (\cos(2 \times (\theta - \theta_0)) - 1) \\ A_\phi &= \kappa_\phi \times (\cos(\theta - \theta_0) - 1) \\ A &= \exp(A_\theta + A_\phi + \log R_{amp}) + R_0 \end{aligned}$$

Based on our extracted parameters, orientation and direction selective indexes (OSI and DSI) are computed as following :

$$\begin{aligned} DSI &= \frac{R_{pref} - R_{null}}{R_{pref}} = \frac{R_{amp}(1 - e^{-2\kappa_\phi})}{R_0 + R_{amp}} \\ OSI &= \frac{R_{pref} + R_{null} - (R_{orth+} + R_{orth-})}{R_{pref} + R_{null}} \\ &= \frac{R_{amp} \times (1 + e^{-2\kappa_\phi} - 2e^{-(2\kappa_\theta + \kappa_\phi)})}{2R_0 + R_{amp} \times (1 + e^{-2\kappa_\phi})} \end{aligned}$$

Decoding method based on Jazayeri and Movshon (2006). The likelihood function of the stimulus direction is equivalent to the sum of the likelihood functions of each neuron, which is equivalent to summing the agreement functions of each neuron weighted by the activity of each neuron during stimulus presentation. If we take W_i as the tuning curve of neuron i and A_i^s as the activity induced by stimulus s . Then, L_i^s and L^s are respectively the likelihood function for a particular trial of the neuron i and the population.

$$\log L^s(\theta) = \sum_{i=0}^N \log L_i^s(\theta) = \sum_{i=0}^N A_i^s(\theta) \log W_i(\theta)$$

Results : single neuron analysis

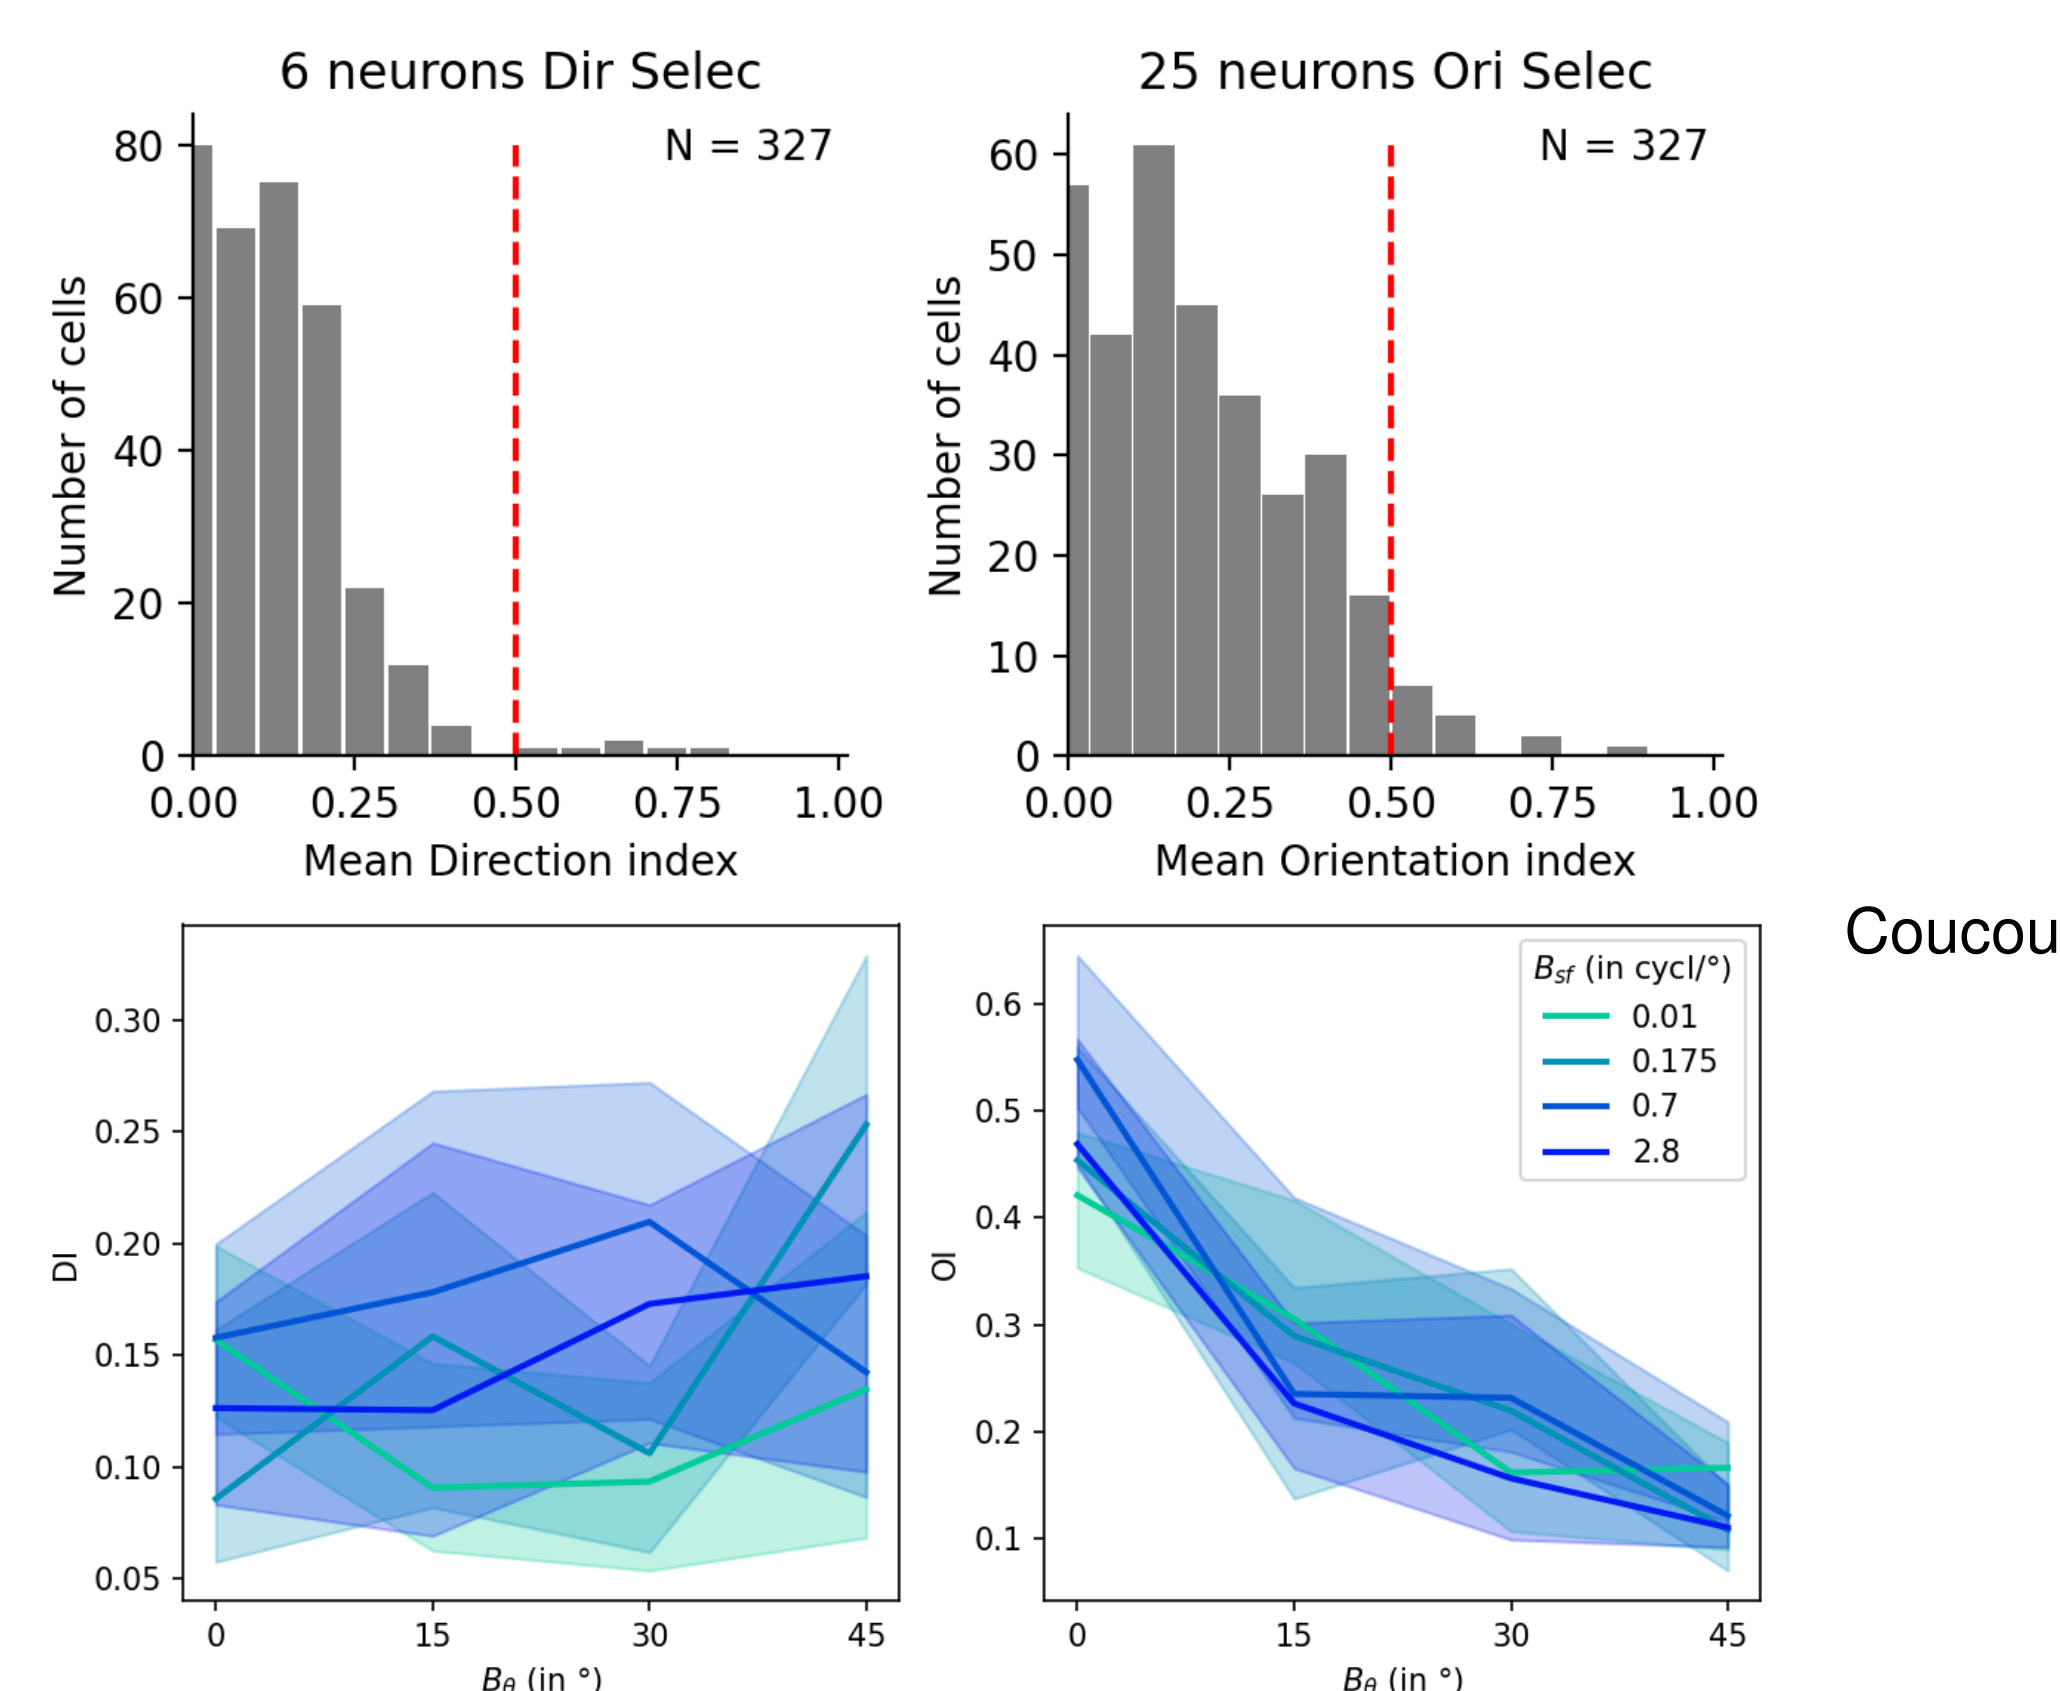


Figure 2: Mean DSI and OSI in population.

Results : population decoding

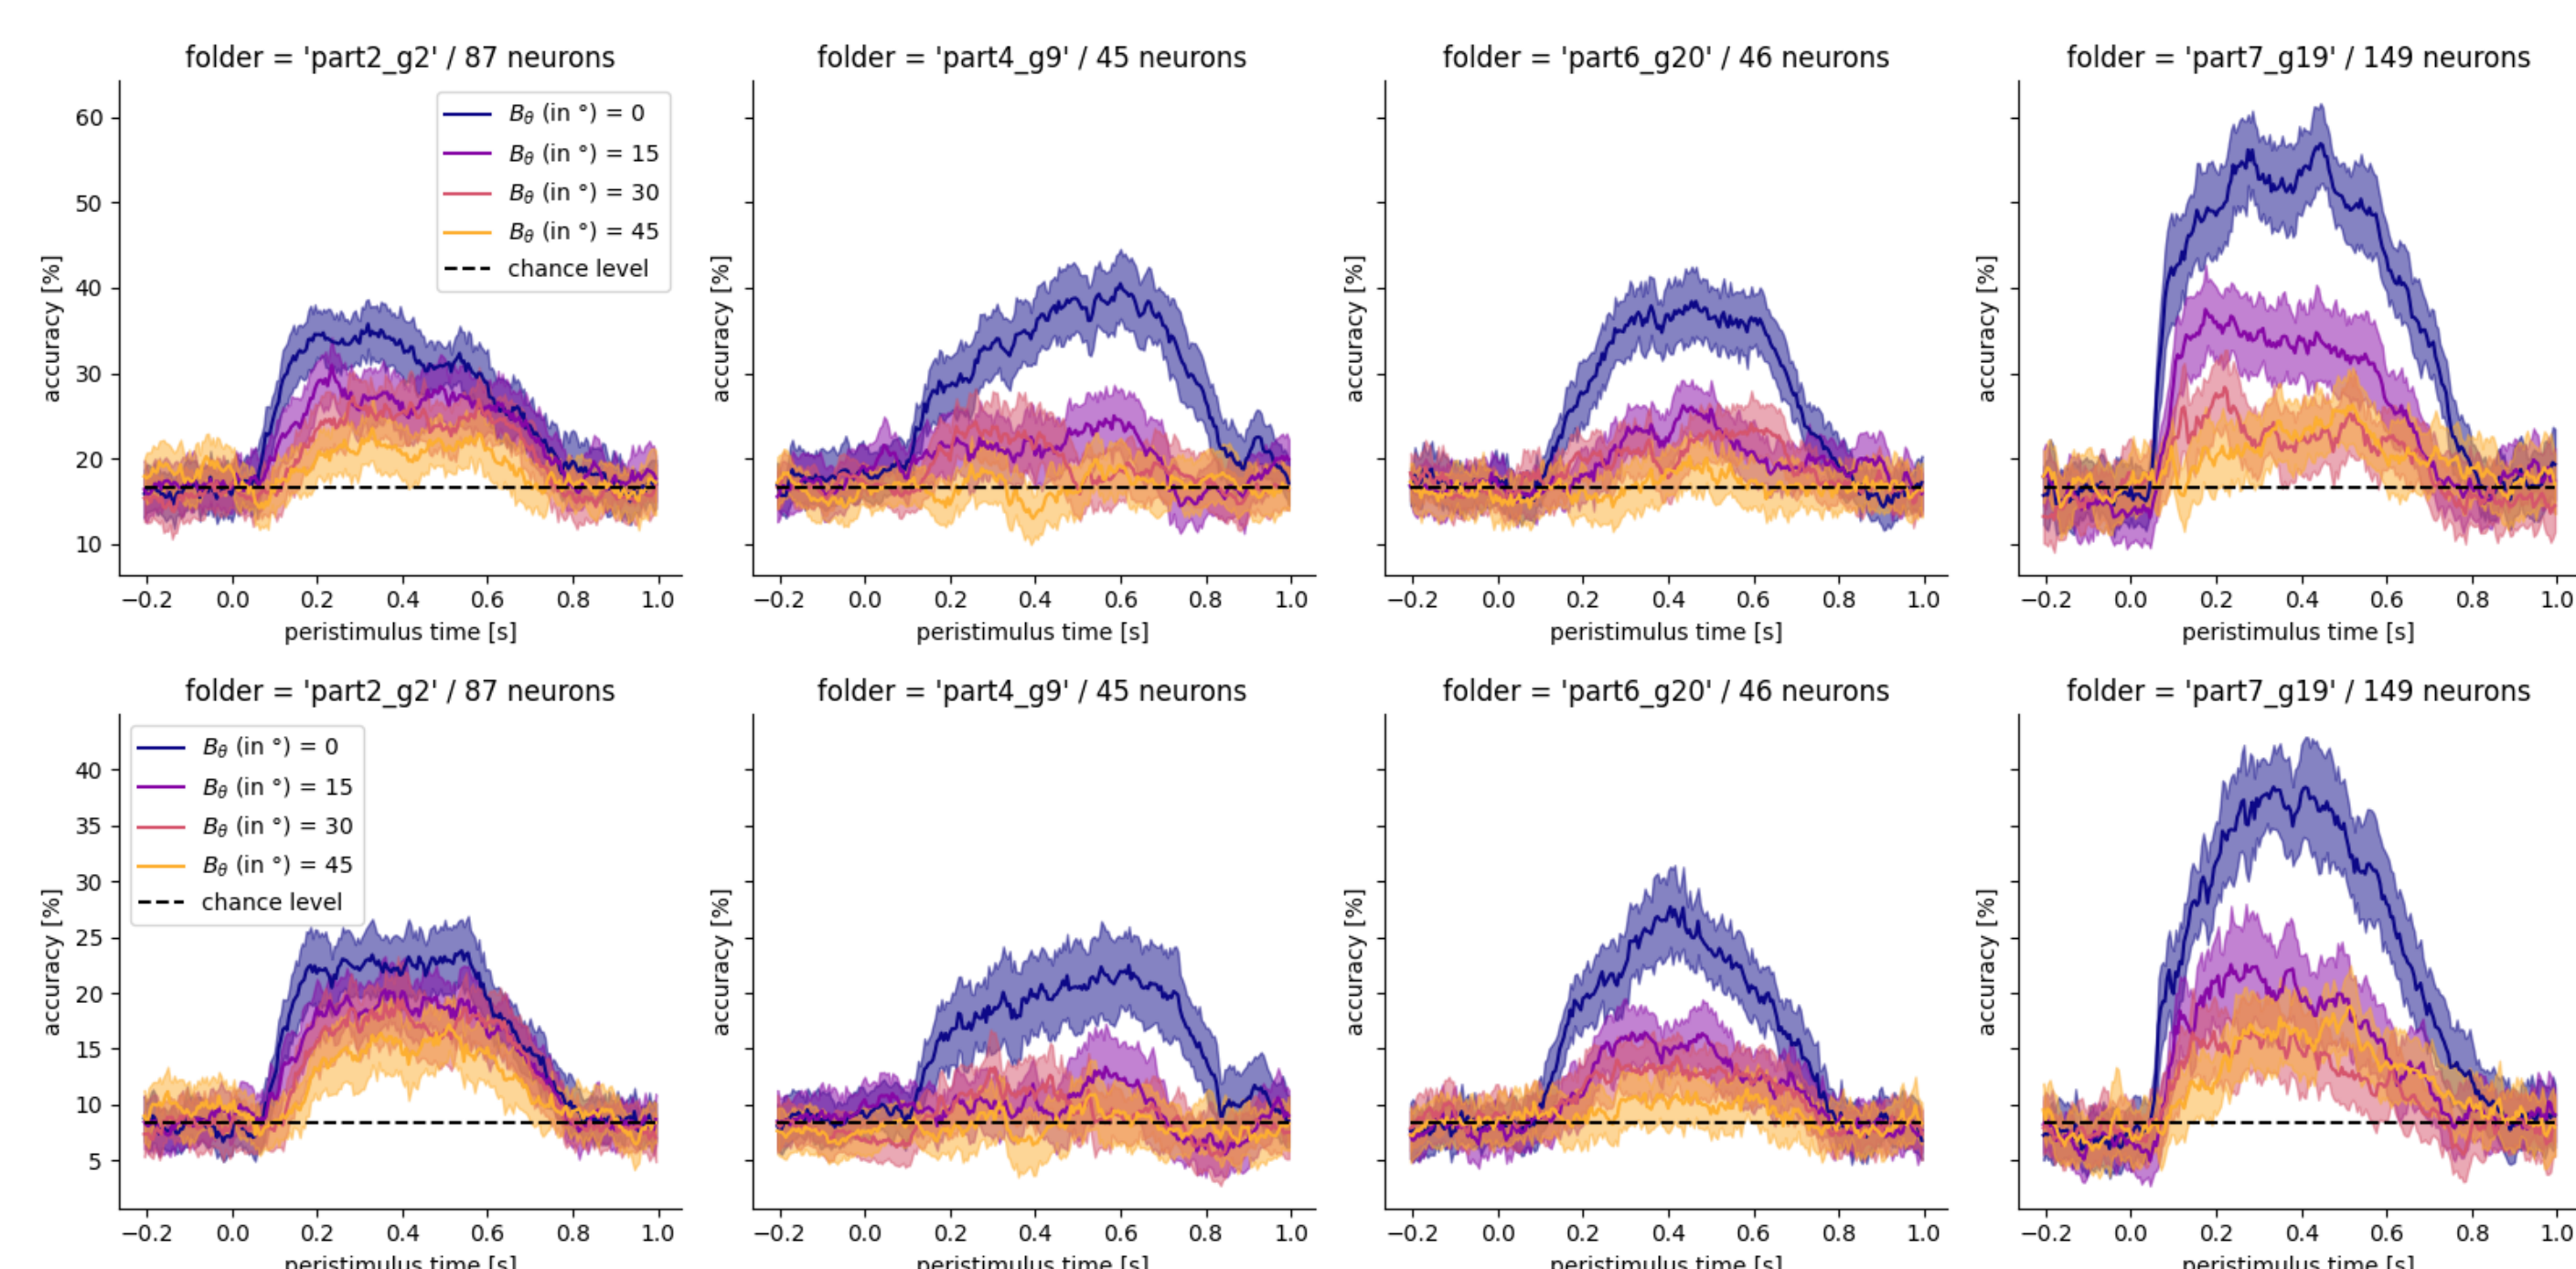


Figure 3: Mean DSI and OSI in population.

Discussion

This decoding approach clarifies the **representation of directional information** in the marmoset primary visual cortex, its stability accross time and its modulation by the precision level.