


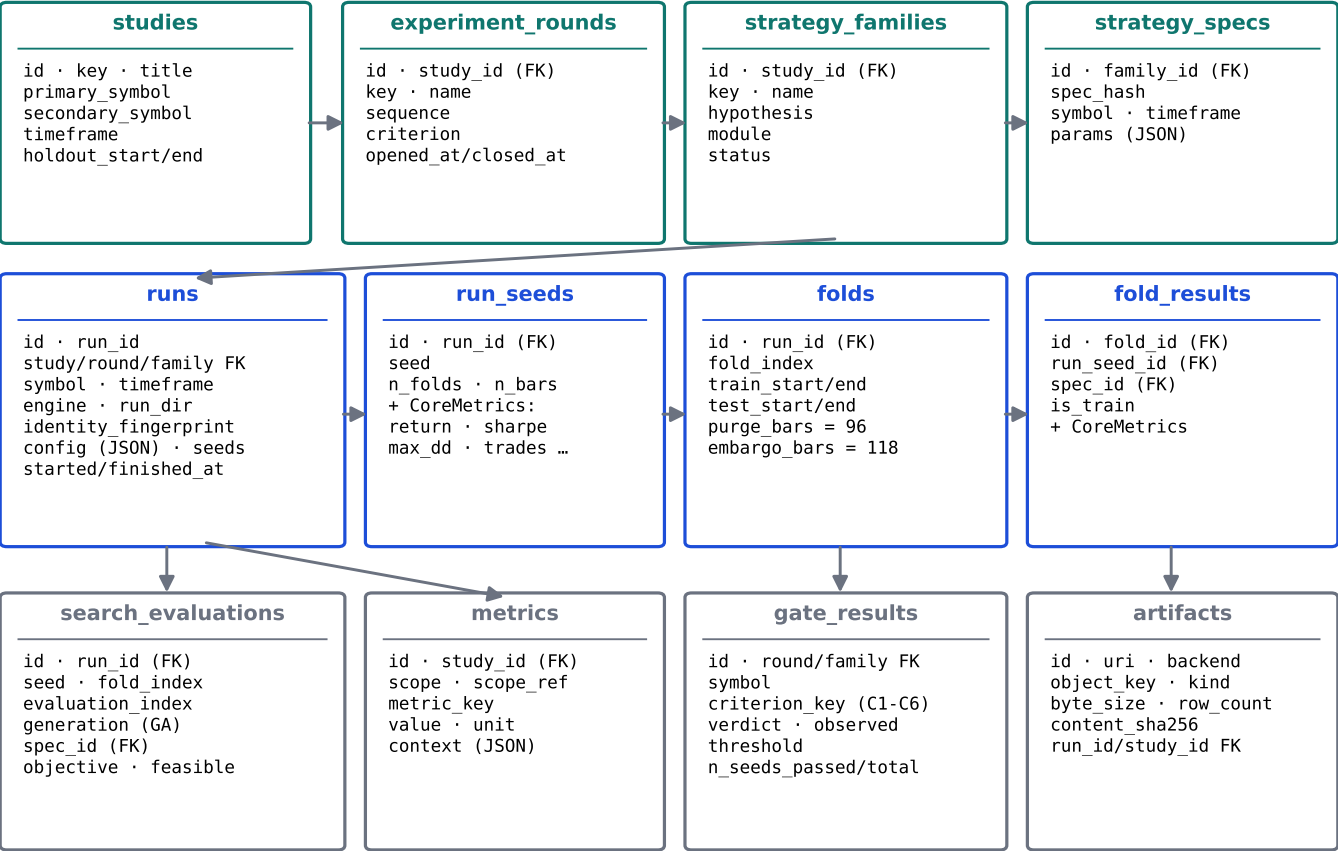

monte_carlo_runs and holdout_registry (append-only) complete the schema. Every table inherits ProvenanceMixin (source_artifact, source_sha256, git_commit, code_version, ingested_at); results tables add StatusMixin and CoreMetricsMixin. A Metric row without a linked measurement raises MetricsWithoutMeasurementError at ingest time.