

Classification Models For Legendary Pokemon

Alex Ryan

May 9, 2018

Introduction

This is a project that focuses on classifying Non-Legendary Pokemon from Legendary Pokemon. I will explore the data with visualizations and explanations. I will also utilize knn, naive bayes, and xgbtree. These models will attempt to distinguish between these two types of pokemon.

Data Dictionary

The Pokemon dataset was taken from Kaggle. The pokemon included come from Generations 1-6. The dataset includes attributes such as id number, name, Type.1, Type.2, total, HP, Attack, Defense, Sp.Atk, Sp.Def, Speed, Generation, and Legendary. Added features will be discussed in later sections.

Variable Name:	Variable Description:
'id'	Identification number of pokemon
'name'	Name of Pokemon
'Type.1'	Primary property trait of pokemon
'Type.2'	Secondary property trait of pokemon
'total'	Total stats of pokemon
'HP'	Total Health of pokemon
'Attack'	Total Attack of pokemon
'Defense'	Total Defense of pokemon
'Sp.Atk'	Total Special Attack of pokemon
'Sp.Def'	Total Special Defense of pokemon
'Speed'	Total Speed of pokemon
'Generation'	The generation number of pokemon
'Legendary'	A true or false value that defines whether the pokemon is a legendary or not


Data Loading and Packages Used

So in order to create the visualizations and use knn, naive bayes, and xgbtrees, I loaded in all of the packages below as well as the ggplot2 and the xgboost package. I also loaded in my data.


```
library(caret)
library(doSNOW)
library(magrittr)
library(dplyr)
library(ggthemes)
library(fmsb)

pokemon = read.csv("Pokemon.csv", stringsAsFactors = FALSE)
```

Exploratory Analysis with Visualizations

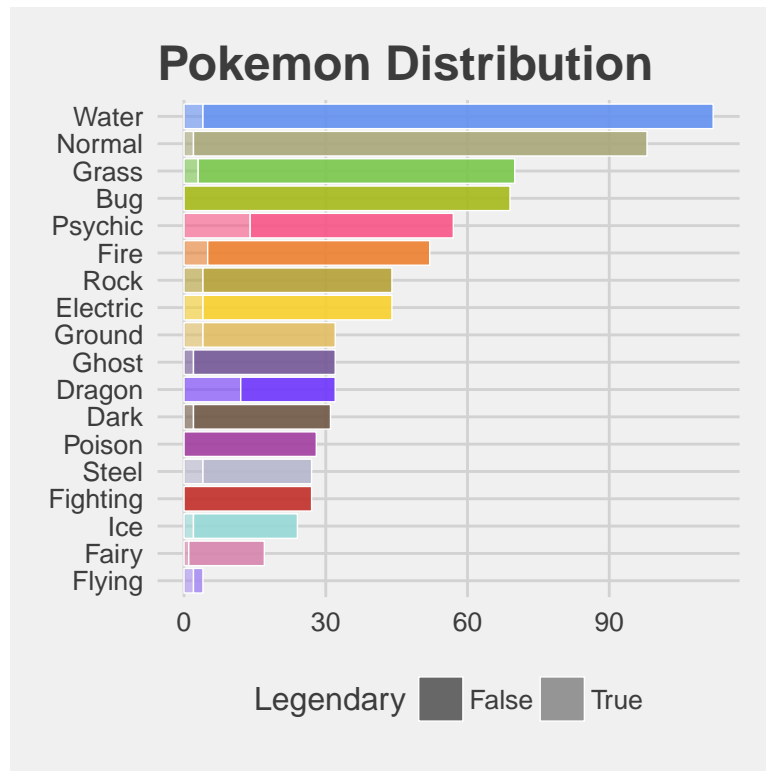

This graph displays the number of pokemon for each primary type and proportion of legendaries in each type. The Psychic, Dragon, and Flying Types have a higher proportion of Legendaries than the other types. So I decided to create three features that target those three types of pokemon. There is also another feature I created based on the graph below.

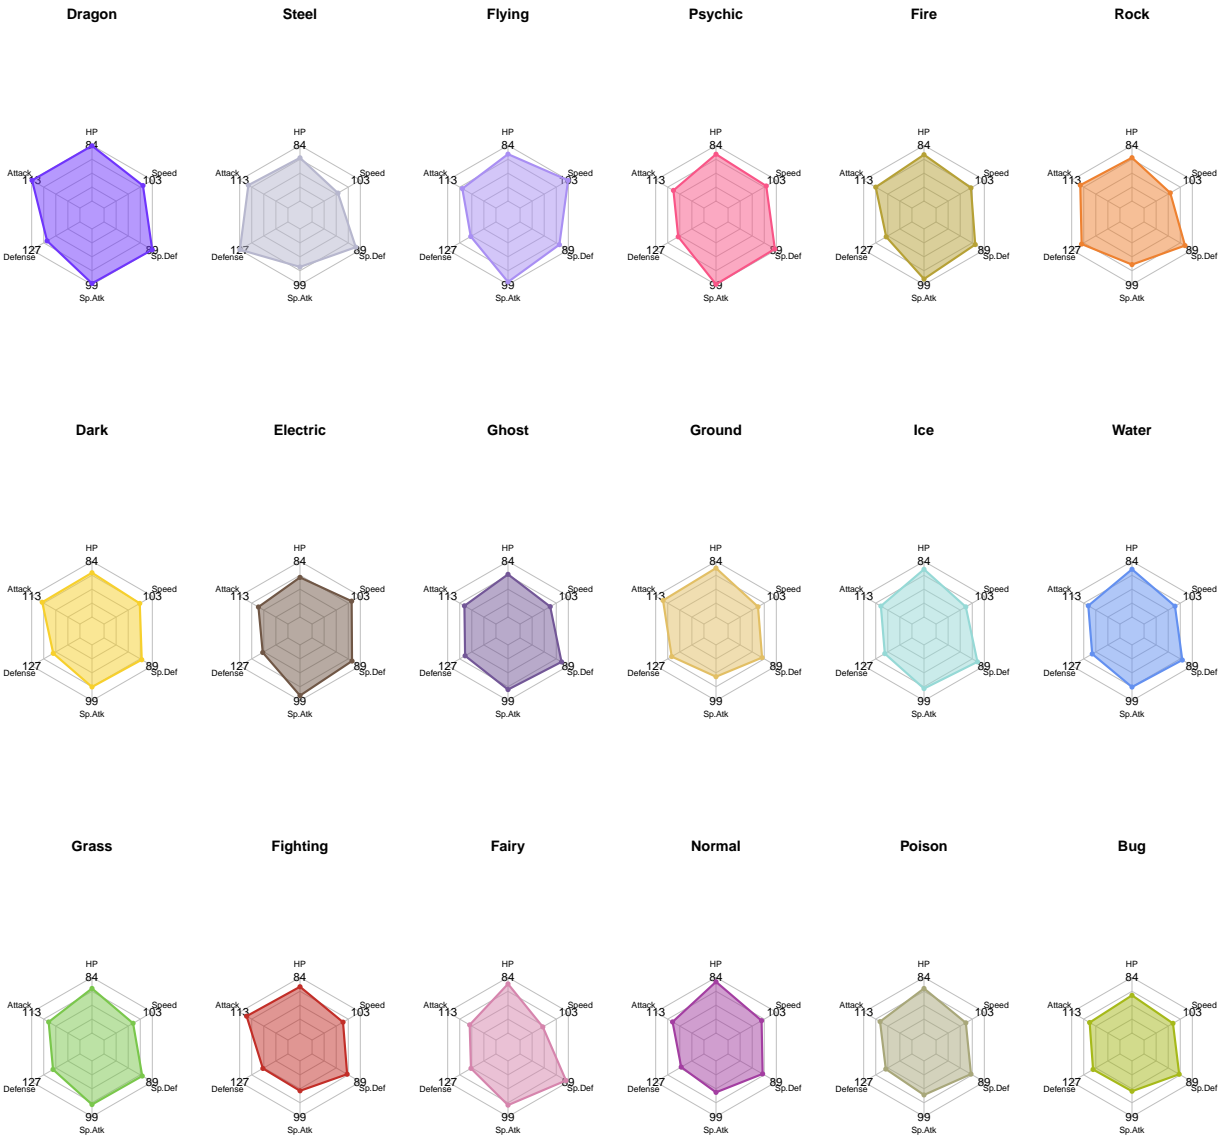

In this graph, we can see the average base stat distribution in comparison to the primary type's average base stat distribution. The three categories of Psychic, Dragon, and Flying all have at least average to above average stat distribution for each stat. Because each of those three primary types have a high proportion of legendaries, I decided to create a total stat strength feature to help improve legendary classification.

Features Created

This is the feature code for checking if the pokemon is a dragon, psychic, or flying. These three types all have a high proportion of legendary pokemon.

```
#Features to distinguish pokemon of these three types
pokemon$isDragon <- ifelse(pokemon$Type.1 == "Dragon", "Y", "N")
pokemon$isPsychic <- ifelse(pokemon$Type.1 == "Psychic", "Y", "N")
pokemon$isFlying <- ifelse(pokemon$Type.1 == "Flying", "Y", "N")
```

This is the feature code for checking if pokemon has higher total base stats than the median pokemon. This is because legendaries and the three high proportion types have higher base stats than the average pokemon.

```
#Features to  
pokemon$OverallStrength <- ifelse(pokemon$Total > median(pokemon$Total),  
                                   "Strong", "Weak")
```