

# Mutual Modelling in Educational Child-Robot Interaction

Alexis Jacq<sup>1,2</sup>

<sup>1</sup>CHILI Lab, École Polytechnique Fédérale de Lausanne, Switzerland,

<sup>2</sup>Instituto Superior Técnico, University of Lisbon, Portugal

February 23, 2016

## Abstract

In any constructive social interaction, agents must be able to understand each other. This mutual understanding requires the ability to establish a mental model of the other, called mutual modelling. My *Ph.D.* is focused on mutual modelling in robotics: How robots can model other agents within social activities? Such models must be dynamic in order to keep track of shared knowledge, and adaptive in order to deal with specific behaviours of agents. This work is directly applied to the CoWriter Project, that aims at exploring how a robot can help children with the acquisition of handwriting <sup>1</sup>. Does a second level of mutual modelling in robots would actually improve educative Human-Robot Interactions?

---

<sup>1</sup><http://chili.epfl.ch/cowriter>

# Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	Importance of higher levels of Mutual Modelling in HRI . . . . .	2
1.2	Application to the CoWriter project . . . . .	3
<b>2</b>	<b>Related work</b>	<b>4</b>
<b>3</b>	<b>Development &amp; experiments with CoWriter</b>	<b>4</b>
3.1	Interaction overview . . . . .	5
3.2	Generating and learning letters . . . . .	6
3.3	Long-term studies . . . . .	6
3.4	With-me-ness . . . . .	12
3.5	Importance of these results in future works . . . . .	12
<b>4</b>	<b>Framework for mutual modelling in robotics</b>	<b>12</b>
4.1	Justification of the approach . . . . .	12
4.2	Notations . . . . .	12
4.3	Mutual understanding . . . . .	13
4.4	Structure and dynamic of the models . . . . .	13
<b>5</b>	<b>Cognitive architecture</b>	<b>14</b>
5.1	Global description . . . . .	14
5.2	Perception modules . . . . .	14
5.3	Mutual modelling modules . . . . .	15
5.4	Decision making . . . . .	15
<b>6</b>	<b>Implementation</b>	<b>15</b>
6.1	ROS modules . . . . .	15
6.2	Integration to CoWriter . . . . .	15
<b>7</b>	<b>Evaluation</b>	<b>16</b>
7.1	Hypothesis . . . . .	16
7.2	Experimental studies . . . . .	17
<b>8</b>	<b>Conclusion and planning</b>	<b>17</b>

## 1 Introduction

### 1.1 Importance of higher levels of Mutual Modelling in HRI

As human individuals, most of our skills and knowledge have been built through social interactions. At the beginning we learn from parents language and basics of etiquette. Older, we learn culture and science mainly at school with teachers. To make possible such a social learning, both learners and teachers need to model each other: a teacher has to be aware of understood knowledge of his student, and a learner has to take the perspective of his teacher to understand his lessons.

Developed by Baron-Cohen and Leslie [1], the Theory of Mind (ToM) describes the ability to attribute mental states and knowledge to others. In interaction, humans are permanently collecting and analysing huge quantity of information to stay aware of emotions, goals and

understandings of their fellows. In this work, we focus on a generalization of this notion: Mutual Modelling characterizes the effort of one agent to model the mental state of another one [5].

Until now, the work conducted by the Human-Robot Interaction (HRI) community to develop mutual modelling abilities in robots was limited to a first level of modelling (see Related Work section 2). Higher levels require the ability to recursively attribute a theory of mind to other agent (*I think that you think that ...*) and their application to HRI remains unexplored. However, a knowledge of oneself perceived by others is necessary to adapt a behaviour to keep mutual understandings. Without such a reflection it is possible to try sharing knowledge, but no immediate feedbacks of success are given. If the trial has failed it is impossible to guess it and to repair it.

Especially in a context of child-robot interaction, a robot must take care of his image: how much it is perceived as an automatic and boring agent, or contrariwise as a surprising and intelligent character. If the robot is able to detect this perception of itself, it can adapt its behaviour in order to be understood: “you think I am sad while I am happy, I want you to understand that I am happy”. In an educational context where knowledge is shared, agents must exhibit that they are acquiring the shared information with an immediate behaviour: “I look what you are showing to me, do you see I am looking what you are showing, do you think I am paying attention to your explanation ?”; “I have understood your idea, do you understand I have understood ?”. We have different strategies to exhibit understanding or to repair a misunderstanding. As an example, if someone is talking about a visual object, we alternatively gaze at the object and at the person to make sure he saw we gazed at the object. Or if we detect that the other have not understood a gesture (e.g. pointing an object) we probably exaggerate the gesture.

The goal of this thesis is to develop a cognitive architecture that enables robots to perform mutual modelling-based reasoning in order to reach such a behaviour. It requires the robot to be aware of itself, of the human, and of itself perceived by the human.

Our research question is: *does a second level of modelling enables higher quality interactions?* We will operationalize this questions and the measures of quality in this document.

## 1.2 Application to the CoWriter project

Children facing difficulties in handwriting integration are more exposed to troubles during the acquisition of other disciplines as they grow up [3]. The CoWriter activity introduces a new approach to help those children [11]. Based on *learning by teaching* paradigm, it aims to repair self-confidence and motivation of the child rather than his handwriting performance alone.

*Learning by teaching* is a technique that engages students to conduct the activity in the role of the teachers in order to support their learning process. This paradigm is known to produce motivational, meta-cognitive and educational benefits in a range of disciplines [16]. The CoWriter project is the first application of learning by teaching approach to handwriting.

The effectiveness of our learning by teaching activity is built on the “protégé effect”: the teacher feels responsible for his student, commits to the student’s success and possibly experiences student’s failure as his own failure to teach. The main idea is to promote in the child an extrinsic motivation to write letters (he will do it in order to help his “protégé” robot) and to reinforce the self-esteem of the child (he plays the teacher and the robot actually progress).

Our project requires a robot that play the role of a realistic learner to attract and challenge the child. At the moment, we have already implemented and tested the activity without mutual modelling ability in the robot [11]: the movements, the learning curve and the sentences of the robot are set beforehand and do not depend on the interaction. However, the realism of the

learning robot and the protégé effect could be strongly improved if the robot was able to play his role according to a model of the child and, at a deeper level, to a model of *the robot-perceived-by-the-child* and *the child-perceived-by-himself*.

With a mutual modelling architecture, the robot could adapt his learning speed based on these models to make sure the child perceive its progresses. Furthermore, we want a robot that implicitly leads the child to correct himself while correcting the robot: for example, it could detect and exaggerate the mistakes of the child. At another scale, the robot could have a physical behaviour adapted to the child: *micro-behaviours* (gestures, gazes and sounds) must be based on the content of the interaction and on the behaviour of the child in order to improve the realism of the robot, to induce strong protégé effect and to make the interaction with the robot more comfortable for a young child.

In this thesis, we aim to construct a general framework for mutual modelling and, in the same time, to develop and test it through this activity. We have designed an experimental framework that enable long-term studies in real pedagogic/therapeutic contexts [12]. Following this work, our results will be based on experimental studies with children that face actual difficulties in learning handwriting.

## 2 Related work

In several contexts, a large amount of fields have introduced their own framework to describe mutual modelling ability [14]. In Developmental psychology, Flavell [7] denotes two different levels of perspective taking: The *cognitive connection* (I see, I hear, I want, I like...) and *mental representation* (what other agents feel, hear, want...). A specific deficit, namely autistic spectrum disorder, is accompanied by a lack of theory of mind in affected children. The study of this disorder led psychologists to develop false-belief experiments [1][8] that are used to bring out different levels of ToM in children.

In Psycholinguistics and collaborative learning, and more precisely in *computer supported collaborative learning* (CSCL), Roschelle and Teasley [18] suggested that collaborative learning requires a process of constructing and maintaining a *shared understanding* of the task at hand. The term “mutual modelling” was introduced in this context, and focused on knowledge states of agents [5]. Dillenbourg developed in [19] a computational framework to represent mutual modelling situations. He introduced the notation  $\mathbf{M}(\mathbf{A}, \mathbf{B}, \mathbf{X})$  to denote “**A** knows that **B** knows **X**”.

Epistemic logic uses another notation to describe this concept:  $\mathbf{K}_\mathbf{A} \mathbf{K}_\mathbf{B} \mathbf{X}$  where  $\mathbf{K}_\mathbf{i} \mathbf{X}$  stands for “agent **i** knows **X**”. This notation is extended in order to describe more complex situations, like the *shared-knowledge* (all the agents of a group know **X**) and the *common-knowledge* (all the agents of a group know **X**, and know that all the agent know **X**, and know that all the agents know that all the agents know **X**..., etc.) [10].

However, HRI research has not, until now, explored the whole potential of mutual modelling. In [20], Scassellati gave an initial account of Leslie’s and Baron-Cohen’s theory of mind from the perspective of robotics. He limited his work to perceptual precursors (face detection or colour saliency detection). Since then, some work (including Breazeal [2], Trafton [22], Ros [17] and Lemaignan [13]) has been conducted to implement Flavell’s first level of perspective taking [6] (“*I see (you do not see the book)*”), ability that is limited to the process of visual perception.

## 3 Development & experiments with CoWriter

During the first year of my *Ph.D.* I worked to develop the CoWriter activity by improving the

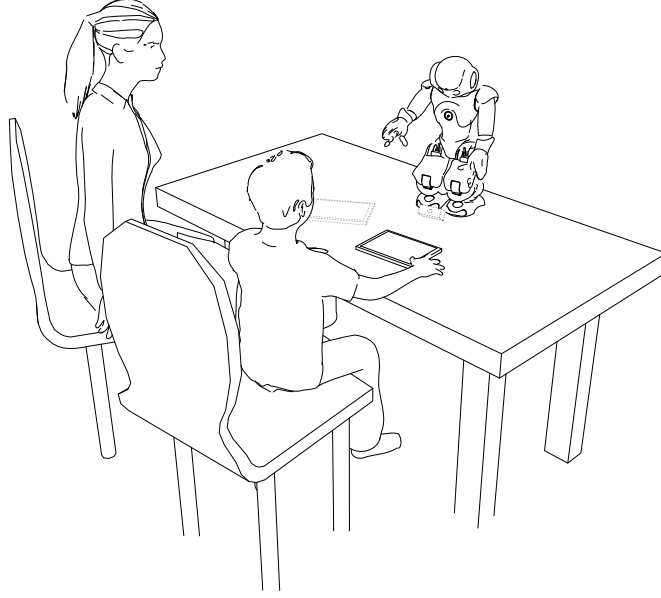


Figure 1: Our experimental setup: face-to-face interaction with a NAO robot. The robot writes on the tactile tablet, the child then corrects the robot by directly overwriting its letters on the tablet with a stylus. An adult (either a therapist or an experimenter, depending on the studies), remains next to the child to guide the work (prompting, turn taking, etc.). For some studies, a second tablet and an additional camera (lightened) are employed.

### 3.1 Interaction overview

Figure 1 illustrates our general experimental setup: a face-to-face child-robot interaction with an (autonomous) Aldebaran’s NAO robot.

A tactile tablet (with a custom application) is used by both the robot and the child to write: in each turn, the child requests the robot to write something (a single letter, a number or a full word), and pushes the tablet towards the robot, the robot writes on the tablet by gesturing the writing (but without actually physically touching the tablet). The child then pulls back the tablet, corrects the robot’s attempt by writing himself on top or next to the robot’s writing, and “sends” his demonstration to the robot by pressing a small button on the tablet. The robot learns from this demonstration and tries again.

In [12], we added buttons to the tablet interface to allow the child to evaluate the robot. Even if this feedback does not necessarily concerns the progress of the robot’s writing (children also use them to express how they like the robot), we can still exploit and improve this idea to get effective information about the child’s perception of the robot.

The robotic implementation of this activity is explained in [11]. We used ROS to ensure the synchronization and communication between different devices. Likewise, the cognitive architecture for mutual modelling will be designed as a ROS module that will collect information about the mental state of agents (here, the child, or *the robot-perceived-by-the-child*, or *the child perceived by himself*) in order to update its model of these agents. Then, other modules (for example the module that governs the learning algorithm of the robot) will use these models to make decisions. We will better explain this design below, in section [cognitive architecture / implementation].

### 3.2 Generating and learning letters

Since our approach is based on teaching a robot to write, generating (initially bad) letters and learning from demonstrations is a core aspect of the project. The initial state of the robot and his ability to obviously learn from demonstrations of the child is the key to lend credibility to the activity and to induce the “protégé” effect.

The technical idea is simple: allographs of letters are encoded as a sequence of 70 points in 2D-space and can be seen as vectors with 140 elements  $(x_1, \dots, x_{70}, y_1, \dots, y_{70})$ . We arbitrarily chose a set of allograph that define the initial state of generated letters. After the child provided a demonstration of a letter, the algorithm generates a new letter corresponding to the middle point between the last state and the demonstration. Details of this algorithm are presented in [11] and improvements are tested in [12].

However, to keep the child engaged, the robot must learn at the right rate, not too fast otherwise the kid will have no opportunity for improving his skills and not too slow otherwise he may lose trust in his ability to improve the robot’s skills. And a learning curve just based on the middle point between last state and demonstration will be too fast for one child, and too slow for another one. We need to make the robot aware of the child’s perception of it progresses to take decision about its own learning curve. This awareness should be taken in account in our mutual modelling implementation, described in section 5.

### 3.3 Long-term studies

We tested CoWriter in real pedagogic/therapeutic contexts with children in difficulty over repeated long sessions (40-60 min). Through 3 different case studies, we explored and refined experimental designs and algorithms in order for the robot to adapt to the troubles of each child and to promote their motivation and self-confidence. We report positive observations, suggesting commitment of children to help the robot, and their comprehension that they were good enough to be teachers, overcoming their initial low confidence with handwriting. We detail the measures and results of these studies in the following 3 subsections:

#### Case-study 1: Vincent

**Context** Vincent<sup>2</sup> is a five year-old child. At school, he has difficulties to learn writing, particularly with cursive letters. From our perspective, Vincent is shy and quiet. He suffers from poor self-confidence much more than any actual writing problem. The experiment was conducted without any therapist, in our laboratory. A parent was here to accompany the child, but she did not intervene during interactions. Children’s personalities, conditions and state evaluation were reported by the parent.

**Hypothesis** The CoWriter activity needs a child engaged as interaction leader. With this study we consider the problem of long-term interactions. We hypothesize that with an appealing scenario children can maintain motivation in doing a handwriting activity for an hour over 4 sessions.

**Methodology** Our goal was to provide Vincent with an environment that would enable him to sustain engagement over four one-hour sessions, one session per week. We decided to introduce a scenario to elicit a strong “protégé effect” and such induce a stronger commitment.

---

<sup>2</sup>The names of children has been changed.

Table 1: Number of demonstrations provided by Vincent over the four sessions.

Session	S1	S2	S3	S4	Total
Number of demonstrations	23	34	52	46	155

While the child came with low motivation in writing exercise for himself, our idea was to use this effect to promote a new extrinsic motivation: improving letters in order to help the robot. Details of the experimental design are presented in [12].

**Measures & Analysis** We measured the commitment of the child with the number of demonstration he provided. We also measured the duration of sessions. During the two last sessions, we recorded the time taken by the child to write each demonstration. After the experiment we interviewed the parent of the child. She was asked if she observed any impact of our activity on the child. We compared the number of demonstrations provided by Vincent along the 4 sessions (reported on Table 1) and we summed the time spend by the child to write demonstration during the 2 last sessions.

**results** Overall, Vincent provided 155 demonstrations to the robot. We can see in Table 1 that the number of demonstrations provided by Vincent was globally increasing along sessions while the difficulty of the activity was also increasing. Interestingly, as the number of demonstration decreased from session 3 to session 4, the total time spend to write demonstrations is similar: 41.6s in session 3 ( $\sim 0.8$ s per letter) and 41.1s in session 4 ( $\sim 0.89$ s per letter). A explanation of this result could be that since the difficulty was increasing the child spent more time to write his demonstrations.


After the first week, he showed confidence when playing with his “protégé” and he built affective bonds with the robot over the course of the study, as evidenced by some cries on the last session, and several letters sent to the robot *after* the end of the study (one of them 4 months later) to get news. This represents a promising initial result: we can effectively keep a child committed into the activity with the robot for a relatively long periods of time (about 4 hours).

From the parent’s perspective, Vincent was actually showing a new motivation in improving his handwriting. He took pleasure to work with the robot and to accomplish his teacher’s mission. She confirmed that an affection of the child for the robot took root within the experiment. Finally she saw an improvement of his handwriting and explained that the child “passed from a mix of script and cursive writing up to a full-cursive writing”.

But no conclusion can be drawn in terms of actual handwriting remediation: we did not design this study to formally assess possible improvements. However, as pictured on Figure 2, Vincent was able to significantly improve the robot’s skill, and he acknowledged that he had been able to help the robot: in that regard, Vincent convinced himself that he was “good enough” at writing to help someone else, which is likely to have a positive impact on his self-esteem.

## Case-study 2: Thomas

**Context** Thomas, 5.5 years old child, is under the care of an occupational therapist. He has been diagnosed with visuo-constructive deficits. He was frequently performing random attempts and then was comparing with the provided template. According to the therapist, Thomas is restless and careless: he rarely pays attention to advice and does not take care of his

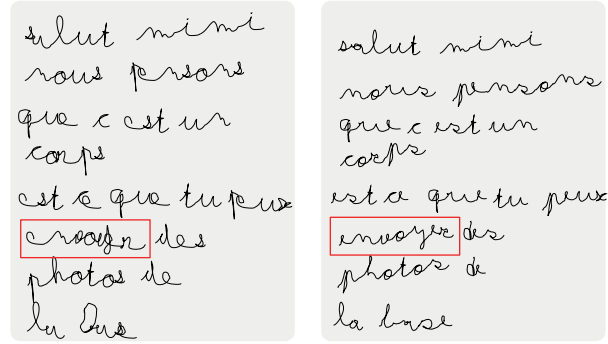

(a) Initial letter, generated by the robot (b) Final letter, after training with Vincent

Figure 2: (French) text generated by the robot, before and after a one hour long interaction session with the child. As an example, the red box highlights the changes on the word “envoyer”.

drawing movement when he is writing. He is quickly shifting his attention from one activity to another. Thomas was working on number allographs with his therapist. During a prior meeting, the therapist provided us with a sequence of numbers written by Thomas. one of the observed problems was drawing horizontally-inverted allographs, mainly for “5”. The experiment was conducted with Thomas’ therapist.

**Hypothesis** We want to see if the CoWriter activity can be adapted to a pedagogical context in order help a child with diagnosed deficits to learn handwriting. We believe that small modifications of the activity adapted to Thomas problems (visuo-constructive deficits and inattention) could help to keep him focused on the activity during forty-minutes sessions, and to evidence to the child that the robot is progressing by dint of his demonstrations.

**Methodology** The experiment was conducted in the therapist’s office (four sessions spanning over 5 weeks). We assumed that a scenario like the one we used for Vincent would not be usable with Thomas. We just introduced the robot and quickly said that it was seeking help to train for a robot handwriting contest. In order to integrate our work with that of the therapist, we decided to adapt the CoWriter activity to work with numbers. Details of the experimental design are presented in [12].

**Measures & Analysis** We recorded all the demonstration performed by the child and by the robot. The duration of sessions and the time spend by demonstration were also recorded by the logs of the tablet. It was difficult to make comparison between different sessions since the child did not work on the same numbers. But we could study the evolution of the quality of Thomas’ demonstration when he was working on a given number (Figure 5). To show how Thomas leaded the robot to reach his level we plotted on the same graph the evolution of the quality of Thomas’ demonstrations and the robot’s trials (Figure 4). We also reconstructed and displayed the drawn allographs of the number 6 to visualize the impact of the lessons of Thomas on the robot (Figure 3).

**Results** Despite his attention deficit, Thomas was able to remain engaged in the activity during more than forty minutes in each session. In total, 55 allographs out of 82 demonstrated



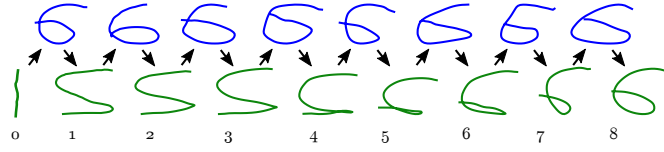


Figure 3: Demonstrations provided by Thomas for the number “6” (top row) and corresponding shapes generated by the robot. After eight demonstrations, Thomas decided that the robot’s “6” was good enough, and went to another character: in that respect, he was the one leading the learning process of the robot.

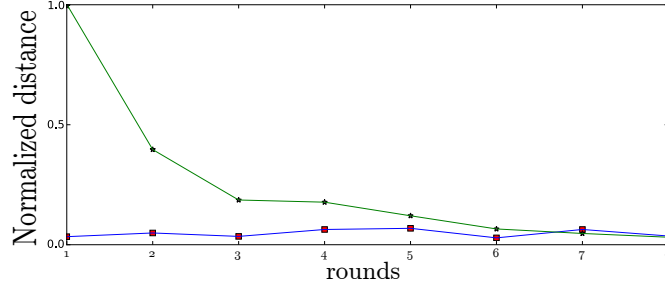


Figure 4: Distance between demonstrations and templates. Green lines represent the robot performance, blue lines performance of the child. The round IDs correspond to the demonstrations pictured on Figure 3.

by the child were acceptable considering our threshold (with a progressive improvement from 13 out of 28 in the first session up to 26 out of 29 in the last session).

As soon as Thomas understood that the robot was only accepting well-formed allographs, he started to focus on it and he would typically draw 5 or 6 times the number before actually sending to the robot (the tablet lets children clear their drawing and try again before sending it). According to the therapist, it was the first time that Thomas corrected himself in such a way: he made the effort to take into account how *another agent* (the robot) would interpret and understand his writing. Figure 5 shows how he gradually improved his demonstrations for some numbers, according to the metric we used to make the robot accept/refuse samples.

Since the robot’s handwriting started from a simple primitive (a stroke), each time Thomas succeeded to have his demonstrations accepted by it, the robot’s improvement was clearly visible (as measured in Figure 4). This led to a self-rewarding situation that effectively supported Thomas’ commitment.

### Clinic-study: when children evaluate the robot

**Context** Each of previous studies was specifically adapted to a particular child: we relied on two different designs in order to sustain each child’s commitment. In this new experiment, we conducted a study with eight children using a single experimental design. The children all have in common difficulties to learn cursive writing but the nature and magnitude of these troubles are significantly different from one child to another. Valerie (7 years old), Antoine (6.5) and Johan (7) are under the care of an occupational therapist. Emilien (8) and Mathieu (7) are repeating their school year because of writing. Marie (6) and Adele (8) are bottom of their respective classes in writing activities. Nicolas (7) is under the care of a neurologist, and has been diagnosed with specific language impairment. Given their school year, all of these

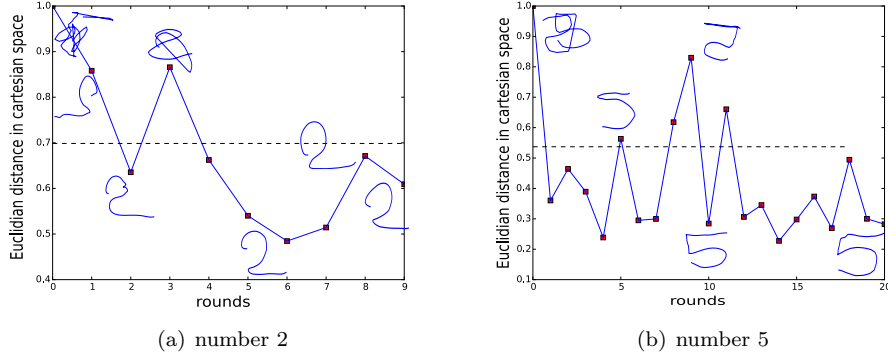


Figure 5: Improvement of Thomas demonstrations for some numbers: a) the number 2 and b) the number 5. Thomas progressively took care of the demonstrations he was providing to the robot for those numbers. We used for this figure the same metric than the one used for the acceptance algorithm to measure distance between demonstration and templates. Distances are normalized with respect to the biggest value. The dashed line correspond to the threshold of robot’s acceptance.

children would be expected to know the shape of cursive letters. The experiment was conducted in collaboration with an occupational therapist. Our goal was to study the perception of the robot’s progress in children. We wanted to know how easily children were able to take the role of teachers and to detect improvements or eventual degradations of the robot’s letters.

**Hypothesis** Children understand their role and find motivation to teach the robot. They are able to perceive the progress of the robot, and their evaluations correlates with its hand-writing performance.

**Methodology** This experiment took place in an occupational therapist clinic in Normandy, France. Over a period of two weeks, each child came three times for a one hour long session (except Adele and Marie who only attended one session). An experimenter was present to explain the rules of the game and tablet usage. As in the previous experiments, children were provided with two tablets: one to choose a word (or a single letter) to teach, one used by both the child and the robot to write. We also provided printed templates for the letters if the child asked for them. Besides, we added two buttons to the tablet interface: a green one with a “thumbs up”, and a red one with a “thumbs down”. Those buttons could be used by the children to evaluate the robot (the green one was for positive feedback while the red one was for negative feedback). We used it as a measure of the perception of the robot by the child: the more the child used evaluation buttons, the more he was adopting the role of the teacher, judging the robot instead of himself. Children were free to use the buttons whenever they wanted during the experiment.

**Measures & Analysis** As in previous studies, we recorded the timestamps of all demonstrations, the duration of demonstrations and we measured the overall commitment of the children as the number of demonstrations provided per session. We also logged all the evaluations provided by the children. The awareness of children for the robot progress is measured as the correlation between children evaluations and distances between the robot’s letters and reference templates. Since sessions took place over only two weeks, we did not attempt to study

Table 2: Feedback from the children to the robot.  $\#Demo$  denotes the average number of demonstrations per session provided by the child;  $\#Pos$  and  $\#Neg$  the total number of positive (resp. negative) feedbacks they provided.  $r$  (robot) is the correlation coefficient between the feedback provided by the children and the performance of the robot.  $r$  (child) is the correlation coefficient between the feedback provided by the children and their own progress.

Child	# Demo	# Pos	# Neg	$r_{robot}$	$r_{child}$
<i>Valérie</i>	42	24	6	0.25 **	0.14 <i>ns</i>
<i>Émilien</i>	74	20	9	0.06 <i>ns</i>	0.02 <i>ns</i>
<i>Mathieu</i>	43	10	3	0.23 **	0.21 **
<i>Nicolas</i>	38	16	4	0.31 ***	0.20 **
<i>Johan</i>	32	10	5	0.10 <i>ns</i>	0.03 <i>ns</i>
<i>Antoine</i>	27	10	3	0.20 *	-0.02 <i>ns</i>
<i>Adèle</i>	35	4	2	0.28 *	0.30 **
<i>Marie</i>	40	5	1	-0.02 <i>ns</i>	0.13 <i>ns</i>

possible handwriting remediation in children, and we focused instead on the correlation between the children’s evaluations and the robot’s progression. We estimated the robot’s progression as the difference between an initial score (score of the first robot’s attempt when the children have chosen a new word/letter to work on) and the current robot’s score (after being taught by the child). The score is calculated as the average of the euclidean distance between the robot’s generated letter and the reference allograph for each of the letters of the word. The reference letters were manually created beforehand, based on typical cursive letters template<sup>3</sup>. At every turn, we associate two values: the current score of the robot, and the child’s immediate feedback (+1 if the child pressed the green button, -1 if he pressed the red one, 0 if he did not press any button during the round). We only keep rounds with feedback (*i.e.* a non-zero grade) and computed a Pearson’s correlation between the robot score and the child feedback.

**Results** All children maintained their engagement during all the sessions. They provided on average 42 demonstrations per session. All children made use of the evaluation buttons and had preference to reward the robot (in total, 99 positive feedbacks and 33 negative ones were recorded). Interestingly, the time spent by the children to draw the demonstrations systematically increased from one session to the other. We interpret this result as the children being more careful and demonstrating the correct gestures to the robot in a slower fashion.

We found that five children out of the eight provided evaluations that significantly correlated with progress of the robot. The coefficients of correlation  $r_{robot}$  are reported in Table 2.

We also computed the correlation between the children’s evaluations and their own progress. The analysis was conducted in the same way, using distances between the children’s demonstrations and reference allographs as a progress score. The evaluations of three out of the five children whose evaluations correlated with the robot’s progress, were also significantly correlated with their own progress ( $r_{child}$  in Table 2). For those children, it seems that the robot was reflecting their own performances, and while they were judging the robot positively (three times more positive feedback than negative feedback), they were actually evaluating themselves.

<sup>3</sup><http://www.education.com/slideshow/cursive-handwriting-z/>

### 3.4 With-me-ness

*With-me-ness*, a concept borrowed from the field of *Computer-Supported Collaborative Learning*, measures in a well-defined way to what extent the human is *with* the robot over the course of an interactive task. As such, it is a meaningful precursor of engagement.

**Description** We explored a methodology, from real-time estimation of the human’s focus of attention (relying on a novel, open-source, vision-based head pose estimator), to on-line computation of with-me-ness. The process can be described in 3 main steps:

**Head-pose estimation**

**Field and focus of attention estimation**

**Computing with-me-ness**

**Validation** We validated this approach using a naturalistic setup involving children during a complex robot-teaching task.

### 3.5 Importance of these results in future works

## 4 Framework for mutual modelling in robotics

### 4.1 Justification of the approach

A first intuition for mutual modelling (MM) is to assume that all agents have the same architecture. In [2], Breazeal shows a MM-based reasoning where the robot uses its own architecture to model other agents. We can imagine a second level of modelling where the robot recursively attribute to other agents the mutual modelling ability. But that can create an infinite recursive loop: the agent then models the robot that models the agent etc. Another reasons to avoid an infinite recursive approach is that different agents must have different behaviours: in similar situations, they do not necessary take similar decisions.

We propose a different approach of modelling, where we define two orders of agent’s model: the **first-order-agents** concern direct representations of agents by the robot (for example the child), while the **second-order-agents** concern the representation of agents by agents (for example the robot-perceived-by-the-child). Modelling second-order-agent like the robot-perceived-by-the-child, helps to model how the child perceives the robot, e.g. to make sure the child understand that the robot is learning from his demonstrations. We can as well define **n<sup>th</sup>-order-agents** with a higher level of theory of mind. But taking into account high levels of mutual modelling would be difficult to process in real time. Unlike the epistemic logic, our proposed framework will not take into account infinite regress [4] of mutual modelling.

### 4.2 Notations

$M_R[A]$  stands for the model (built by the robot R) about the agent A (first-order-agent).  $M_R[A,B]$  stands for the model (built by the robot R) about the agent B perceived by the agent A (second-order-agent). As said above, we limit our approach to 1st and 2nd order of modelling. In a two-agents interaction (the child and the robot) we will focus on three models:  $M_R[C]$  (the model about the child),  $M_R[R]$  (the model about the robot) and  $M_R[C,R]$  (the

robot perceived by the child). It would be also interesting to study  $M_R[C, C]$ , the model about the child perceived by himself in order to play with his self-confidence. But detecting differences between  $M_R[C]$  and  $M_R[C, C]$  seems difficult with the current abilities of the robot.

As models are dynamic,  $M_R^t[A]$  represent the model about an agent A at time  $t$ .

### 4.3 Mutual understanding

Given those three models ( $M_R[R]$ ,  $M_R[C]$  and  $M_R[C, R]$ ) the robot must be able to detect misunderstandings. A misunderstanding of an agent  $A$  by the robot can be formalised as a error between what is actually in the mind of the agent (we can call it  $\Phi[A]$ ) and the model built by the robot:  $\Delta(\Phi[A]; M_R[A])$ . But if  $A$  is human,  $\Phi[A]$  is inaccessible to the robot. In order to maintain a mutual understanding, humans [21] (and monkeys [9]), use predictions of others' behaviours. A bio-inspired approach would be to make, at time  $t$ , a prediction  $P_R^{t+1}[A]$  of the model. Then, at time  $t+1$ , the robot can compute a **prediction error**  $\Delta(M_R^{t+1}[A]; P_R^{t+1}[A])$  in order to detect such a misunderstanding. This idea rely on the assumption that the better are the predictions of a model, the better the model fits the reality. Then, the dynamic of the model can be updated according to the resulting error of prediction. This rule can be used with  $M_R[C]$  and  $M_R[C, R]$ .

Another type of misunderstanding concerns the comprehension of the robot by the child: using the same formalism, it is an error between the actual perception of the robot by the child (we can call it  $\Phi[C, R]$ ) and the robot itself:  $\Delta(\Phi[C, R]; M_R[R])$ . Again, the robot does not have access to  $\Phi[C, R]$ , but it approximates it with  $M_R[C, R]$ . Finally we define the **child's perception error** at time  $t$  by  $\Delta(M_R^t[C, R]; M_R^t[R])$ . This error is taken in account only if the robot has a correct model of itself perceived by the child (only if  $M_R[C, R]$  produce small prediction errors). Since this error assumes that models built by the robot are correct, it is not used to update these models. It corresponds to an error of the child: in order to repair it, the robot must explain the misunderstanding to the child or exaggerate an action to make sure it will be understood.

As an example, in the CoWriter activity, the child teach handwriting to the robot. The robot pretends to be a beginner, but it has its idea of a good handwriting. The robot is perfectly aware of its played progresses. But we want the child to be aware of the progress of the robot. In that perspective, the child's perception error corresponds to the sentence "*I make progress but the child think I don't*", while the prediction error of  $M_R[C, R]$  corresponds to "*The child think I don't make progress, but maybe he think I do and I haven't understood him*".

### 4.4 Structure and dynamic of the models

Each model contains the knowledge and possible actions of an agent. The dynamic between actions and knowledges must be encoded. Some causality can be assumed in advance (if the child gives a good feedback to the robot, it means that the robot-perceived-by-the-child makes progresses) while other can be learnt (e.g. if each time the robot looks at the head of the child the child stops to write). Each modelled agent has its own goals, encoded as a reinforcement learning process. As an example, in CoWriter the robot-perceived-by-the-child ( $M_R[C, R]$ ) is a learner and has the simple goal to make progress. The child ( $M_R[C]$ ) is modelled as a teacher and is assumed to have the goal to improve the robot's writing. Then, the goal of the robot ( $M_R[R]$ ) is to keep a mutual understanding: its knowledges and actions must correspond to itself perceived by the child, and it must be able to predict the behaviour of the child. The schema on Figure 6 visually summarizes this example.

The goals of  $M_R[C]$  and  $M_R[C, R]$  depend on the activity and must be programmed each

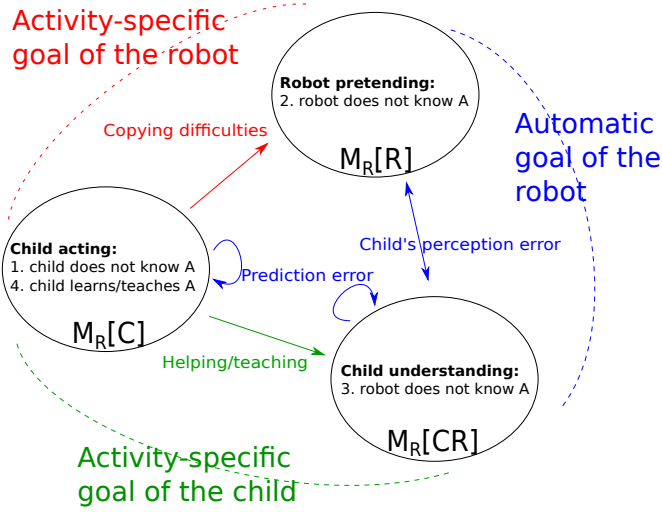


Figure 6:

time we move to a new activity. They can be improved to better fit the child’s behaviour by learning from experience. Contrariwise, the goal of  $M_R[R]$  to keep a mutual understanding is independent and reusable.

## 5 Cognitive architecture

### 5.1 Global description

Our cognitive architecture for mutual modelling can be designed in three main parts. A **perception part** will regroup all the modules that measure the values of the perceived variables using sensitive devices (camera, sensors, micros...). An example of module of the sensitive part could be the system developed by Lemaignan [15] that uses camera to measure a value of *with-me-ness*. These values are sent to the **mutual modelling part** that updates in real-time models with measured values of perceived variables and deducts the value of abstract variables. Finally, the **decision part** contains all the modules associated to the control of the robot (and other active devices like tablets in CoWriter). These modules can read values given by mutual models in order to compute decisions. In the example of the CoWriter activity, these modules are given by the system that learns and generate letters, but we can add a module that generates micro-behaviour, another that decides to switch to a new activity (e.g. drawing with the robot),... etc. The following subsections explain in detail the content and operation of the three parts of the architecture.

### 5.2 Perception modules

The sensitive modules contain all the module able to use sensitive devices to measure value of relevant perceived variables. Some of these modules are associated with the content of the interaction activity. In CoWriter, the learning module takes inputs of tablets to compute the new state of robot’s writing. It defines a sensitive module, and the value of the new state of the robot to write a letter defines a perceived variable. As well, the evaluation of the robot by the child via the feedback buttons defines another perceived variable provided by the modules of the

activity. Other modules are independent of the activity: the system that estimates the target objects looked by the child provides additive information not directly used by the modules of the activity.

### 5.3 Mutual modelling modules

Each perceived value measured by sensitive modules are associated with the model of an agent (or a  $n^{th}$ -order agent). Each mutual model can be designed as a module that knows the list of its associated perceived variables and watch if the value of one of these variables has been changed. An additive module knows all the expected causalities and computes the values of abstract variables. Some expected causalities can be empirically learned and other set by hands.

### 5.4 Decision making

We believe that the values of variables provided by mutual modelling will provide rich and useful information for decision making. Taking in account these values to elaborate decision should improve the realism and the efficiency of the robot in the interaction. Just like the sensitive ones, the modules that take decision can be directly associated to the activity (in CoWriter, the choice of a new learning curve or the decision to suddenly make a big mistake), or can govern independent behaviour (for example a module that generate the micro-behaviour of the robot).

Some decisions, especially the one that will govern the micro-behaviours of the robot can be autonomously made by the robot. It will not strongly affect the content and objectives of the activity (in CoWriter the main objective is to provide the child with a new extrinsic motivation to write in helping the robot). But other decisions can have a high impact on the progress of the interaction: to stop an activity and to switch to a new one can frustrate a child that was committed into the activity. The conditions to make such a decision are not directly assessable, but must be learned by the robot. In order to make these decision cautiously, we propose to start by a Wizard-of-Oz approach and to move towards an autonomous approach following these steps:

1. **Wizard-of-Oz:** A human takes decisions; the robot learns
2. **Mixed-initiative:** The robot makes suggestions; a human agrees or disagrees
3. **Autonomous:** The robot makes decisions

The picture 7 visually summarize the global design of our architecture.

## 6 Implementation

### 6.1 ROS modules

The architecture will be implemented using ROS to synchronize the activity of different modules (written as ROS nodes). The perceived variables provided by sensitive modules and abstract variables provided by expected causalities will be published as messages on topics specific to the associated models. In the same way, modules of decision part will subscribe to the model's topic in order to watch the values of the variables that they need.

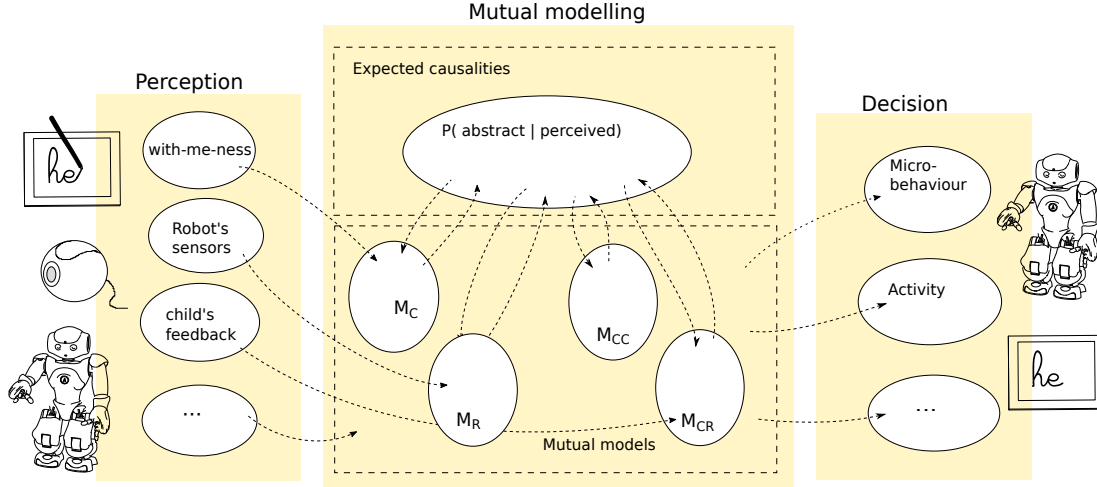


Figure 7: **Overview of the cognitive architecture.** Yellow squares represent different main parts. White ellipses represent modules. We named in example some content of modules and illustrated possible devices used for perception and decisions.

## 6.2 Integration to CoWriter

The CoWriter activity is already implemented using ROS. The main nodes that measure values of relevant variables are the robot's state machine, the node that governs the algorithm to learn/generate letters and the interpreter of the tablet inputs. Variables are already published on other topics used by the activity. We will additionally publish them on the topics associated to the mutual models.

We will use four models: the model of the robot  $M_R$ , the model of the child  $M_C$ , the model of the robot-perceived-by-the-child  $M_{C,R}$  and the model of the child-perceived-by-the-child  $M_{C,C}$ .

Currently, the decisions made within the CoWriter activity that needs information from mutual models are the physical behaviour of the robot (for example, when the robot is waiting for a demonstration it looks the tablet) and the progress of the robot (the choice of the new state learned from the demonstration). We can add several decisions in order to improve the realism and the smoothness of the interaction (for example, the robot suddenly makes an exaggerated mistake, the robot changes its learning curve ...). If we want to take into account information from mutual modelling, we need to improve the algorithms of decision since we bring additive variables: for example, to change the learning curve will require some values of variables associated with  $M_{C,R}$  like the feedback of the child from tablet's buttons.

## 7 Evaluation

### 7.1 Hypothesis

The question of this thesis concerns the improvement of human-robot interactions brought by mutual modelling, especially in the educational context of the CoWriter activity. In order to evaluate this improvement, we hypothesize the following assertion:

*Decisions made using additive information from second level of mutual modelling improve the quality of the CoWriter interaction.*



To study this hypothesis, we need to rigorously define the *quality of the interaction*. Since the goal is to promote child’s self-esteem and extrinsic motivation by inducing a “protégé” effect, we would like to measure the motivation of the child to play the activity and his satisfaction of the robot’s progress.

## 7.2 Experimental studies

Such a measure can be defined by a large amount of variable that provide cues about the commitment of the child (quantity of demonstrations, time spend to write demonstrations, quality/progress of demonstration, progress of the robot, *with-me-ness* ...). The evaluation with feedback buttons can also be used to estimate how the child understands his role of teacher [12].

Along the successive steps to develop our mutual modelling architecture (each step being the addition of a new variable or a group of new variables to take into account), we will test the improvement of the interaction by measuring the above values. We will promote long-term studies with children facing real difficulties to learn handwriting with professional facilitators (teachers or therapists), following our previous works [12].

## 8 Conclusion and planning

We presented in this paper the research question of this thesis, which concerns the importance of mutual modelling in educative human-robot interactions. In order to study this question, we will develop an architecture based on mutual modelling that will collect information about mental and physical states of different agent. The stages of this construction will correspond to the successive additions of variables (or groups of variables) to take into account by the models. We will progressively extract pieces of response to our research question by testing our system each time a stage is crossed. We will use the framework for mutual modelling in HRI that we introduced in 4 in order to simplify notations and clarify the concepts.

During the first year of this thesis, our work was turned on the improvement and finishing of the CoWriter activity’s implementation. We designed an experimental set-up that enable long-term studies in pedagogic/therapeutic contexts with children facing real difficulties to learn handwriting [12]. Finally, we started to implement additional sensitive modules independent of the CoWriter that will provide relevant variables to feed our future mutual modelling architecture (e.g. the system that estimates what the visual object of attention of the child [15]).

## References

- [1] S. Baron-Cohen, A. Leslie, and U. Frith. Does the autistic child have a “theory of mind” ? *Cognition*, 1985.
- [2] C. Breazeal, M. Berlin, A. Brooks, J. Gray, and A. Thomaz. Using perspective taking to learn from ambiguous demonstrations. *Robotics and Autonomous Systems*, pages 385–393, 2006.
- [3] C. A. Christensen. The Role of Orthographic–Motor Integration in the Production of Creative and Well-Structured Written Text for Students in Secondary School. *Educational Psychology*, 25(5):441–453, Oct. 2005.
- [4] H. H. Clark and S. E. Brennan. Grounding in communication. *Perspectives on socially shared cognition*, 13(1991):127–149, 1991.
- [5] P. Dillenbourg. What do you mean by collaborative learning? *Collaborative-learning: Cognitive and Computational Approaches.*, pages 1–19, 1999.

- [6] J. H. Flavell. The development of knowledge about visual perception. *Nebraska Symposium on Motivation*, 25:43–76, 1977.
- [7] J. H. Flavell, F. L. Green, and E. R. Flavell. Developmental changes in young children’s knowledge about the mind. *Cognitive Development*, 5(1):1–27, 1990.
- [8] U. Frith and F. Happé. Autism: Beyond “theory of mind”. *Cognition*, 50(1):115–132, 1994.
- [9] K. Haroush and Z. M. Williams. Neuronal prediction of opponent’s behavior during cooperative social interchange in primates. *Cell*, 160(6):1233–1245, 2015.
- [10] V. Hendricks and J. Symons. Epistemic logic. In *Stanford Encyclopedia of Philosophy*. 2008.
- [11] D. Hood, S. Lemaignan, and P. Dillenbourg. When children teach a robot to write: An autonomous teachable humanoid which uses simulated handwriting. In *Proceedings of the Tenth Annual ACM/IEEE International Conference on Human-Robot Interaction*, HRI ’15, pages 83–90, New York, NY, USA, 2015. ACM.
- [12] A. Jacq, S. Lemaignan, F. Garcia, P. Dillenbourg, and A. Paiva. Building successful long child-robot interactions in a learning context. In *Proceedings of the 2016 ACM/IEEE Human-Robot Interaction Conference*, 2016.
- [13] S. Lemaignan. *Grounding the Interaction: Knowledge Management for Interactive Robots*. PhD thesis, CNRS - Laboratoire d’Analyse et d’Architecture des Systèmes, Technische Universität München - Intelligent Autonomous Systems lab, 2012.
- [14] S. Lemaignan and P. Dillenbourg. Mutual modelling in robotics: Inspirations for the next steps. In *Proceedings of the 2015 ACM/IEEE Human-Robot Interaction Conference*, 2015.
- [15] S. Lemaignan, F. Garcia, A. Jacq, and P. Dillenbourg. From real-time attention assessment to “with-me-ness” in human-robot interaction. In *Proceedings of the 2016 ACM/IEEE Human-Robot Interaction Conference*, 2016.
- [16] C. A. Rohrbeck, M. D. Ginsburg-Block, J. W. Fantuzzo, and T. R. Miller. Peer-assisted learning interventions with elementary school students: A meta-analytic review. *Journal of Educational Psychology*, 95(2):240–257, 2003.
- [17] R. Ros, E. A. Sisbot, R. Alami, J. Steinwender, K. Hamann, and F. Warneken. Solving ambiguities with perspective taking. In *5th ACM/IEEE International Conference on Human-Robot Interaction*, 2010.
- [18] J. Roschelle and S. D. Teasley. The construction of shared knowledge in collaborative problem solving. In *Computer supported collaborative learning*, pages 69–97. Springer, 1995.
- [19] M. Sangin, N. Nova, G. Molinari, and P. Dillenbourg. Partner modeling is mutual. In *Proceedings of the 8th international conference on Computer Supported Collaborative Learning*, pages 625–632. International Society of the Learning Sciences, 2007.
- [20] B. Scassellati. Theory of mind for a humanoid robot. *Autonomous Robots*, 12(1):13–24, 2002.
- [21] S. Suzuki, R. Adachi, S. Dunne, P. Bossaerts, and J. P. O’Doherty. Neural mechanisms underlying human consensus decision-making. *Neuron*, 86(2):591–602, 2015.
- [22] J. Trafton, N. Cassimatis, M. Bugajska, D. Brock, F. Mintz, and A. Schultz. Enabling effective human-robot interaction using perspective-taking in robots. *IEEE Transactions on Systems, Man and Cybernetics, Part A: Systems and Humans*, 35(4):460–470, 2005.