

Software Reuse

Andy Carpenter

School of Computer Science

(Andy.Carpenter@manchester.ac.uk)

Elements these slides come from Sommerville, author of "Software Engineering", and are copyright Sommerville

Reuse-based software engineering

- System reuse
 - Complete systems, which may include several application programs may be reused.
- Application reuse
 - An application may be reused either by incorporating it without change into other or by developing application families.
- Component reuse
 - Components of an application from sub-systems to single objects may be reused.
- Object and function reuse
 - Small-scale software components that implement a single well-defined object or function may be reused.

Benefits of software reuse

Benefit	Explanation
Accelerated development	Bringing a system to market as early as possible is often more important than overall development costs. Reusing software can speed up system production because both development and validation time may be reduced.
Effective use of specialists	Instead of doing the same work over and over again, application specialists can develop reusable software that encapsulates their knowledge.
Increased dependability	Reused software, which has been tried and tested in working systems, should be more dependable than new software. Its design and implementation faults should have been found and fixed.

Benefits of software reuse

Benefit	Explanation
Lower development costs	Development costs are proportional to the size of the software being developed. Reusing software means that fewer lines of code have to be written.
Reduced process risk	The cost of existing software is already known, whereas the costs of development are always a matter of judgment. This is an important factor for project management because it reduces the margin of error in project cost estimation. This is particularly true when relatively large software components such as subsystems are reused.
Standards compliance	Some standards, such as user interface standards, can be implemented as a set of reusable components. For example, if menus in a user interface are implemented using reusable components, all applications present the same menu formats to users. The use of standard user interfaces improves dependability because users make fewer mistakes when presented with a familiar interface.


Problems with reuse

Problem	Explanation
Creating, maintaining, and using a component library	Populating a reusable component library and ensuring the software developers can use this library can be expensive. Development processes have to be adapted to ensure that the library is used.
Finding, understanding, and adapting reusable components	Software components have to be discovered in a library, understood and, sometimes, adapted to work in a new environment. Engineers must be reasonably confident of finding a component in the library before they include a component search as part of their normal development process.
Increased maintenance costs	If the source code of a reused software system or component is not available then maintenance costs may be higher because the reused elements of the system may become increasingly incompatible with system changes.

Problems with reuse

Problem	Explanation
Lack of tool support	Some software tools do not support development with reuse. It may be difficult or impossible to integrate these tools with a component library system. The software process assumed by these tools may not take reuse into account. This is particularly true for tools that support embedded systems engineering, less so for object-oriented development tools.
Not-invented-here syndrome	Some software engineers prefer to rewrite components because they believe they can improve on them. This is partly to do with trust and partly to do with the fact that writing original software is seen as more challenging than reusing other people's software.

The reuse landscape

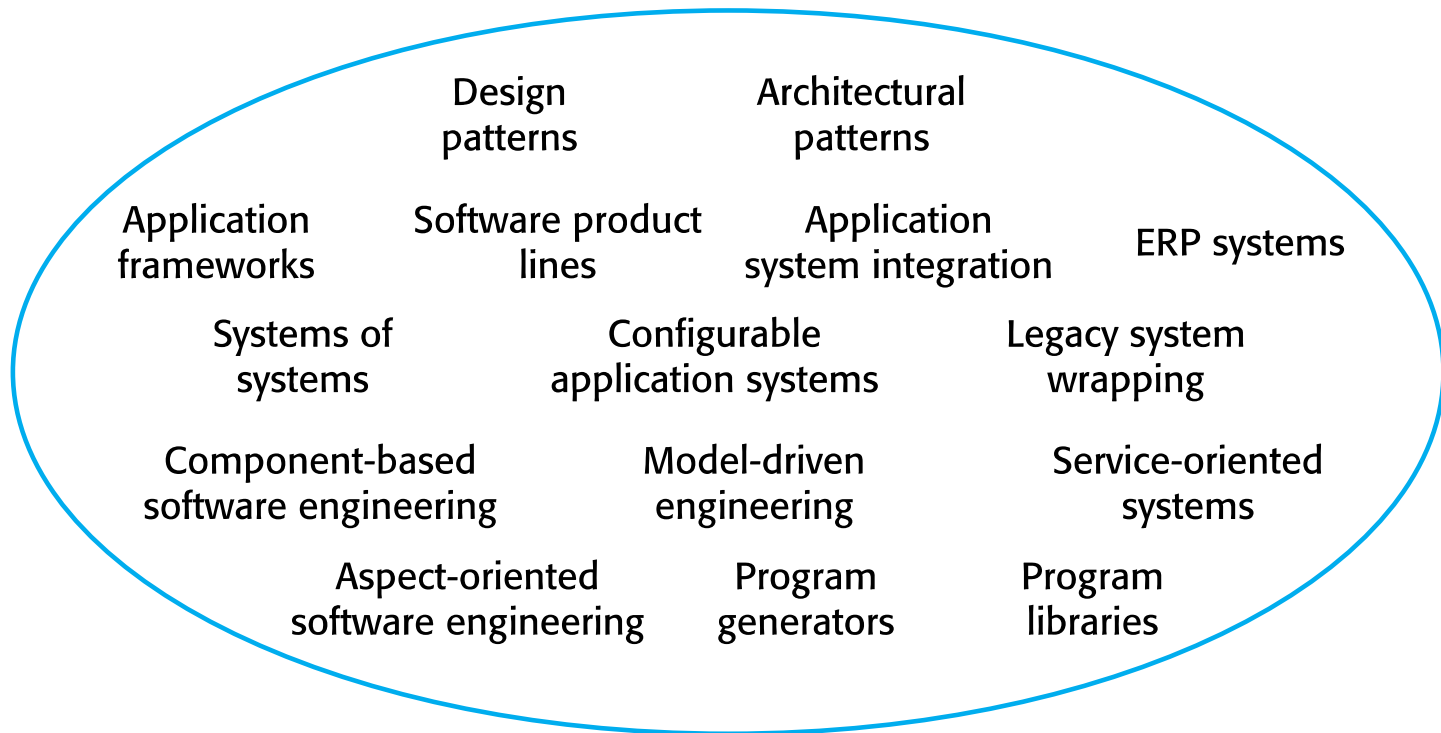

Approaches that support software reuse

Approach	Description
Application frameworks	Collections of abstract and concrete classes are adapted and extended to create application systems.
Application system integration	Two or more application systems are integrated to provide extended functionality
Architectural patterns	Standard software architectures that support common types of application system are used as the basis of applications. Described in Chapters 6, 11 and 17.
Aspect-oriented software development	Shared components are woven into an application at different places when the program is compiled. Described in web chapter 31.
Component-based software engineering	Systems are developed by integrating components (collections of objects) that conform to component-model standards. Described in Chapter 16.

Approaches that support software reuse

Approach	Description
Configurable application systems	Domain-specific systems are designed so that they can be configured to the needs of specific system customers.
Design patterns	Generic abstractions that occur across applications are represented as design patterns showing abstract and concrete objects and interactions. Described in Chapter 7.
ERP systems	Large-scale systems that encapsulate generic business functionality and rules are configured for an organization.
Legacy system wrapping	Legacy systems (Chapter 9) are 'wrapped' by defining a set of interfaces and providing access to these legacy systems through these interfaces.
Model-driven engineering	Software is represented as domain models and implementation independent models and code is generated from these models. Described in Chapter 5.

Approaches that support software reuse

Approach	Description
Program generators	A generator system embeds knowledge of a type of application and is used to generate systems in that domain from a user-supplied system model.
Program libraries	Class and function libraries that implement commonly used abstractions are available for reuse.
Service-oriented systems	Systems are developed by linking shared services, which may be externally provided. Described in Chapter 18.
Software product lines	An application type is generalized around a common architecture so that it can be adapted for different customers.
Systems of systems	Two or more distributed systems are integrated to create a new system. Described in Chapter 20.

Reuse planning factors

- The development schedule for the software.
- The expected software lifetime.
- The background, skills and experience of the development team.
- The criticality of the software and its non-functional requirements.
- The application domain.
- The execution platform for the software.

Application Framework

- Framework definition:
“..an integrated set of software artefacts (such as classes, objects and components) that collaborate to provide a reusable architecture for a family of related applications.”


Application frameworks

- Frameworks are moderately large entities that can be reused. They are somewhere between system and component reuse.
- Frameworks are a sub-system design made up of a collection of abstract and concrete classes and the interfaces between them.
- The sub-system is implemented by adding components to fill in parts of the design and by instantiating the abstract classes in the framework.

Web application frameworks

- Support the construction of dynamic websites as a front-end for web applications.
- WAFs are now available for all of the commonly used web programming languages e.g. Java, Python, Ruby, etc.
- Interaction model is based on the Model-View-Controller composite pattern.

Model-View-Controller pattern

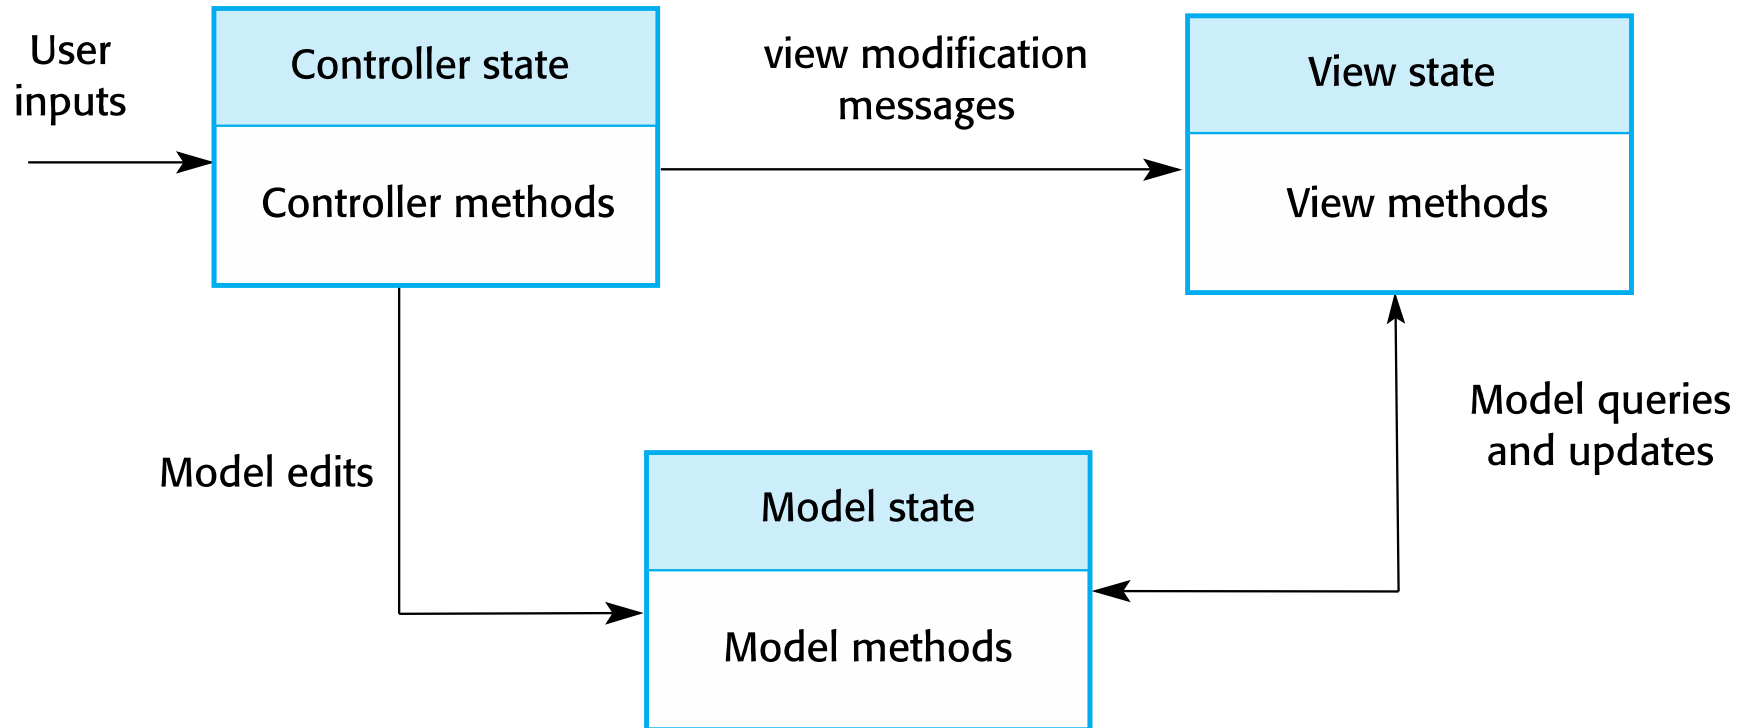


WAF features

- *Security*
 - WAFs may include classes to help implement user authentication (login) and access.
- *Dynamic web pages*
 - Classes are provided to help you define web page templates and to populate these dynamically from the system database.
- *Database support*
 - The framework may provide classes that provide an abstract interface to different databases.
- *Session management*
 - Classes to create and manage sessions (a number of interactions with the system by a user) are usually part of a WAF.
- *User interaction*
 - Most web frameworks now provide AJAX support (Holdener, 2008), which allows more interactive web pages to be created.

Extending frameworks

- Frameworks are generic and are extended to create a more specific application or sub-system. They provide a skeleton architecture for the system.
- Extending the framework involves
 - Adding concrete classes that inherit operations from abstract classes in the framework;
 - Adding methods that are called in response to events that are recognised by the framework.
- Problem with frameworks is their complexity which means that it takes a long time to use them effectively.

Inversion of control in frameworks

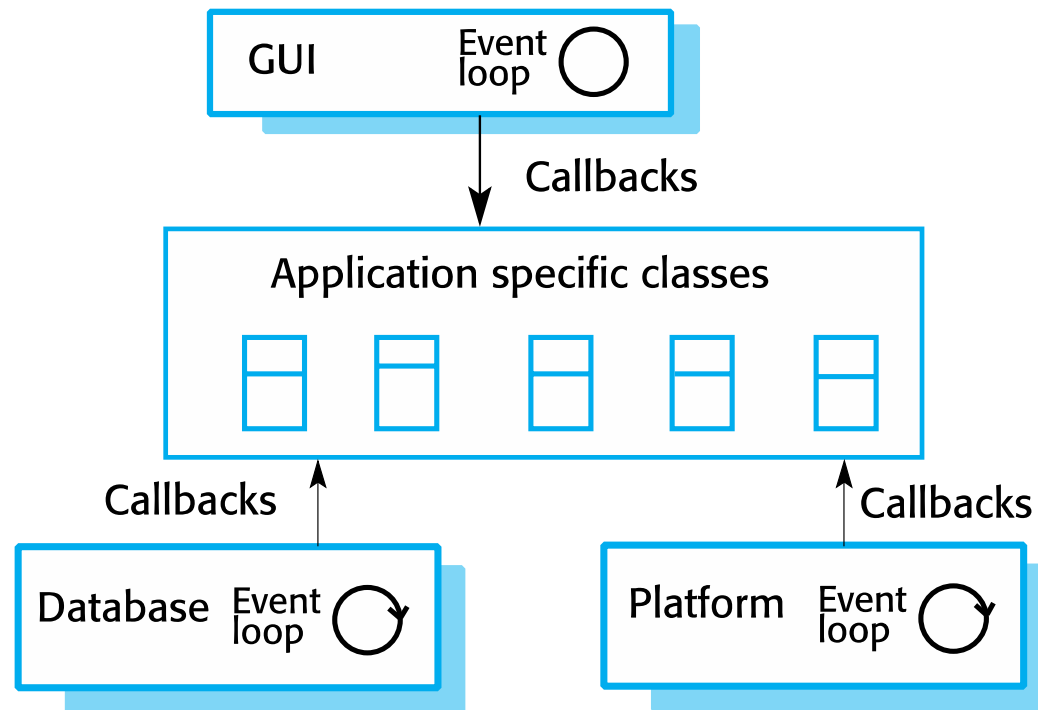


Framework classes

- System infrastructure frameworks
 - Support the development of system infrastructures such as communications, user interfaces and compilers.
- Middleware integration frameworks
 - Standards and classes that support component communication and information exchange.
- Enterprise application frameworks
 - Support the development of specific types of application such as telecommunications or financial systems.

Software product lines

- Software product lines or application families are applications with generic functionality that can be adapted and configured for use in a specific context.
- A software product line is a set of applications with a common architecture and shared components, with each application specialized to reflect different requirements.
- Adaptation may involve:
 - Component and system configuration;
 - Adding new components to the system;
 - Selecting from a library of existing components;
 - Modifying components to meet new requirements.

Base systems for a software product line

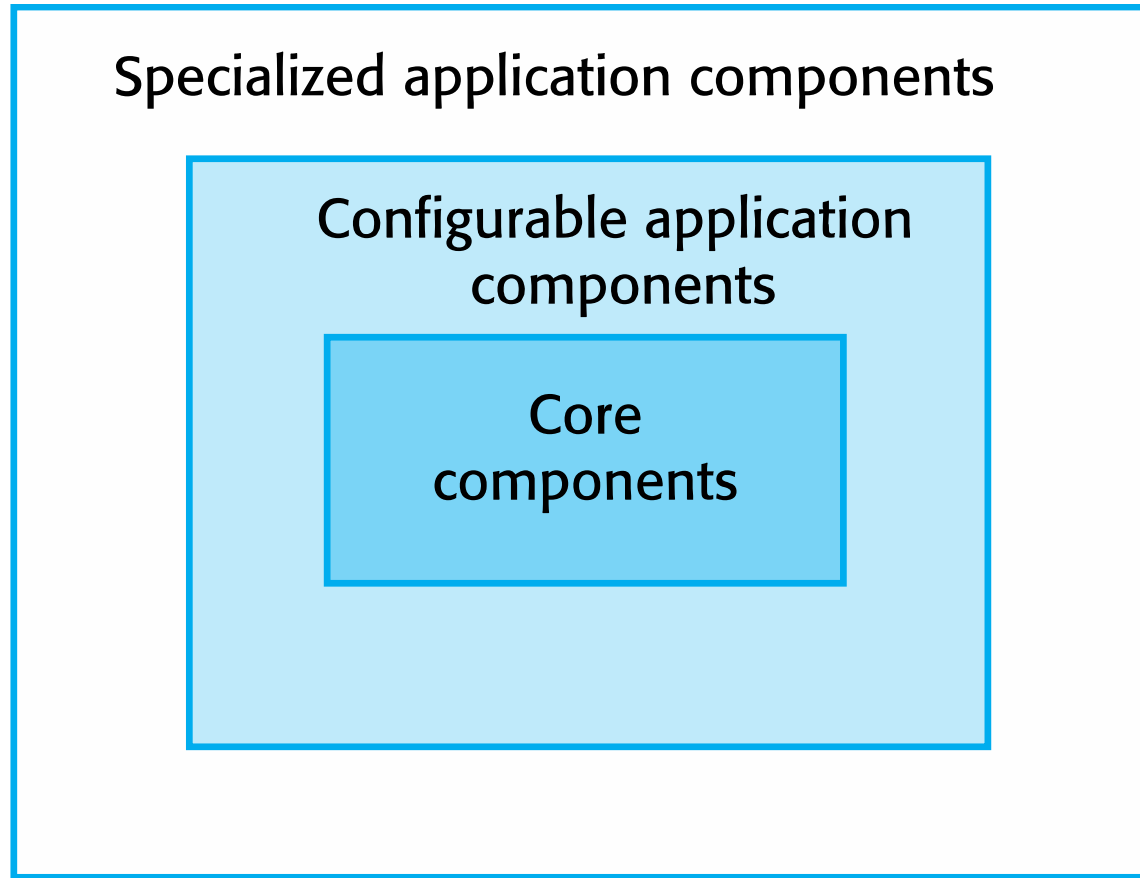

Base applications

- Core components that provide infrastructure support. These are not usually modified when developing a new instance of the product line.
- Configurable components that may be modified and configured to specialize them to a new application. Sometimes, it is possible to reconfigure these components without changing their code by using a built-in component configuration language.
- Specialized, domain-specific components some or all of which may be replaced when a new instance of a product line is created.

Application frameworks and product lines

- Application frameworks rely on object-oriented features such as polymorphism to implement extensions. Product lines need not be object-oriented (e.g. embedded software for a mobile phone)
- Application frameworks focus on providing technical rather than domain-specific support. Product lines embed domain and platform information.
- Product lines often control applications for equipment.
- Software product lines are made up of a family of applications, usually owned by the same organization.

Product line architectures

- Architectures must be structured in such a way to separate different sub-systems and to allow them to be modified.
- The architecture should also separate entities and their descriptions and the higher levels in the system access entities through descriptions rather than directly

The architecture of a resource allocation system

Interaction

User interface

I/O management

User
authentication

Resource
delivery

Query
management

Resource management

Resource
tracking

Resource policy
control

Resource
allocation

Database management

Transaction management


Resource database

The product line architecture of a vehicle dispatcher

Interaction




I/O management

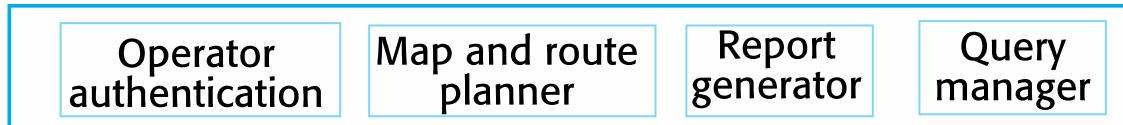

Resource management



Database management

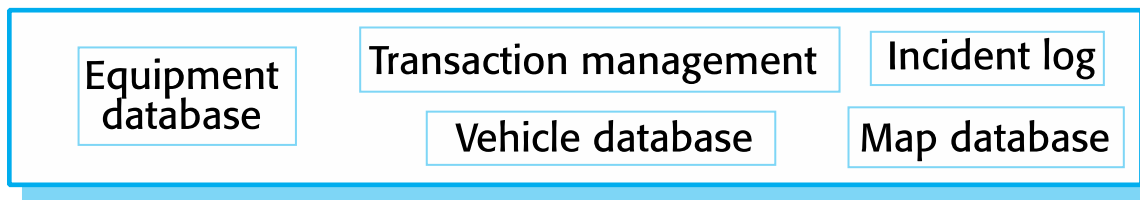


Vehicle dispatching

- A specialised resource management system where the aim is to allocate resources (vehicles) to handle incidents.
- Adaptations include:
 - At the UI level, there are components for operator display and communications;
 - At the I/O management level, there are components that handle authentication, reporting and route planning;
 - At the resource management level, there are components for vehicle location and despatch, managing vehicle status and incident logging;
 - The database includes equipment, vehicle and map databases.

Product line specialisation

- Platform specialization
 - Different versions of the application are developed for different platforms.
- Environment specialization
 - Different versions of the application are created to handle different operating environments e.g. different types of communication equipment.
- Functional specialization
 - Different versions of the application are created for customers with different requirements.
- Process specialization
 - Different versions of the application are created to support different business processes.


Product instance development

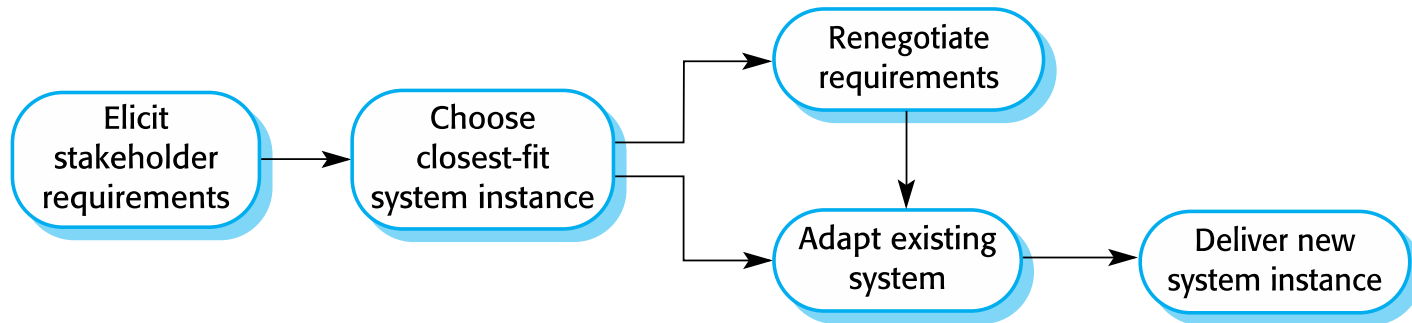

Product line configuration

- Design time configuration
 - The organization that is developing the software modifies a common product line core by developing, selecting or adapting components to create a new system for a customer.
- Deployment time configuration
 - A generic system is designed for configuration by a customer or consultants working with the customer. Knowledge of the customer's specific requirements and the system's operating environment is embedded in configuration data that are used by the generic system.

Deployment-time configuration

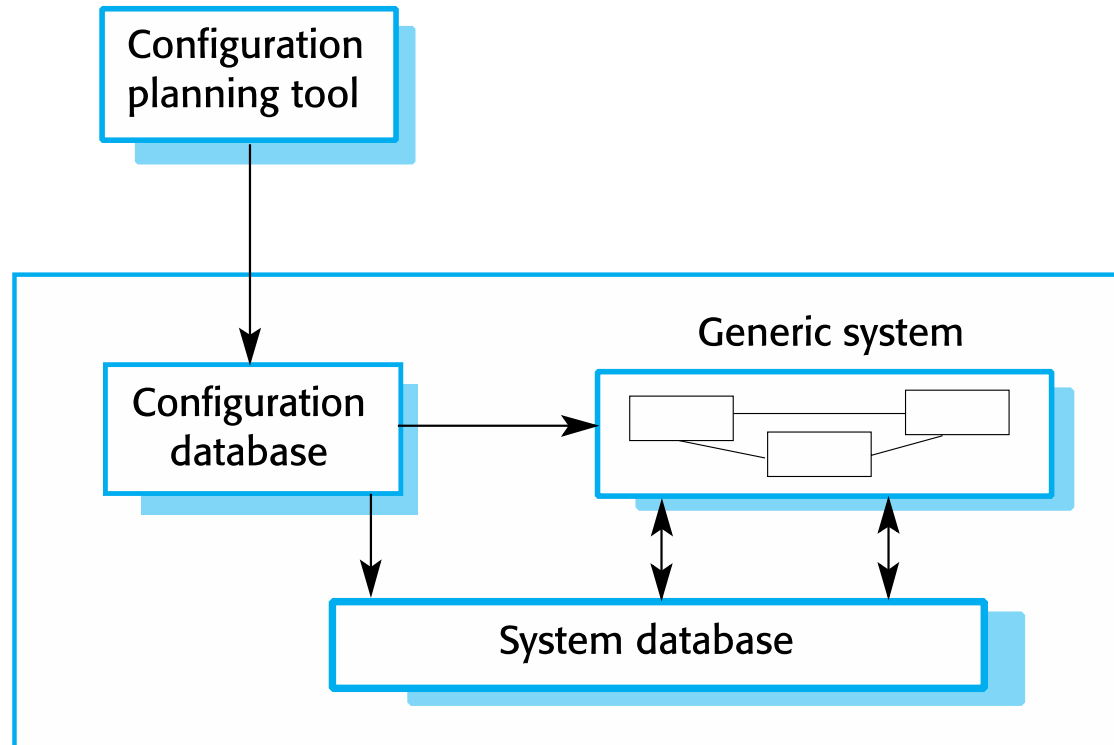

Levels of deployment time configuration

- Component selection, where you select the modules in a system that provide the required functionality.
- Workflow and rule definition, where you define workflows (how information is processed, stage-by-stage) and validation rules that should apply to information entered by users or generated by the system.
- Parameter definition, where you specify the values of specific system parameters that reflect the instance of the application that you are creating