

DREXEL UNIVERSITY

CS499I

ADVANCED NEURAL NETWORKS

Facial Recognition With Artificial Neural Networks

Author:

Alexander MARION
Matthew D'AMORE

Supervisor:

Dr. Matthew BURLICK

April 23, 2017

1 Datasets

Yale Faces Database This dataset contains 165 grayscale images in GIF format of 15 individuals with 11 images per person. There is one image per each of the following configurations: center-light, w/glasses, happy, left-light, w/no glasses, normal, right-light, sad, sleepy, surprised, and wink.

2 Testing Parameters

The following variants are tested for accuracy:

1. With and without a bias node at the input layer
2. With and without a bias node at the hidden layer
3. With and without standardizing features
4. With and without applying PCA to reduce the number of features to 95%

Empirical data was generated to optimize the following parameters:

1. Termination criteria (Number of Iterations)
2. Hidden layer size
3. Image size
4. Learning Rate
5. PCA Field Retention

3 Baseline Accuracy

The baseline accuracy was created using the negative form of all variants with the exception of data standardization. The baseline parameters were as follows: 40 by 40 sized images, a hidden layer size of 20, 1000 training iterations, and a learning rate of 0.05.

Input layer bias node	N
Hidden layer bias node	N
Standardization of features	Y
PCA applied	N
Testing Accuracy	0.800000

Table 1: Baseline Testing Accuracy

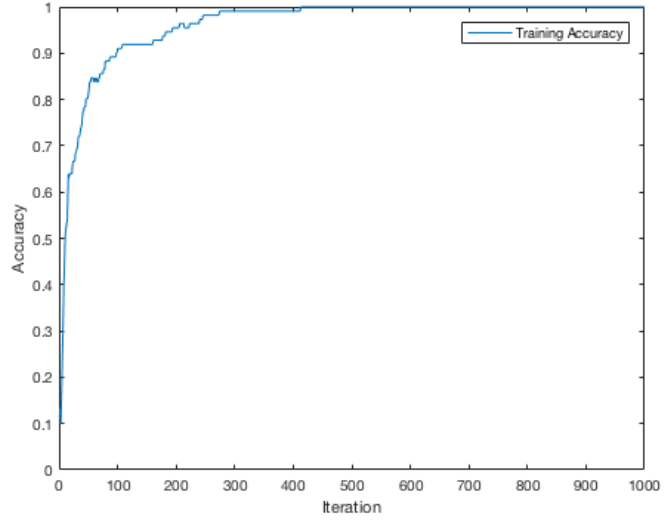


Figure 1: Baseline Training Accuracy

4 Variant Accuracy Testing

All variants were tested using 40 by 40 sized images, a hidden layer size of 20, and 1000 training iterations.

Input layer bias node	N
Hidden layer bias node	N
Standardization of features	N
PCA applied	N
Testing Accuracy	0.1455

Table 2: NNNN Testing Accuracy

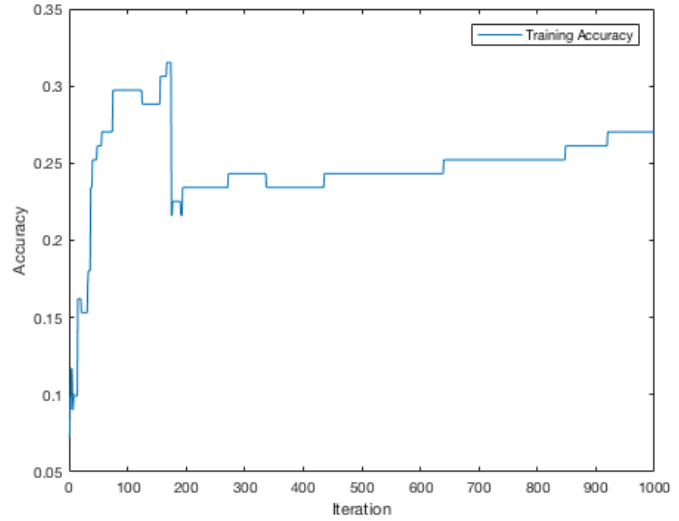


Figure 2: NNNN Training Accuracy

Input layer bias node	Y
Hidden layer bias node	N
Standardization of features	N
PCA applied	N
Testing Accuracy	0.2727

Table 3: YNNN Testing Accuracy

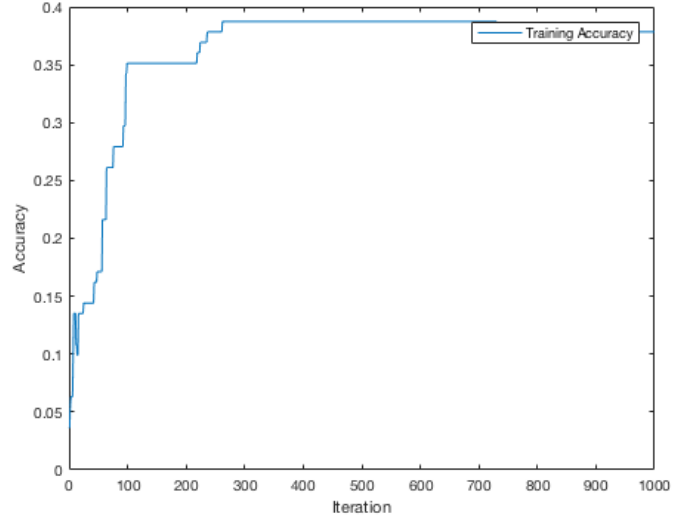


Figure 3: YNNN Training Accuracy

Input layer bias node	N
Hidden layer bias node	Y
Standardization of features	N
PCA applied	N
Testing Accuracy	0.1818

Table 4: NYNN Testing Accuracy

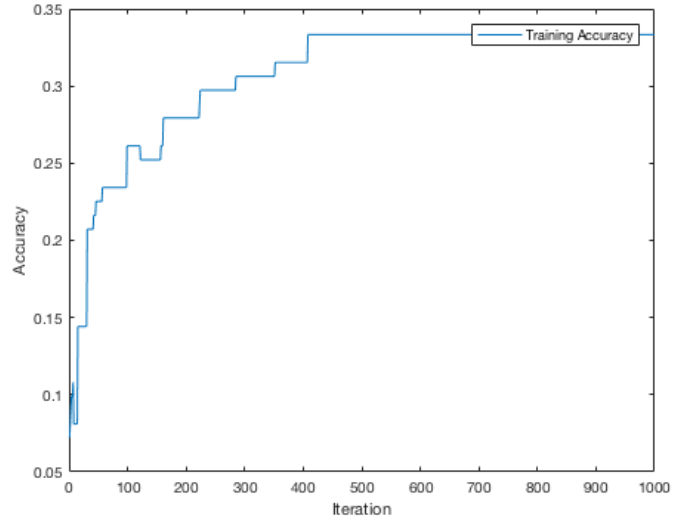


Figure 4: NYNN Training Accuracy

Input layer bias node	N
Hidden layer bias node	N
Standardization of features	N
PCA applied	Y
Testing Accuracy	0.1818

Table 5: NNNY Testing Accuracy

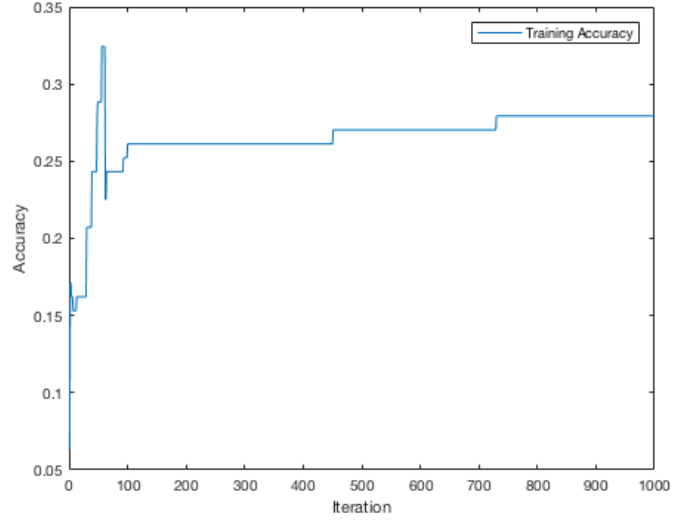


Figure 5: NNNY Training Accuracy

Input layer bias node	Y
Hidden layer bias node	Y
Standardization of features	N
PCA applied	N
Testing Accuracy	0.4000

Table 6: YYNN Testing Accuracy

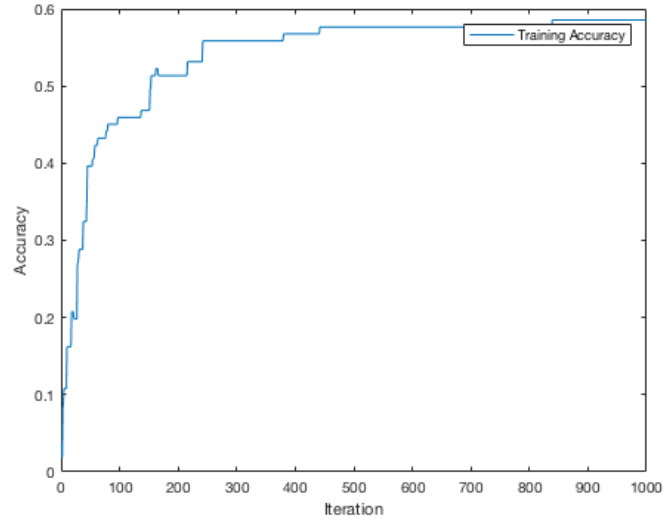


Figure 6: YYNN Training Accuracy

Input layer bias node	Y
Hidden layer bias node	N
Standardization of features	Y
PCA applied	N
Testing Accuracy	0.8182

Table 7: YNNY Testing Accuracy

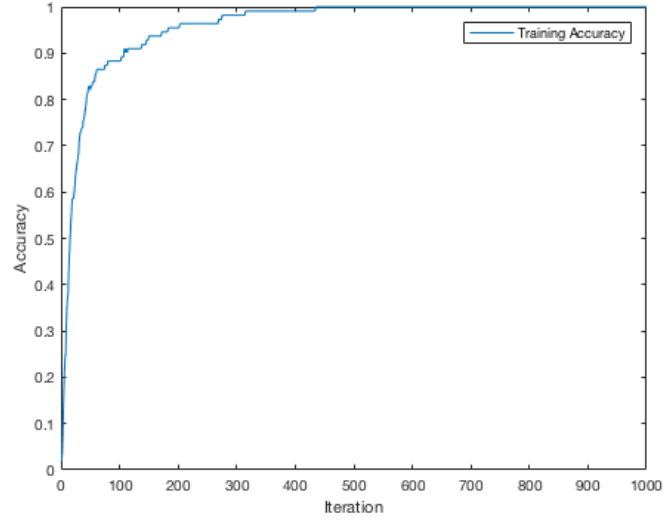


Figure 7: YNNY Training Accuracy

Input layer bias node	Y
Hidden layer bias node	N
Standardization of features	N
PCA applied	Y
Testing Accuracy	0.2364

Table 8: YNNY Testing Accuracy

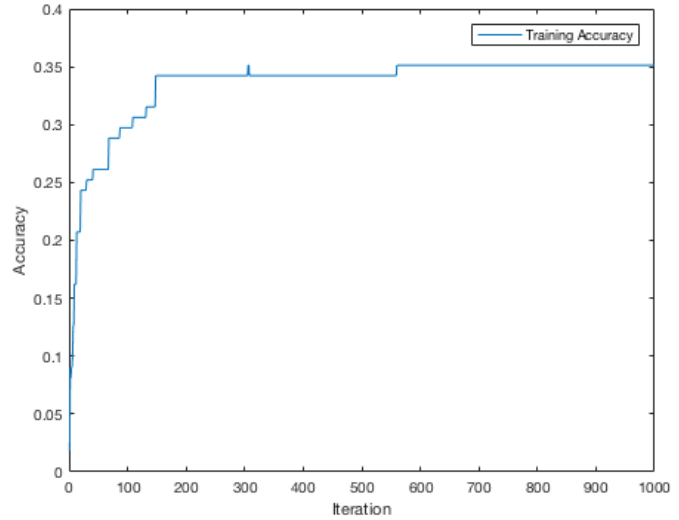


Figure 8: YNNY Training Accuracy

Input layer bias node	N
Hidden layer bias node	Y
Standardization of features	Y
PCA applied	N
Testing Accuracy	0.8182

Table 9: NYYN Testing Accuracy

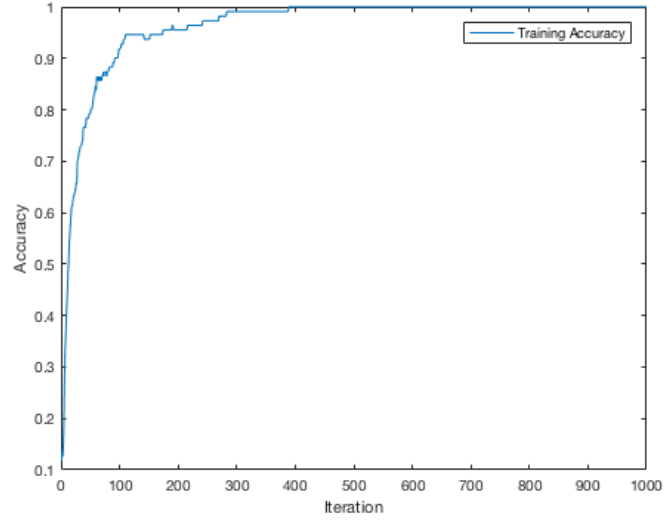


Figure 9: NYYN Training Accuracy

Input layer bias node	N
Hidden layer bias node	Y
Standardization of features	N
PCA applied	Y
Testing Accuracy	0.2364

Table 10: NYNY Testing Accuracy

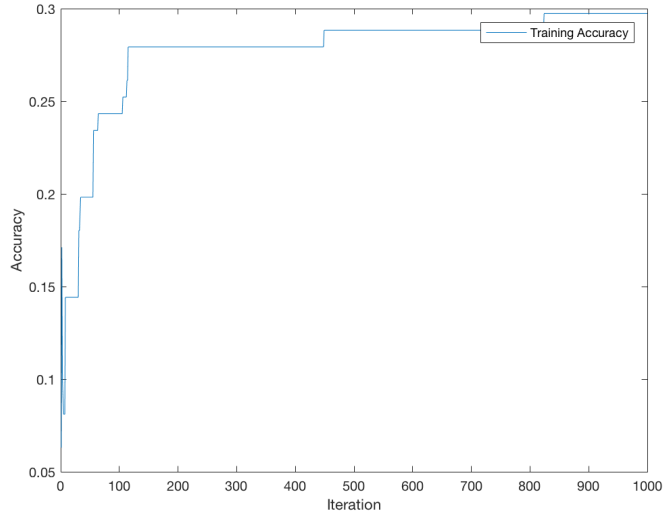


Figure 10: NYNY Training Accuracy

Input layer bias node	N
Hidden layer bias node	N
Standardization of features	Y
PCA applied	Y
Testing Accuracy	0.8000

Table 11: NNYT Testing Accuracy

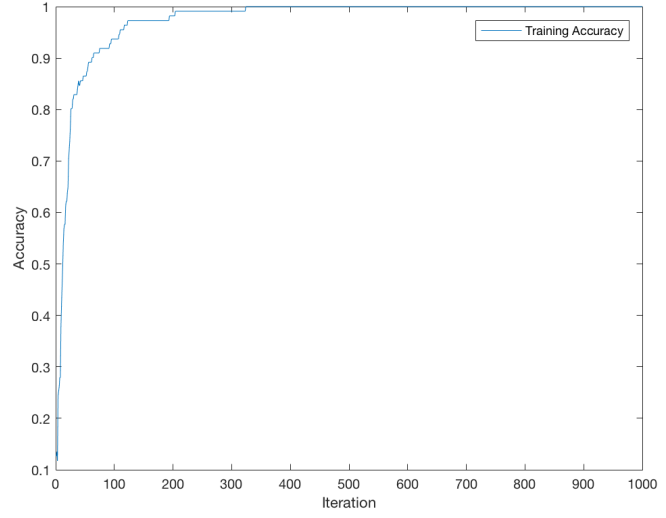


Figure 11: NNYT Training Accuracy

Input layer bias node	Y
Hidden layer bias node	Y
Standardization of features	Y
PCA applied	N
Testing Accuracy	0.8000

Table 12: YYNT Testing Accuracy

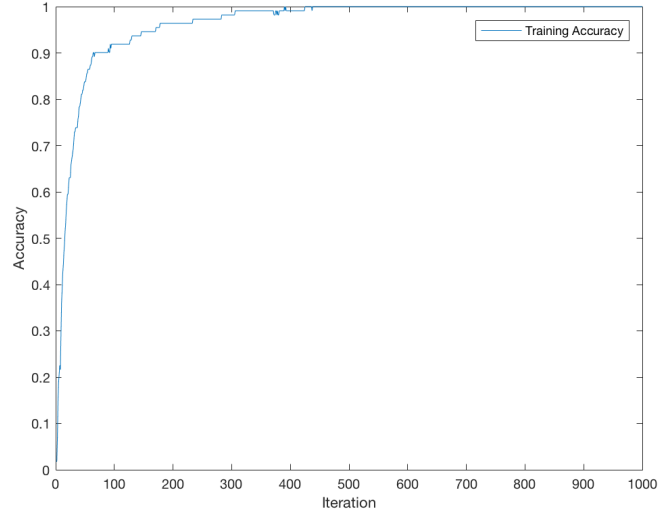


Figure 12: YYNT Training Accuracy

Input layer bias node	Y
Hidden layer bias node	Y
Standardization of features	N
PCA applied	Y
Testing Accuracy	0.2000

Table 13: YYNY Testing Accuracy

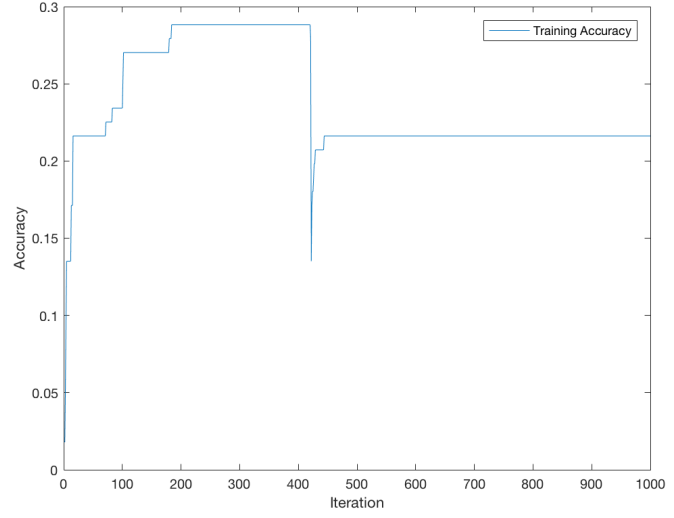


Figure 13: YYNY Training Accuracy

Input layer bias node	Y
Hidden layer bias node	N
Standardization of features	Y
PCA applied	Y
Testing Accuracy	0.8182

Table 14: YNYY Testing Accuracy

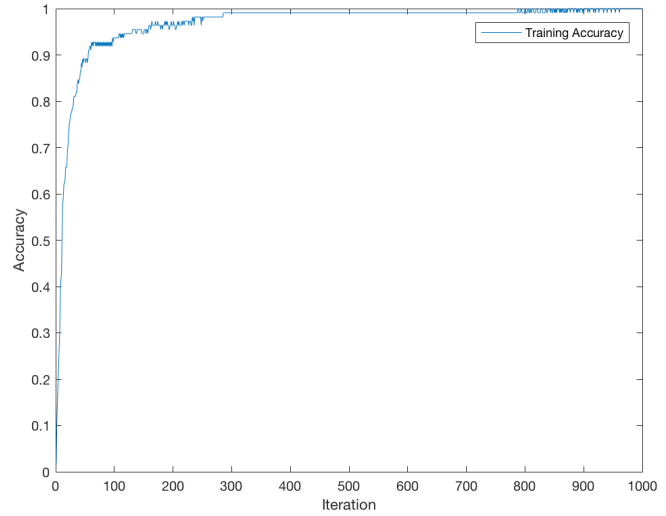


Figure 14: YNYY Training Accuracy

Input layer bias node	N
Hidden layer bias node	Y
Standardization of features	Y
PCA applied	Y
Testing Accuracy	0.8000

Table 15: NYYY Testing Accuracy

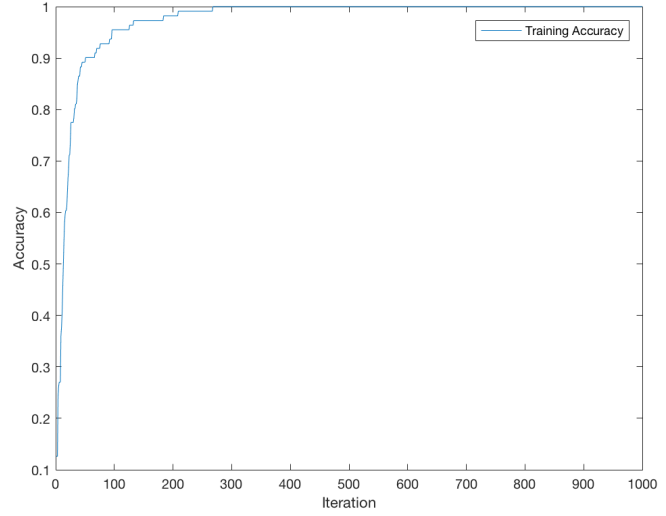


Figure 15: NYYY Training Accuracy

Input layer bias node	Y
Hidden layer bias node	Y
Standardization of features	Y
PCA applied	Y
Testing Accuracy	0.8182

Table 16: YYY Y Testing Accuracy

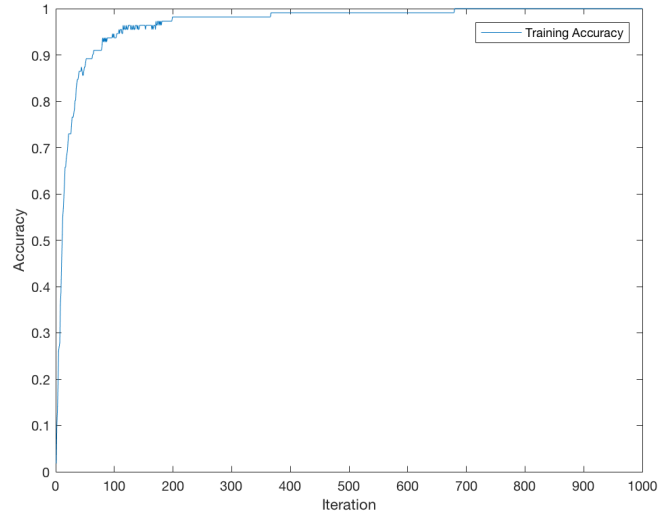


Figure 16: YYY Y Training Accuracy

5 Empirical Parameter Accuracy Testing

All empirical data was gathered using the following variant which had the highest accuracy from the variant testing:

Input layer bias node	Y
Hidden layer bias node	N
Standardization of features	Y
PCA applied	Y
Testing Accuracy	0.8182

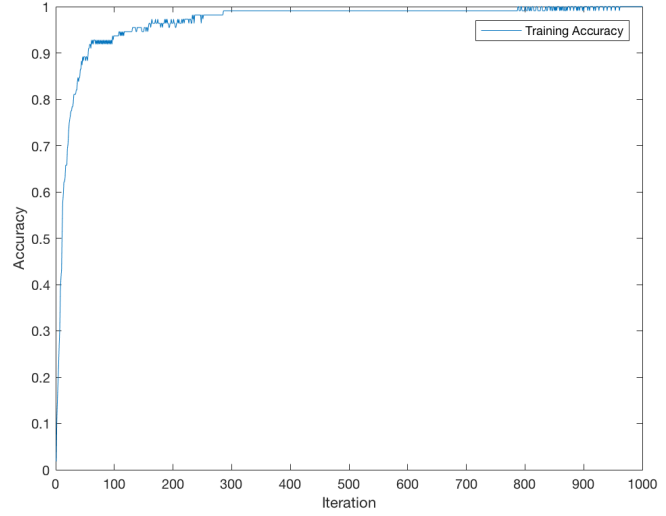


Table 17: YNYY Testing Accuracy

Figure 17: YNYY Training Accuracy

1. Number of Training Iterations The number of training iterations was varied from 0 to 10,000 by 100. The number of hidden nodes was 20, the image size was 40 by 40, and the learning rate was 0.5. The following is a plot of the accuracy as number of training iterations increases.

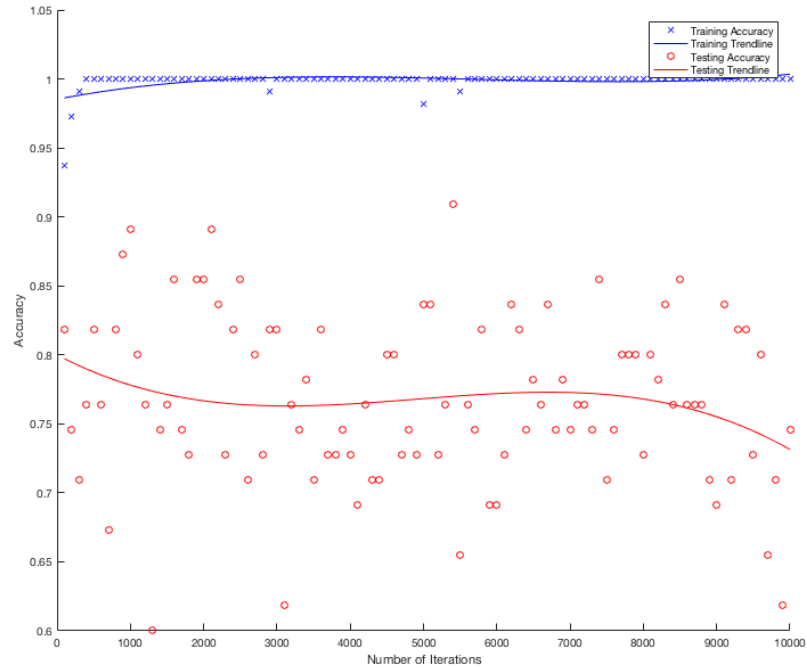


Figure 18: Plot of accuracy as number of training iterations increases

2. Number of Hidden Nodes The number of hidden nodes was varied from 0 to 1600 (the number of features) by 20. The number of training iterations was 10, the image size was 40 by 40, and

the learning rate was 0.5. The following is a plot of the accuracy as number of hidden nodes increases. The number of training iterations was reduced to 10 in order to more clearly show the trend of increasing the number of hidden nodes.

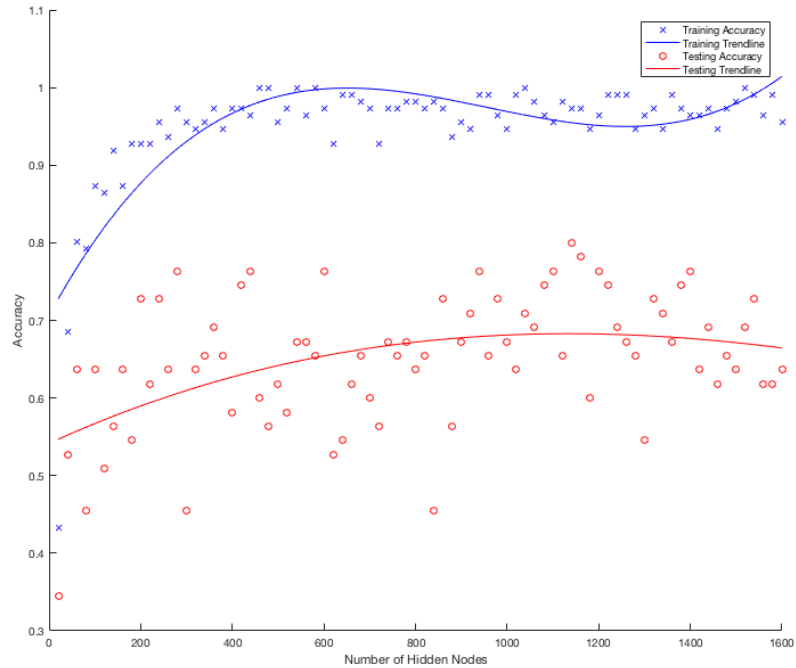


Figure 19: Plot of accuracy as number of hidden nodes increases

3. Image Size The image size was varied from 10 to 100 by 1, thus increasing the number of features quadratically. The number of training iterations was 500, the number of hidden nodes was 20, and the learning rate was 0.5. The number of training iterations was reduced to 500 in order to more clearly show the trend of increasing the number of hidden nodes.

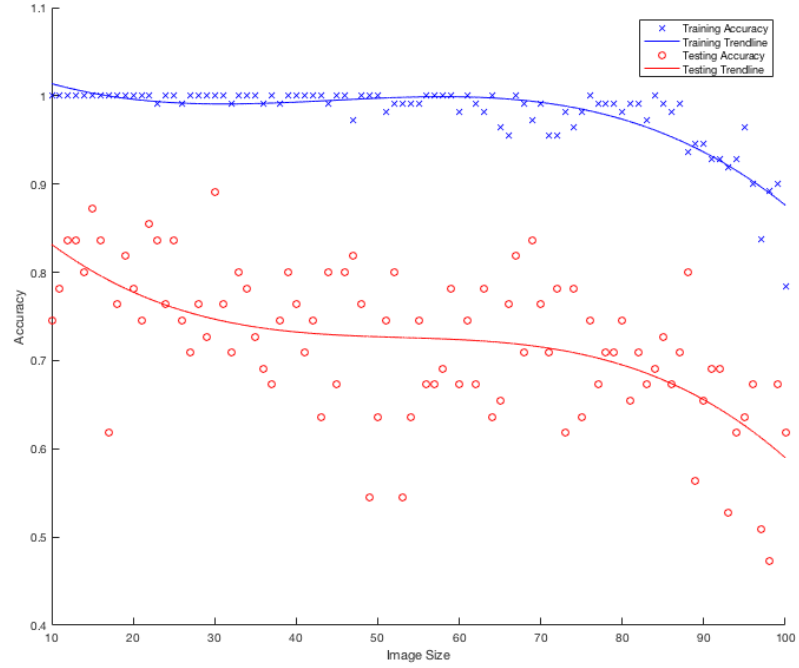


Figure 20: Plot of accuracy as the image size increases

4. Learning Rate The learning rate was varied from 0.05 to 20 by 0.05. The number of training iterations was 50, the number of hidden nodes was 20, and the image size was 40 by 40. The number of iterations was reduced to 50 in order to more clearly show the trend of increasing the learning rate.

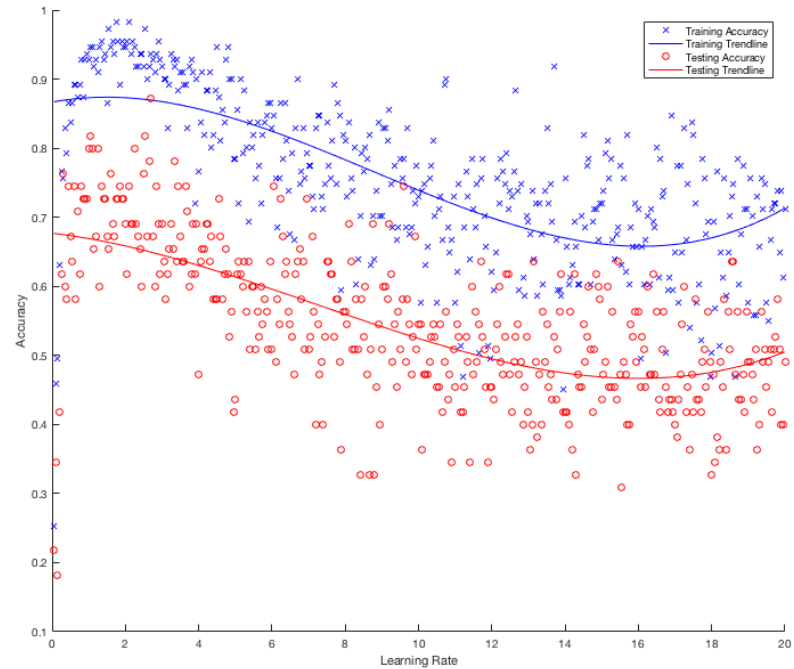


Figure 21: Plot of accuracy as the learning rate increases

5. PCA Field Retention The PCA field retention rate was varied from 0.01 to 1 by 0.01. The number of training iterations was 200, the number of hidden nodes was 20, and the image size was 40 by 40. The number of iterations was reduced to 200 in order to more clearly show the trend of increasing the PCA field retention.

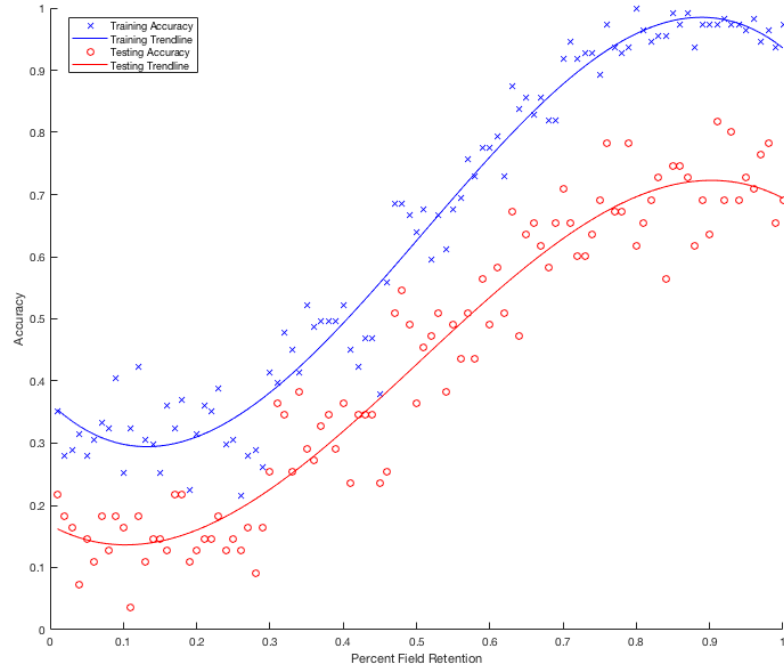


Figure 22: Plot of accuracy as the field retention increases