

Laboratorio: Explorar Azure SQL Database (DP-900)

Este documento contiene las capturas de pantalla que evidencian la realización de los pasos del laboratorio oficial de Microsoft Azure Data Fundamentals.

Paso 1: Crear una base de datos de Azure SQL

Capturas mostrando la configuración y el despliegue del recurso en el portal de Azure (incluyendo la selección de la base de datos de muestra AdventureWorksLT).

1.1. Configuración básica de la base de datos y el servidor

Microsoft Azure

Home > Marketplace > Azure SQL

Create SQL Database

Microsoft

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription *

Resource group *

[Create new](#)

Database details

Enter required settings for this database, including picking a logical server and configuring the compute and storage resources

Database name *

Server *

[Create new](#)

Want to use SQL elastic pool? ☐ Yes ☒ No

Workload environment ☒ Development ☐ Production

Compute + storage *

General Purpose - Serverless
Standard-series (Gen5), 1 vCore, 32 GB storage, zone redundant disabled
[Configure database](#)

Backup storage redundancy

[Review + create](#) [Next: Networking >](#)

NOTES
1 Serverless databases are billed in vCore seconds based on a combination of CPU and memory utilization. [Learn more about serverless billing](#)

1.2. Configuración de orígenes de datos (Selección de datos de muestra)

Home > Azure SQL

Create SQL Database

Microsoft

Connectivity method *

- ☐ No access
- ☒ Public endpoint
- ☐ Private endpoint

Firewall rules

Setting 'Allow Azure services and resources to access this server' to Yes allows communications from all resources inside the Azure boundary, that may or may not be part of your subscription. [Learn more](#)

Setting 'Add current client IP address' to Yes will add an entry for your client IP address to the server firewall.

Allow Azure services and resources to access this server *

Add current client IP address *

Connection policy

Configure how clients communicate with your SQL database server. [Learn more](#)

Connection policy

- ☒ Default - Uses Redirect policy for all client connections originating inside of Azure (except Private Endpoint connections) and Proxy for all client connections originating outside Azure
- ☐ Proxy - All connections are proxied via the Azure SQL Database gateways
- ☐ Redirect - Clients establish connections directly to the node hosting the database

Encrypted connections

This server supports encrypted connections using Transport Layer Security (TLS). For information on TLS version and certificates, refer to connecting with TLS/SSL. [Learn more](#)

Minimum TLS version

<https://go.microsoft.com/fwlink/?linkid=2104243>

1.3. Despliegue completado con éxito

Home

Microsoft.SQLDatabase.newDatabaseNewServer_ed4ef90ba81b4b3e8bee | Overview

Deployment

Search

Delete Cancel Redeploy Download Refresh

Overview

Inputs

Outputs

Template

✓ Your deployment is complete

Deployment name : Microsoft.SQLDatabase.newDatabaseNewServer_ed4ef90ba81b4b... Start time : 9/25/2026, 10:18:14 AM

Subscription : Azure for Students Correlation ID : 3f8166b2-3a54-414a-9689-e29534109458

Resource group : Practoca06

Deployment details

Next steps

Deployment succeeded

Deployment

Microsoft.SQLDatabase.newDatabaseNewServer_ed4ef90ba81b4b3e8bee to resource group 'Practoca06' was successful.

Cost management

Get notified to stay within your budget and prevent unexpected charges on your bill. [Set up cost alerts >](#)

Microsoft Defender for Cloud

Secure your apps and infrastructure [Go to Microsoft Defender for Cloud >](#)

Free Microsoft tutorials

Start learning today >


Work with an expert

Azure experts are service provider partners who can help manage your assets on Azure and be your first line of support. [Find an Azure expert >](#)

Paso 2: Consultar la base de datos

Capturas utilizando el Editor de consultas (Query editor) integrado en el portal de Azure para interactuar con los datos.

2.1. Inicio de sesión en el Editor de consultas

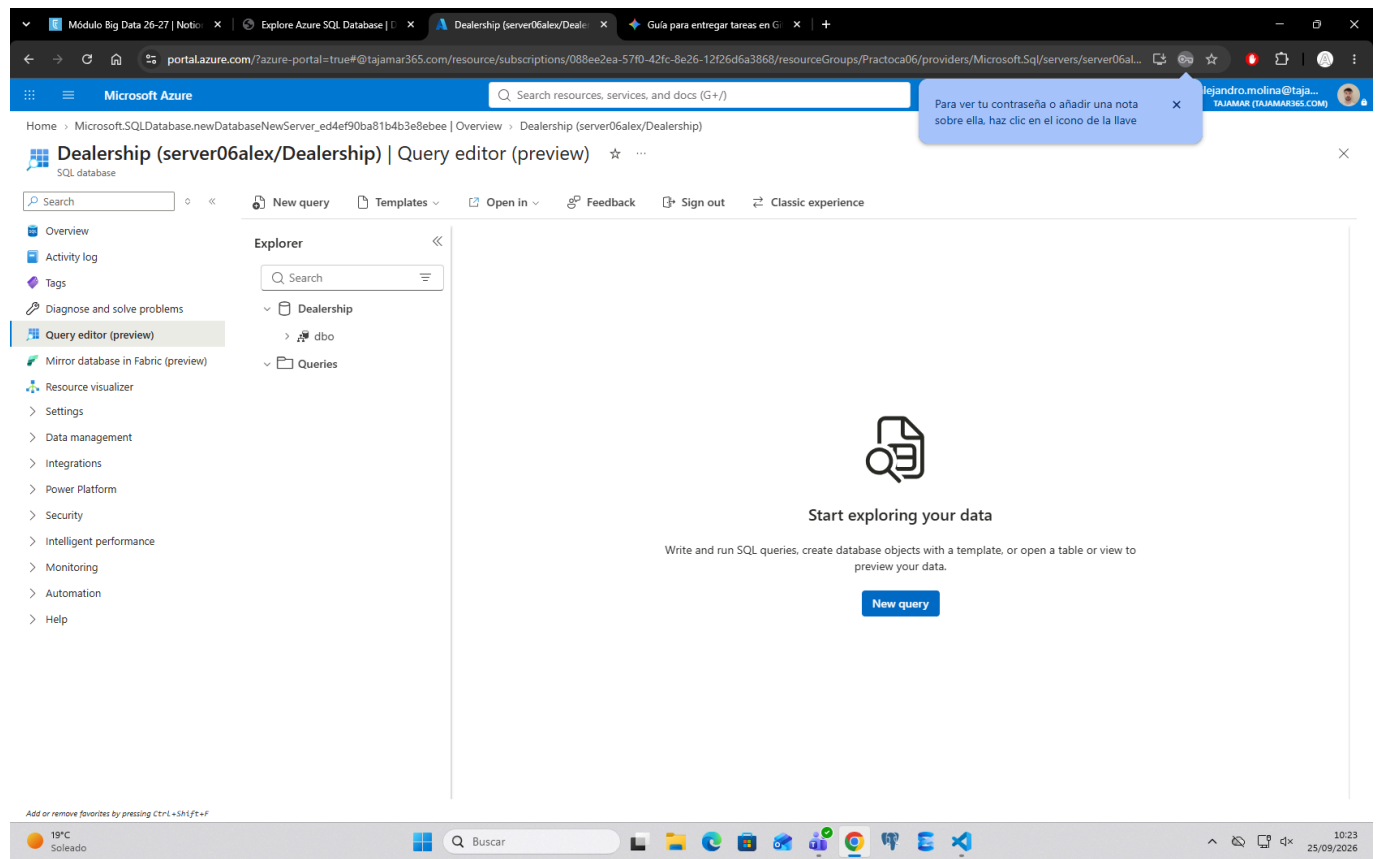

2.2. Ejecución de consulta (Ver productos)

The screenshot displays the Microsoft Azure portal interface for a SQL database named 'Dealership (server06alex/Dealership)'. The interface is divided into several sections:

- Navigation Sidebar:** Includes links to Overview, Activity log, Tags, Diagnose and solve problems, Query editor (preview), Mirror database in Fabric (preview), Resource visualizer, Settings, Data management, Integrations, Power Platform, Security, Intelligent performance, Monitoring, Automation, and Help.
- Explorer:** Shows the database structure with folders for 'Dealership' and 'Queries'. The 'Queries' folder is expanded, showing 'SQL query 1'.
- SQL query 1:** Contains two SQL queries:

```
1 CREATE TABLE Manufacturer
2 (
3     ManufacturerID INT PRIMARY KEY,
4     ManufacturerName NVARCHAR(50) NOT NULL,
5     Country NVARCHAR(50)
6 );
7
8 CREATE TABLE Vehicle
9 (
10    VehicleID INT PRIMARY KEY,
11    ModelName NVARCHAR(50) NOT NULL,
12    ManufacturerID INT NOT NULL,
13    ModelYear INT,
14    BodyType NVARCHAR(30),
15    ListPrice DECIMAL(10,2)
```

The 'Messages' pane shows the execution status of the queries:

 - 10:23:33 AM: Started executing on line 1. Affected rows: 0. Query executed successfully.
 - 10:24:28 AM: Started executing on line 1. Affected rows: 12. Query executed successfully.

The bottom status bar indicates 'Succeeded (0 sec 165 ms)' and 'Succeeded (0 sec 163 ms)' respectively.


The screenshot shows the Microsoft Azure portal interface for a SQL database named "Dealership (server06alex/Dealership)". The "Query editor (preview)" is open, displaying a SQL query: `SELECT * FROM Vehicle;`. The results table shows 8 rows of data, including columns for VehicleID, ModelName, ManufacturerID, ModelYear, BodyType, and ListPrice.

VehicleID	ModelName	ManufacturerID	ModelYear	BodyType	ListPrice
101	Corolla	1	2024	Sedan	24500.00
102	RAV4	1	2024	SUV	31200.00
103	F-150	2	2023	Pickup	38900.00
104	Mustang	2	2024	Coupe	42500.00
105	Golf	3	2023	Hatchback	27800.00
106	Tiguan	3	2024	SUV	33400.00
107	Elantra	4	2024	Sedan	22300.00
108	Tucson	4	2023	SUV	29600.00

The second screenshot shows the same interface, but the query is modified to: `SELECT ModelName, BodyType, ListPrice FROM Vehicle;`. The results table now shows 8 rows of data, including columns for ModelName, BodyType, and ListPrice.

ModelName	BodyType	ListPrice
Corolla	Sedan	24500.00
RAV4	SUV	31200.00
F-150	Pickup	38900.00
Mustang	Coupe	42500.00
Golf	Hatchback	27800.00
Tiguan	SUV	33400.00
Elantra	Sedan	22300.00
Tucson	SUV	29600.00

2.3. Ejecución de consulta JOIN (Ver productos y categorías)

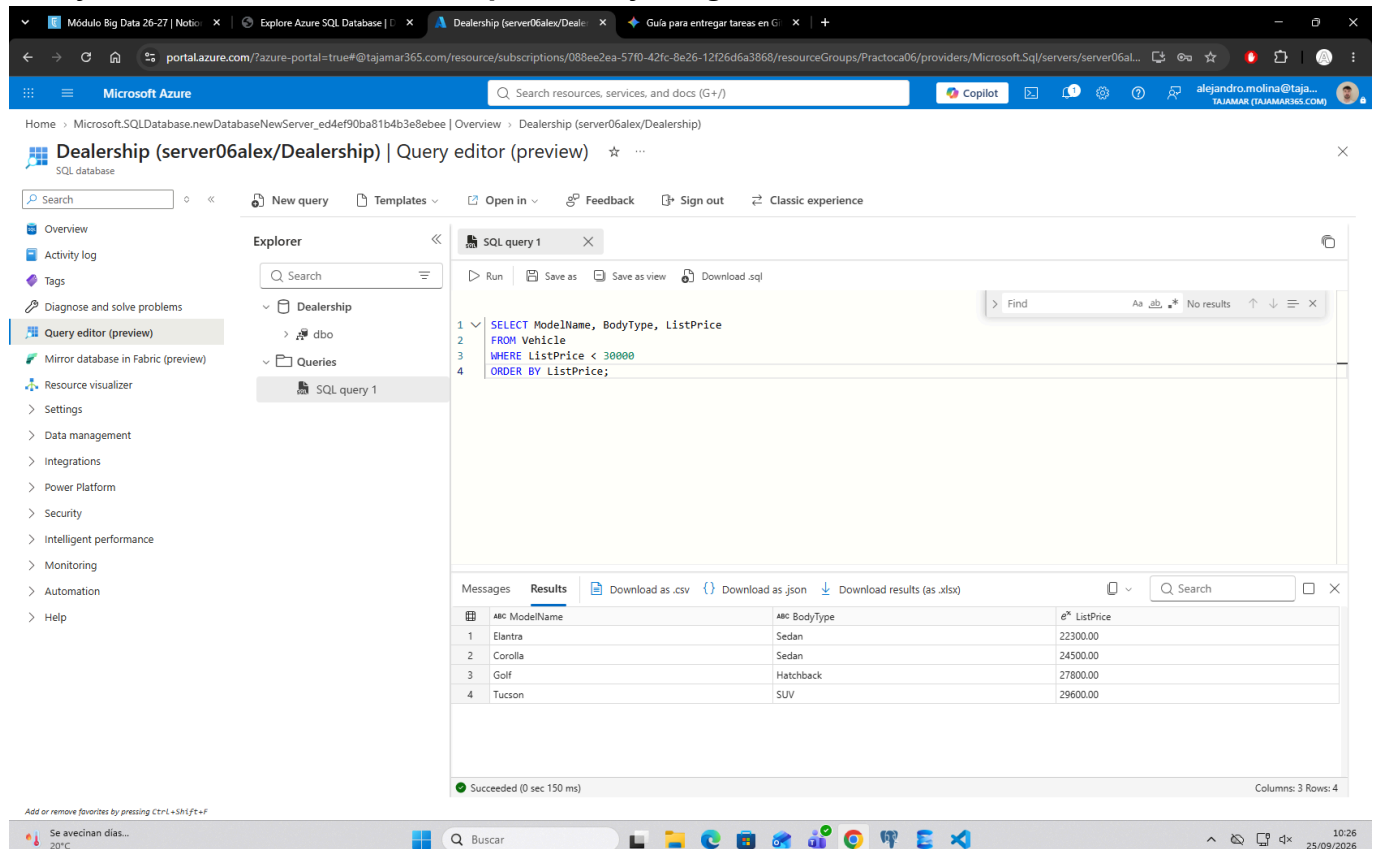


The screenshot shows the Microsoft Azure portal interface for a SQL database named 'Dealership (server06alex/Dealership)'. The 'Query editor (preview)' is active, displaying a SQL query that filters vehicles by price and orders them by price. The query is as follows:

```
1 SELECT ModelName, BodyType, ListPrice
2 FROM Vehicle
3 WHERE ListPrice < 30000
4 ORDER BY ListPrice;
```

The results of the query are displayed in a table with 4 rows and 3 columns: ModelName, BodyType, and ListPrice.

ModelName	BodyType	ListPrice
Elantra	Sedan	22300.00
Corolla	Sedan	24500.00
Golf	Hatchback	27800.00
Tucson	SUV	29600.00

The status bar indicates 'Succeeded (0 sec 150 ms)' and 'Columns: 3 Rows: 4'.

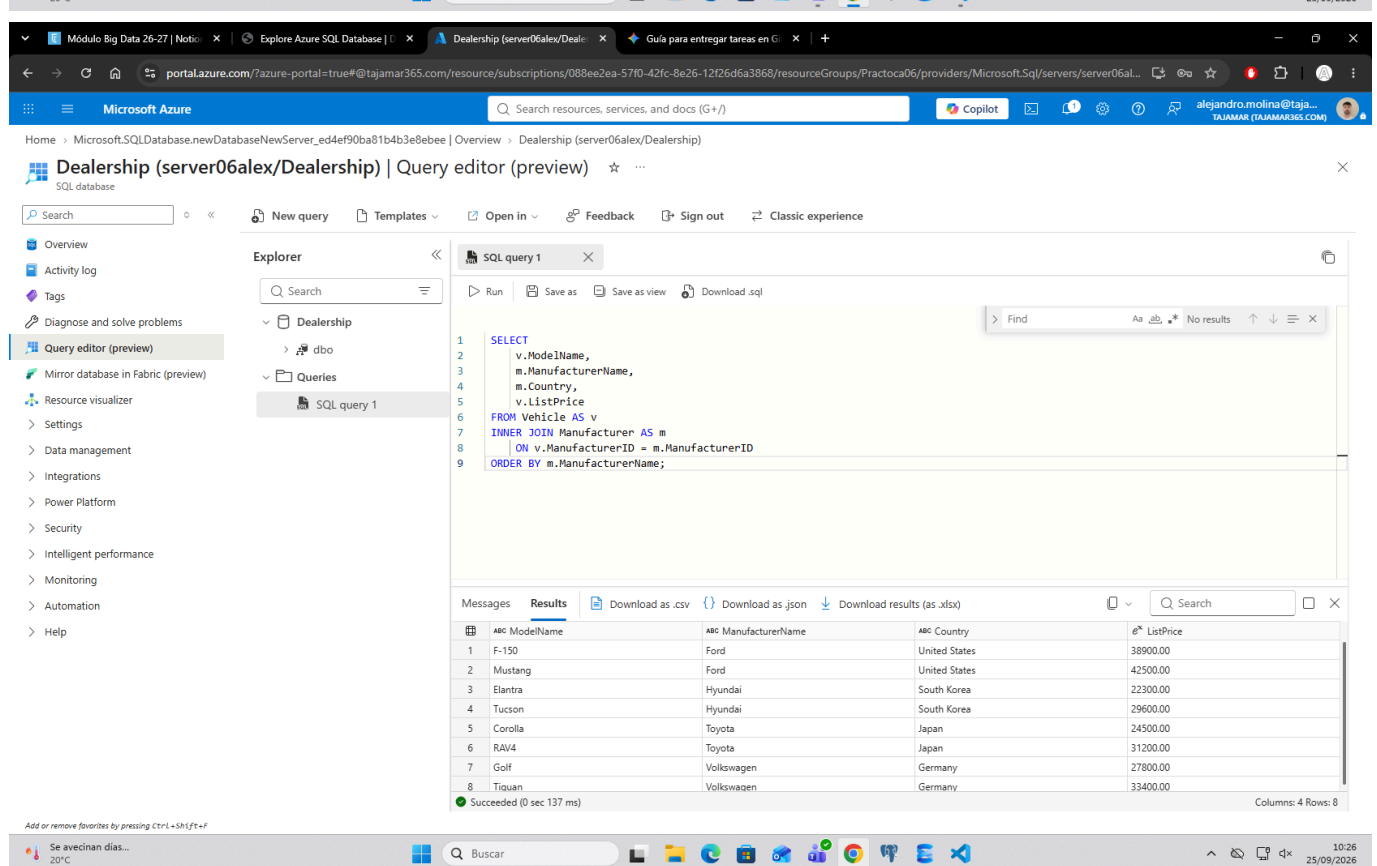

The screenshot shows the Microsoft Azure portal interface for the same SQL database. The 'Query editor (preview)' is active, displaying a SQL query that joins vehicle information with manufacturer information. The query is as follows:

```
1 SELECT
2     v.ModelName,
3     m.ManufacturerName,
4     m.Country,
5     v.ListPrice
6 FROM Vehicle AS v
7 INNER JOIN Manufacturer AS m
8     ON v.ManufacturerID = m.ManufacturerID
9 ORDER BY m.ManufacturerName;
```

The results of the query are displayed in a table with 8 rows and 4 columns: ModelName, ManufacturerName, Country, and ListPrice.

ModelName	ManufacturerName	Country	ListPrice
F-150	Ford	United States	38900.00
Mustang	Ford	United States	42500.00
Elantra	Hyundai	South Korea	22300.00
Tucson	Hyundai	South Korea	29600.00
Corolla	Toyota	Japan	24500.00
RAV4	Toyota	Japan	31200.00
Golf	Volkswagen	Germany	27800.00
Tiquan	Volkswagen	Germany	33400.00

The status bar indicates 'Succeeded (0 sec 137 ms)' and 'Columns: 4 Rows: 8'.