

Tutorial de Configuração de Replicação no SQLServer 2012



Conteúdo



Configuração do Distributor.....	2
Configuração de uma Publicação Snapshot	9
Configuração de uma Subscrição	19



Complementos de Bases de Dados

Elaborado por: Anacleto Correia

Configuração do Distributor

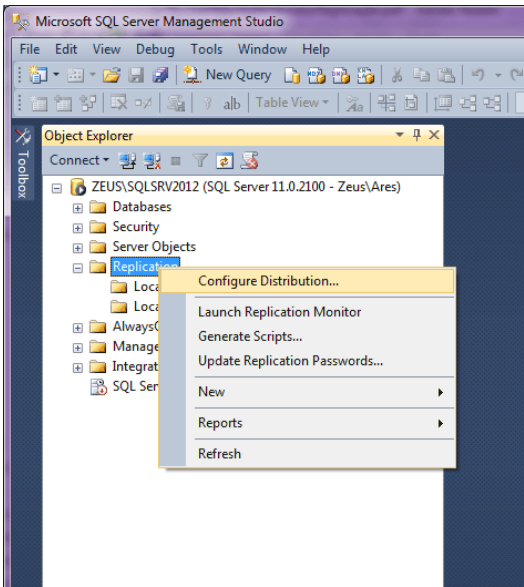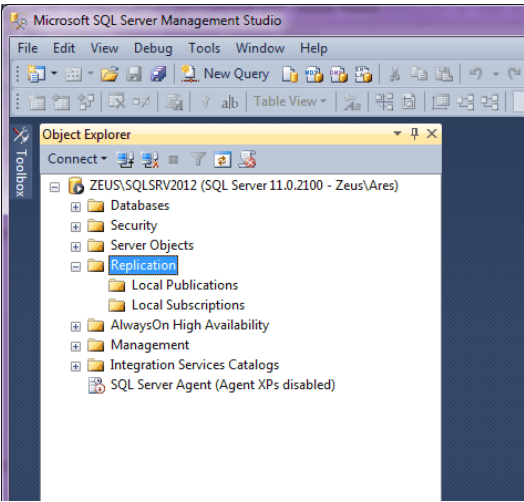

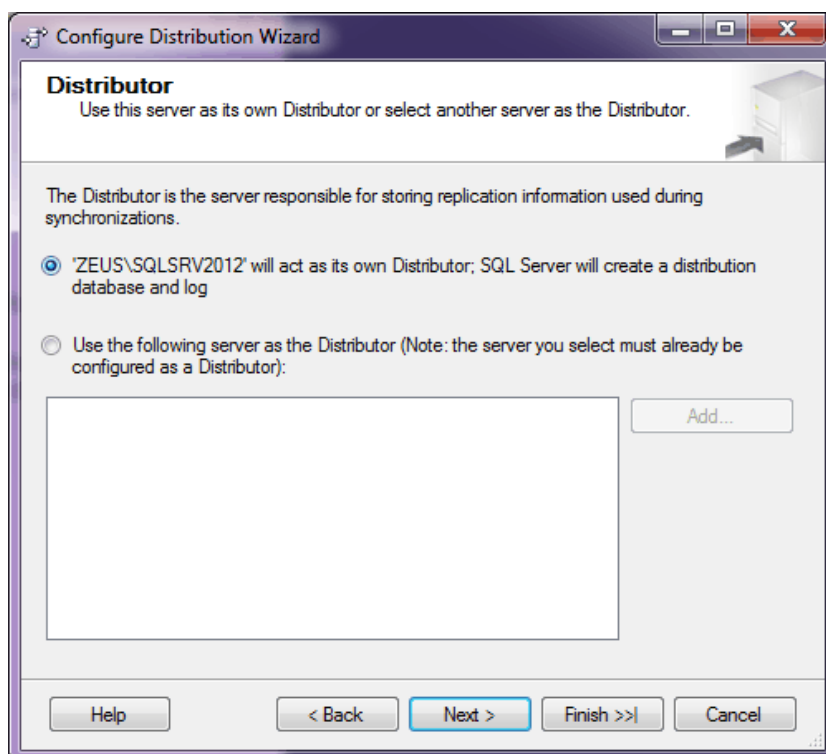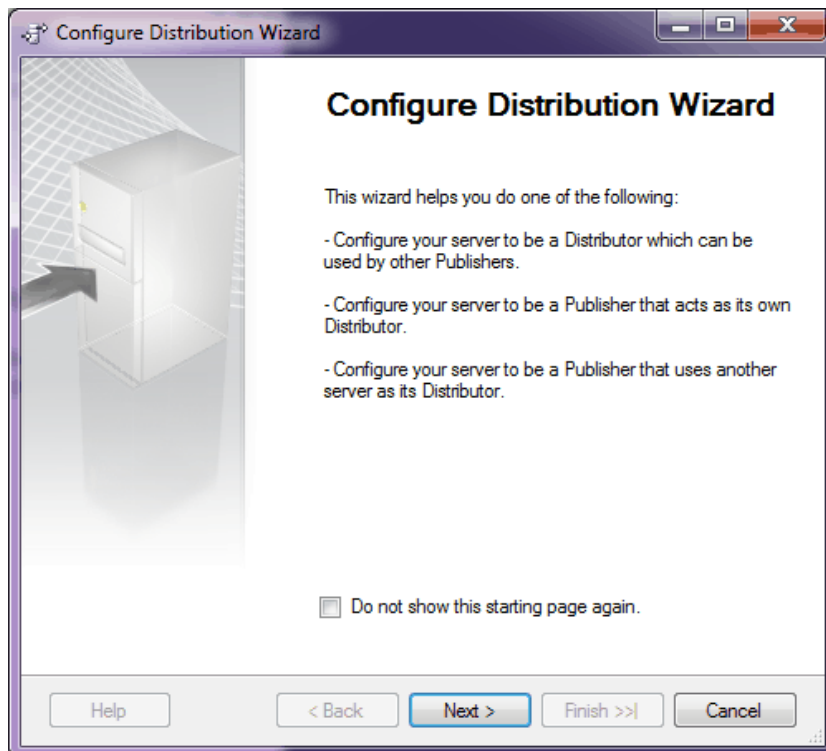

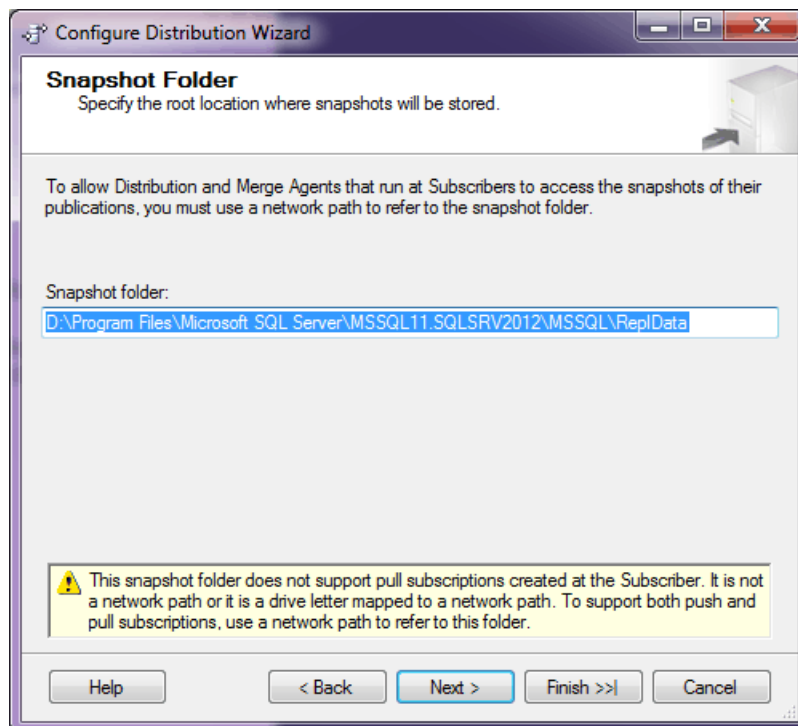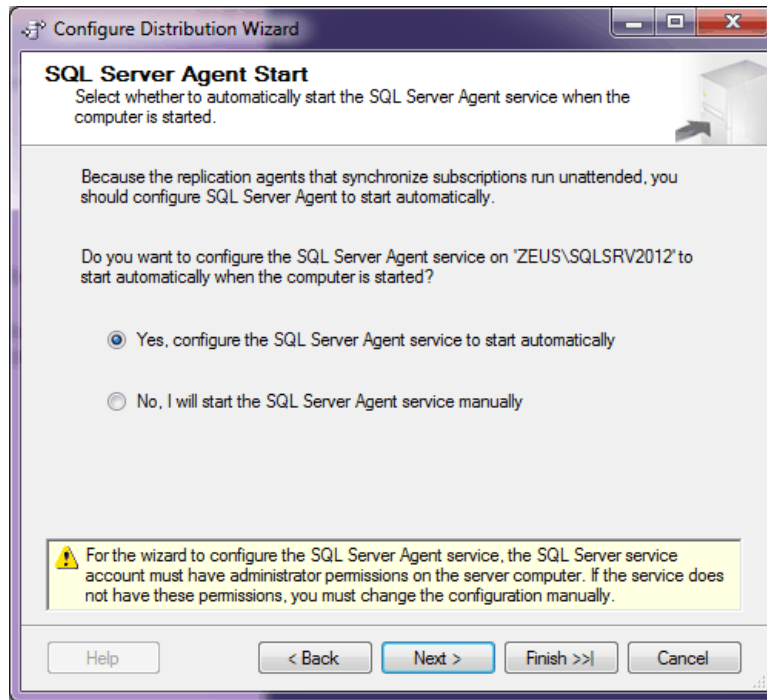

Configure Distribution Wizard

Distribution Database

Select the name and location of the distribution database and log files.

The distribution database stores changes to transactional publications until Subscribers can be updated. It also stores historical information for snapshot and merge publications.

Distribution database name:

Folder for the distribution database file:

Folder for the distribution database log file:

The paths must refer to disks that are local to the Distributor and begin with a local drive letter and colon (for example, C:). Mapped drive letters and network paths are invalid.



Configure Distribution Wizard



Publishers


Enable servers to use this Distributor when they become Publishers.

Publishers:



Publisher	Distribution Database
<input checked="" type="checkbox"/> ZEUS\SQLSRV2012	distribution

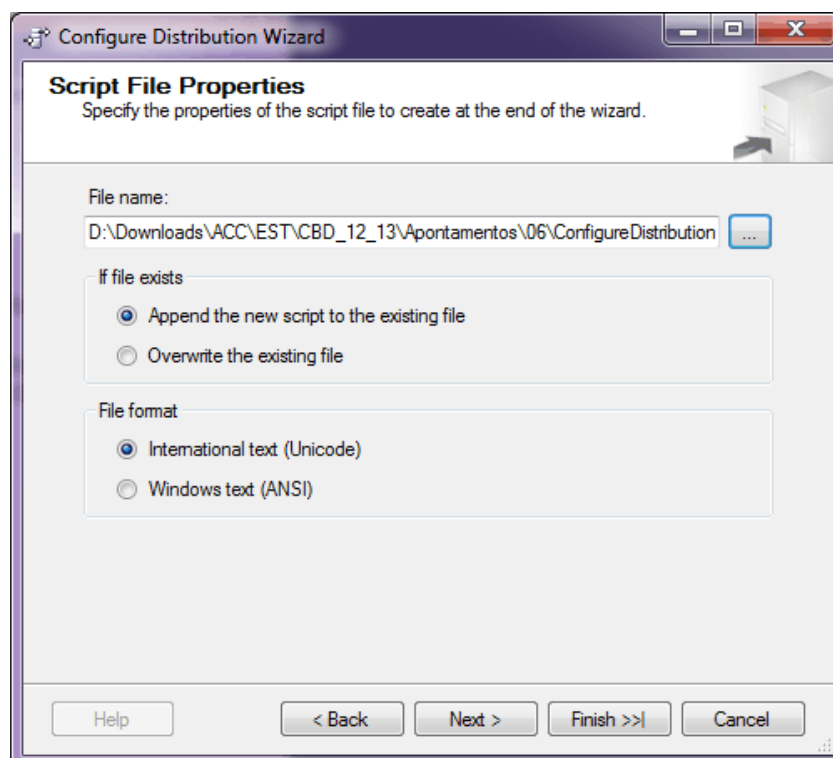
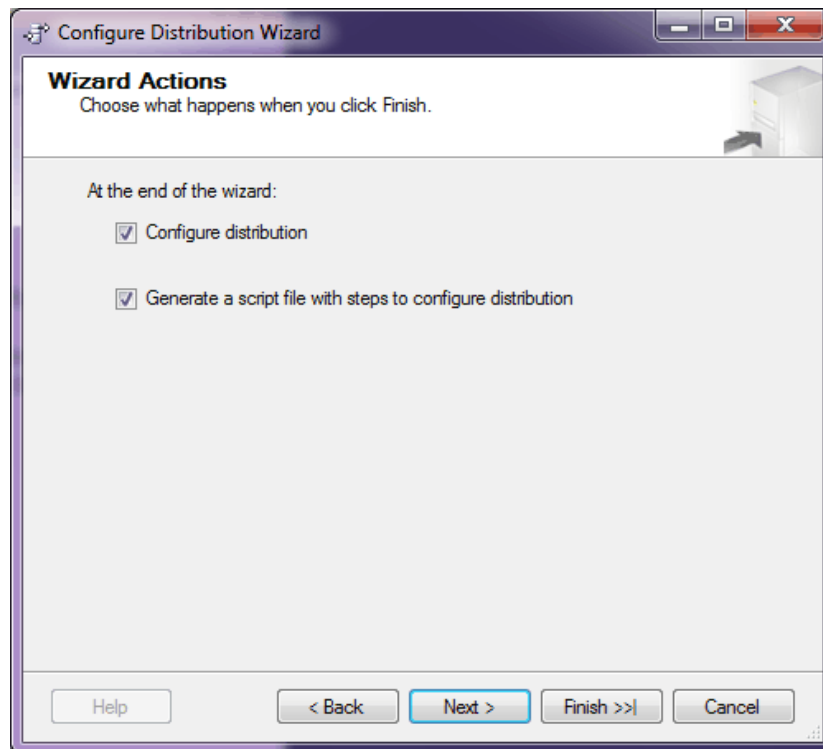


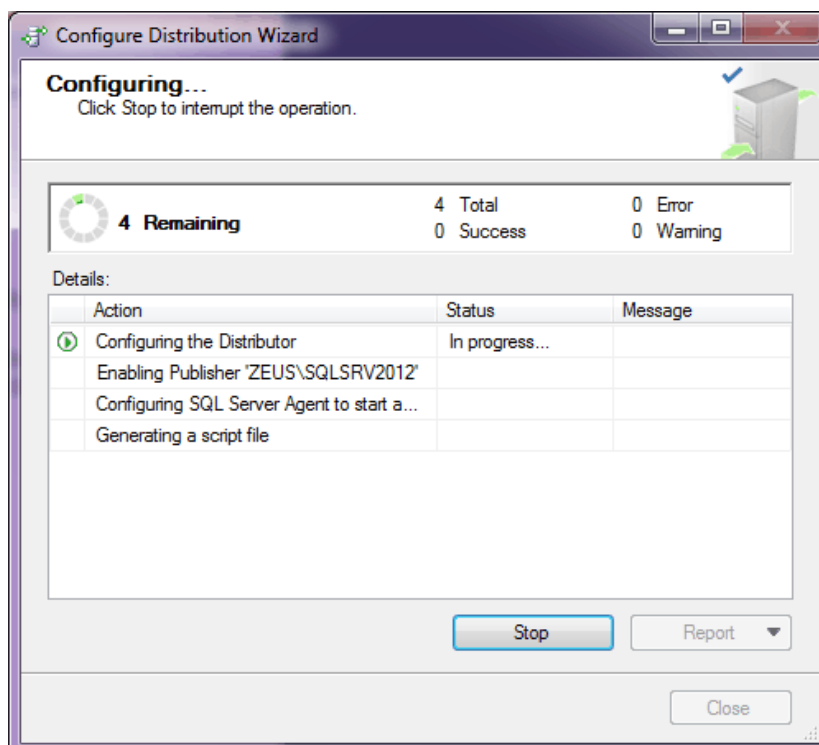
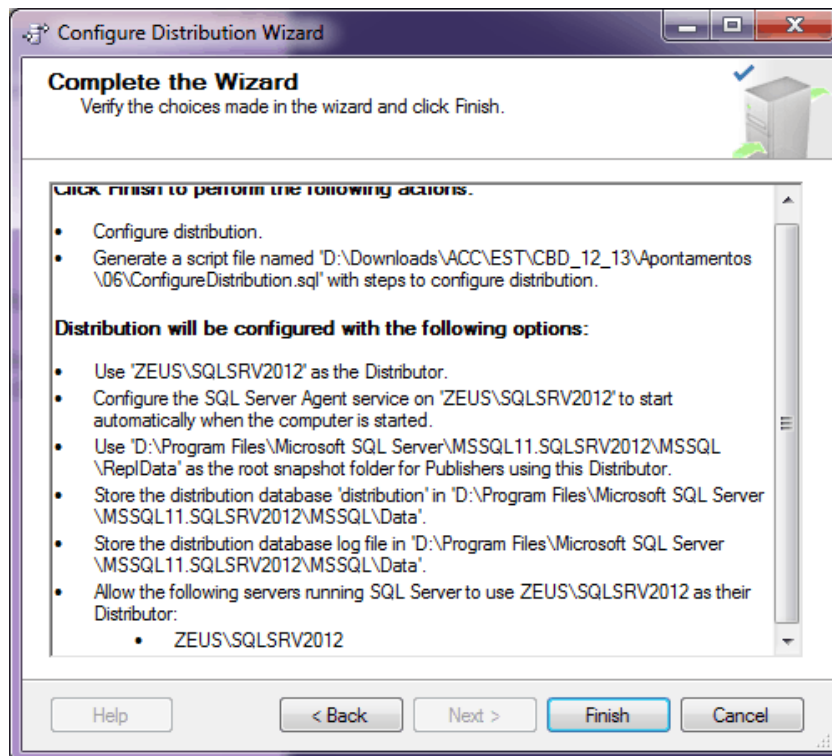


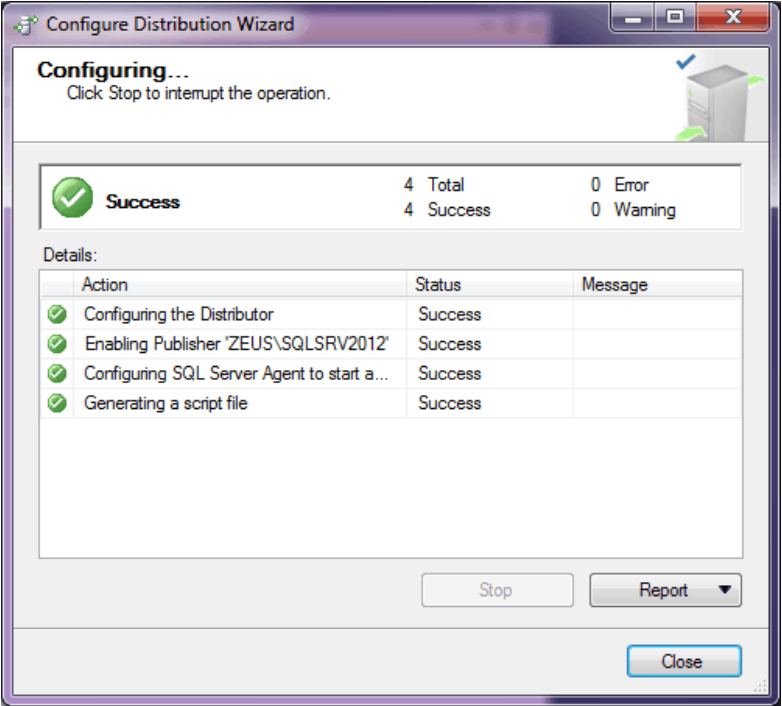


Configuração de uma Publicação Snapshot

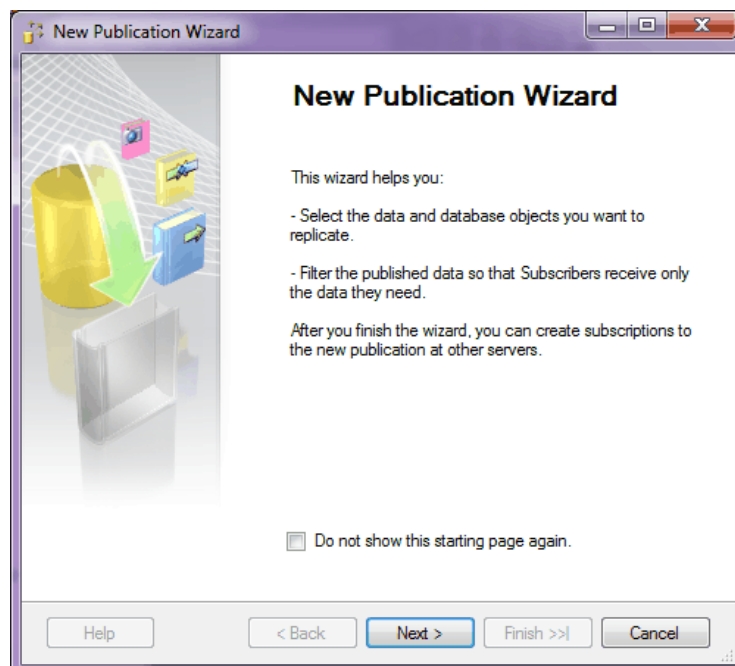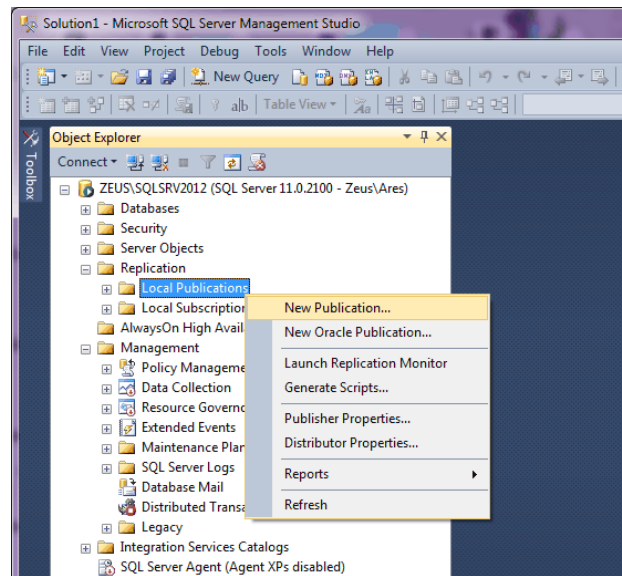

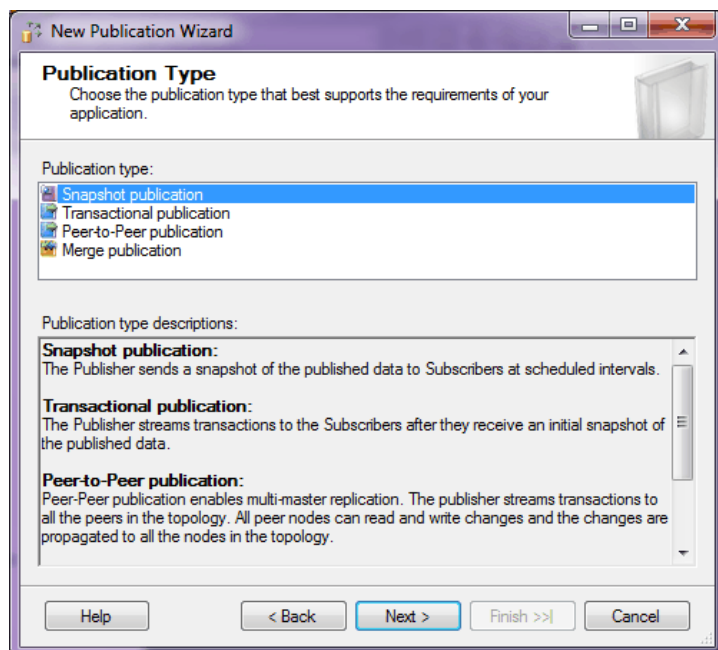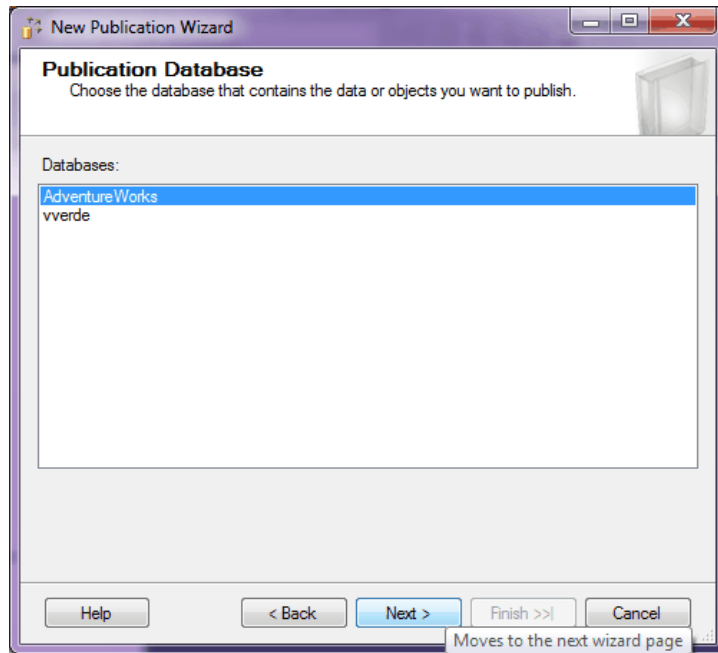

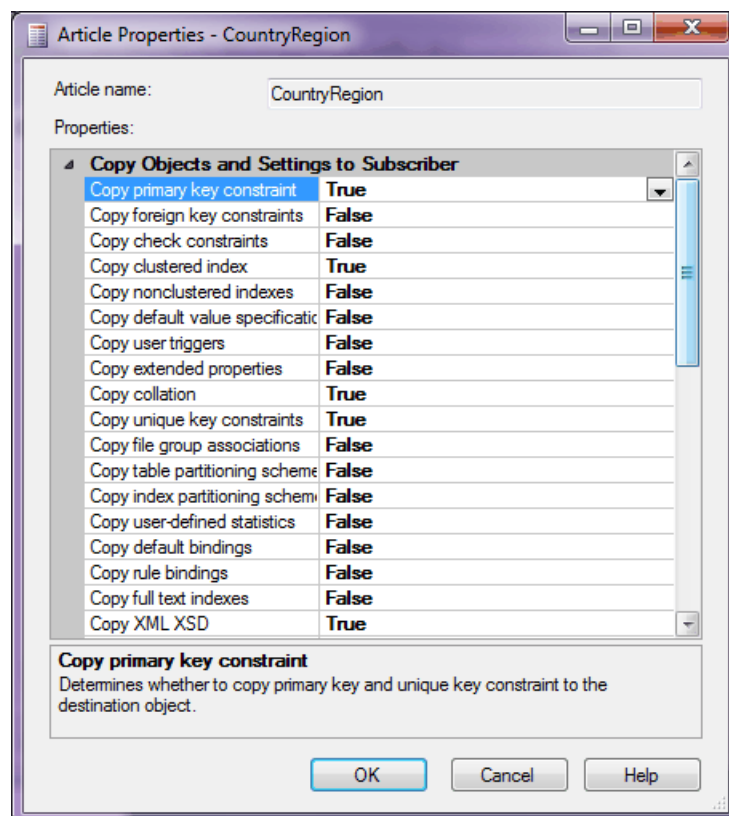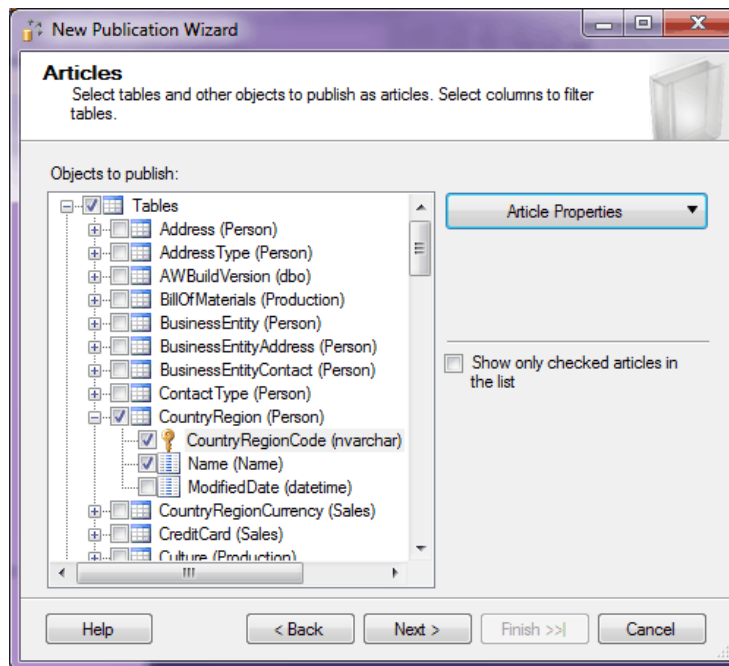

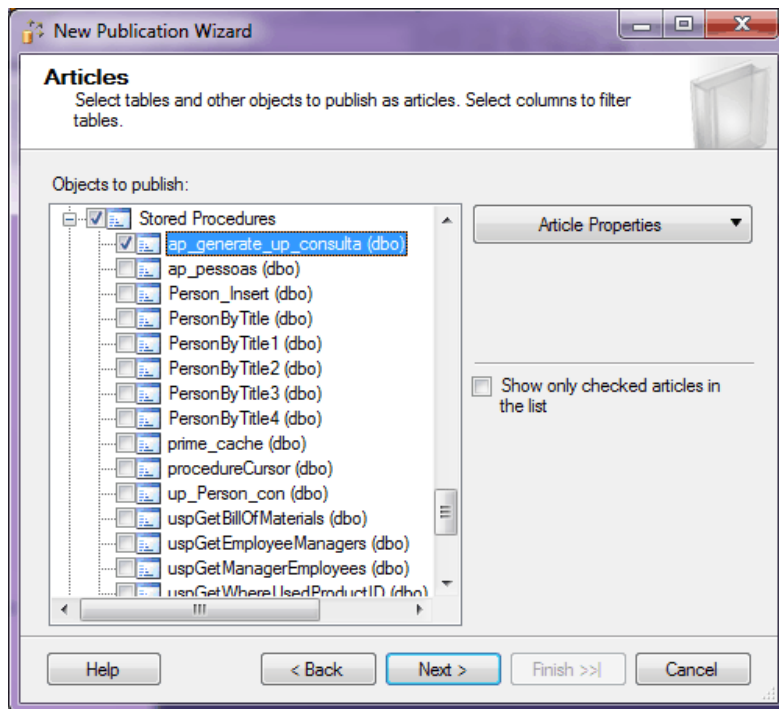

Add Filter

1. Select the table to filter.
CountryRegion (Person)

2. Complete the filter statement to identify which table rows Subscribers will receive. [Example statements](#)

Columns:

CountryRegionCode (nvarchar)
Name (Name)

Filter statement:

```
SELECT <published_columns> FROM [Person].
[CountryRegion] WHERE
```

OK Cancel Help

Add Filter

1. Select the table to filter.
CountryRegion (Person)

2. Complete the filter statement to identify which table rows Subscribers will receive. [Example statements](#)



Columns:

CountryRegionCode (nvarchar)
Name (Name)

Filter statement:

```
SELECT <published_columns> FROM [Person].
[CountryRegion] WHERE [Name] Like 'A%'
```

OK Cancel Help

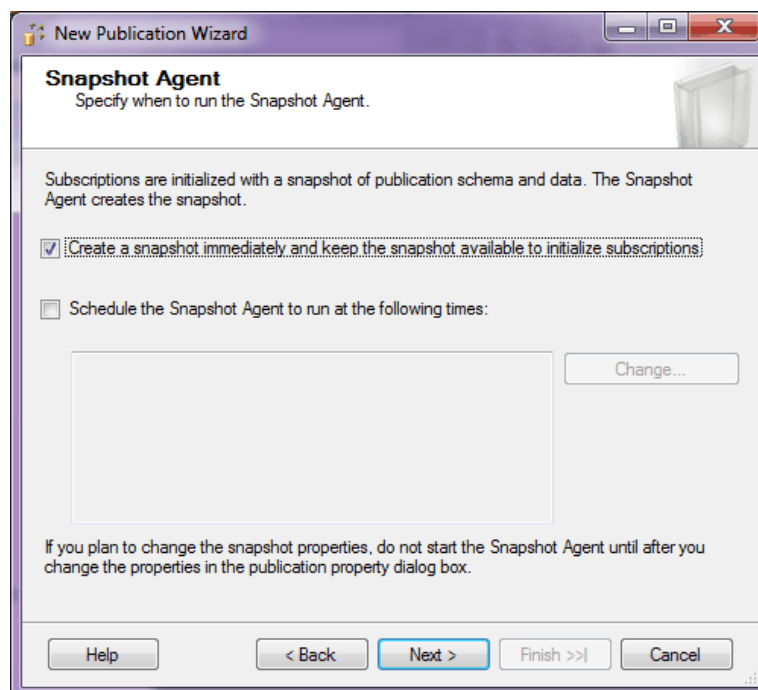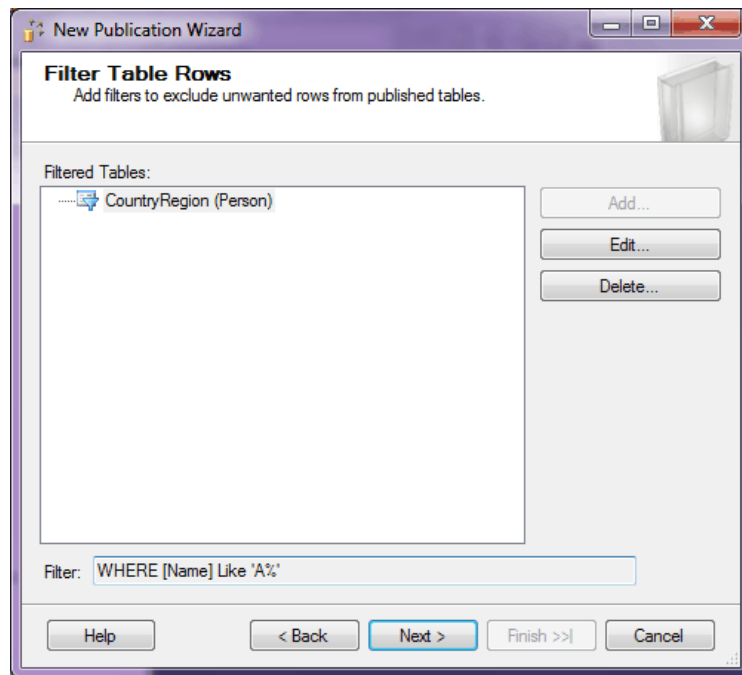

Snapshot Agent Security

Specify the domain or machine account under which the Snapshot Agent process will run.

☒ Run under the following Windows account:

Process account: Zeus\Ares
Example: domain\account

Password:

Confirm Password:

☐ Run under the SQL Server Agent service account (This is not a recommended security best practice.)

Connect to the Publisher

☒ By impersonating the process account

☐ Using the following SQL Server login:

Login:

Password:

Confirm Password:

OK Cancel Help



New Publication Wizard



Agent Security
For each agent, specify the account under which it will run and its connection settings.



Snapshot Agent:
Zeus\Ares

Security Settings...



Help < Back Next > Finish >> Cancel

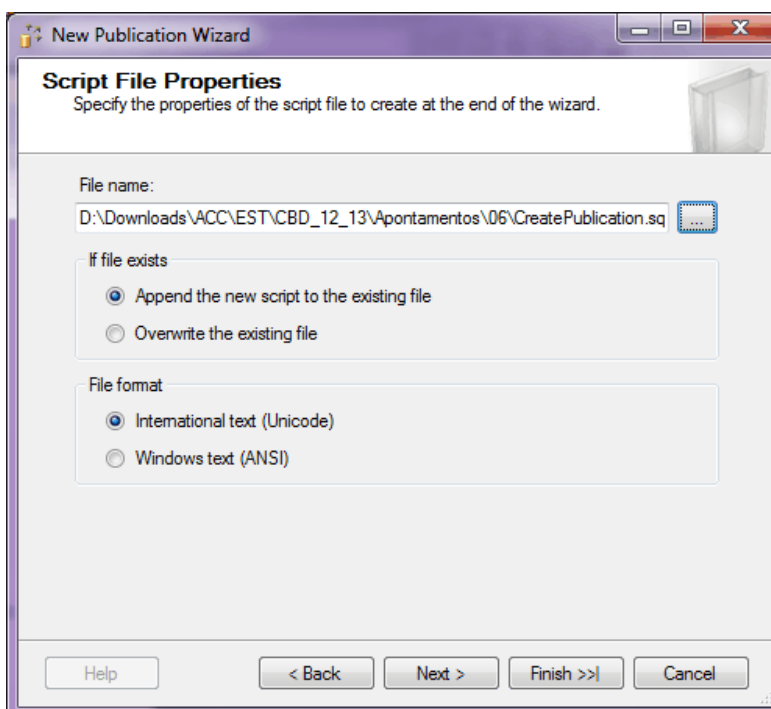
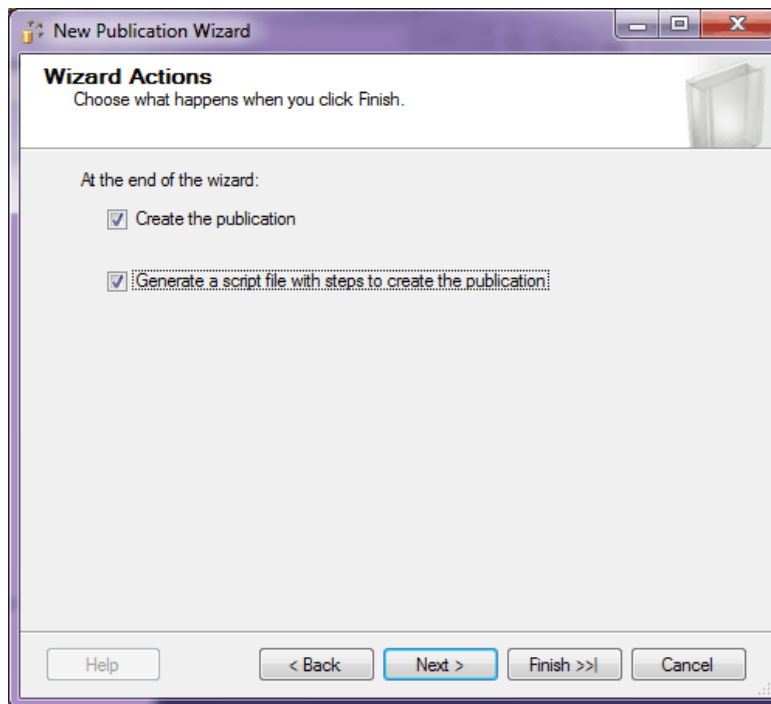


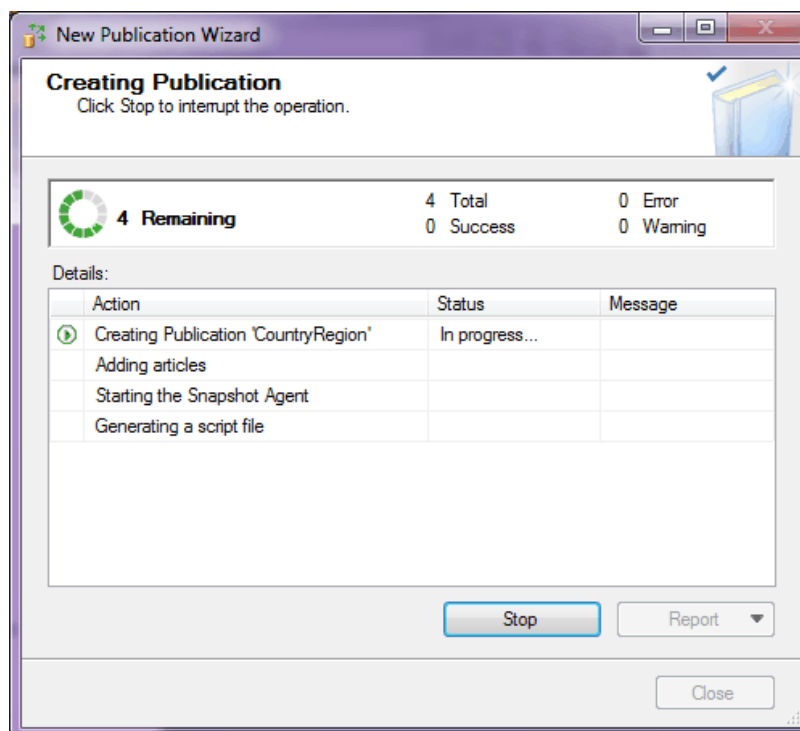
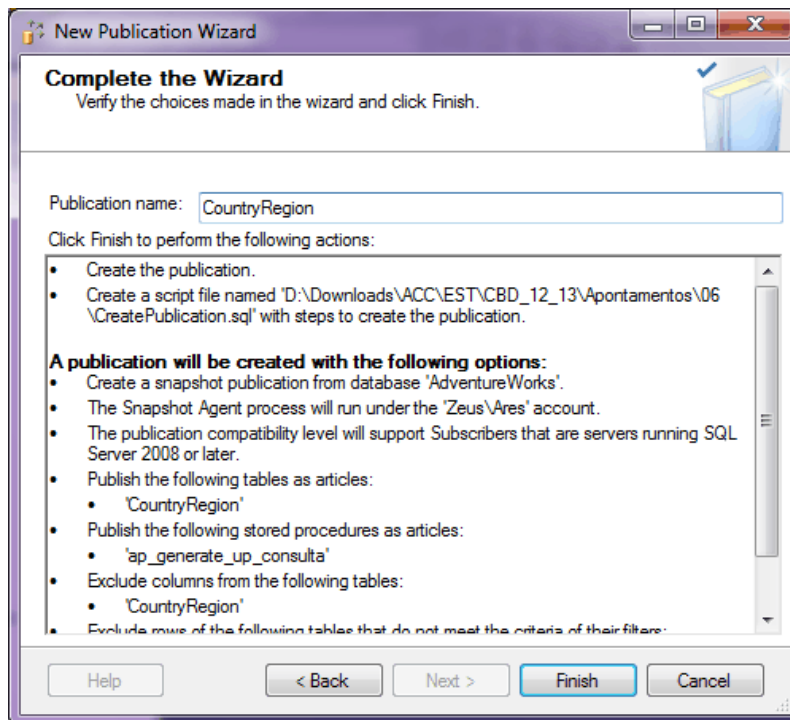


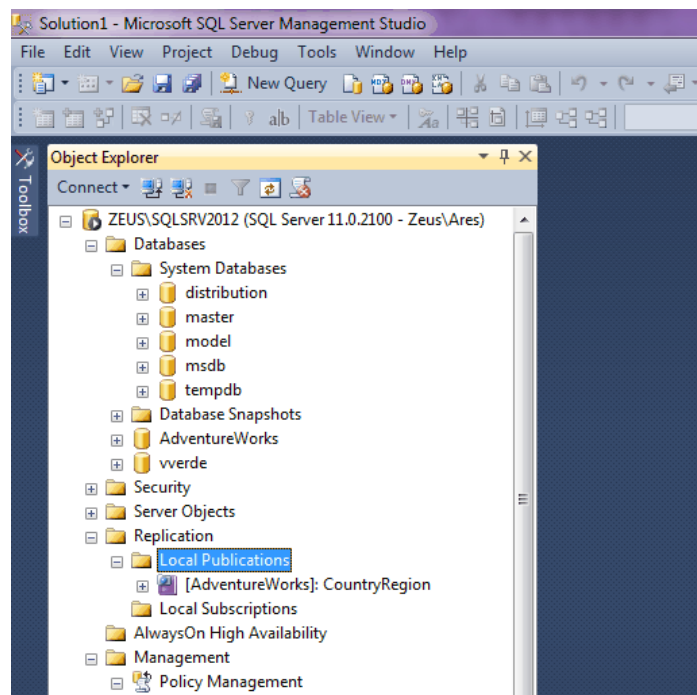
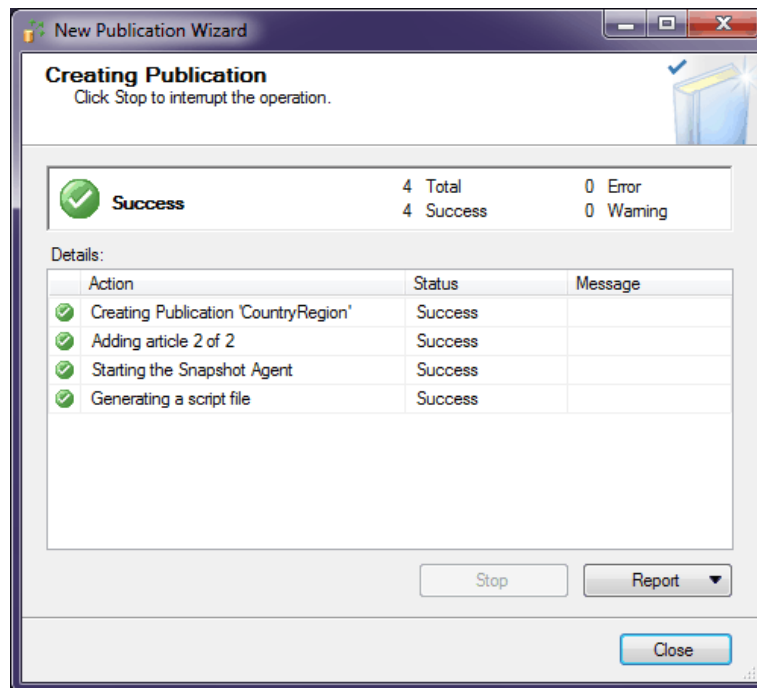




Configuração de uma Subscrição

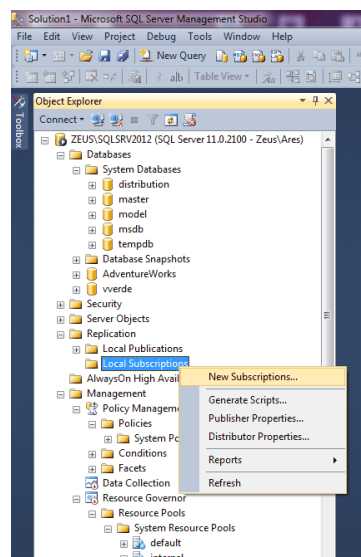
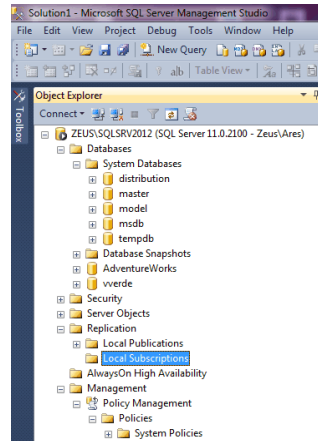


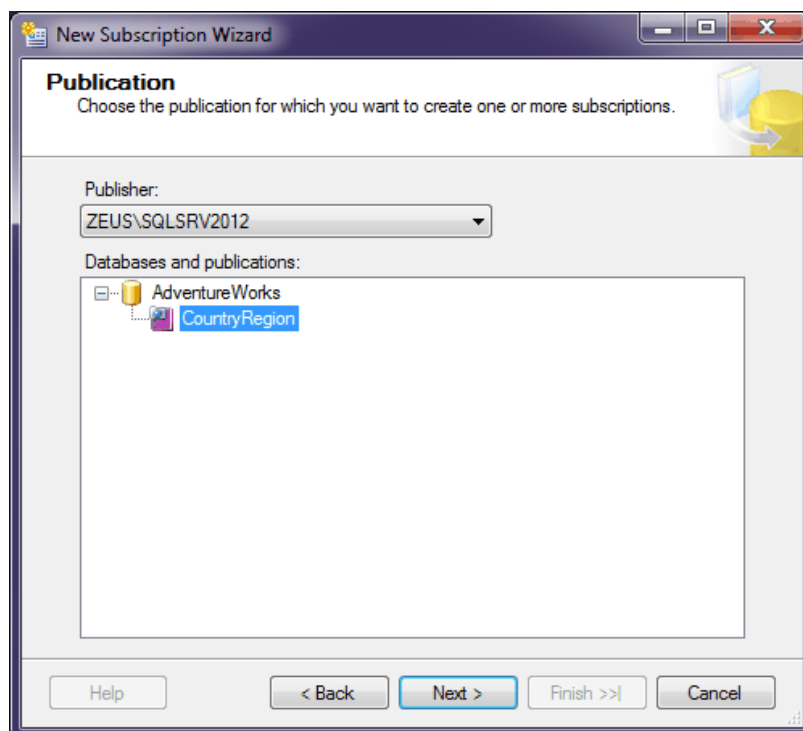
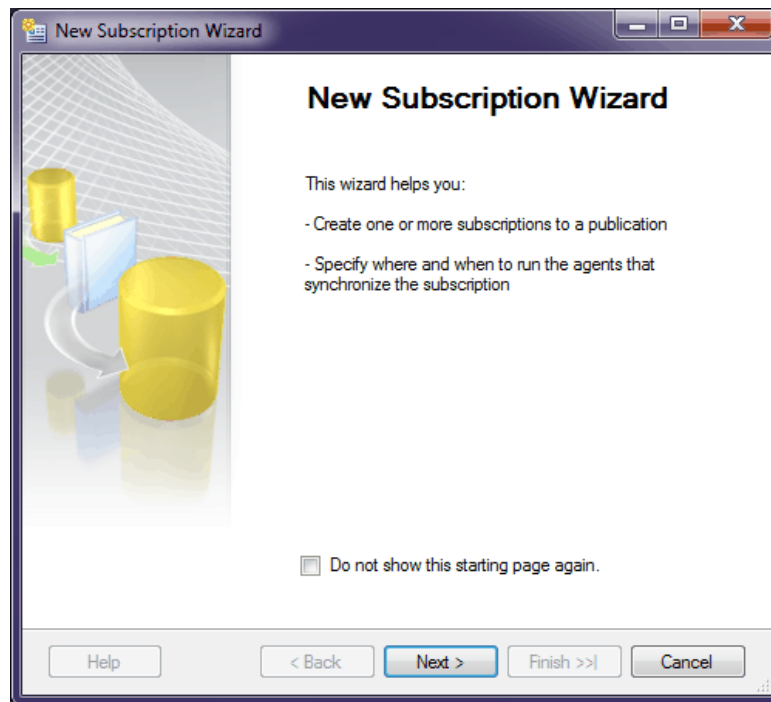


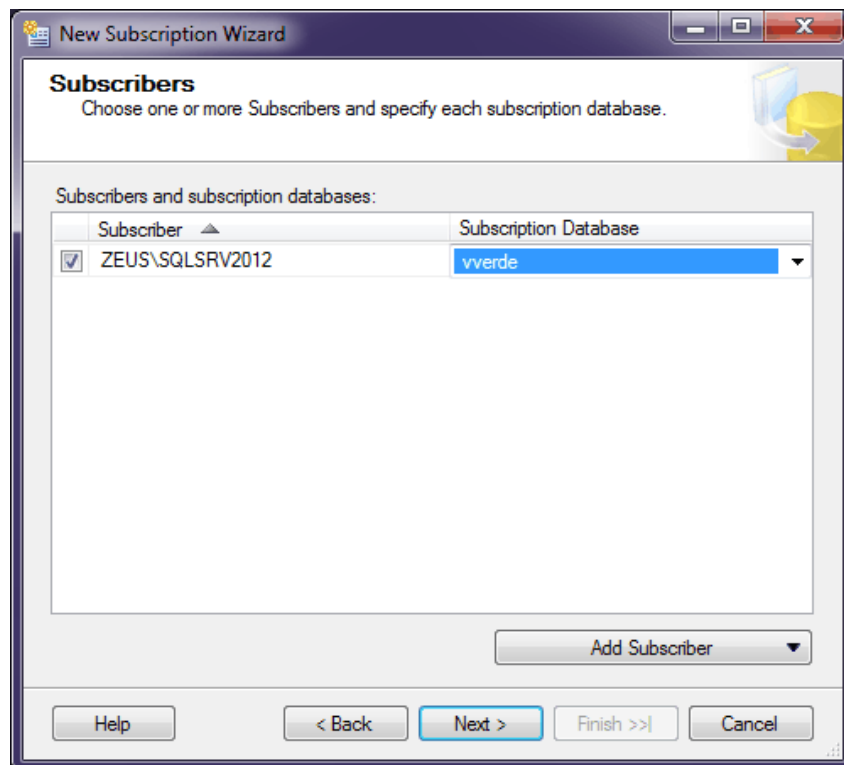
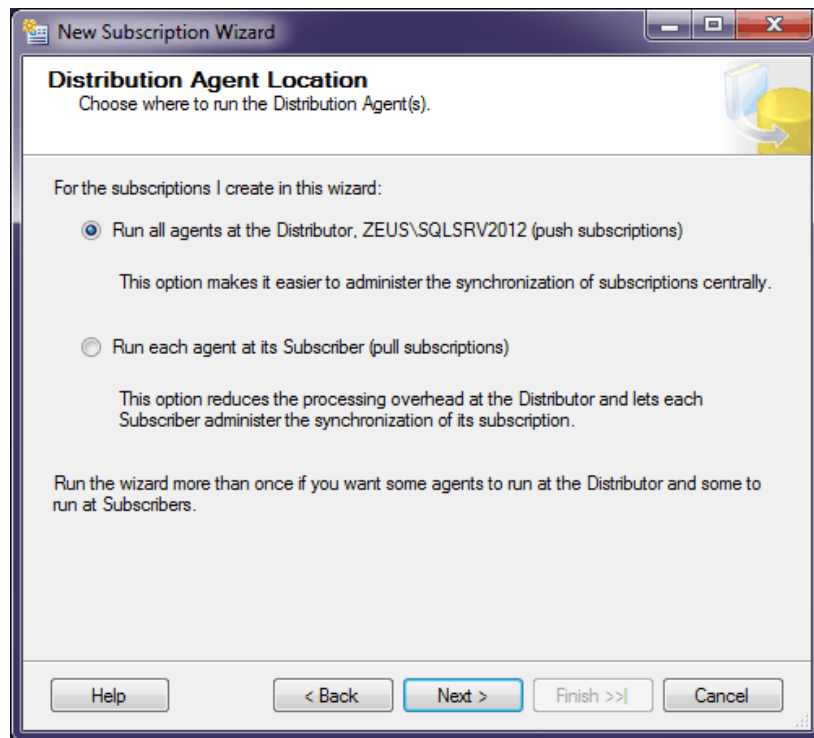



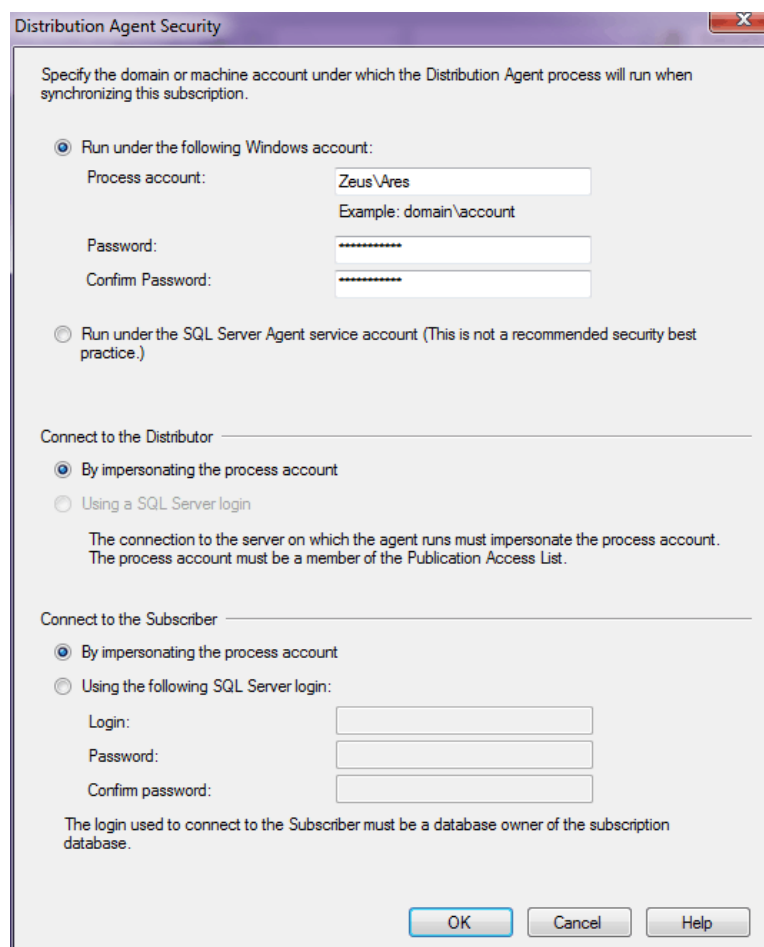
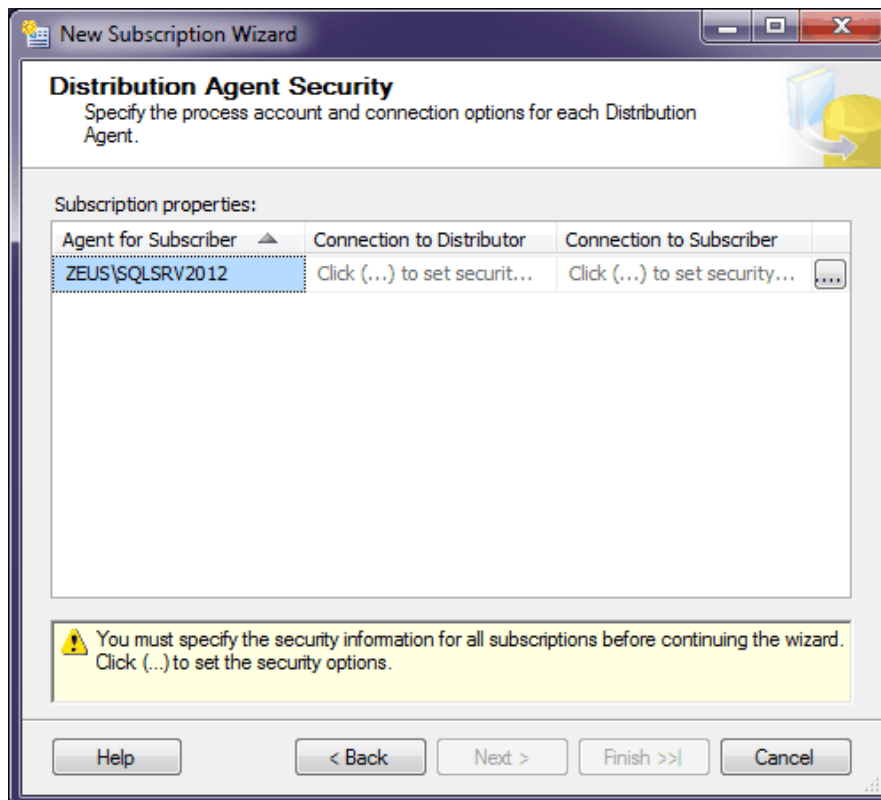


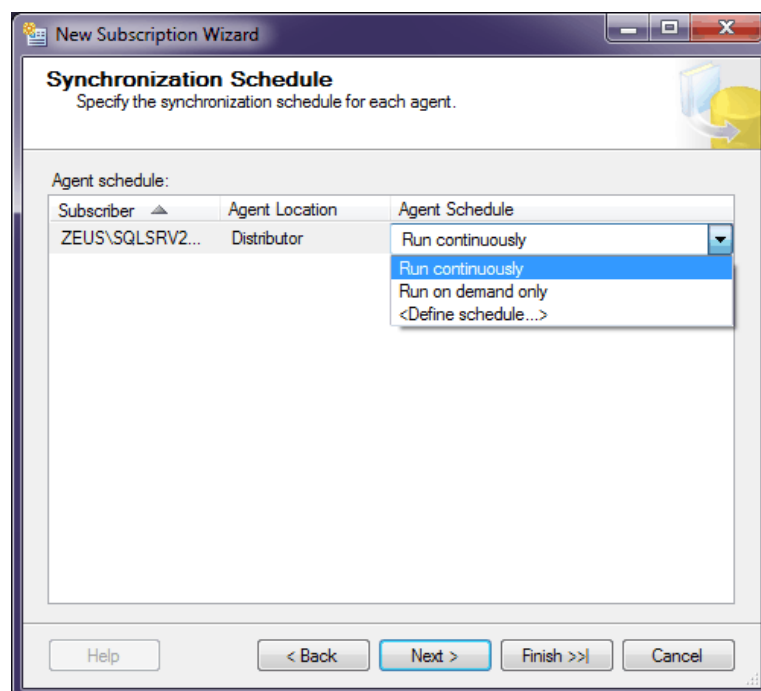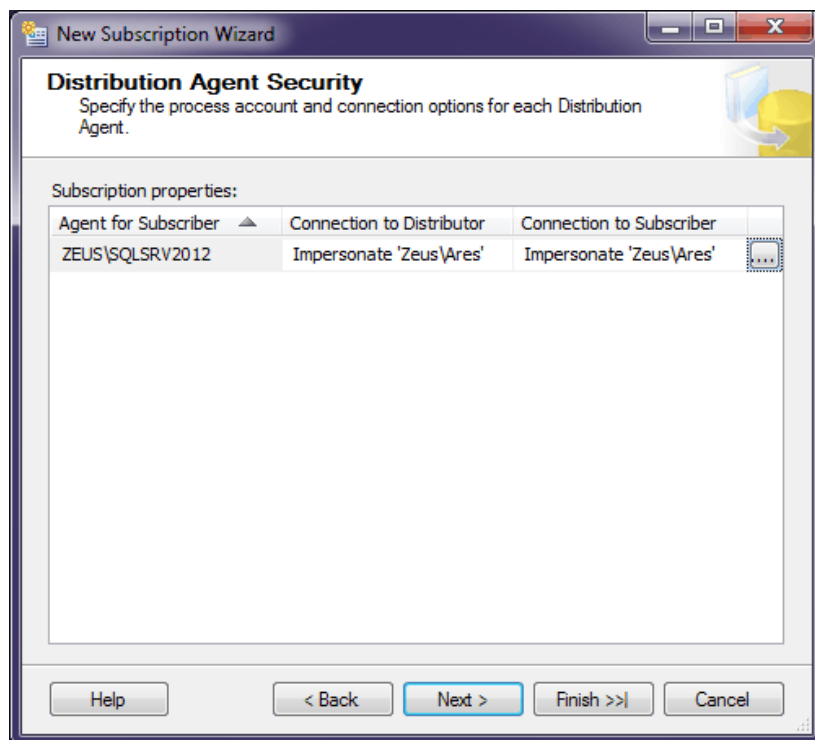

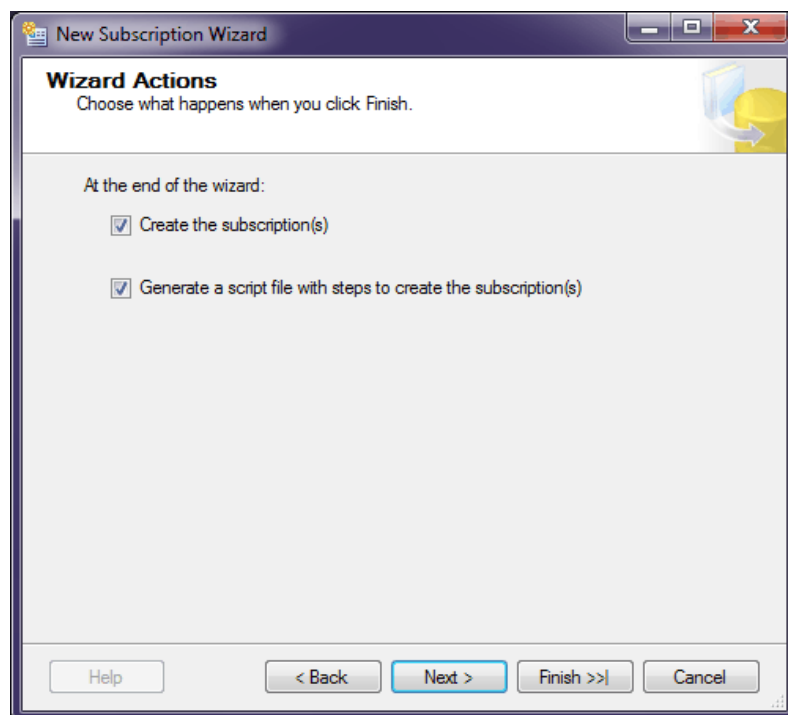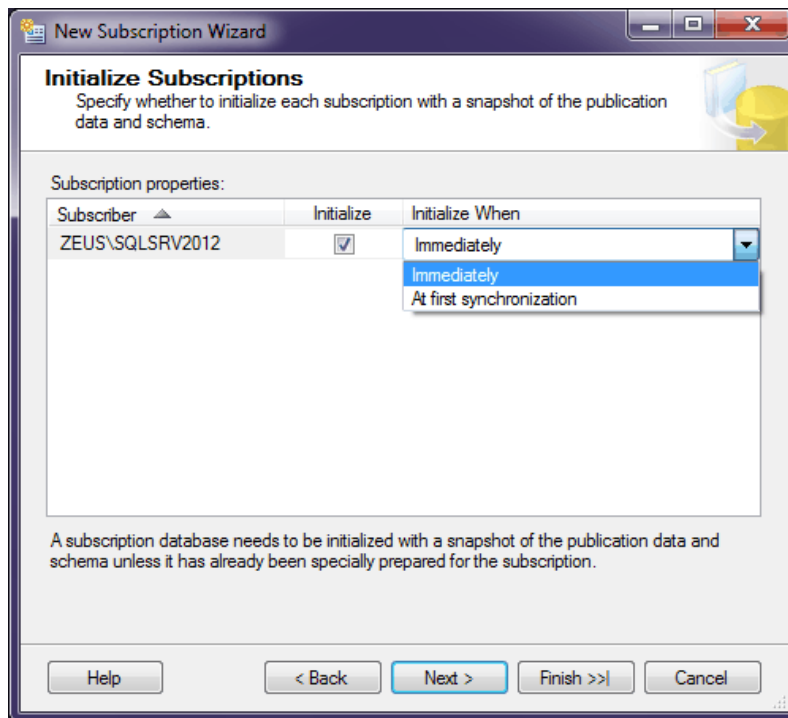

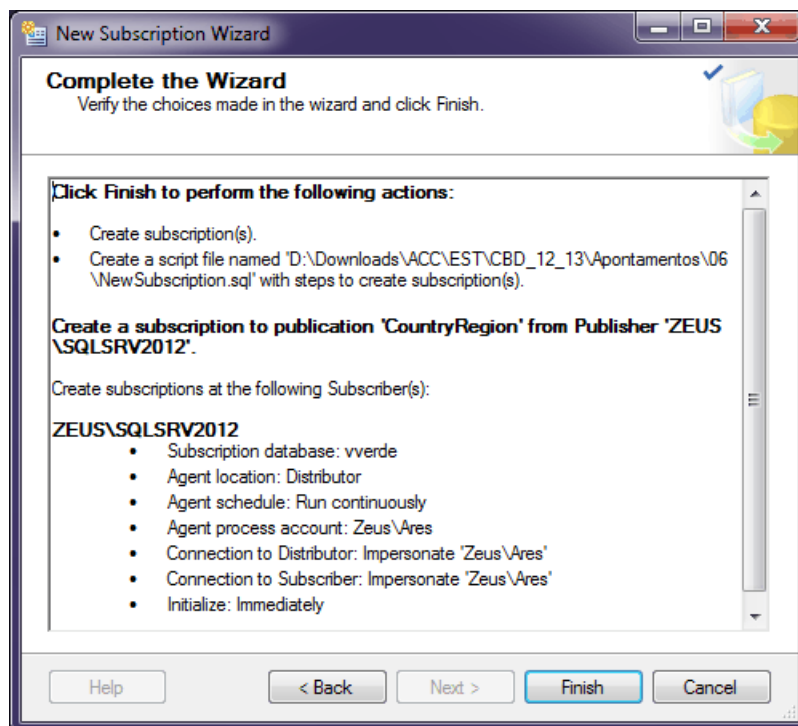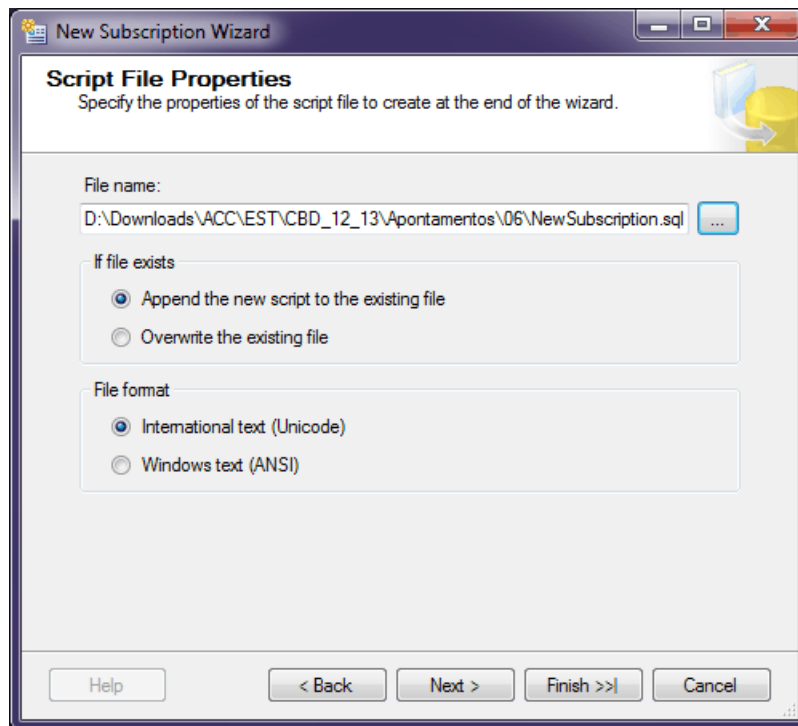

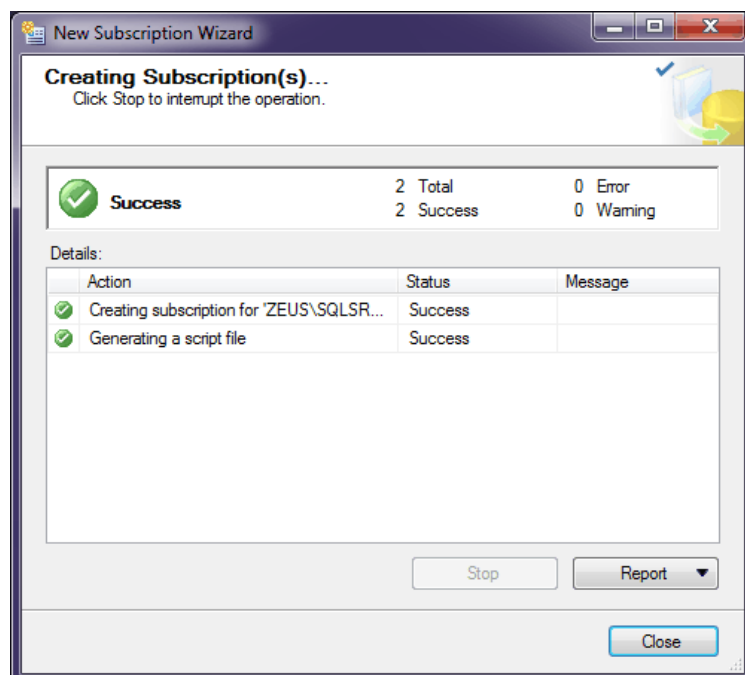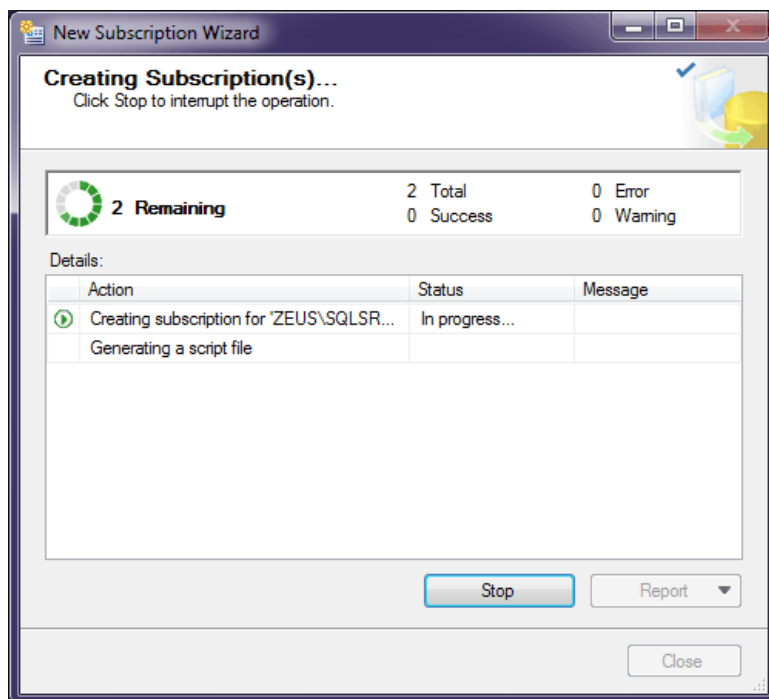

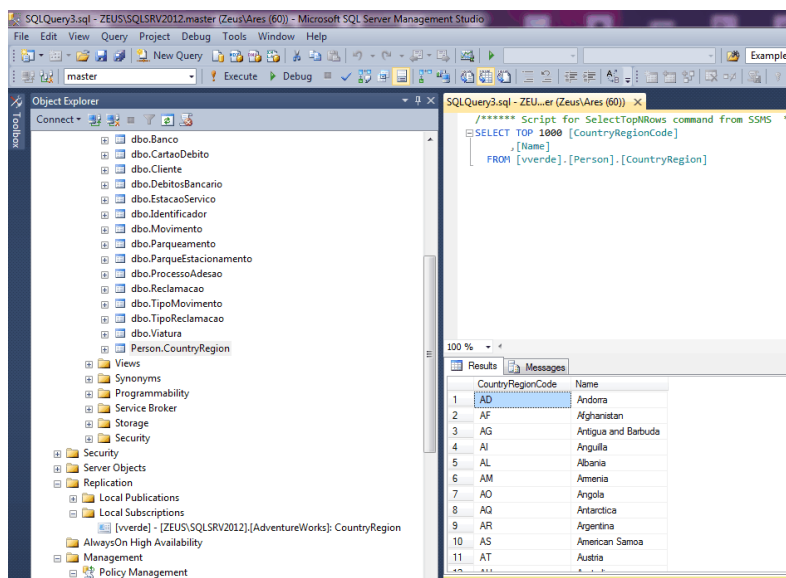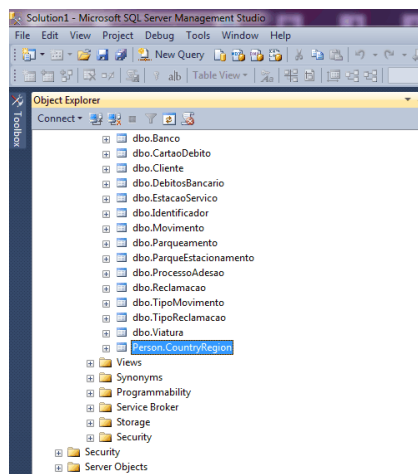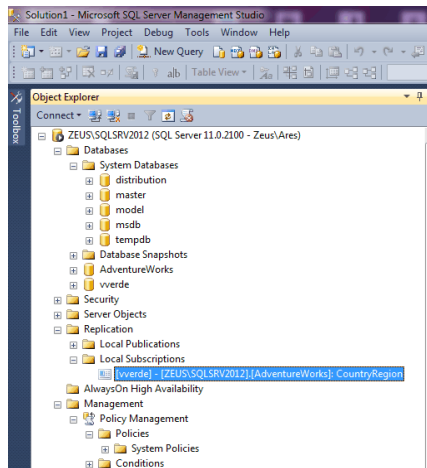




- dbo.Cliente
- dbo.DebitosBancario
- dbo.EstacaoServico
- dbo.Identificador
- dbo.Movimento
- dbo.Parqueamento
- dbo.ParqueEstacionamento
- dbo.ProcessoAdesao
- dbo.Reclamacao
- dbo.TipoMovimento
- dbo.TipoReclamacao
- dbo.Viatura
- Person.CountryRegion
- Views
- Synonyms
- Programmability
 - Stored Procedures
 - System Stored Procedures
 - dbo.ap_generate_up_consulta
 - dbo.ap_generate_up_consulta0
 - dbo.ap_generate_up_insert
 - dbo.up_Cliente_con
 - dbo.up_Viatura_con
- Functions