

Self-hosted Team Pool on Kubernetes

What it is

- Cursor Cloud Agent loop stays in Cursor cloud
- Tool execution runs on your workers in Kind / K8s
- Pool **kind-demo**: any-repo, outbound-only (no Ingress / TLS)

Benefits

- Keep code and builds on your infrastructure
- Service-account auth for the worker fleet
- Scale workers 1–5 with a standard HPA (optional demand scaler, demo-only)

SHOW · POOL PICKER (cursor.com/agents → Remote Machines)

Remote Machines Search Remote Machines...

Suggested

pick kind-demo → kind-demo

WORKER DEPLOYMENT (EXCERPT)


```
kind: Deployment
metadata:
  name: cursor-pool-worker
  namespace: cursord
spec:
  replicas: 1
  template:
    spec:
      containers:
        - name: worker
          image: cursor-pool-worker:demo
          env:
            - name: POOL_NAME
              value: kind-demo
            - name: IDLE_RELEASE_TIMEOUT
              value: "600"
# entrypoint:
#   agent worker --pool $POOL_NAME \
#     --idle-release-timeout 600 start
```

HPA · autoscaling/v2

```
kind: HorizontalPodAutoscaler
metadata:
  name: cursor-pool-worker
spec:
  scaleTargetRef:
    kind: Deployment
    name: cursor-pool-worker
  minReplicas: 1
  maxReplicas: 5
  metrics:
    - type: Resource
      resource:
        name: cpu
        target:
          averageUtilization: 50
```

Next: pick **kind-demo**, send a prompt, watch the claim on the worker.

Who owns what

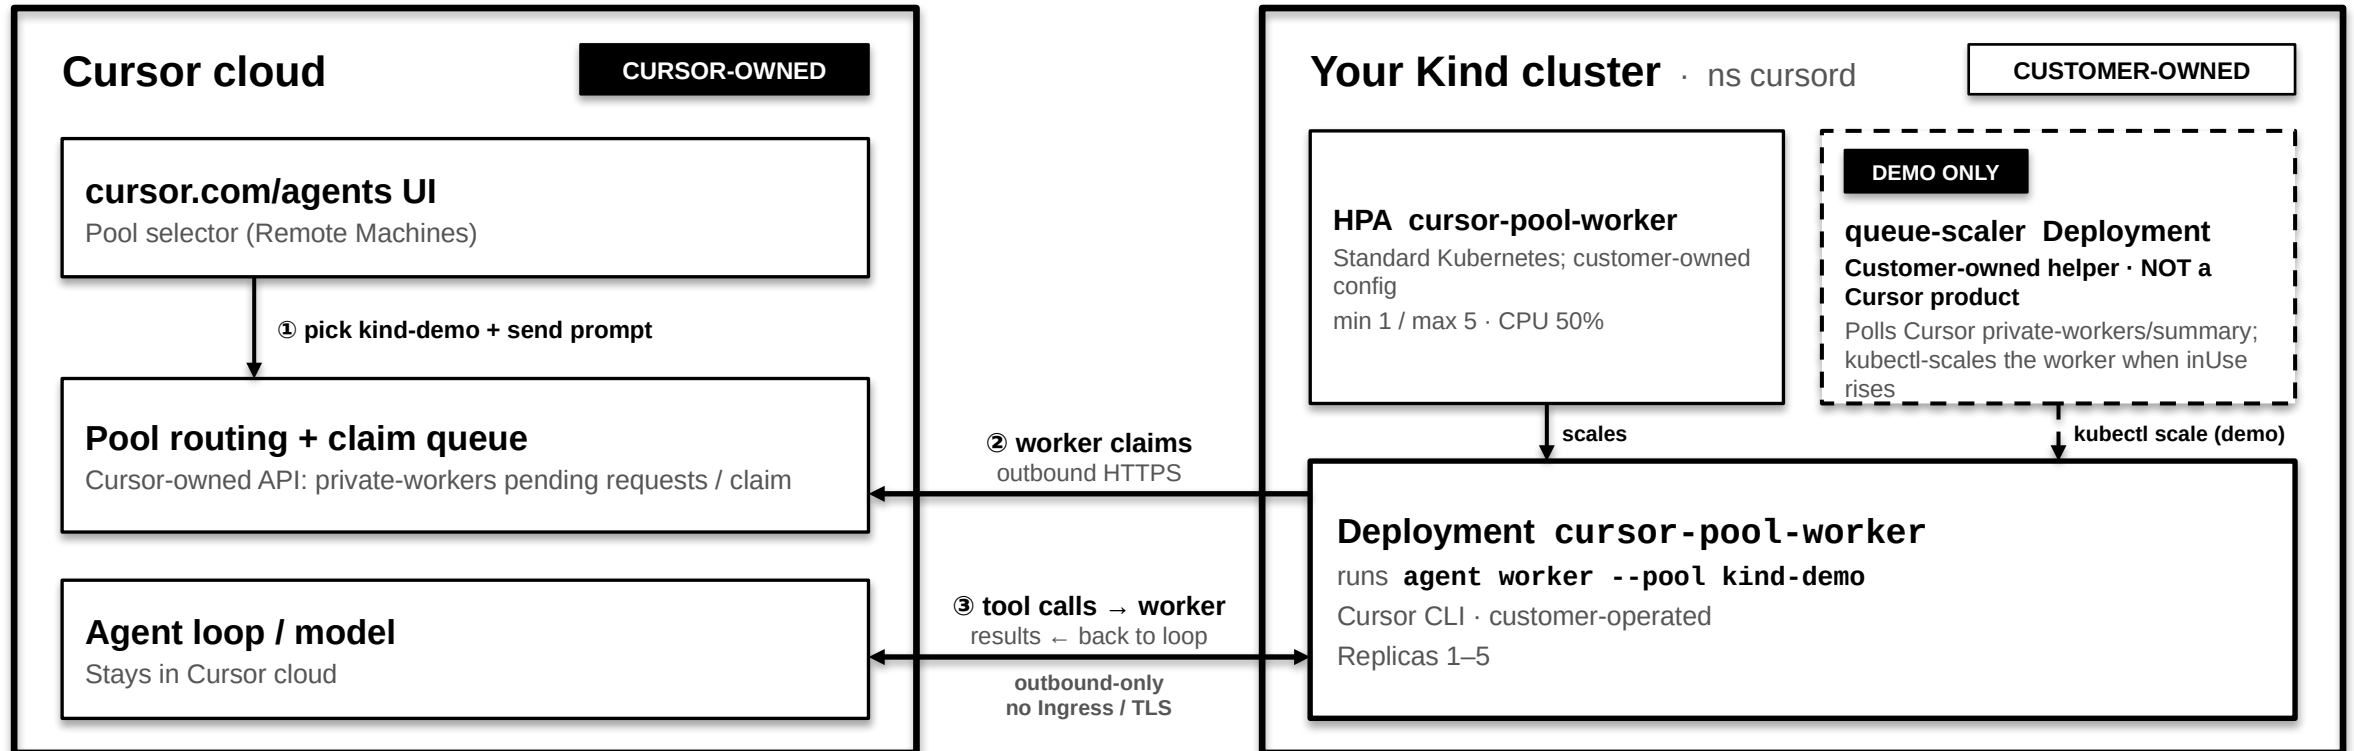

Production path: `anywhere/k8s-workers` → `agent worker controller --spawn / --warm-idle`

The queue-scaler above is a demo-only, customer-owned helper. It is not a Cursor product and not the production path.

Disk in this demo: no PVC · ephemeral container filesystem · `--clone-git-repos` not enabled