

\*\*\*\*\*

→ ① we can only use 'where' concept along with the 'select' concept.

→ ② we can also use 'where' concept along with the 'update' concept.

where : select, update

update :-

apple

A
1
2
3

update apple set A=8;

apple

A
8
8
8


update + where :-

apple

A
1
2
3

update apple set A=8 where A=2

location condition

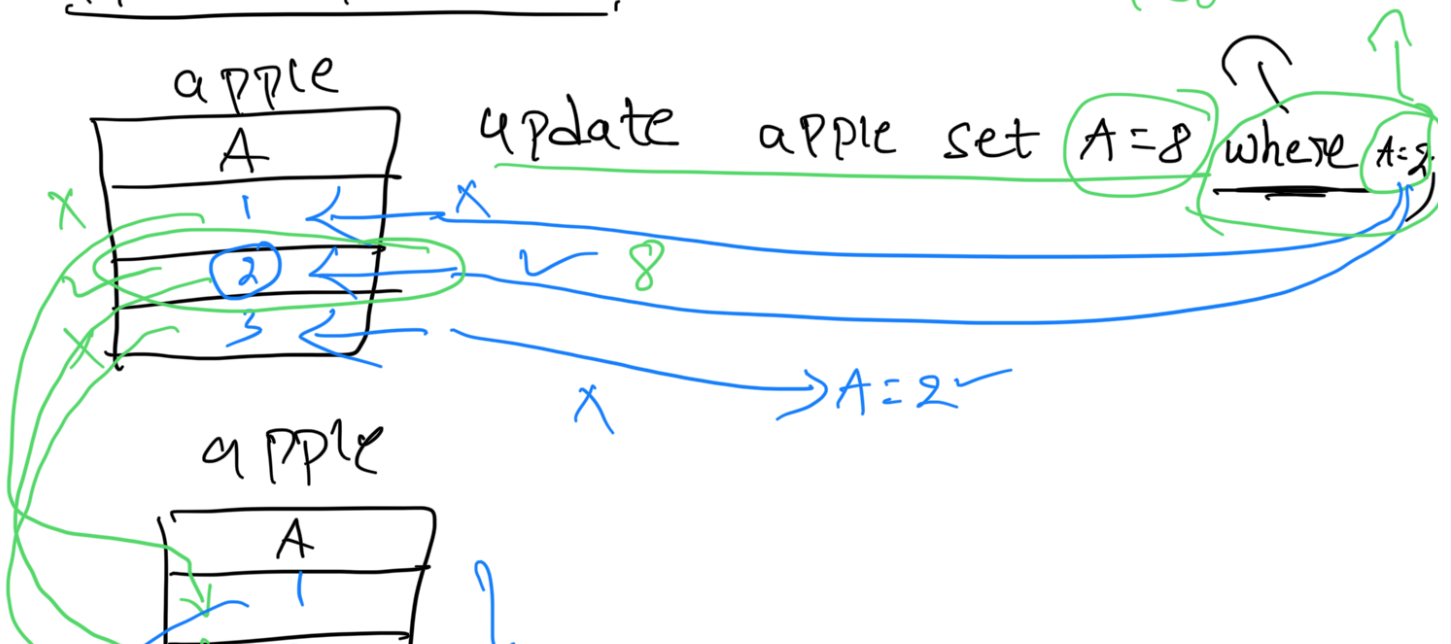

8
3

update apple set  $A=10$  where  $A=3$

$\rightarrow 1=3 \times$   
 $\rightarrow 8=3 \times$   
 $\rightarrow 3=3 \checkmark$

apple

A
1
8
10

update apple set

$A=35$  where  $A > 2$

$\rightarrow 1 > 2 \times$   
 $\rightarrow 8 > 2 \checkmark$   
 $\rightarrow 10 > 2 \checkmark$

apple

A
1
35
35

$\otimes$  update  $\rightarrow$  All values will change

$\otimes$  update + where  $\rightarrow$  only values will change if condition satisfy