Guide to use app card/API

Agenda

1. What is app card?
2. How to use the app card in the scenario
3. API integration
4. User-input & API integration
5. Transmitting an API response to another API
6. How to use app card in the webhook
7. Others

- Interfacing with scenario, home, feedback
- Disabling & updating an app card
- Contents inputted in the app card can be checked and approved by other user(s).
- Contents inputted in the app card can be sent as a notification to other user(s) and chat room(s).
- Limiting the button click

1. What is app card?


App card is a UI message which has been written by JSON.

The message can be written by in many ways, and can interact with users or interface with API.

JSON


```
{
  "title": "Tell us about yourself",
  "body": "We just need a few more details to get you booked for the trip of a lifetime!",
  "disclaimer": "Don't worry, we'll never share or sell your information.",
  "properties": [
    {
      "id": "myName",
      "label": "Your name (Last, First)",
      "validation": "^[A-Z][a-z]+, [A-Z][a-z]+$",
      "error": "Please enter your name in the specified format"
    },
    {
      "id": "myEmail",
      "label": "Your email",
      "validation": "^[A-Za-z0-9._%+-]+@[A-Za-z0-9.-]+[.][A-Za-z0-9-]{2,4}$",
      "error": "Please enter a valid email address"
    },
    {
      "id": "myTel",
      "label": "Phone Number (xxx-xxx-xxxx)",
      "validation": "^[0-9]{3}-[0-9]{3}-[0-9]{4}$",
      "error": "Invalid phone number. Use the specified format: 3 numbers, hyphen, 3 numbers, hyphen
and 4 numbers"
    }
  ],
  "thumbnailUrl":
"https://upload.wikimedia.org/wikipedia/commons/b/b2/Diver_Silhouette%2C_Great_Barrier_Reef.jpg",
  "thumbnailAlt": "Diver in the Great Barrier Reef"
}
```


UI

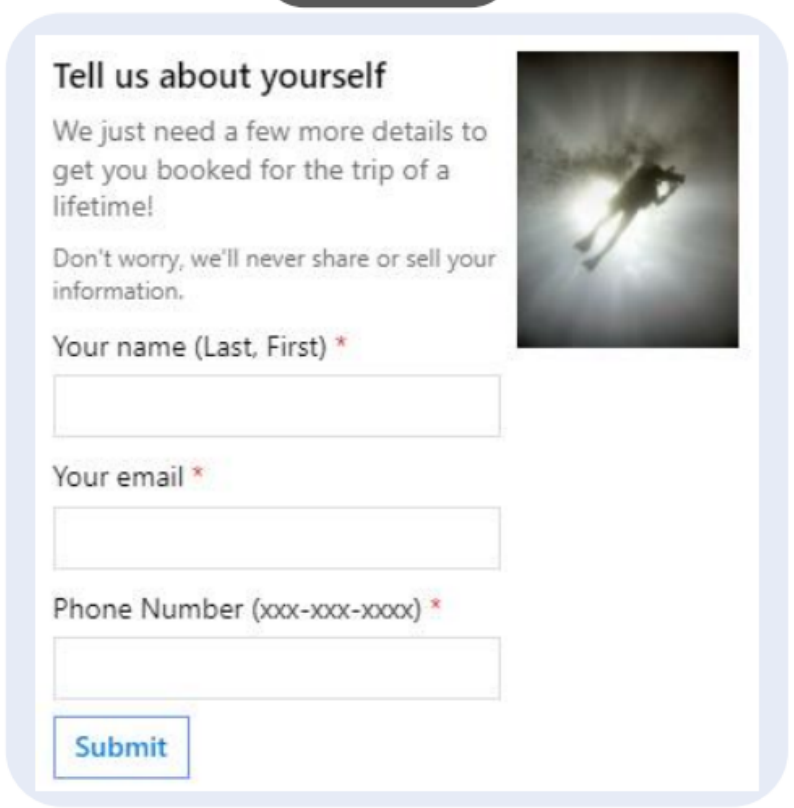


※ App cards follow the policy specifications of Microsoft Adaptive Cards. For the detail information, please check it out on Microsoft Adaptive Cards site.


- Homepage: https://adaptivecards.io/
- Schema: https://adaptivecards.io/explorer


1. What is app card?

App card can be used in the scenario, notification, survey, API interface, webhook, etc.

Scenario	API integration	Webhook

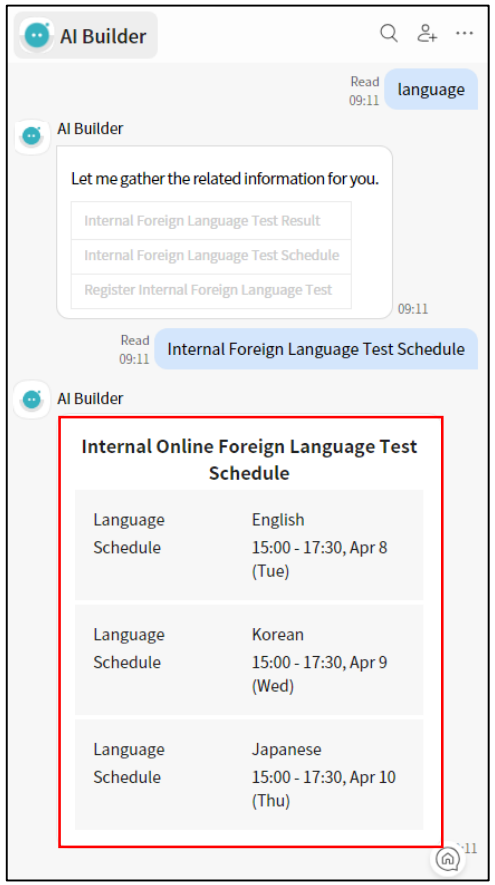


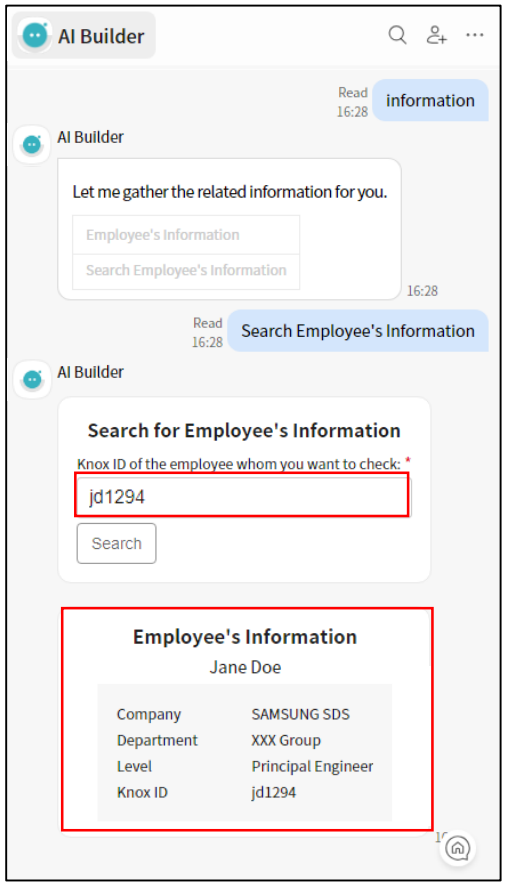

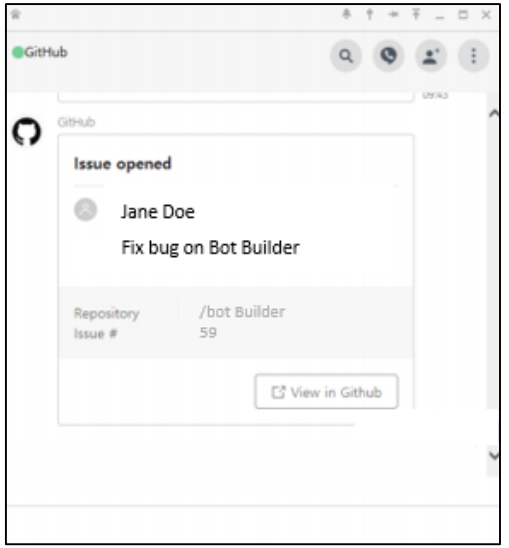

2. How to use the app card in the scenario

App card can be used in the scenario.

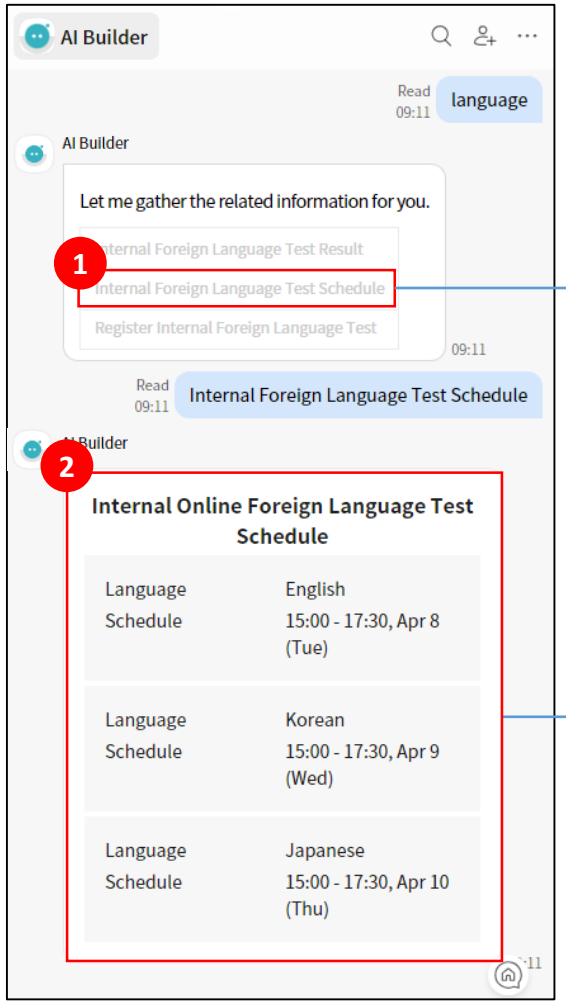


1. Click the scenario

2. App card

2. How to use the app card in the scenario


First of all, register an app card.

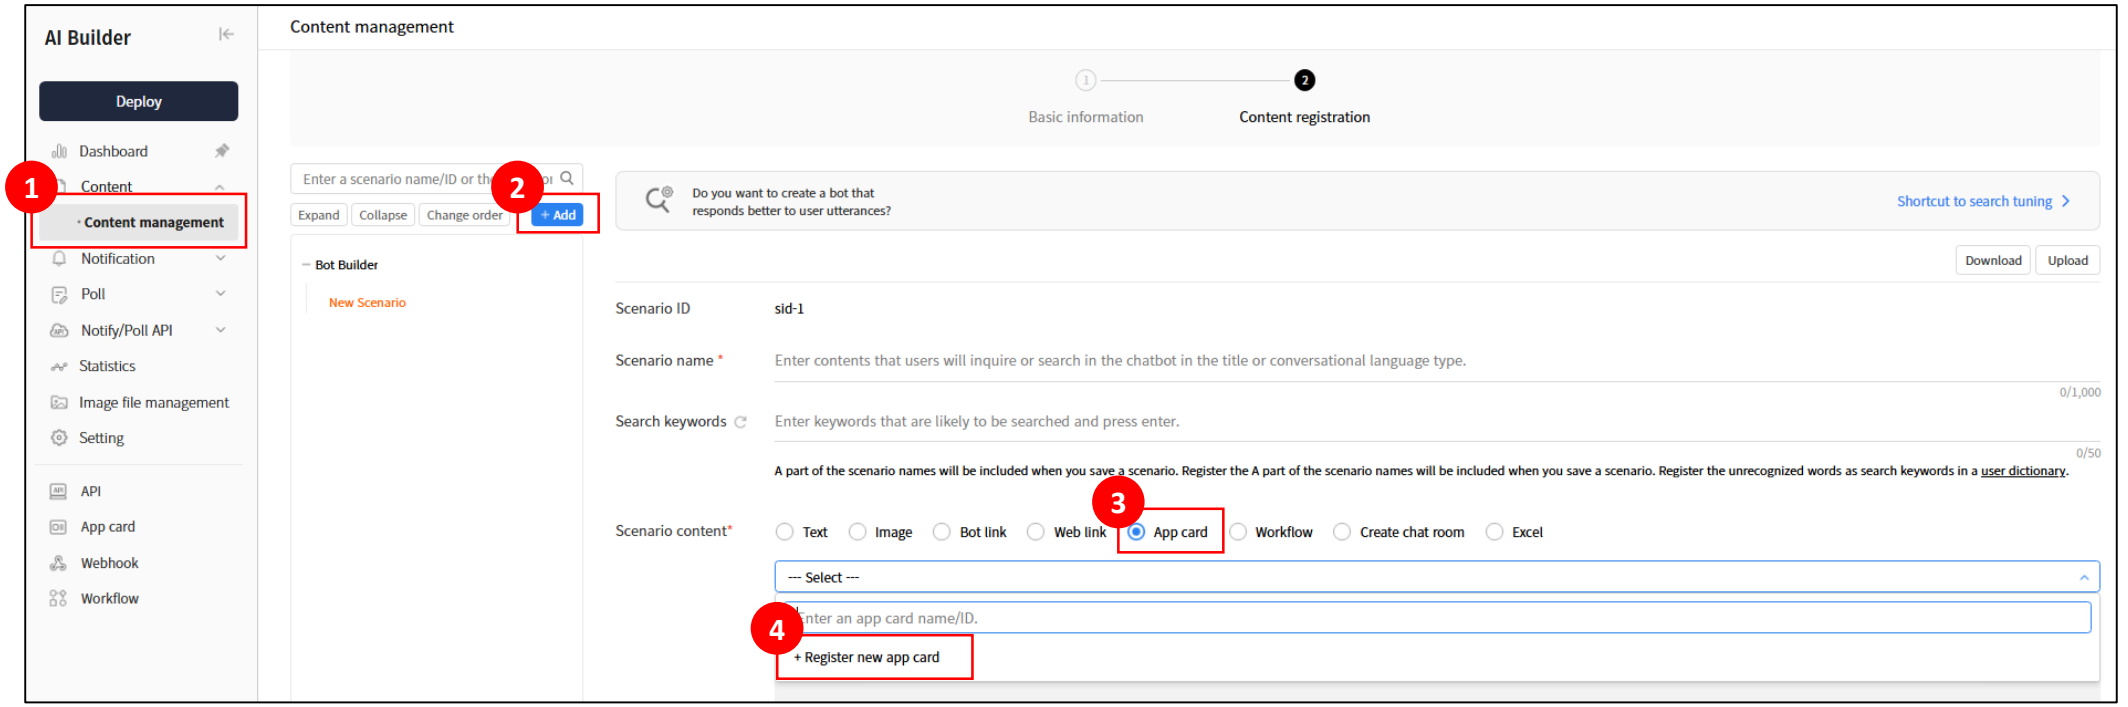

2. How to use the app card in the scenario


Input app card name, app card JSON and save the app card.

※ App card designer: http://developers.samsung.net/static/designer/html/designer.html?v_1666938086951

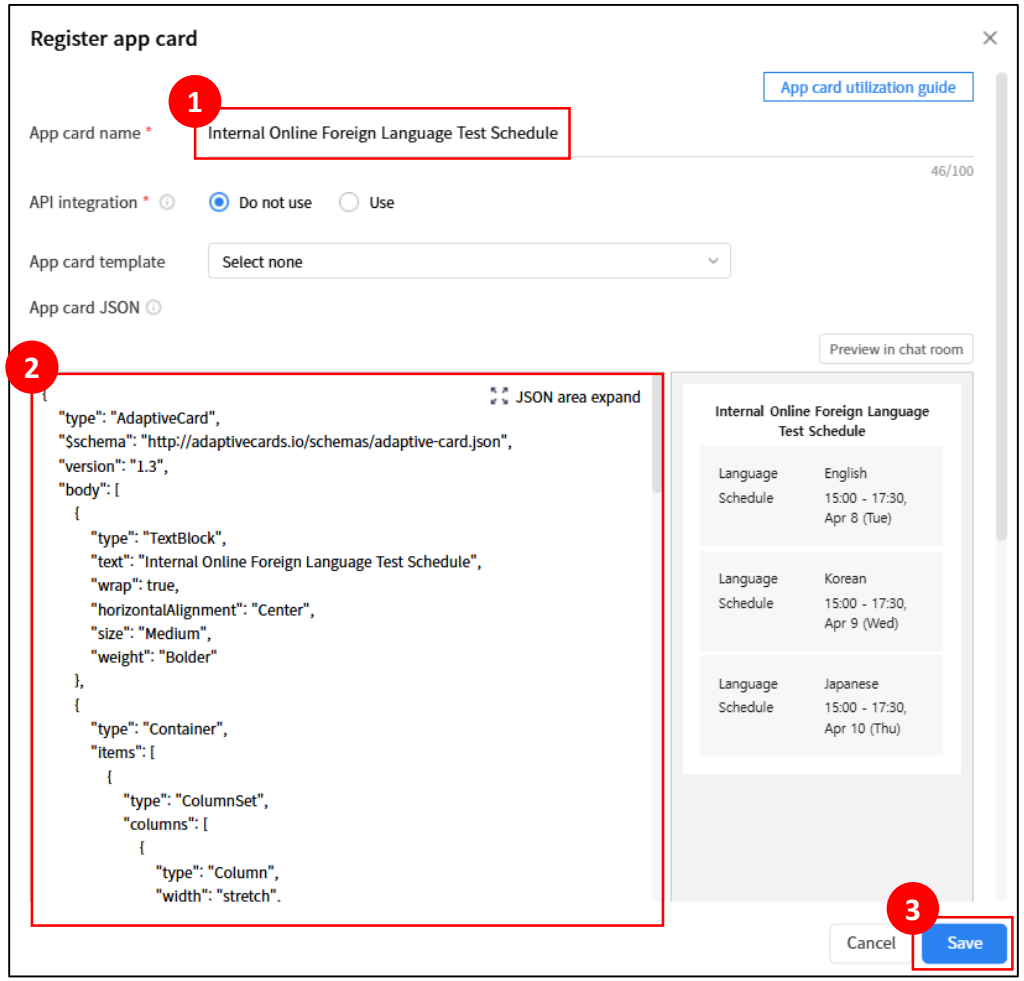


2. How to use the app card in the scenario


Choose ‘App card’ and save the scenario.

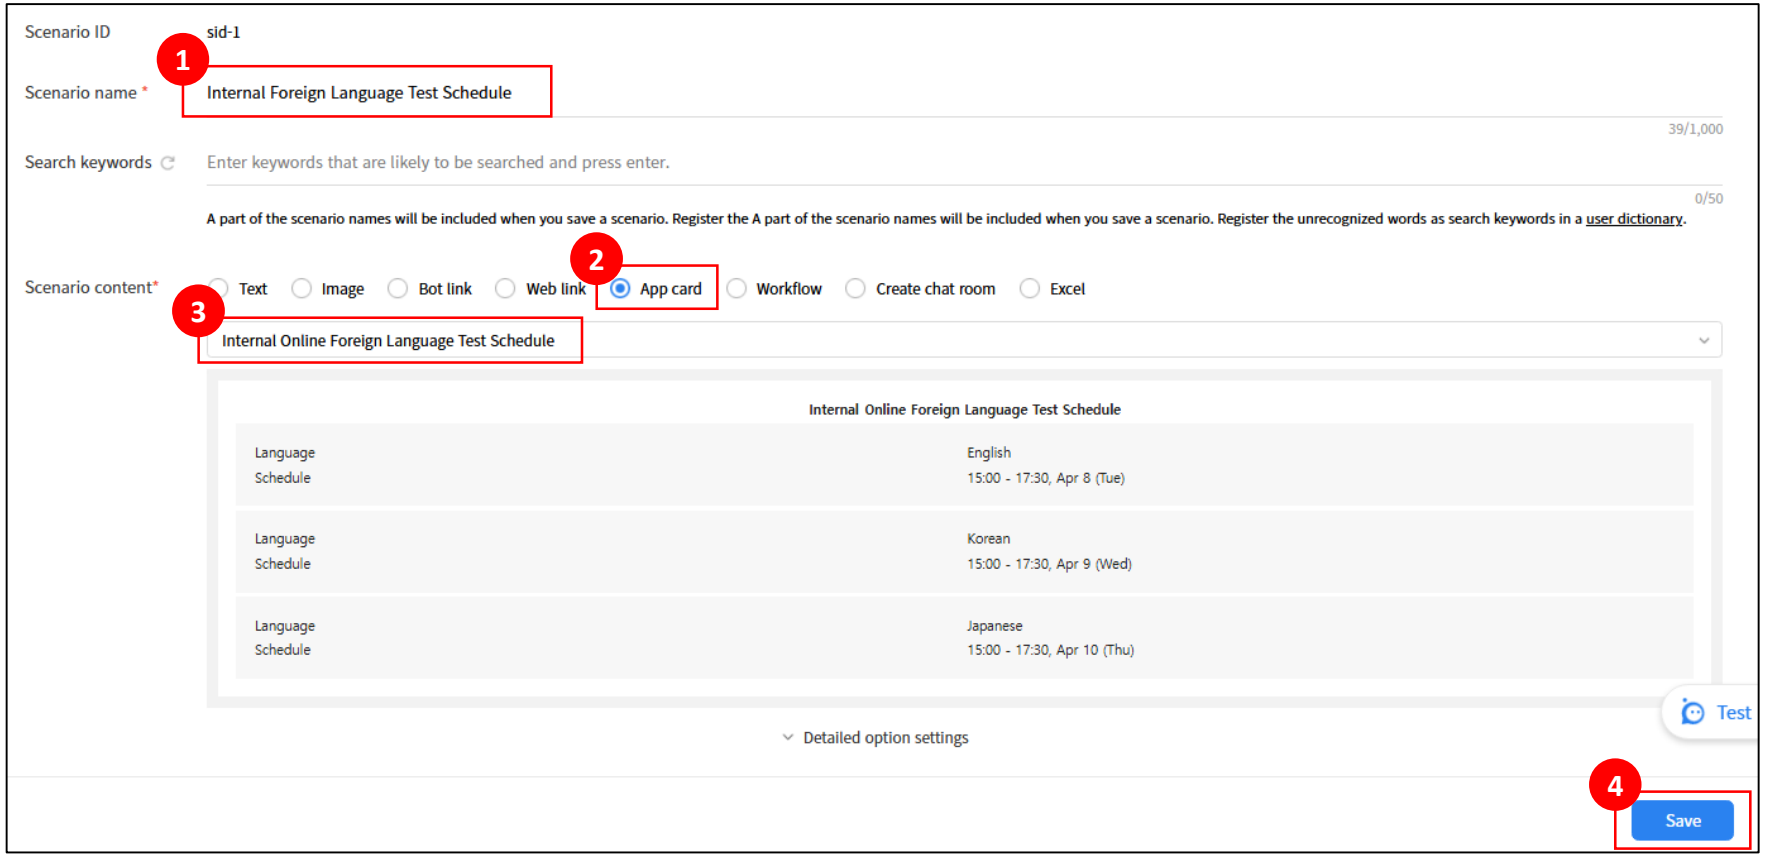

2. How to use the app card in the scenario


After being deployed, app card can be checked in the messenger.

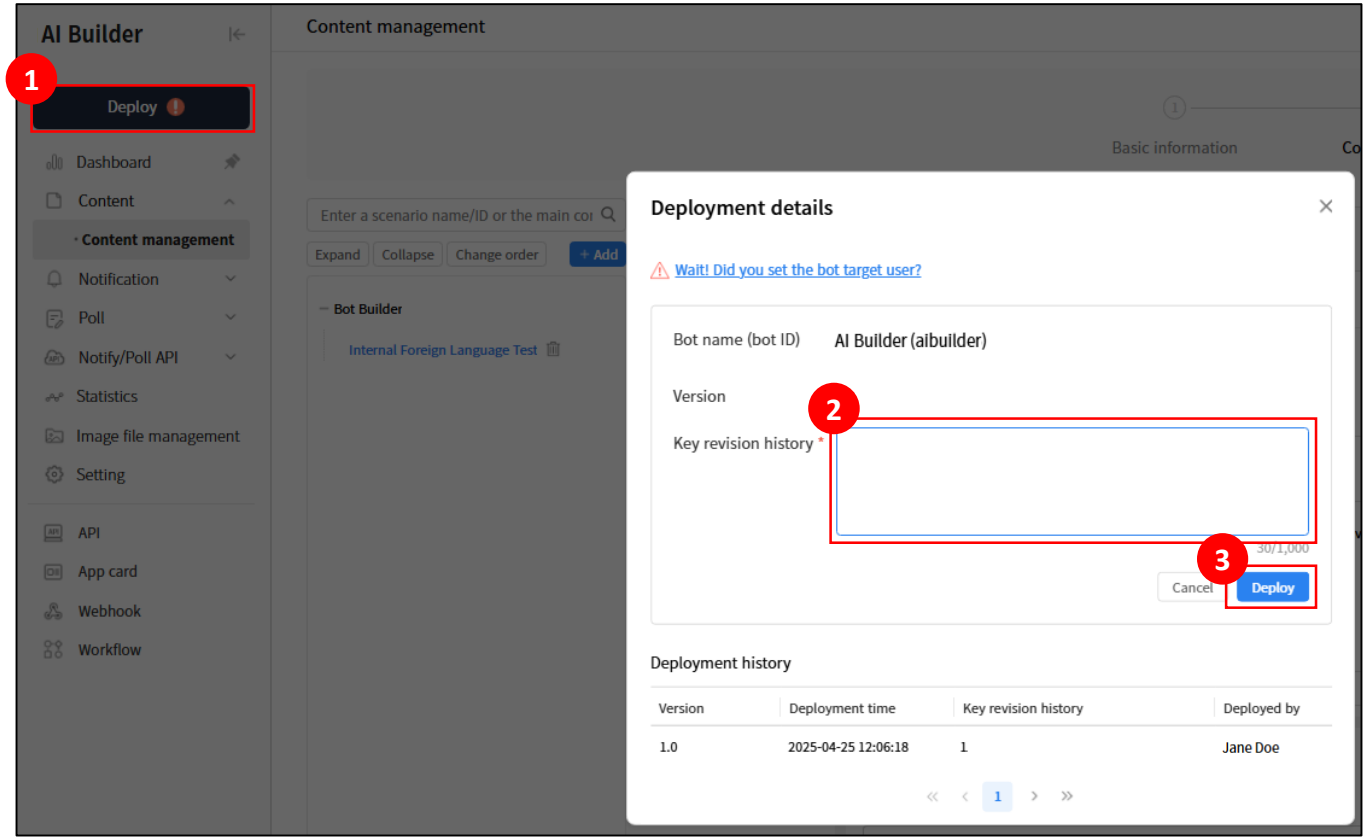

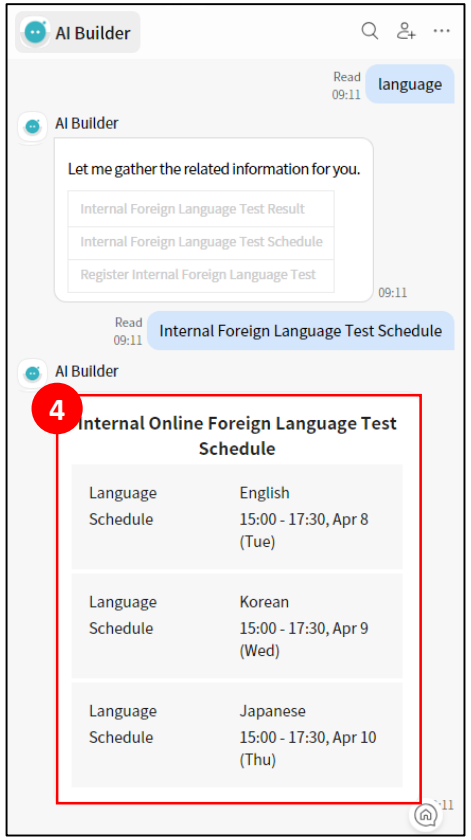

3. API integration

Call API and show the response returned.

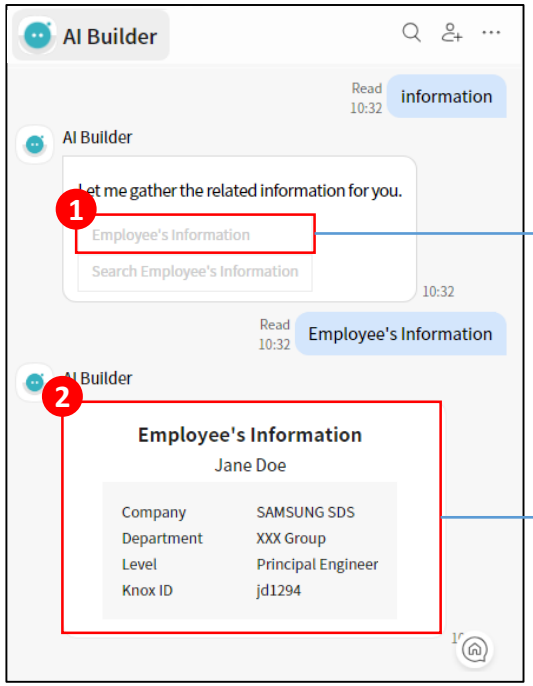


1. Click the scenario

2. Call API and show the result app card


3. API integration

First of all, register an API.

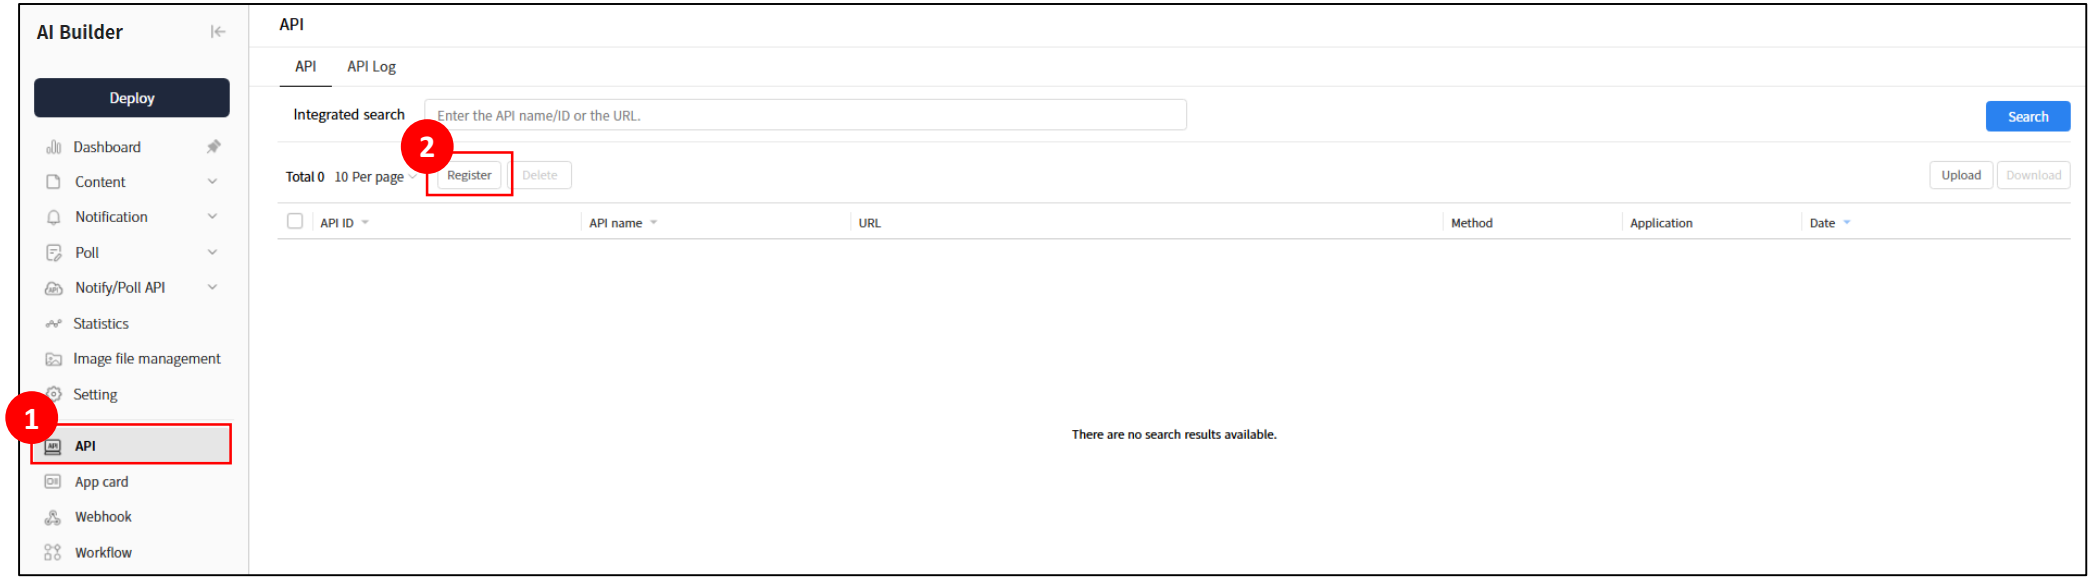


3. API integration

Input API name, URL, method, parameter and save the API.

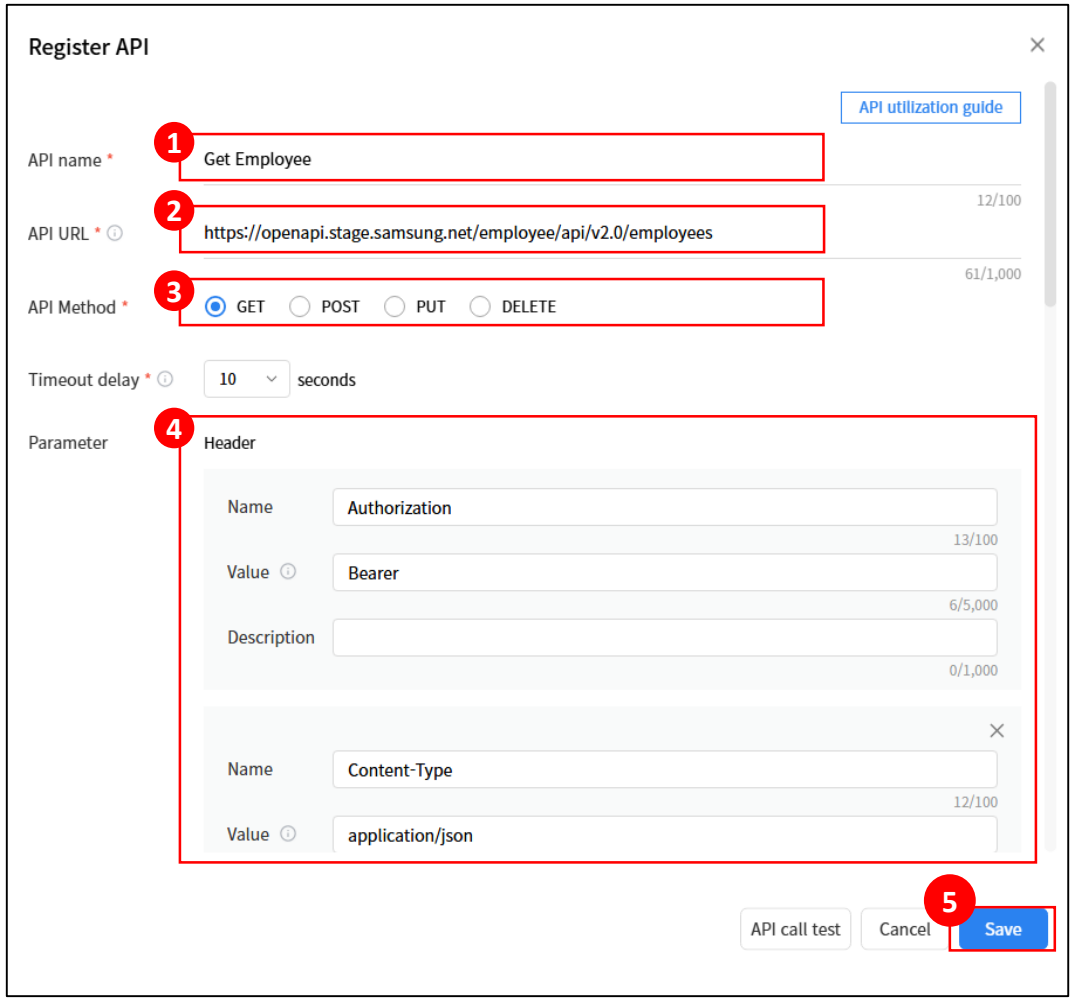


3. API integration

Call API and add an app card which will show the response returned from the API call.

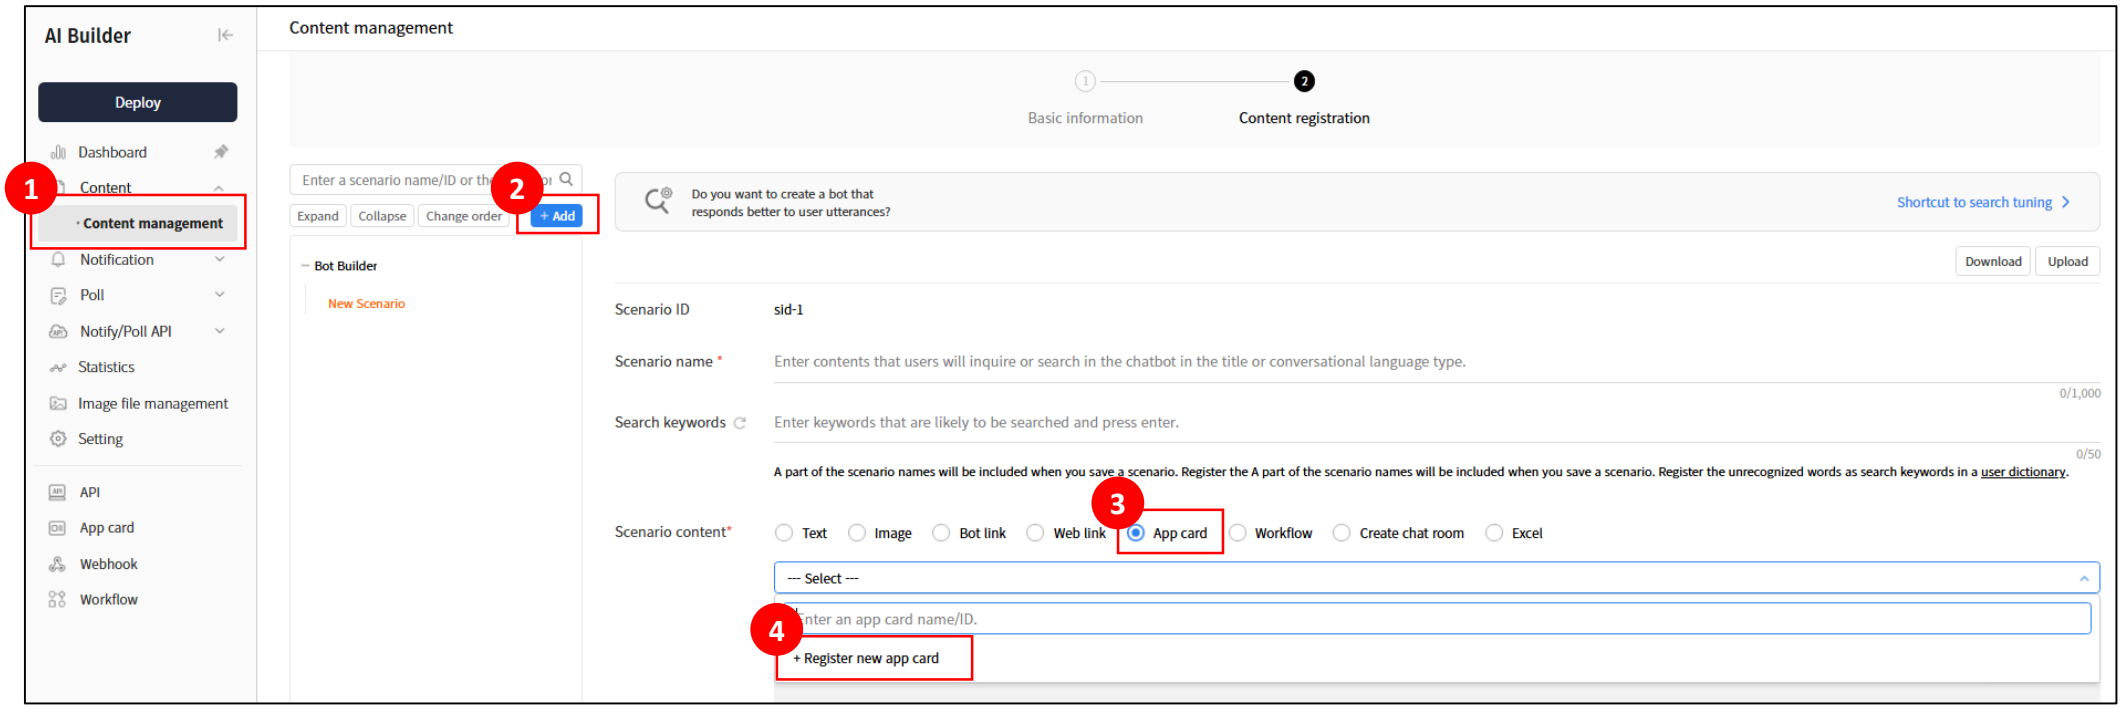

3. API integration

Choose ‘Use’ at API integration, select API and then save the app card.

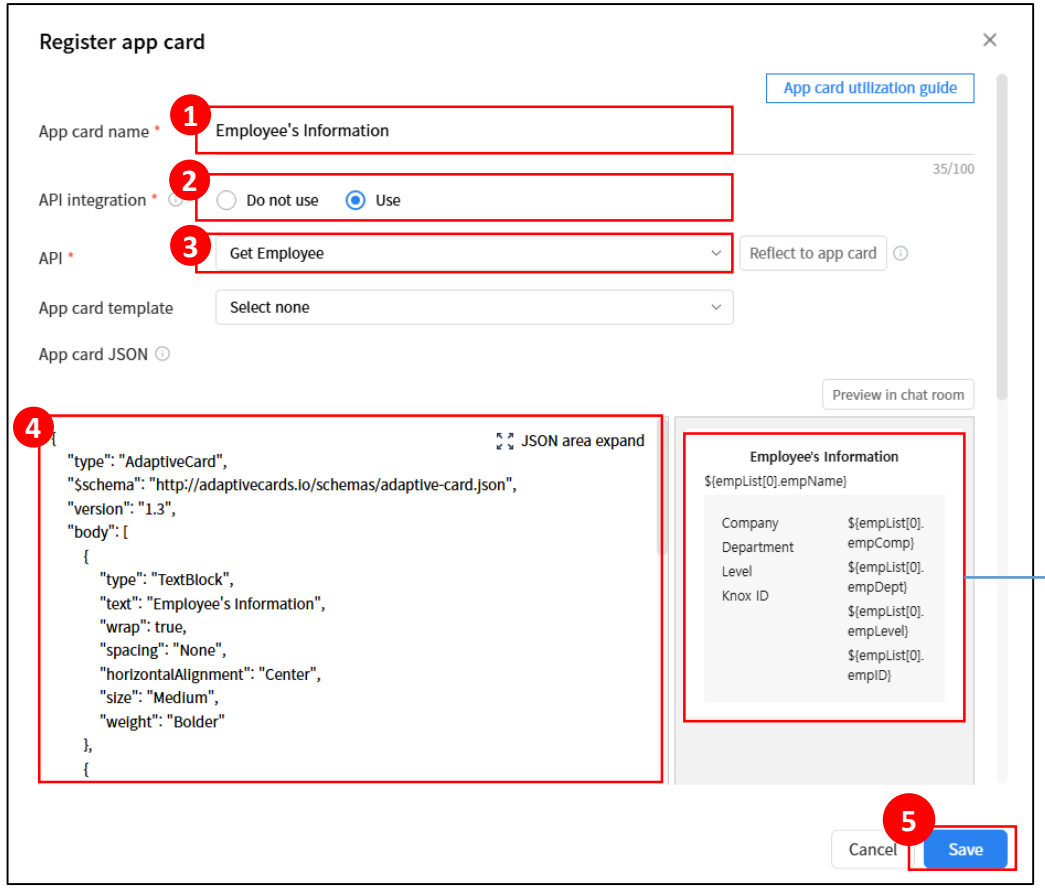

If value is inputted in the form of ${variable name}, then API response body value can be shown.
It is possible when body is JSON.

※ Sample of API response

```
{
   "result": "success",
   "totalPage": 1,
   "currentPage": 1,
   "totalCount": 1,
   "empList": [
      {
{
         "empComp" : "SAMSUNG SDS",
         "empDept": “XXX Group",
         "empLevel" : "Principal Engineer",
         "empID": "jd1294"
      }
   ]
}
```

3. API integration

If API body is JSON, it can be used in the form of ${variableName}.

If API body is Array, it can be used in the form of ${body[number].variableName}.

※ Body is a JSON

```
{
    "result": "success",
    "totalPage": 1,
    "currentPage": 1,
    "totalCount": 1,
    "empList": [
        {
            "empName": "Jane Doe",
            "empComp" : "SAMSUNG SDS",
            "empDept": "XXX Group",
            "empLevel" : "Principal Engineer",
            "empID": "jd1294"
        }
    ]
}
```



Employee's Information

${empList[0].empName}

Company	${empList[0].empComp}
Department	${empList[0].empDept}
Level	${empList[0].empLevel}
Knox ID	${empList[0].empID}

※ Body is an Array

```
[
        {
            "empName": "Jane Doe",
            "empComp" : "SAMSUNG SDS",
            "empDept": “XXX Group",
            "empLevel" : "Principal Engineer",
            "empID": "jd1294"
        }
]
```



Employee's Information

${body[0].empName}

Company	${body[0].empComp}
Department	${body[0].empDept}
Level	${body[0].empLevel}
Knox ID	${body[0].empID}

3. API integration

Use a built-in function in Adaptive card to show different messages depending on the response data.


※ https://learn.microsoft.com/en-us/azure/bot-service/adaptive-expressions/adaptive-expressions-prebuilt-functions

JSON area expand

```
{
  "type": "Column",
  "width": "55px",
  "items": [
    {
      "type": "TextBlock",
      "$when": "${timeLeft == 20}",
      "text": "The working time will be extended to ${if(requestType == 'pregnancy', '8', '10')} hours soon (within 20 minutes), so please arrange your work and prepare to leave.",
      "wrap": true,
      "horizontalAlignment": "Center"
    },
```


3. Using API


Register the app card in the scenario.

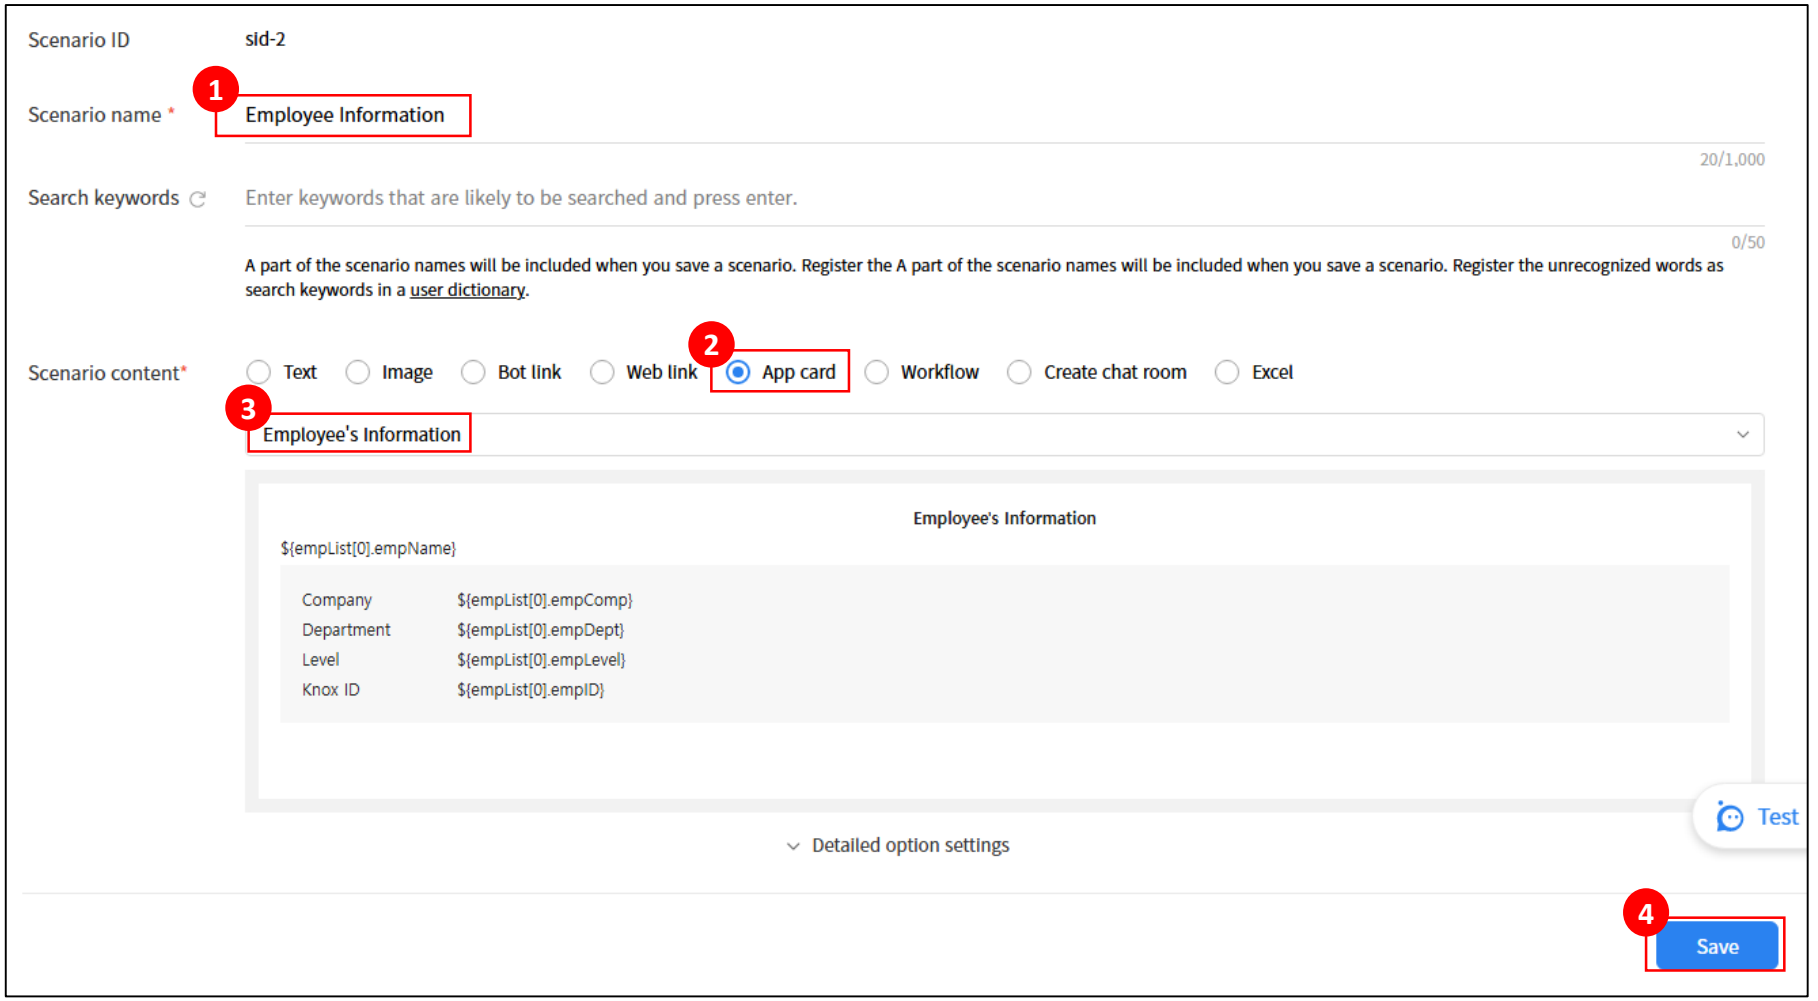

3. Using API

After being deployed, app card can be checked in the messenger.

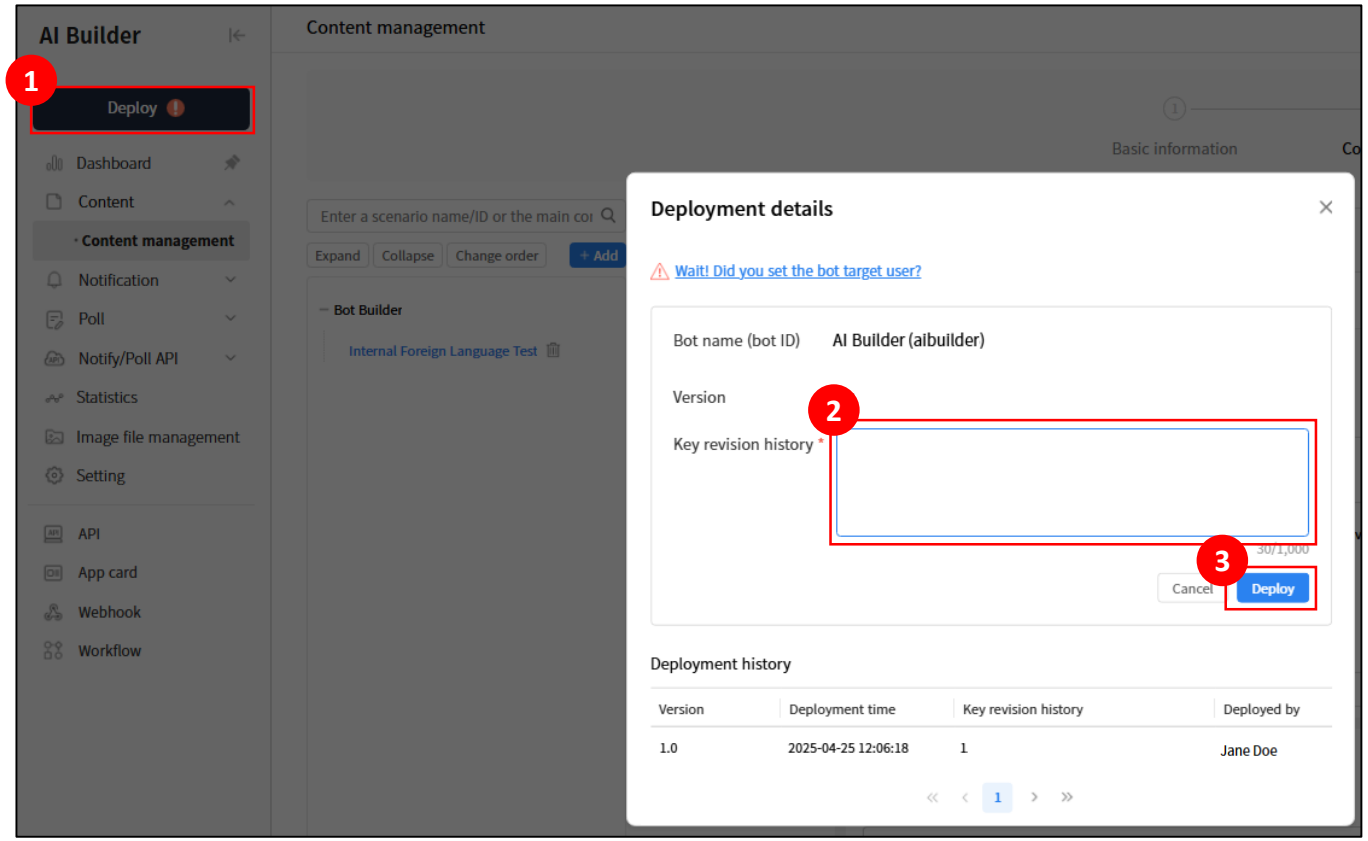


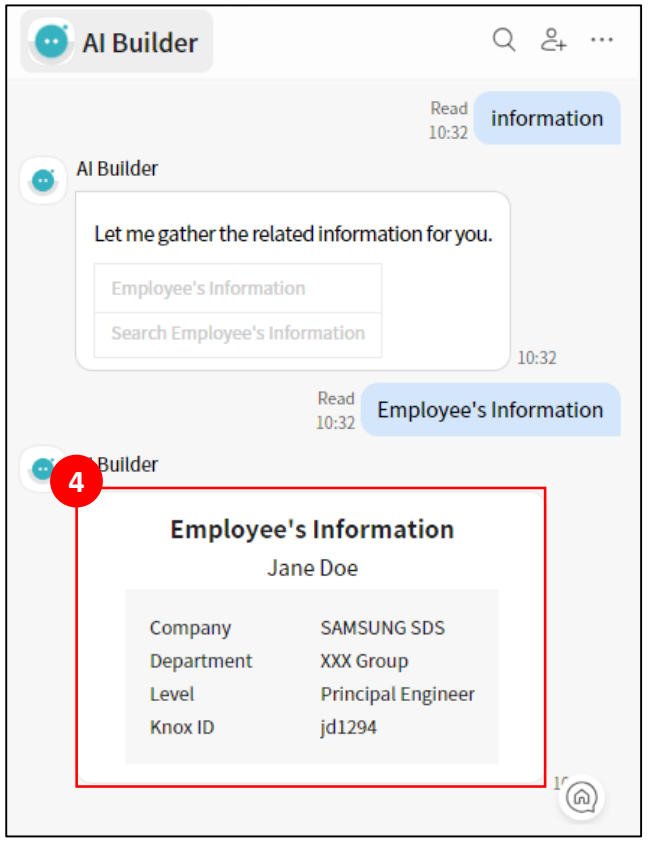

4. User inputting and calling API

Receive user-input data to call API.


User-input app card and API-call app card are required.

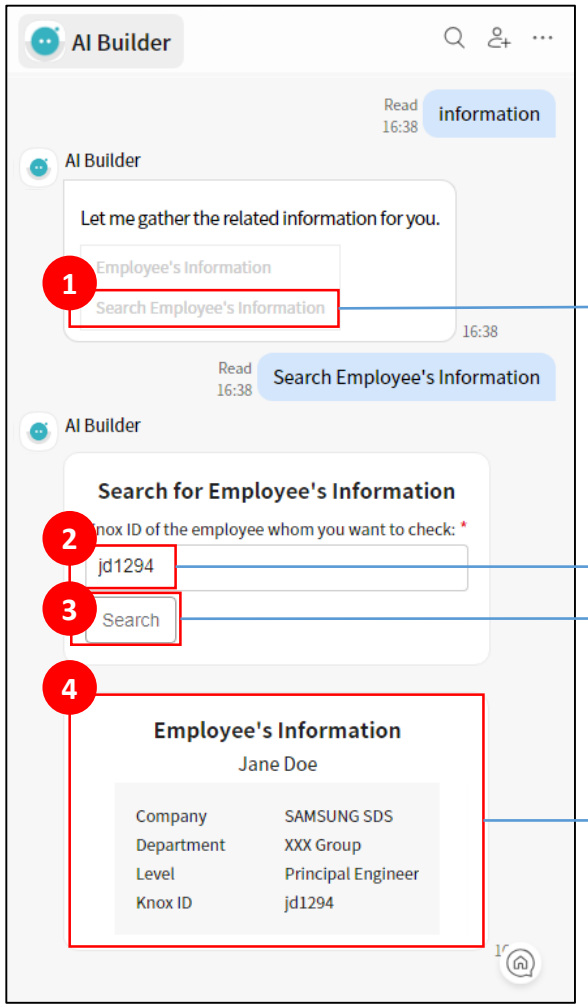

1. Click the scenario
2. User input
3. Click the button
4. Call API and show the response into an app card

4. User inputting and calling API


Add an app card receiving user-input data.

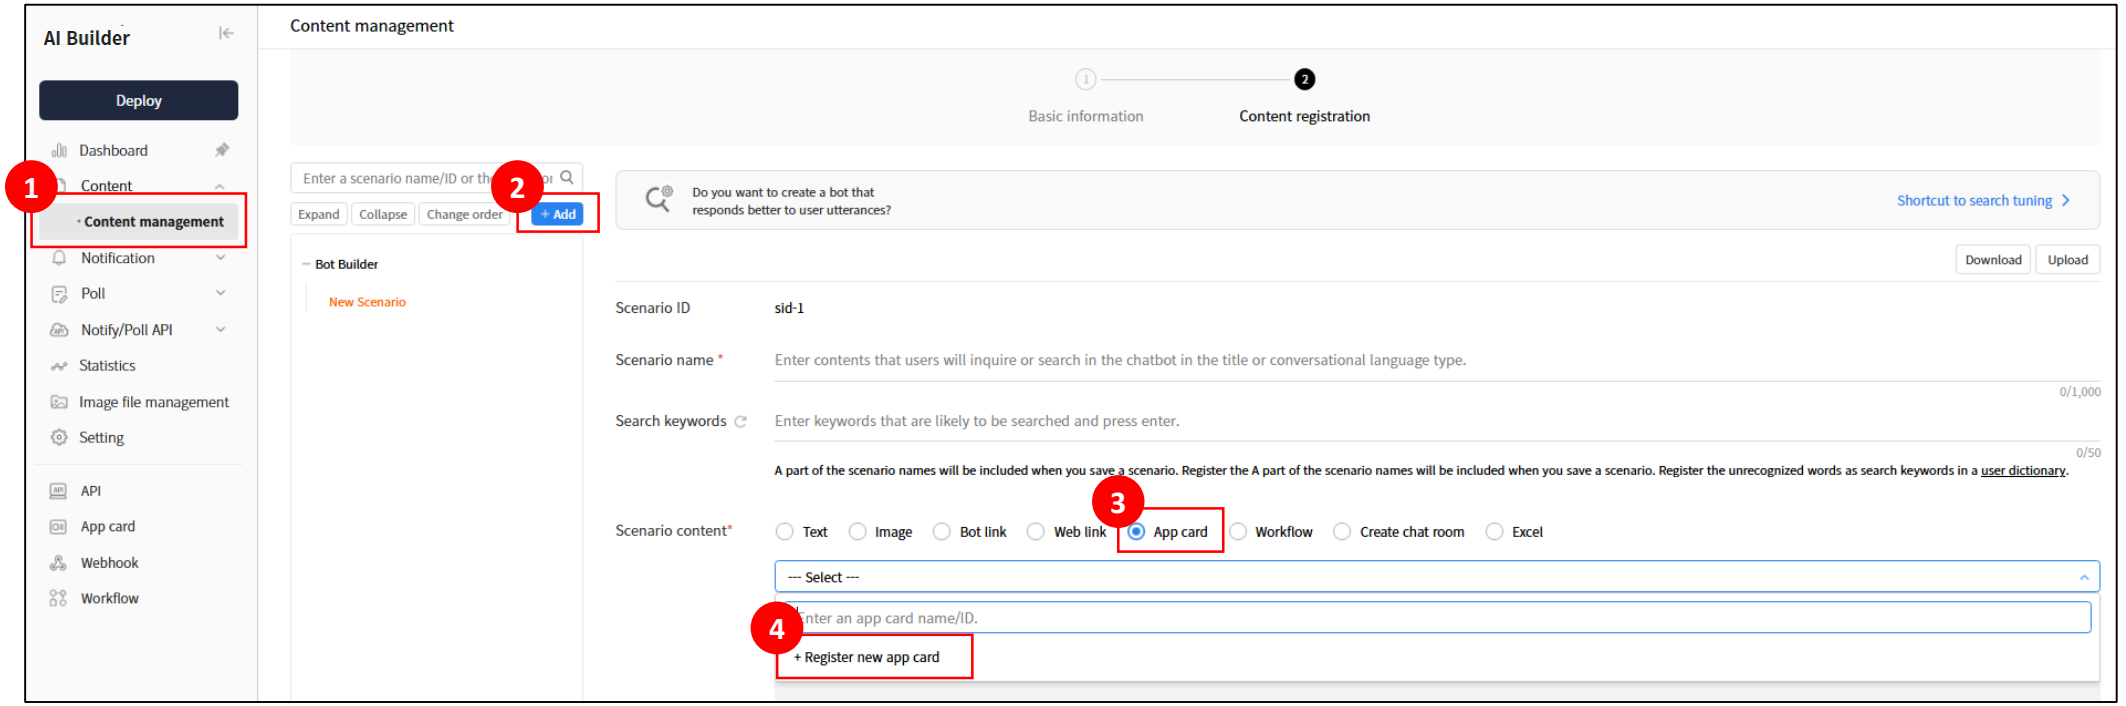

4. User inputting and calling API


Add an element of input type receiving user-input data.

※ ID is a required field.

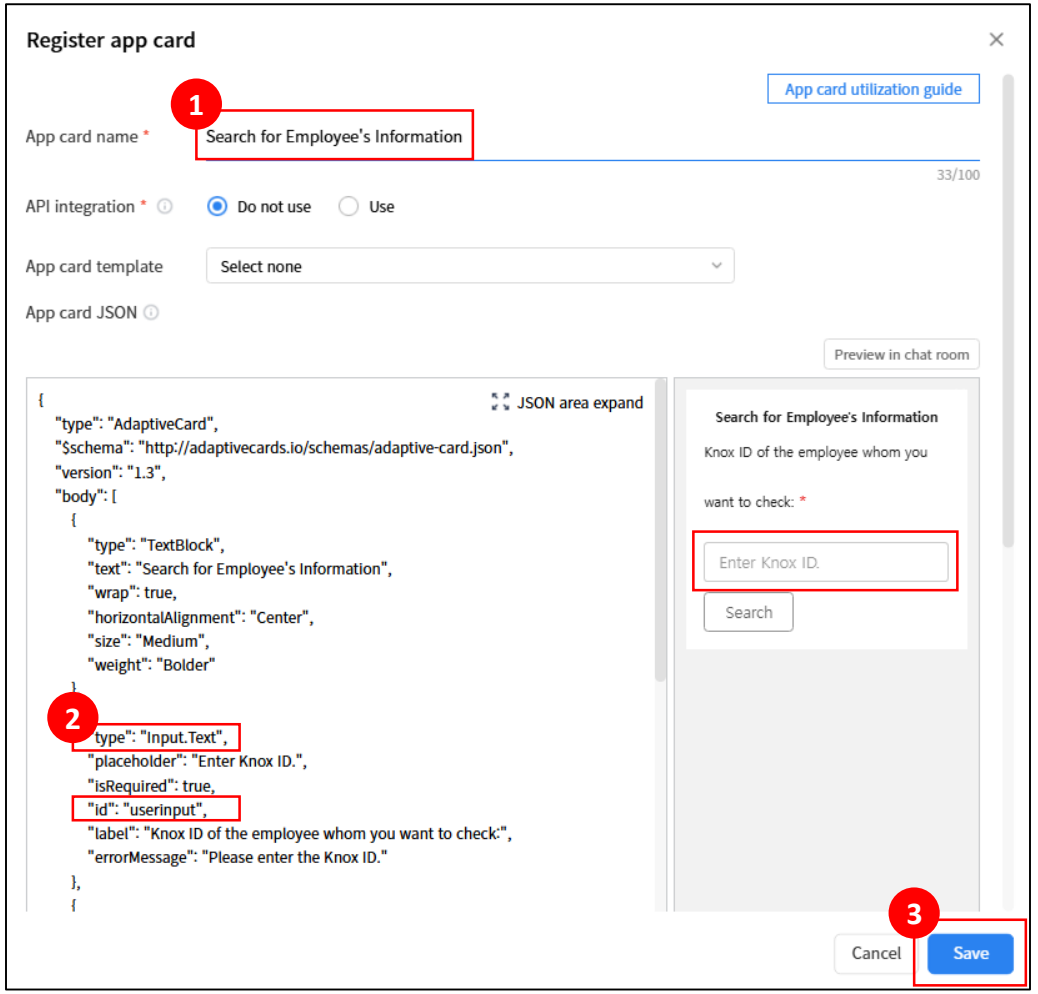

4. User inputting and calling API


Add a button to call another app card.

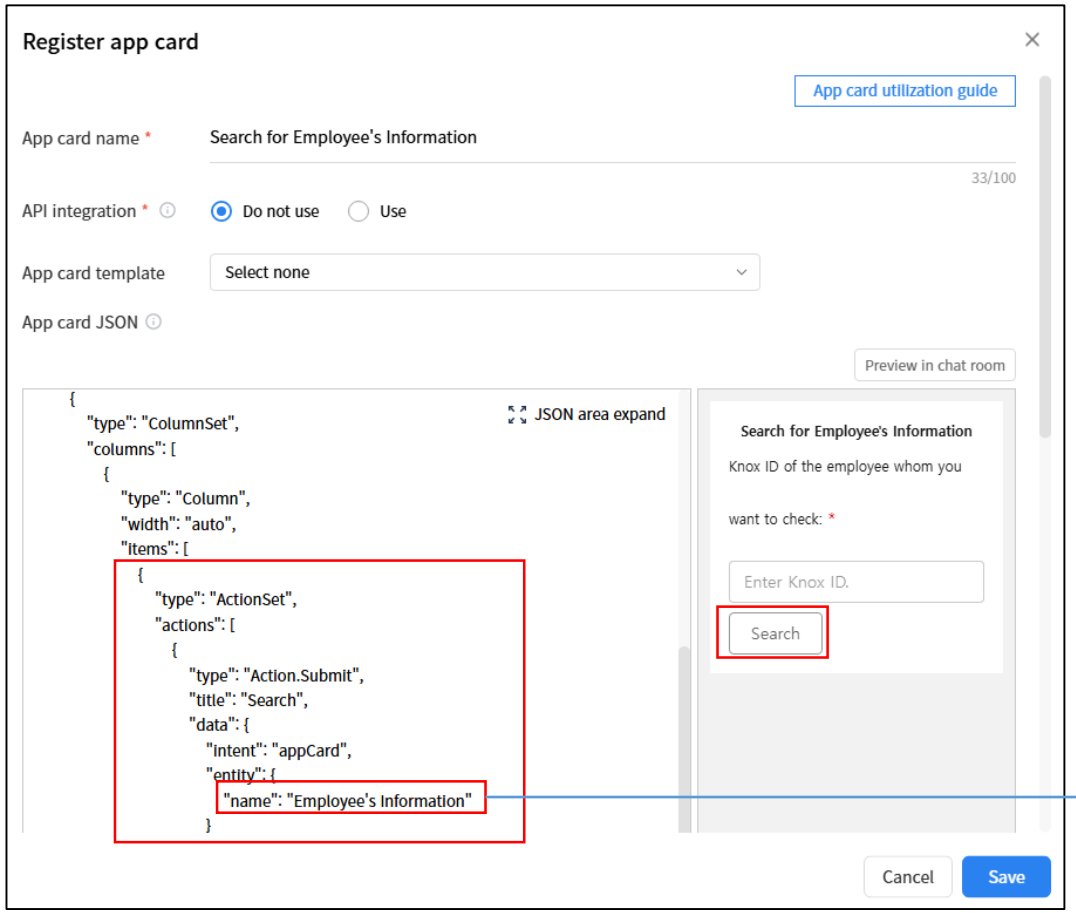

Name of the app card
which will be called when clicking button


4. User inputting and calling API


Register the app card in the scenario.

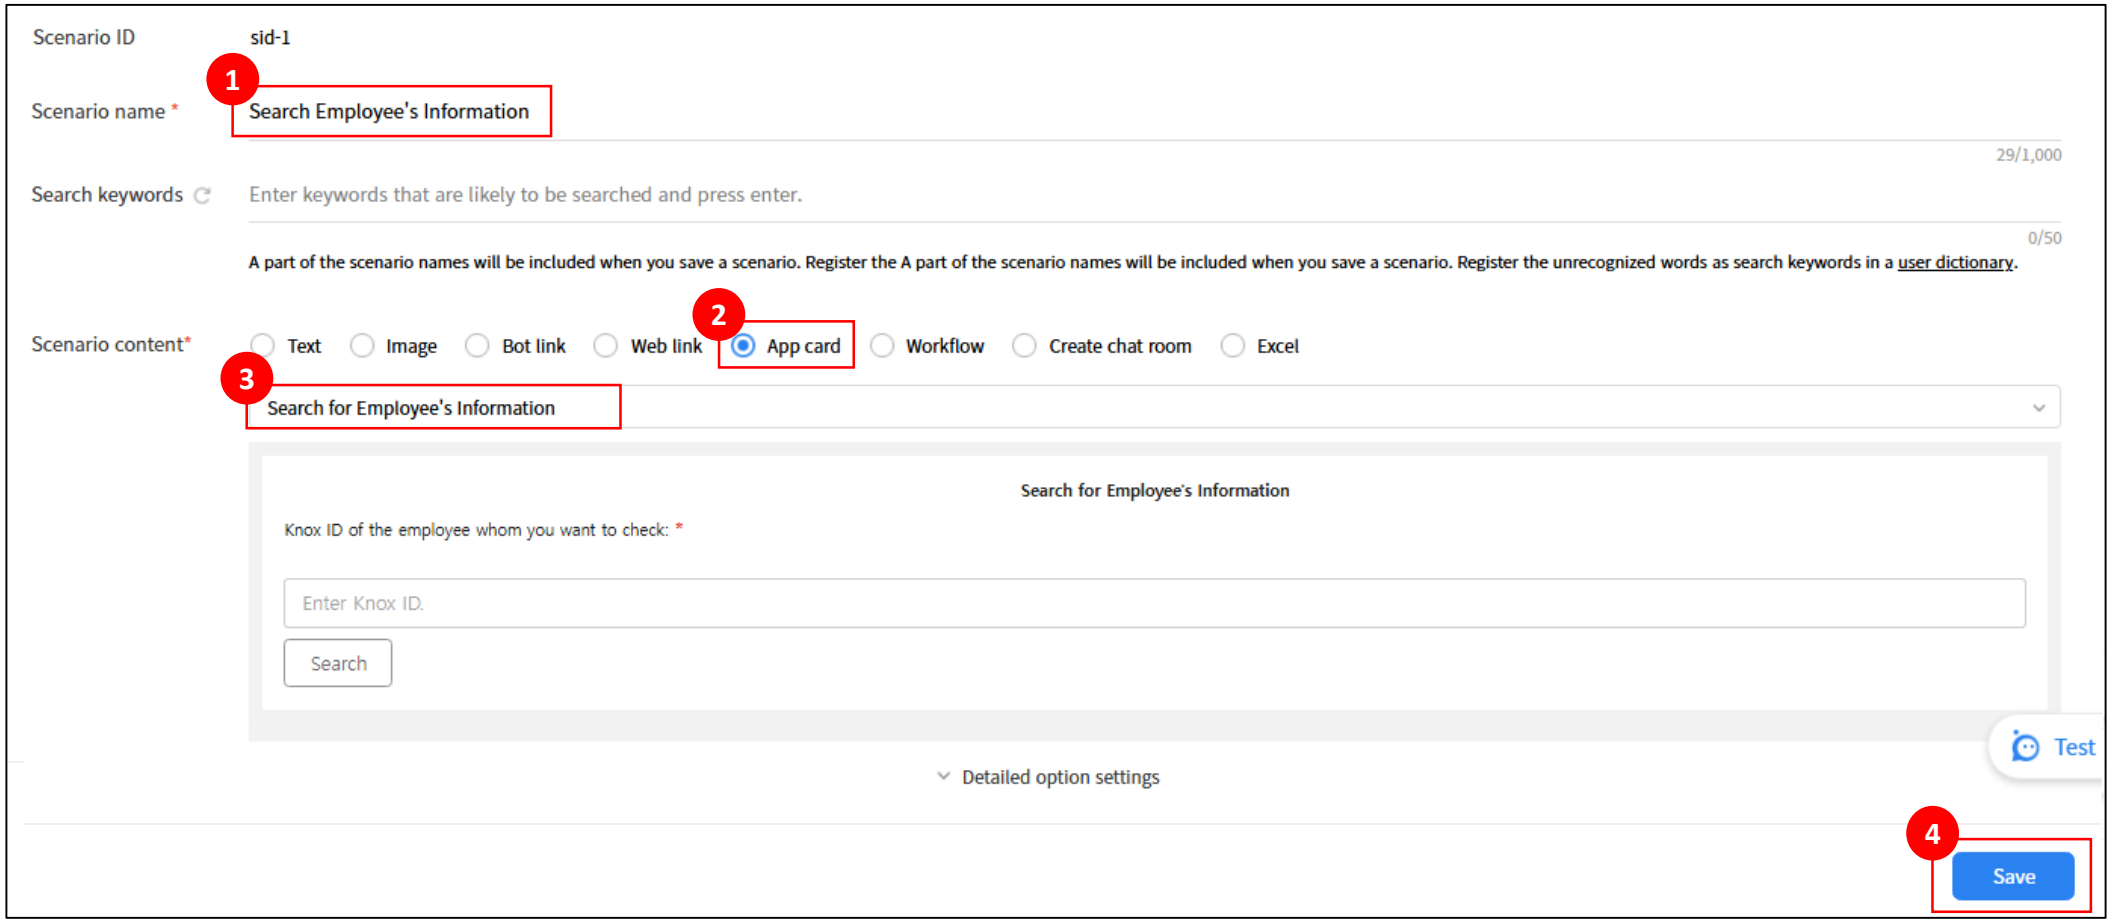

4. User inputting and calling API


Register API. User-input value can be transmitted in the form of ${ID}.

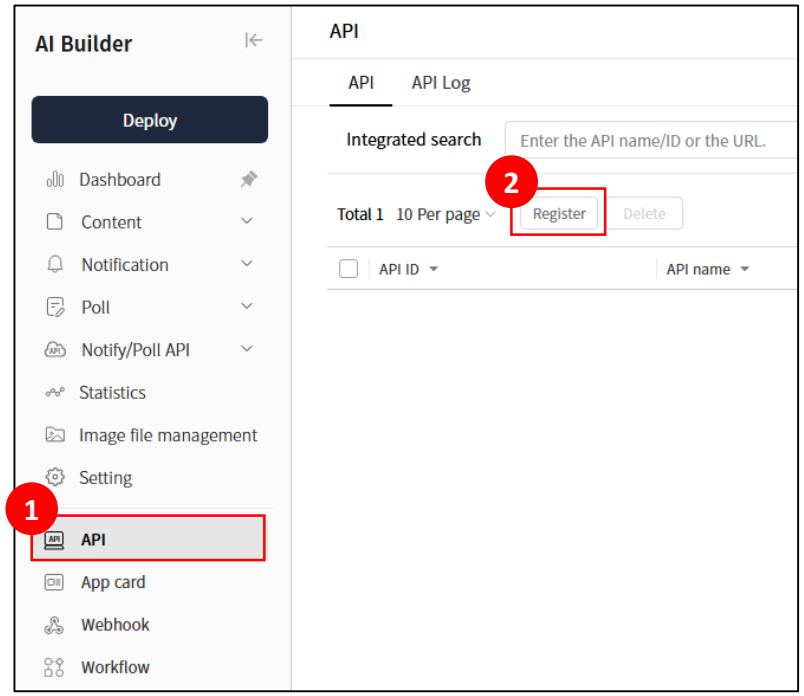

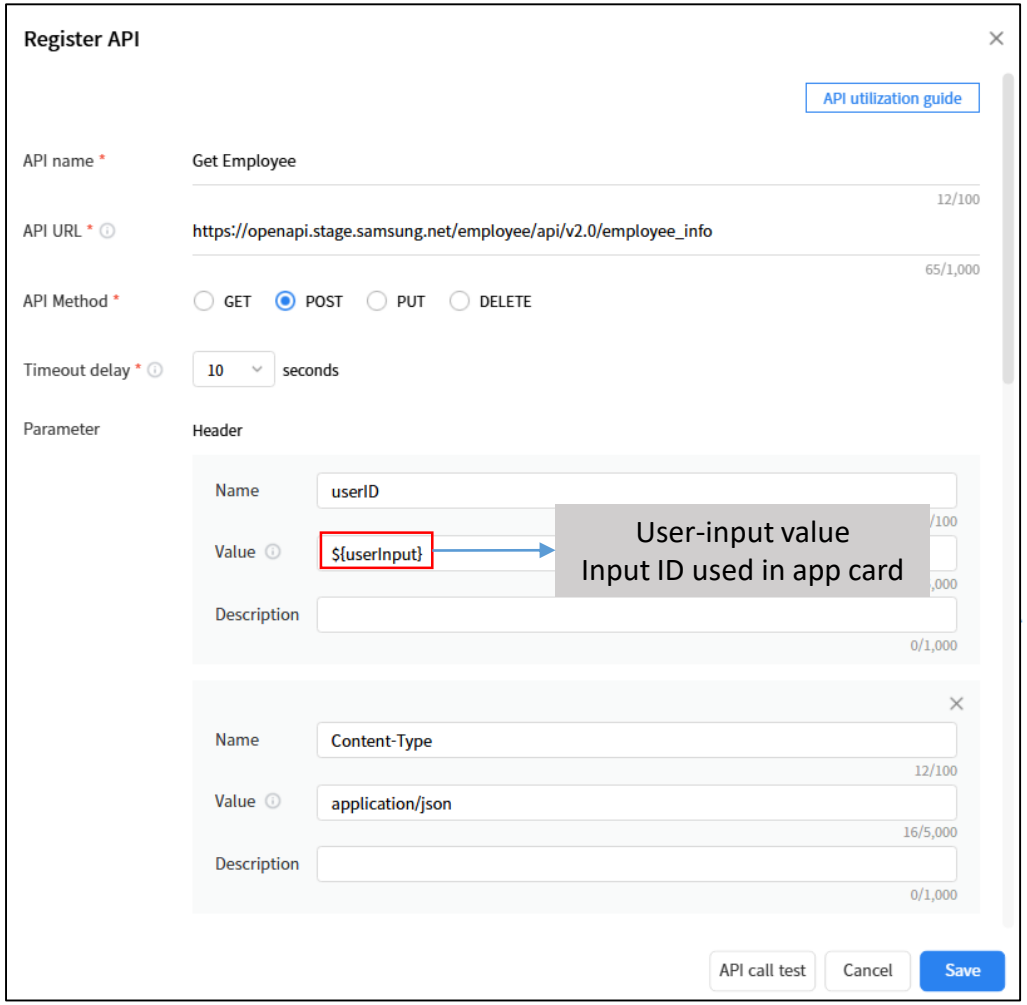

4. User inputting and calling API

Choose ‘Use’ at API integration, select API and then save the app card.

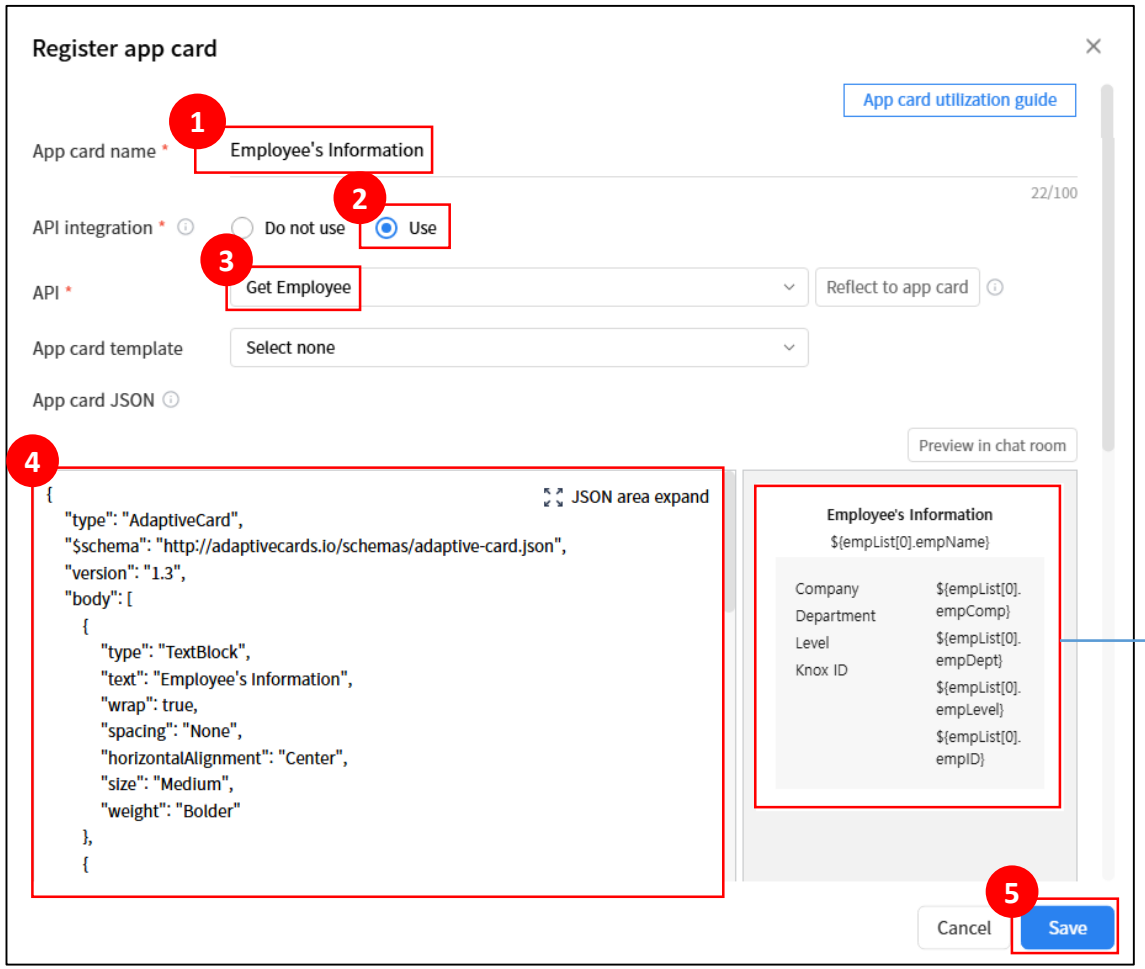

If value is inputted in the form of ${variable name}, then API response body value can be shown.
It is possible when body is JSON.

※ Sample of API response

```
{
   "result": "success",
   "totalPage": 1,
   "currentPage": 1,
   "totalCount": 1,
   "empList": [
      {
{
         "empComp" : "SAMSUNG SDS",
         "empDept": "XXX Group",
         "empLevel" : "Principal Engineer",
         "empID": "jd1294"
      }
   ]
}
```

4. User inputting and calling API

If API body is JSON, it can be used in the form of ${variableName}.

If API body is Array, it can be used in the form of ${body[number].variableName}.

※ Body is a JSON

```
{
    "result": "success",
    "totalPage": 1,
    "currentPage": 1,
    "totalCount": 1,
    "empList": [
        {
            "empName": "Jane Doe",
            "empComp" : "SAMSUNG SDS",
            "empDept": "XXX Group",
            "empLevel" : "Principal Engineer",
            "empID": "jd1294"
        }
    ]
}
```



Employee's Information

${empList[0].empName}

Company	${empList[0].empComp}
Department	${empList[0].empDept}
Level	${empList[0].empLevel}
Knox ID	${empList[0].empID}

※ Body is an Array

```
[
        {
            "empName": "Jane Doe",
            "empComp" : "SAMSUNG SDS",
            "empDept": "XXX Group",
            "empLevel" : "Principal Engineer",
            "empID": "jd1294"
        }
]
```



Employee's Information

${body[0].empName}

Company	${body[0].empComp}
Department	${body[0].empDept}
Level	${body[0].empLevel}
Knox ID	${body[0].empID}

4. User inputting and calling API

Use a built-in function in Adaptive card to show different messages depending on the response data.


※ https://learn.microsoft.com/en-us/azure/bot-service/adaptive-expressions/adaptive-expressions-prebuilt-functions


JSON area expand

```
{
  "type": "Column",
  "width": "55px",
  "items": [
    {
      "type": "TextBlock",
      "$when": "${timeLeft == 20}",
      "text": "The working time will be extended to ${if(requestType == 'pregnancy', '8', '10')} hours soon (within 20 minutes), so please arrange your work and prepare to leave.",
      "wrap": true,
      "horizontalAlignment": "Center"
    },
```

4. User inputting and calling API


After being deployed, app card can be checked in the messenger.

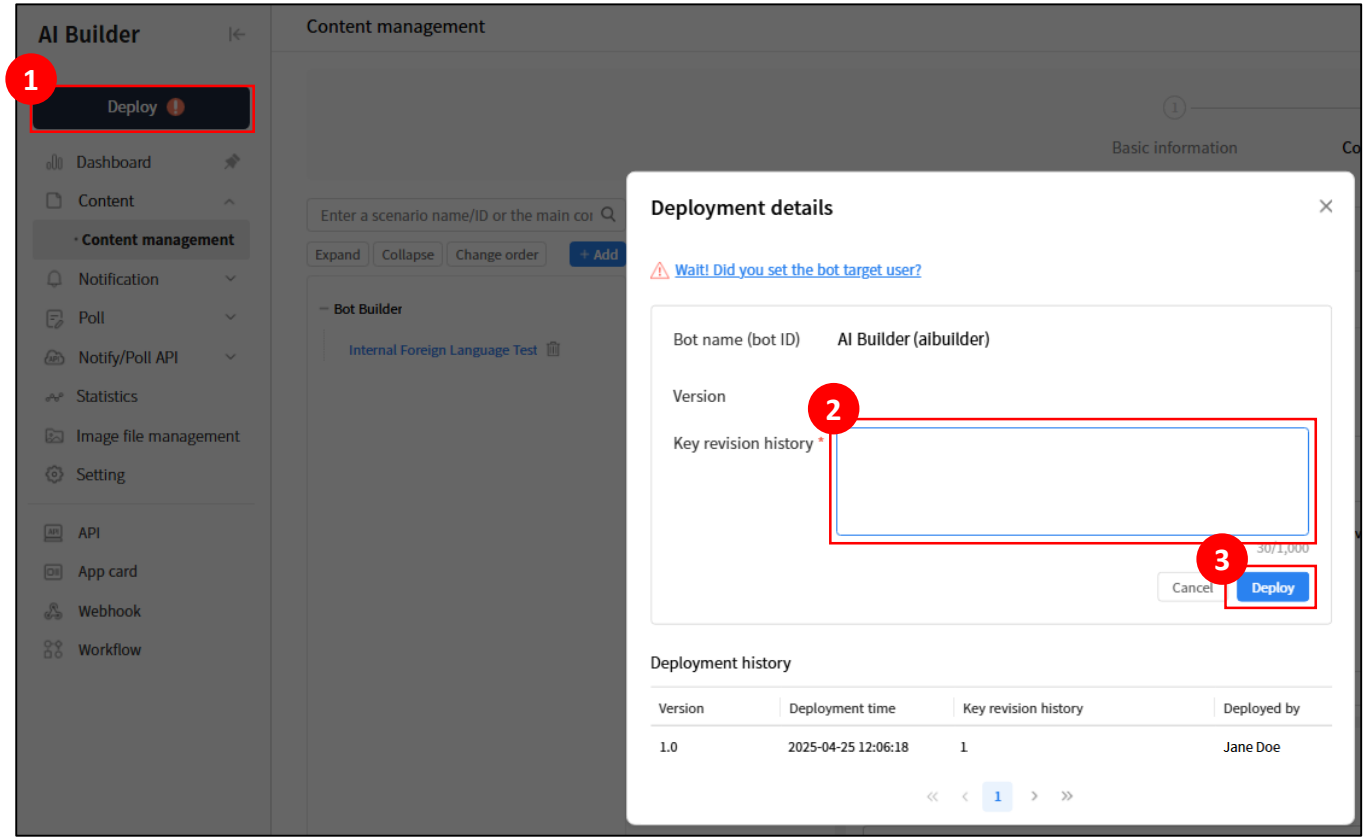

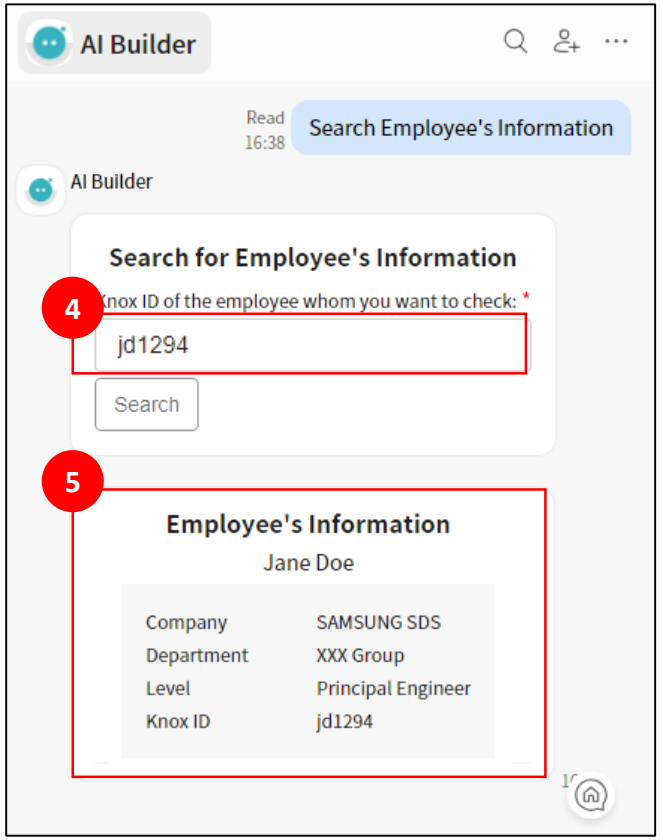

5. Transmitting an API response to another API

API response value can be transmitted to another API.

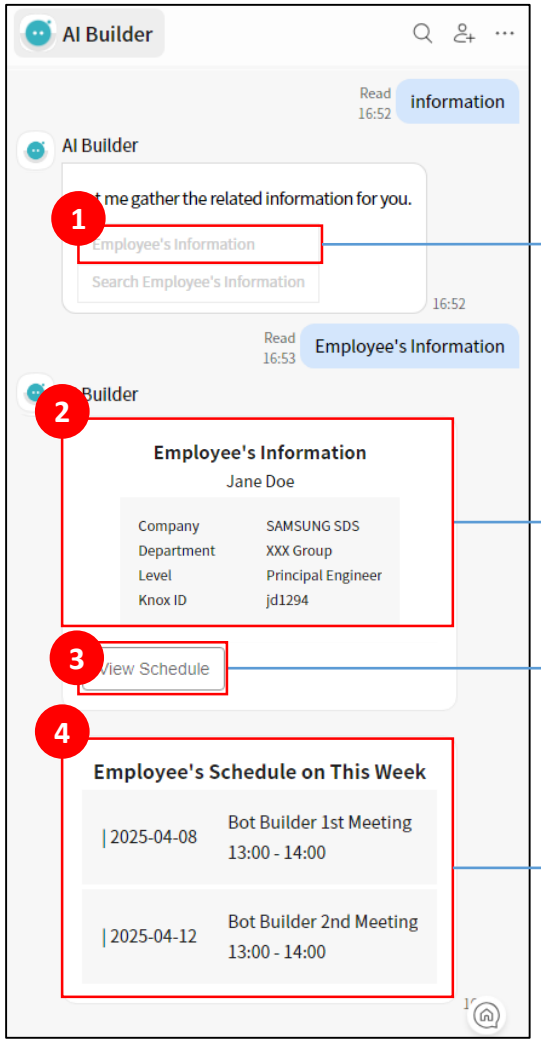

1. Click the scenario


2. Call API and show the response

3. Click the button

4. Call API and show the response from 2. into an app card


5. Transmitting an API response to another API

Register the first app card.

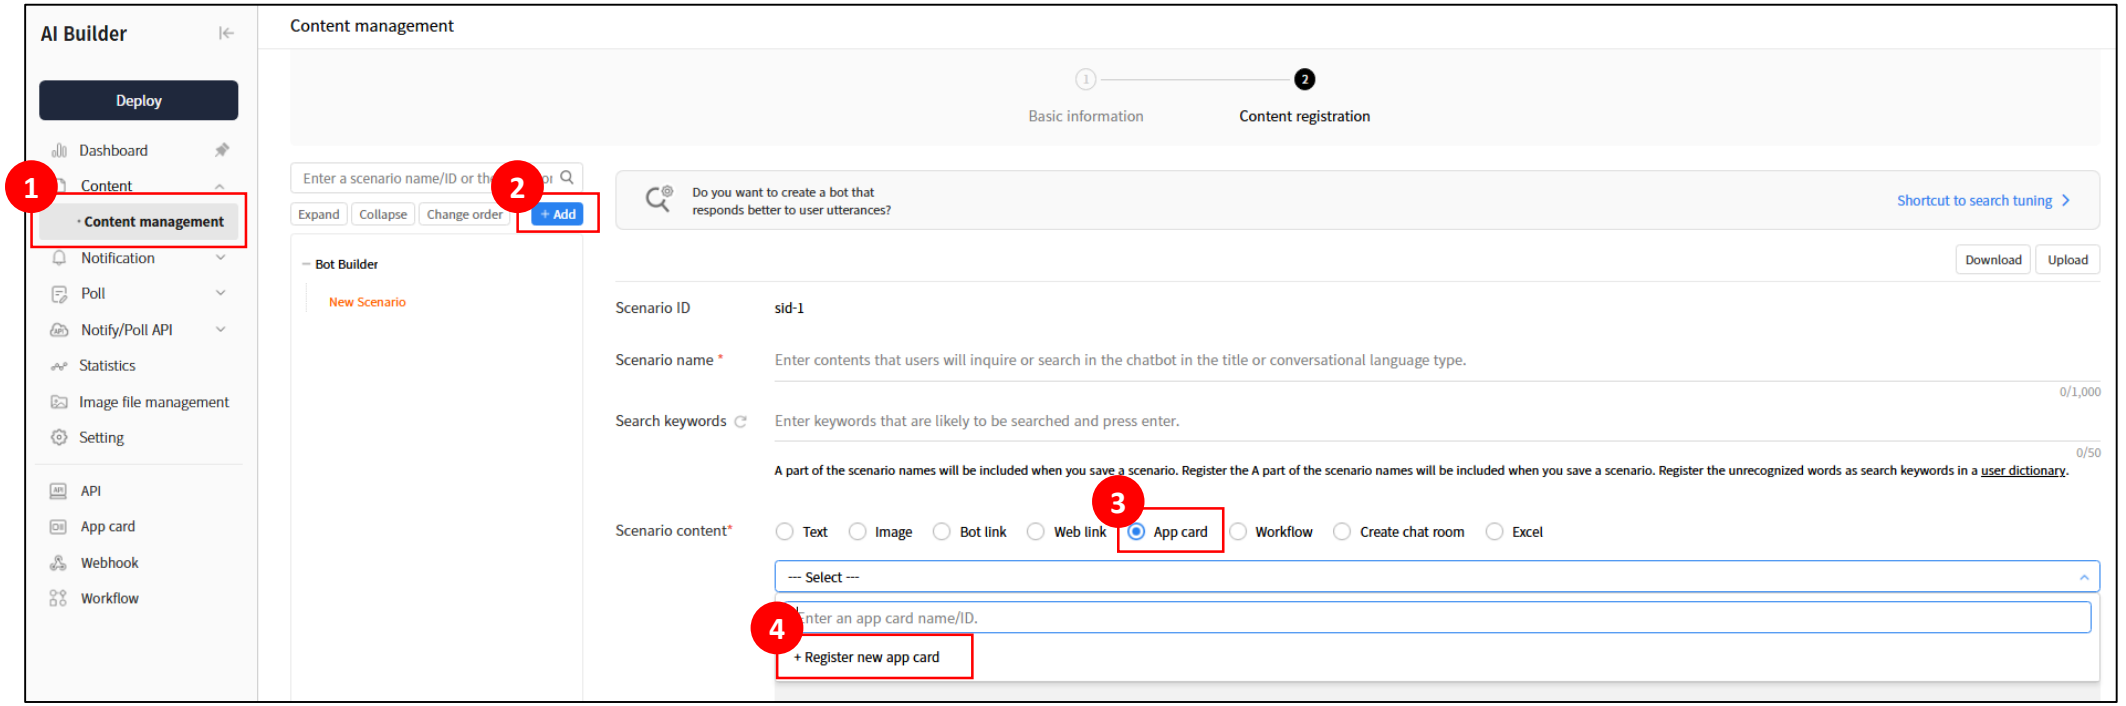


5. Transmitting an API response to another API

Choose ‘Use’ at API integration, and then select API.

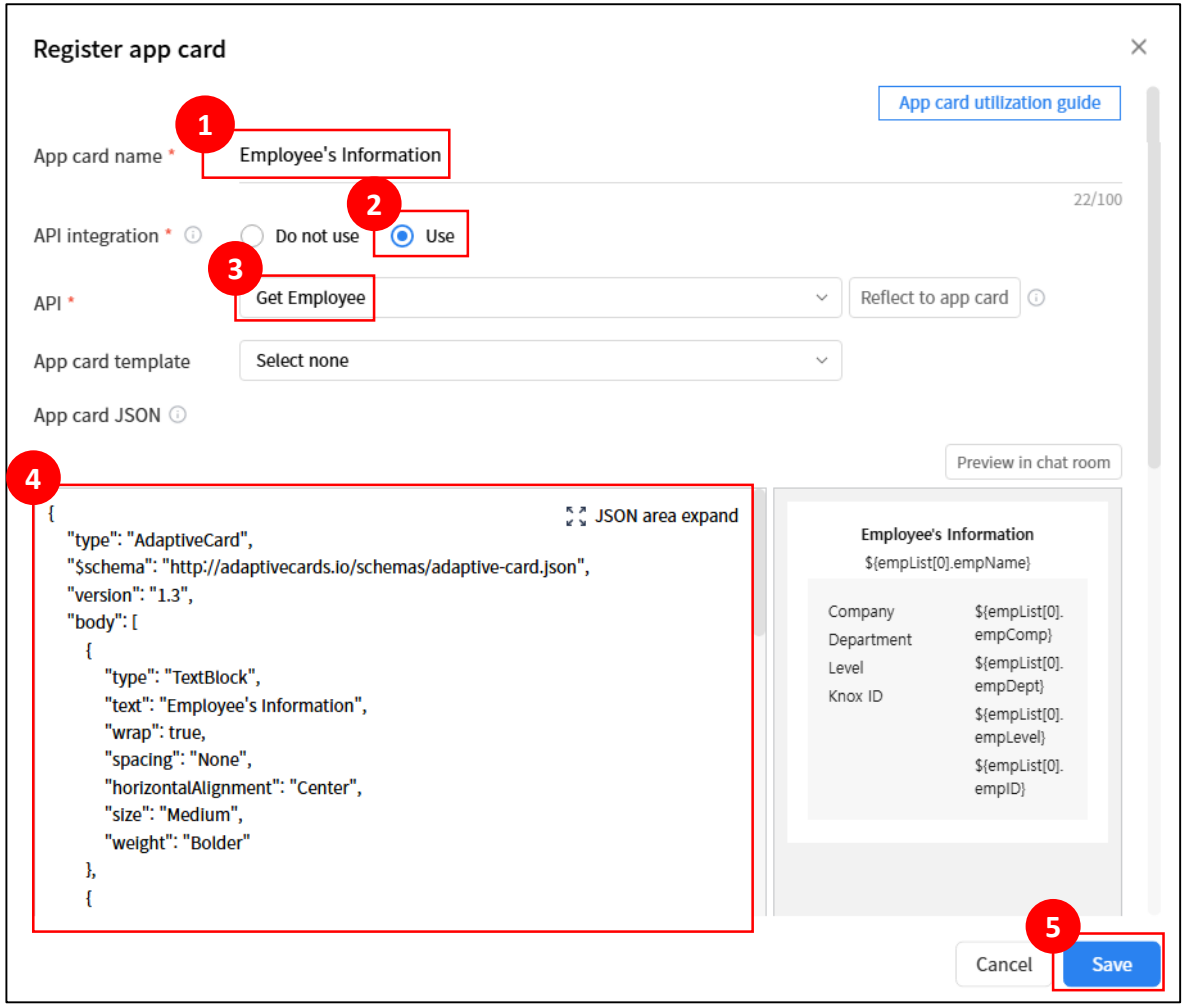

5. Transmitting an API response to another API

Add button to call the second API, and then save the app card.

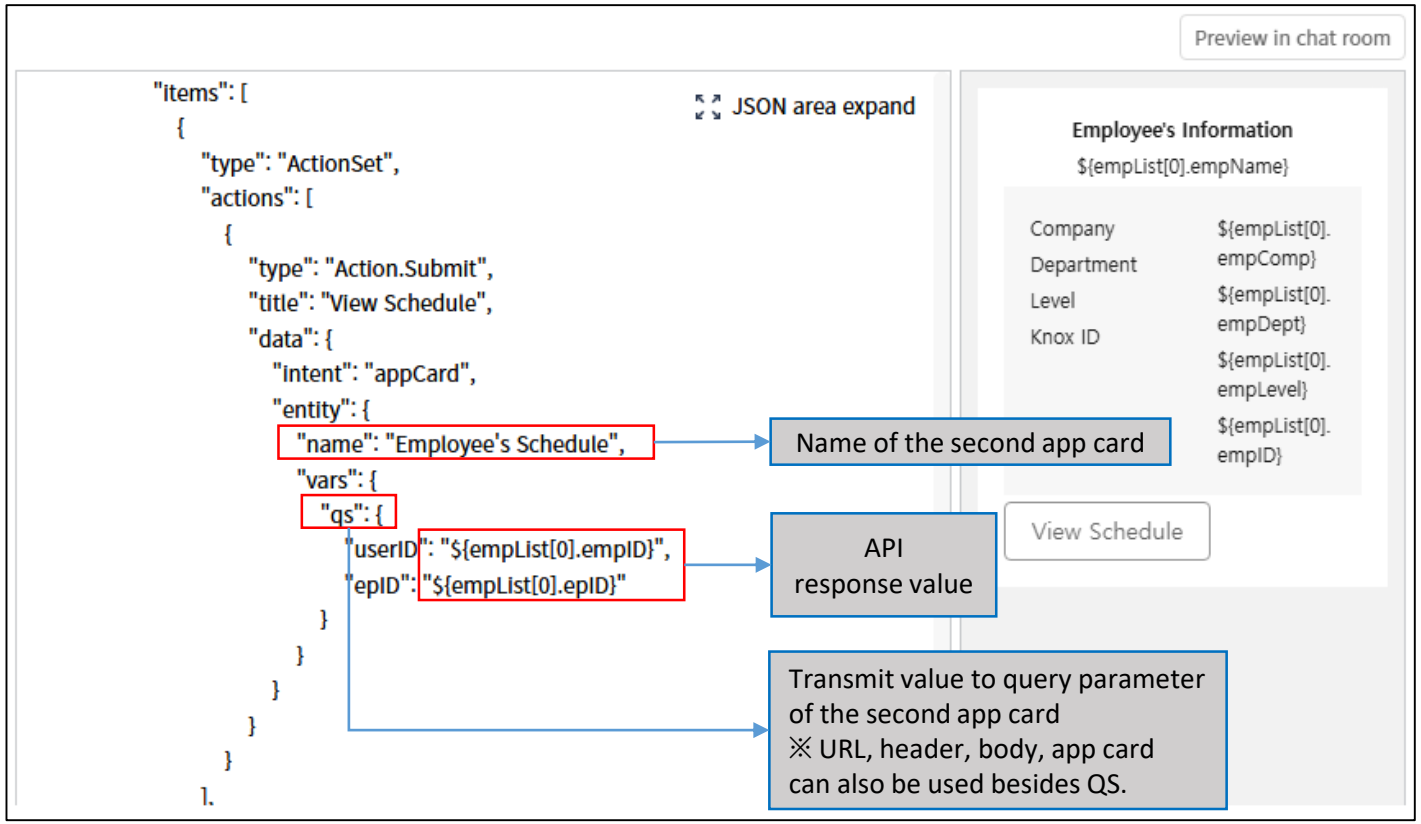


※ Sample of API response

```
{
   "result": "success",
   "totalPage": 1,
   "currentPage": 1,
   "totalCount": 1,
   "empList": [
      {
{
         "empComp" : "SAMSUNG SDS",
         "empDept": "XXX Group",
         "empLevel" : "Principal Engineer",
         "empID": "jd1294"
      }
   ]
}
```


5. Transmitting an API response to another API


Register the app card in the scenario.

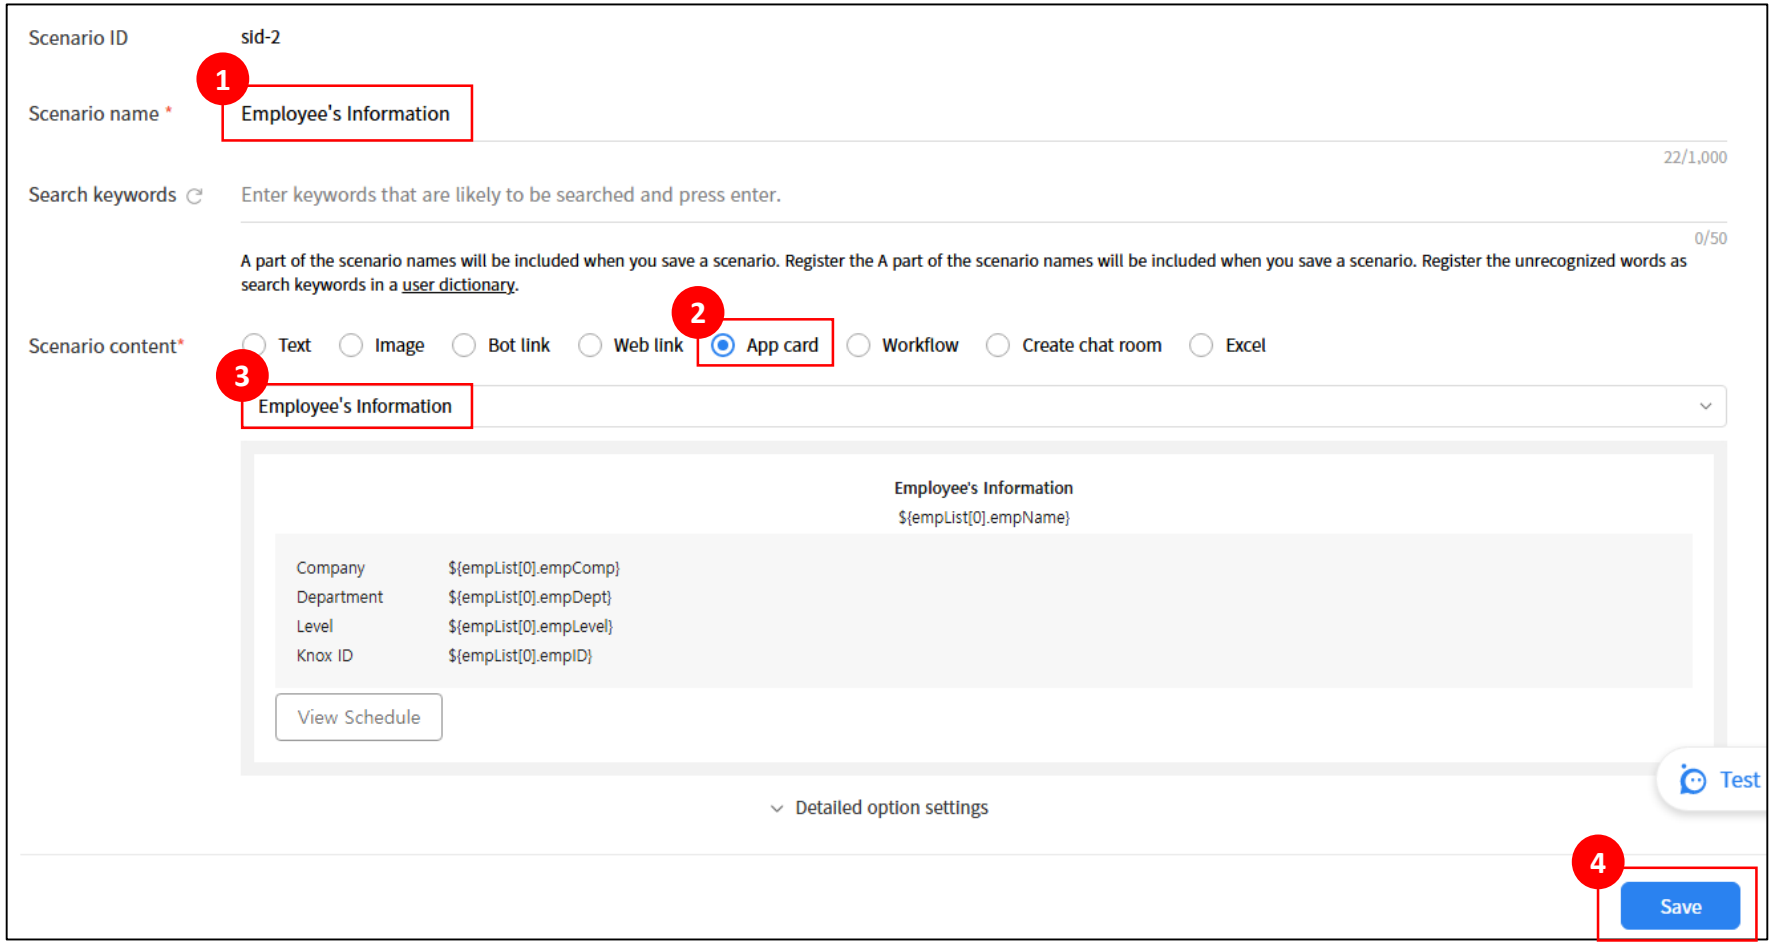

5. Transmitting an API response to another API


Add the second API and app card.

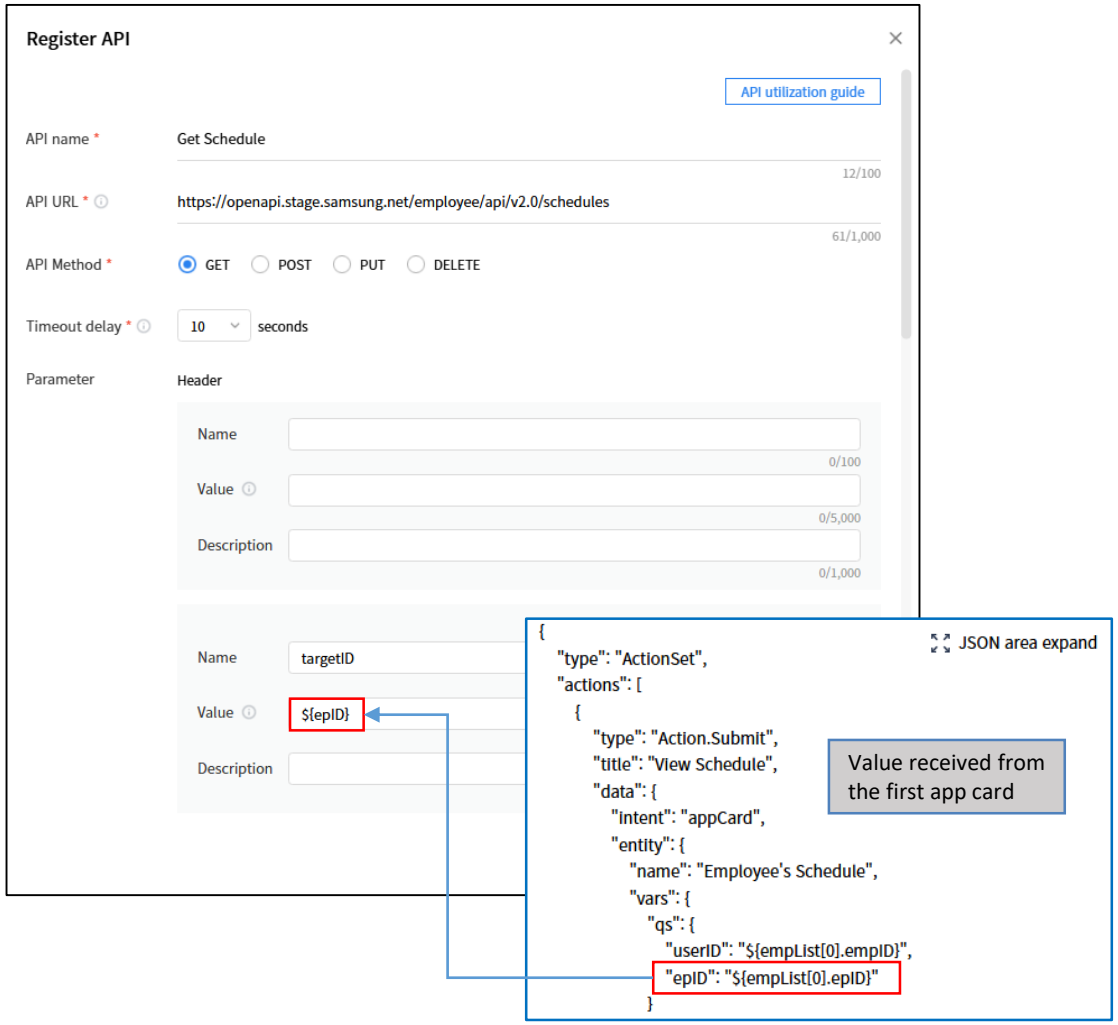


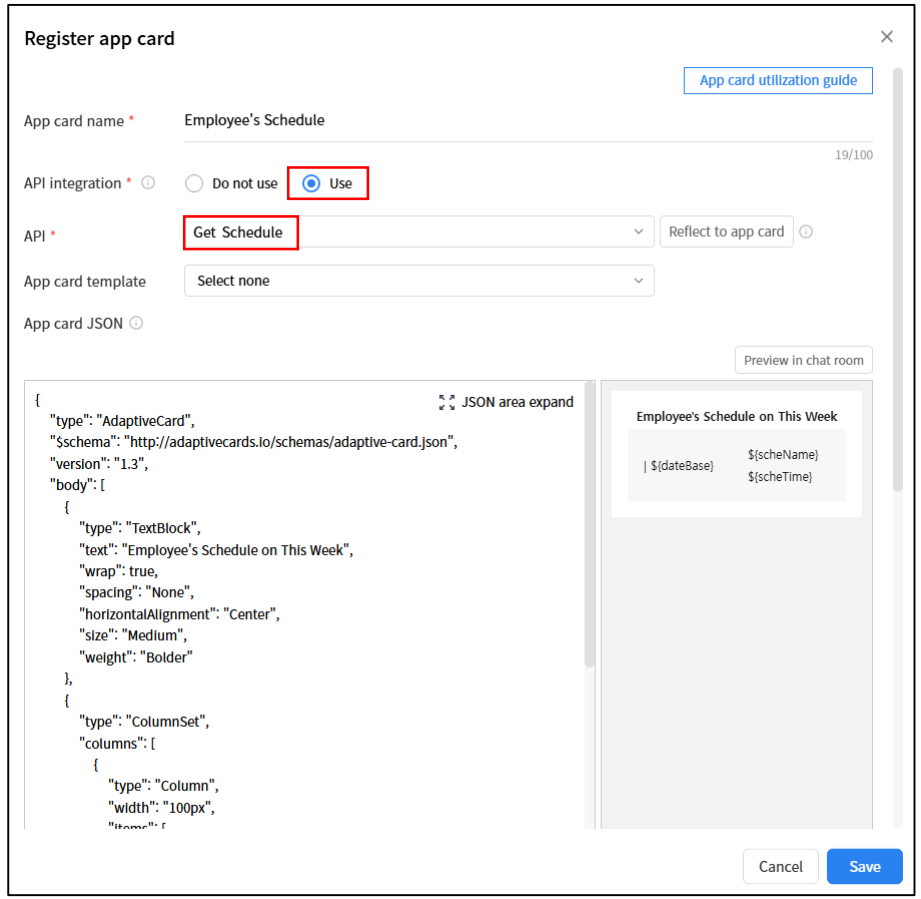

5. Transmitting an API response to another API


After being deployed, app card can be checked in the messenger.

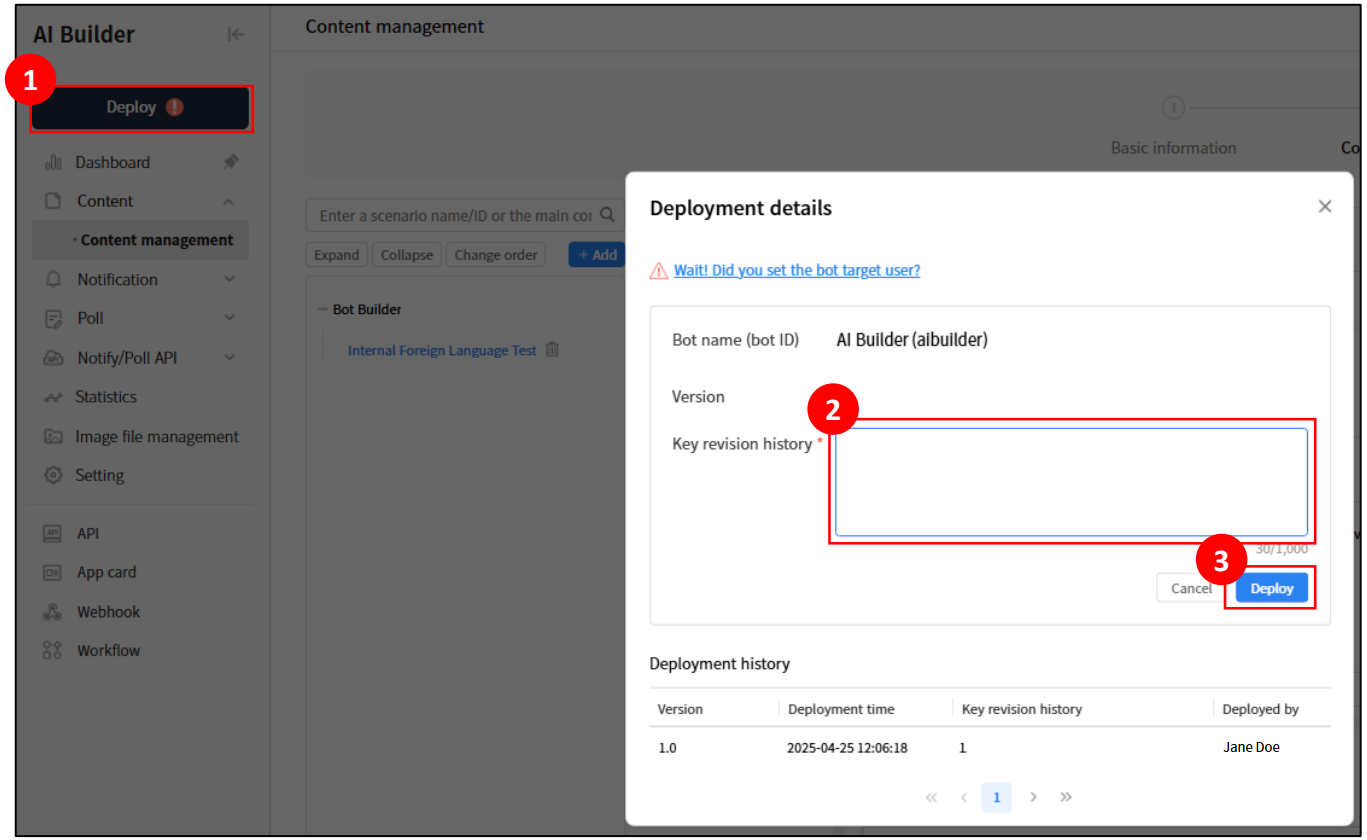

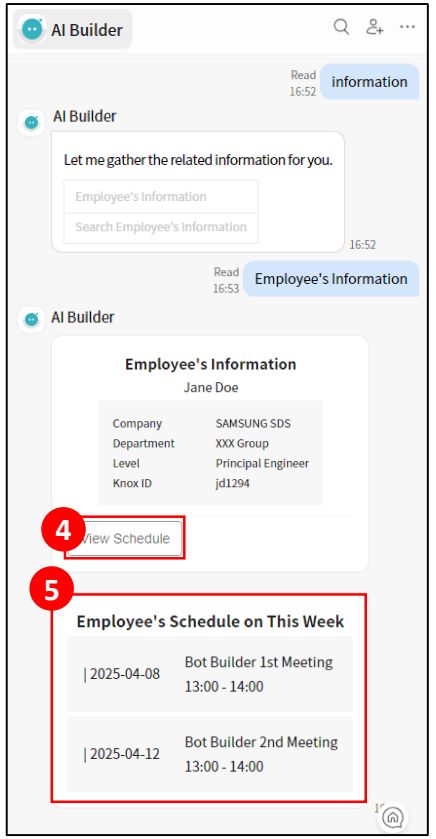


6. How to use app card in the webhook

Webhook event can be received through an app card.

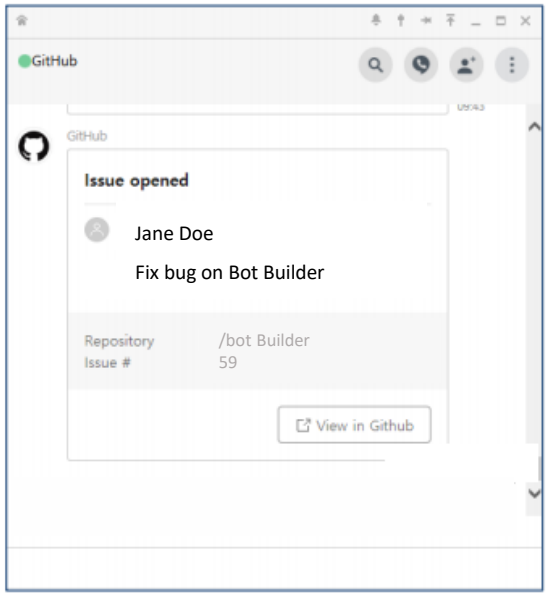


Receive Github event

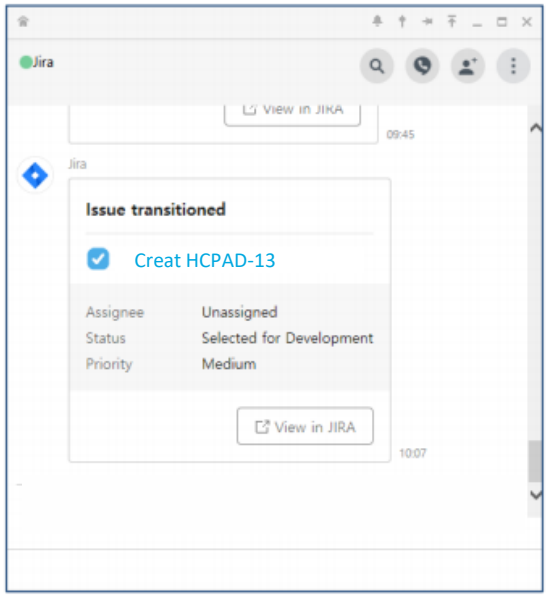


Receive Jira event

6. How to use app card in the webhook

Register a webhook. Select ‘app card’ at display settings.

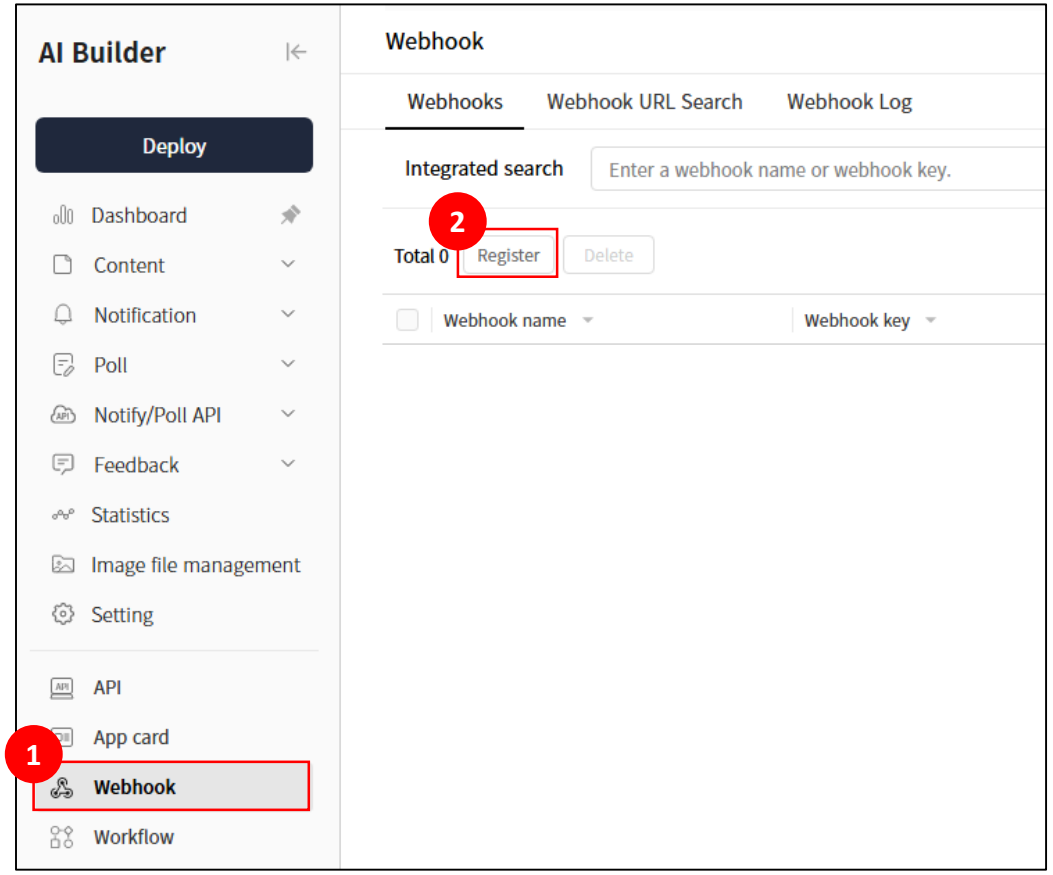


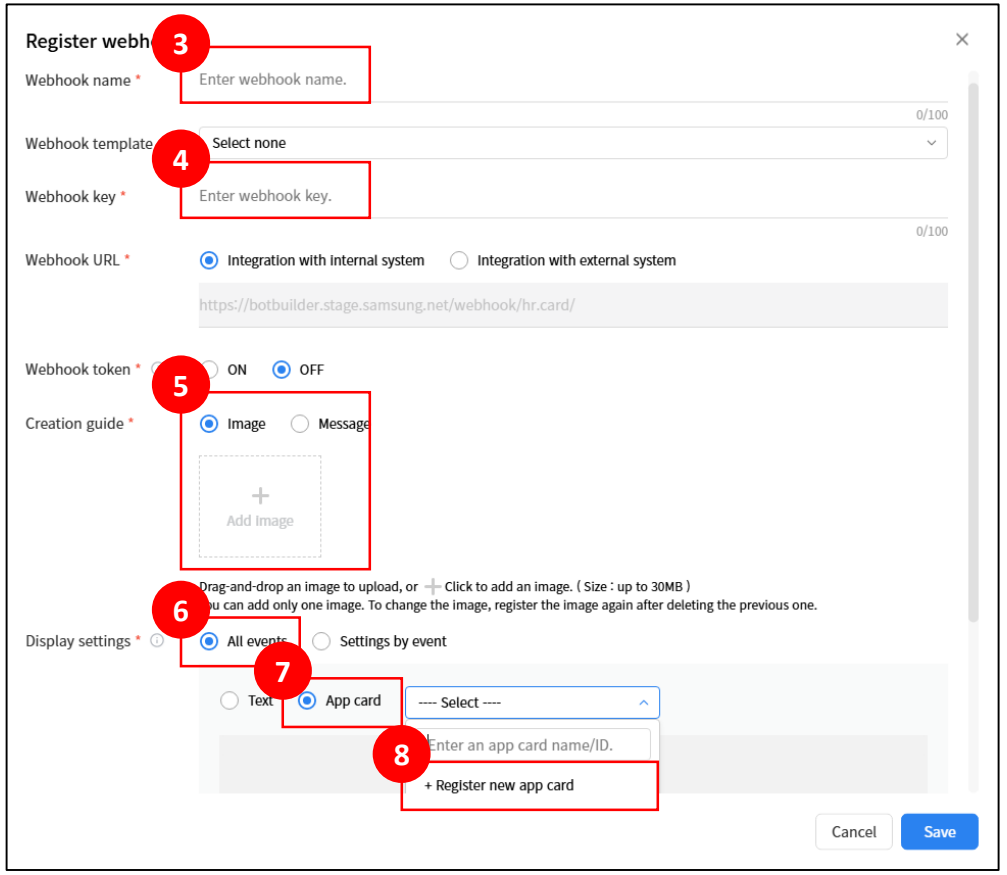

6. How to use app card in the webhook


Add an app card.

It can be integrated with API parameter when the value is inputted in the form of ${body.variableName}.

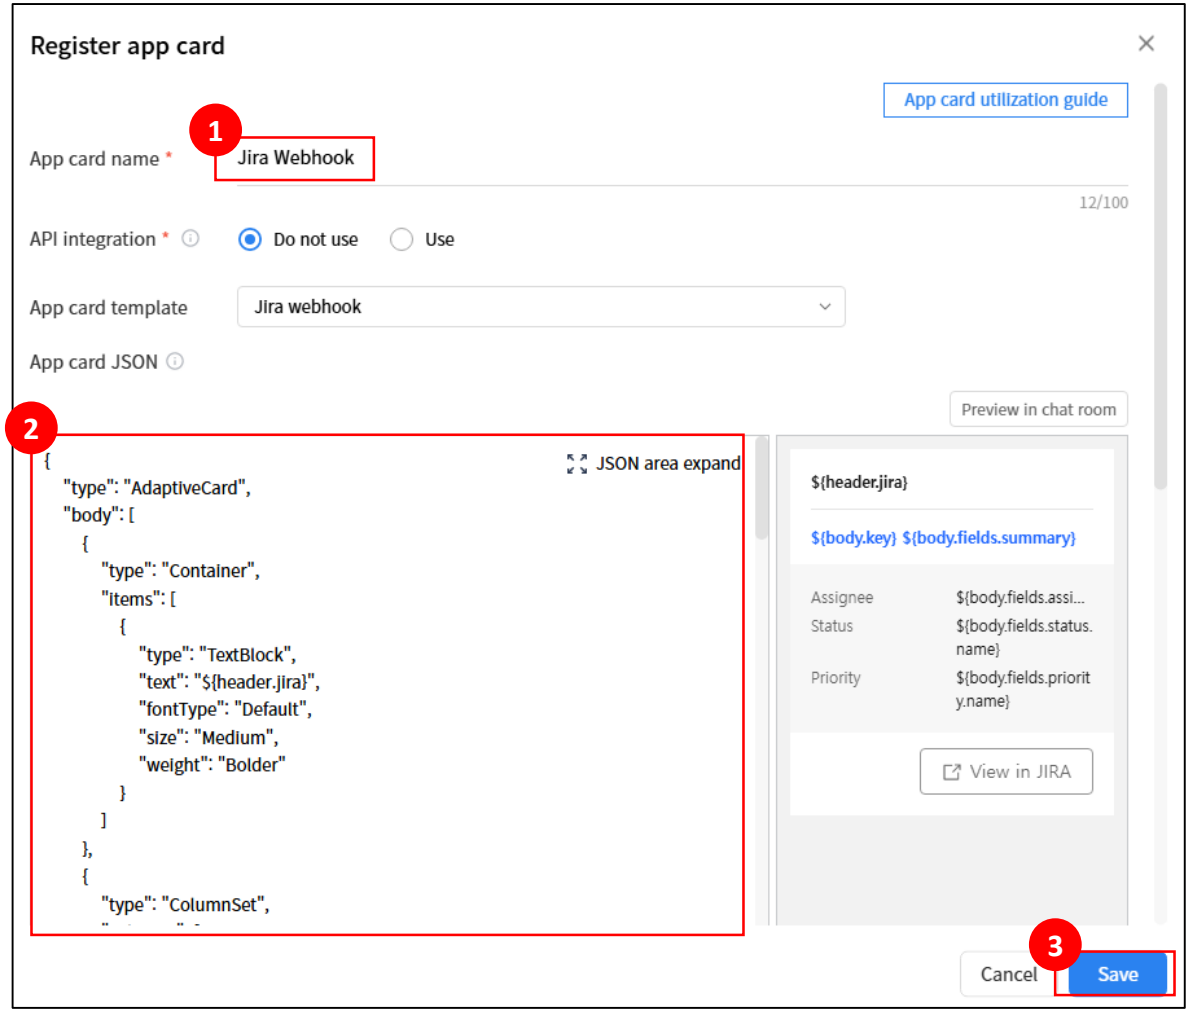


6. How to use app card in the webhook


After being deployed, webhook can be checked in the messenger.

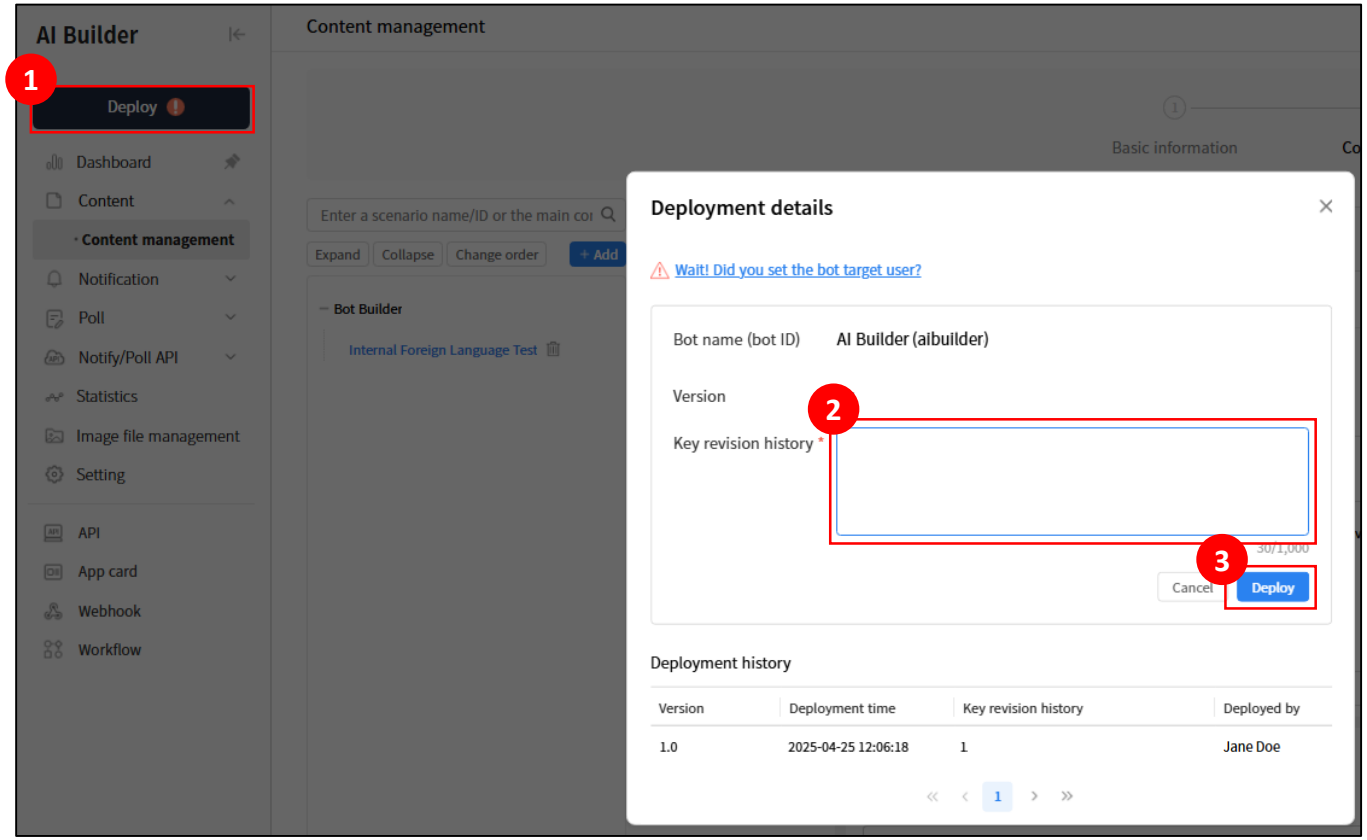

6. How to use app card in the webhook


Check the webhook URL in messenger.

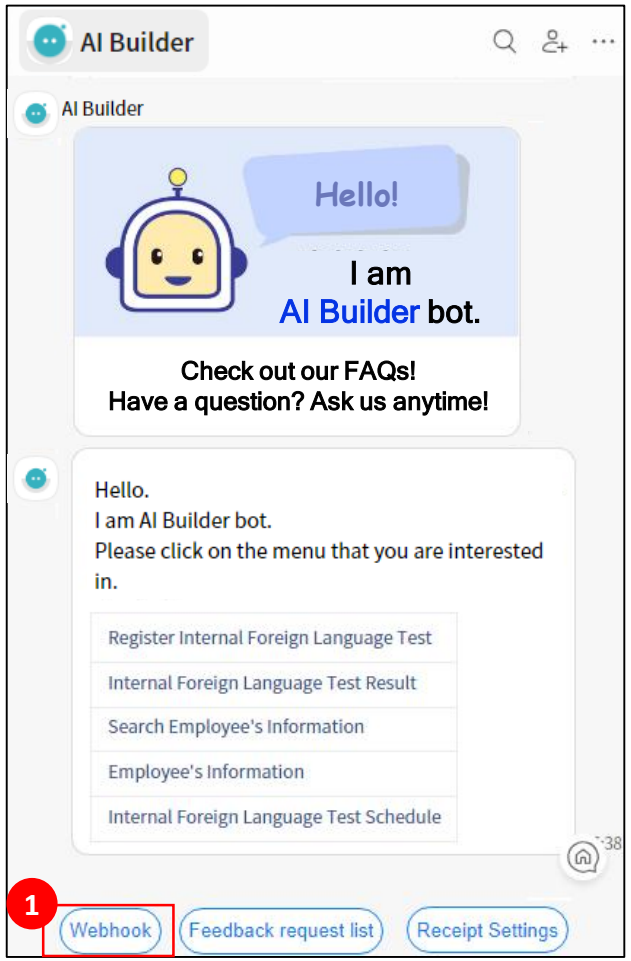

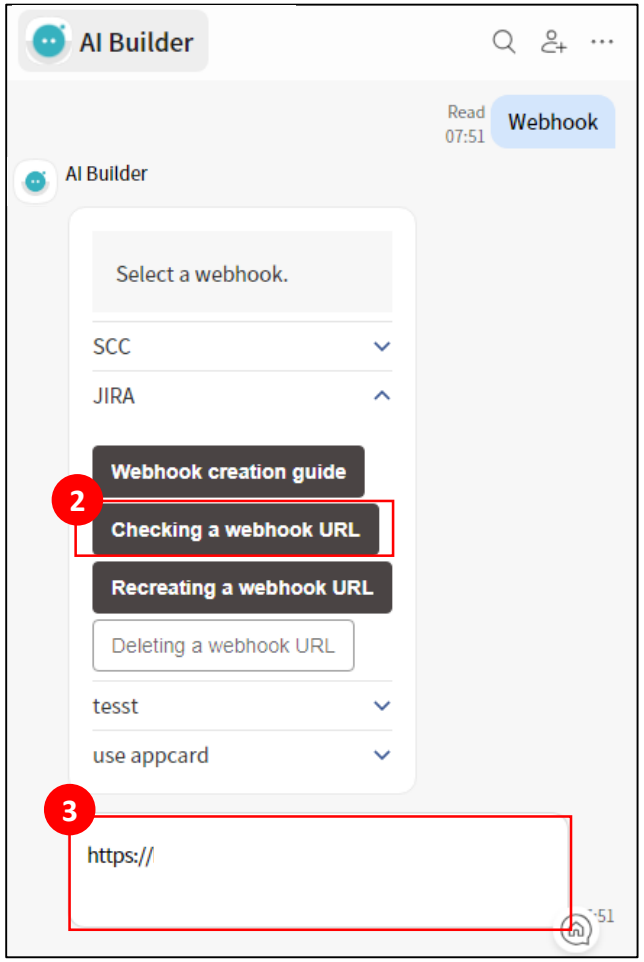


6. How to use app card in the webhook


If webhook URL is called, the app card will be sent.

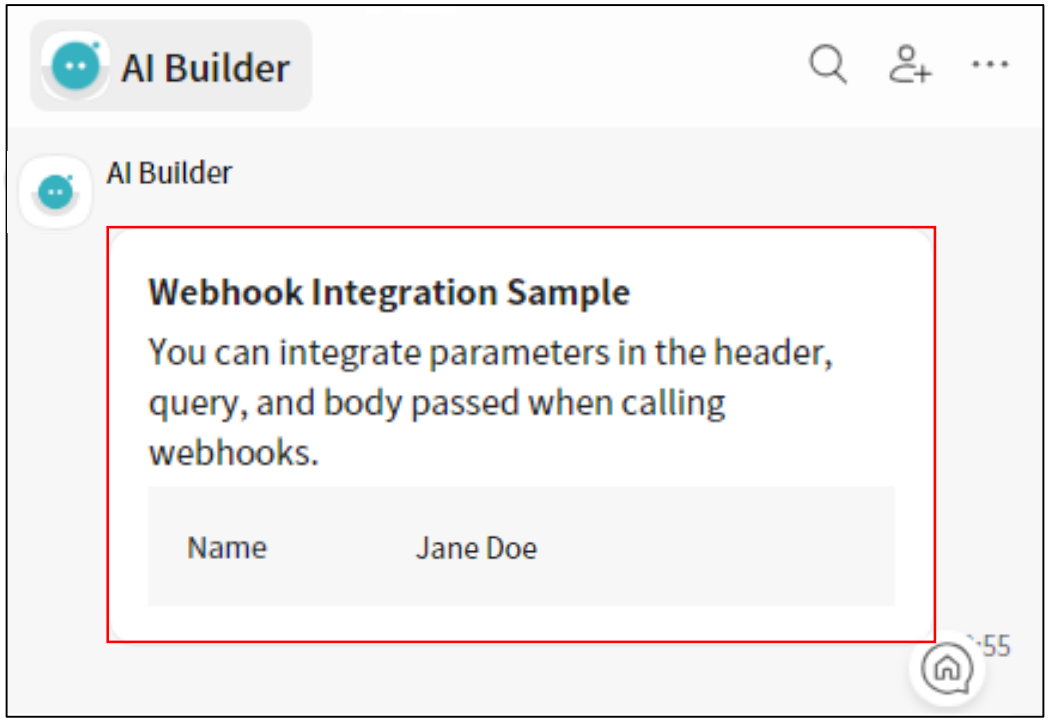

7. Others


The scenario will be shown after a click on the app card button.

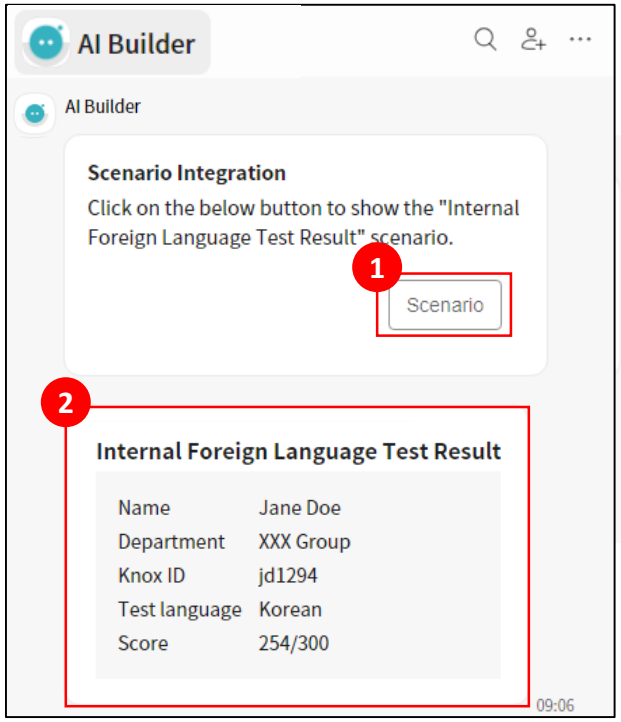

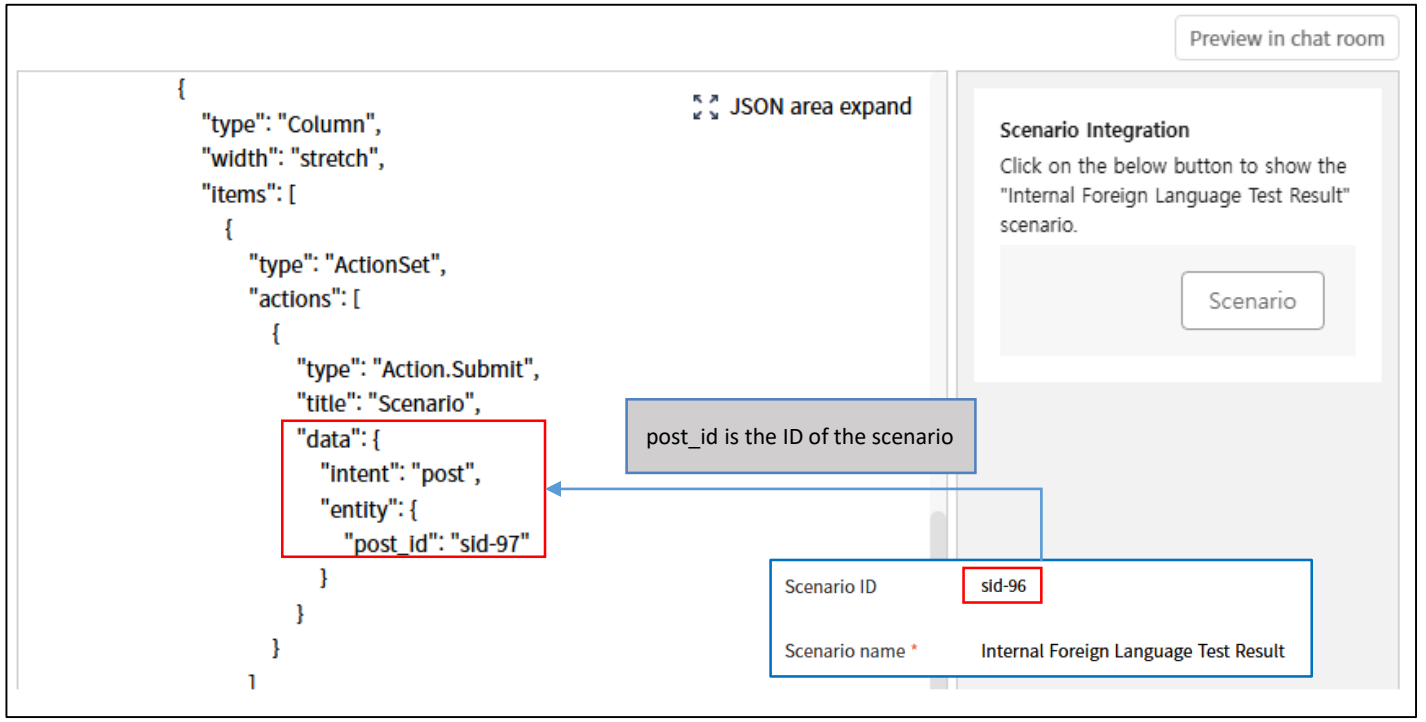

7. Others

Home, back, feedback will be shown after a click on the app card button.

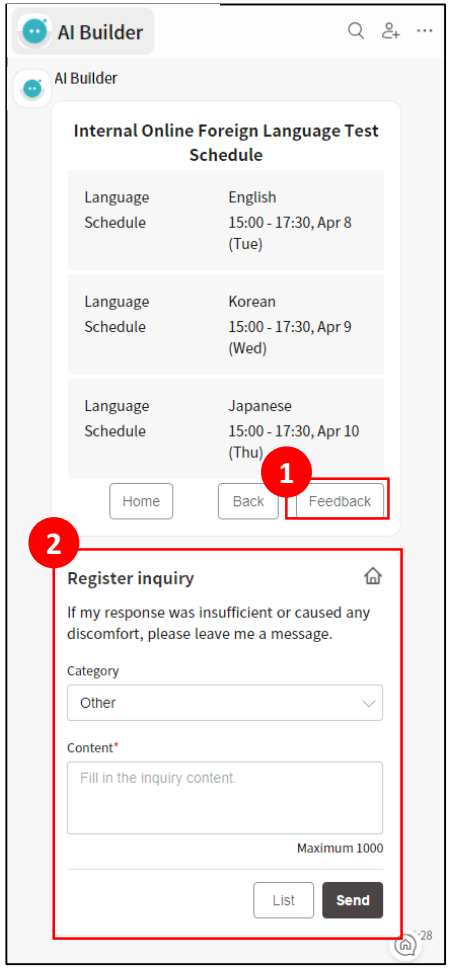



7. Others

Home

```
{
  "type": "Action.Submit",
  "title": "home",
  "data": {
     "intent": "home"
   }
},
```

Back

```
{
  "type": "Action.Submit",
  "title": "home",
  "data": {
     "intent": "historyBack"
   }
},
```

Feedback

```
{
  "type": "Action.Submit",
  "title": "home",
  "data": {
     "intent": “feedback"
   }
},
```

Scenario

If there is no sub-scenario:

```
{
  "type": "Action.Submit",
  "title": "home",
  "data": {
     "intent": "post",
     "entity": {
        "post_id": "scenarioID"
     }
    }
},
```

Scenario

If there is a sub-scenario:


```
{
  "type": "Action.Submit",
  "title": "home",
  "data": {
     "intent": “category",
     "entity": {
        "post_id": "scenarioID"
     }
    }
},
```

App card

```
{
  "type": "Action.Submit",
  "title": "home",
  "data": {
     "intent": “ppCard",
     "entity": {
        "post_id": "appCardName"
     }
    }
},
```


7. Others

App card can be deactivated after a click on app card button.

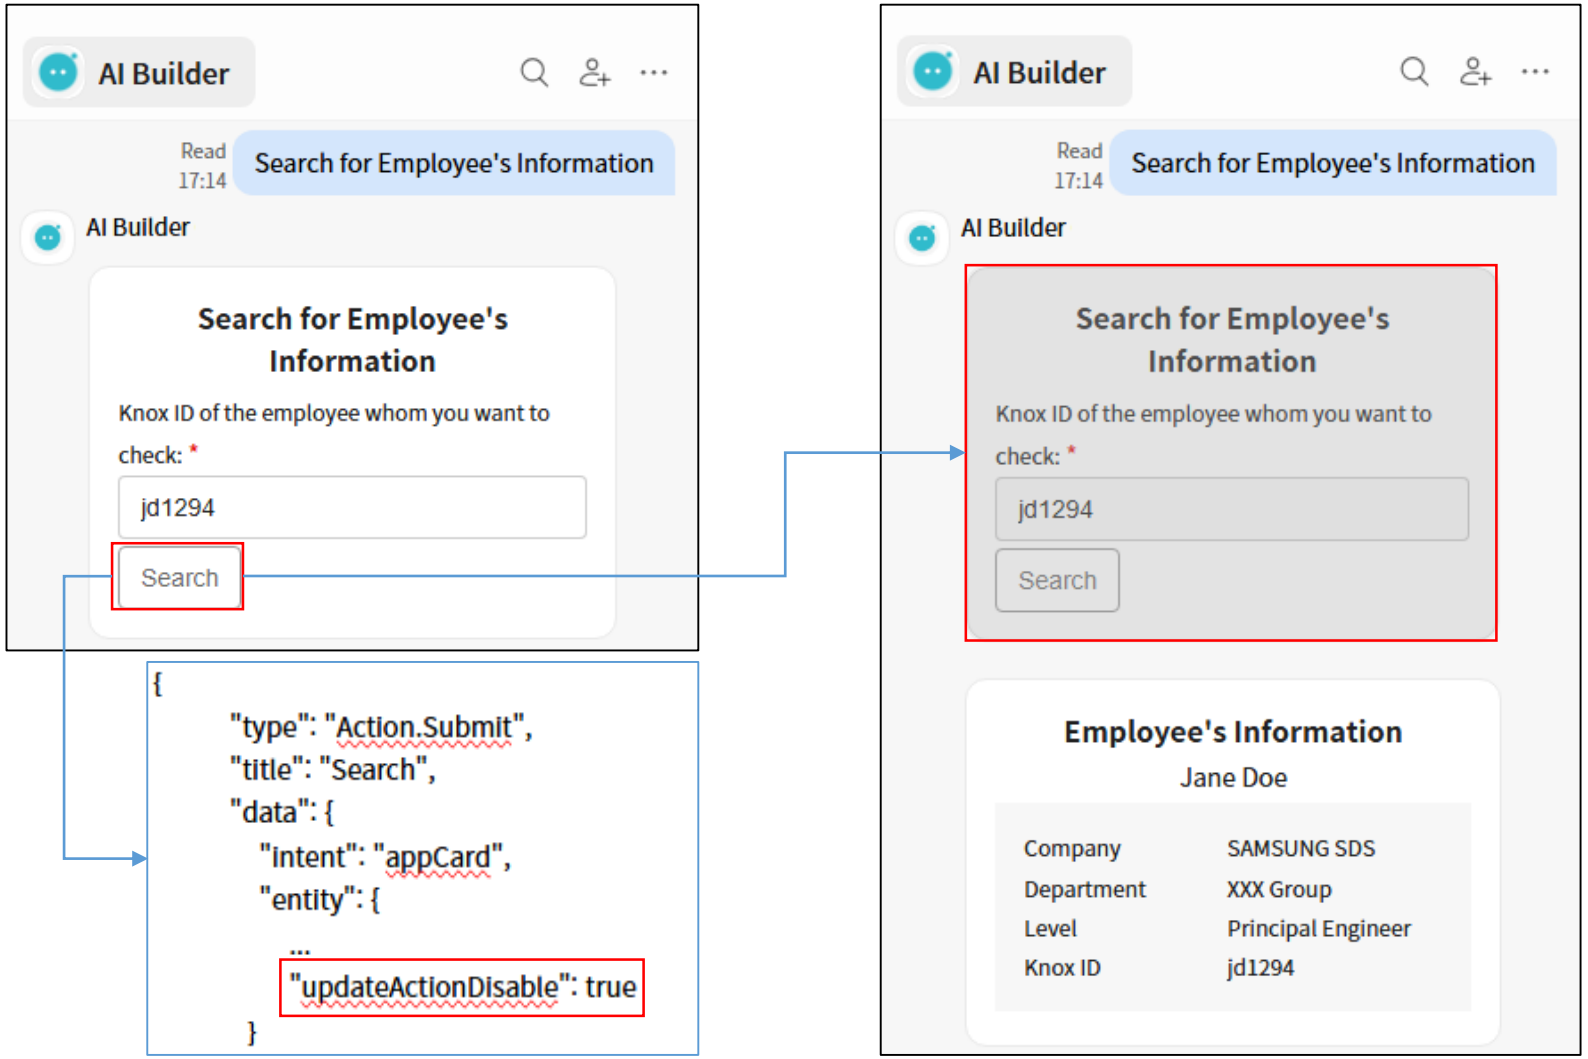

7. Others


App card can be updated after a click on app card button.

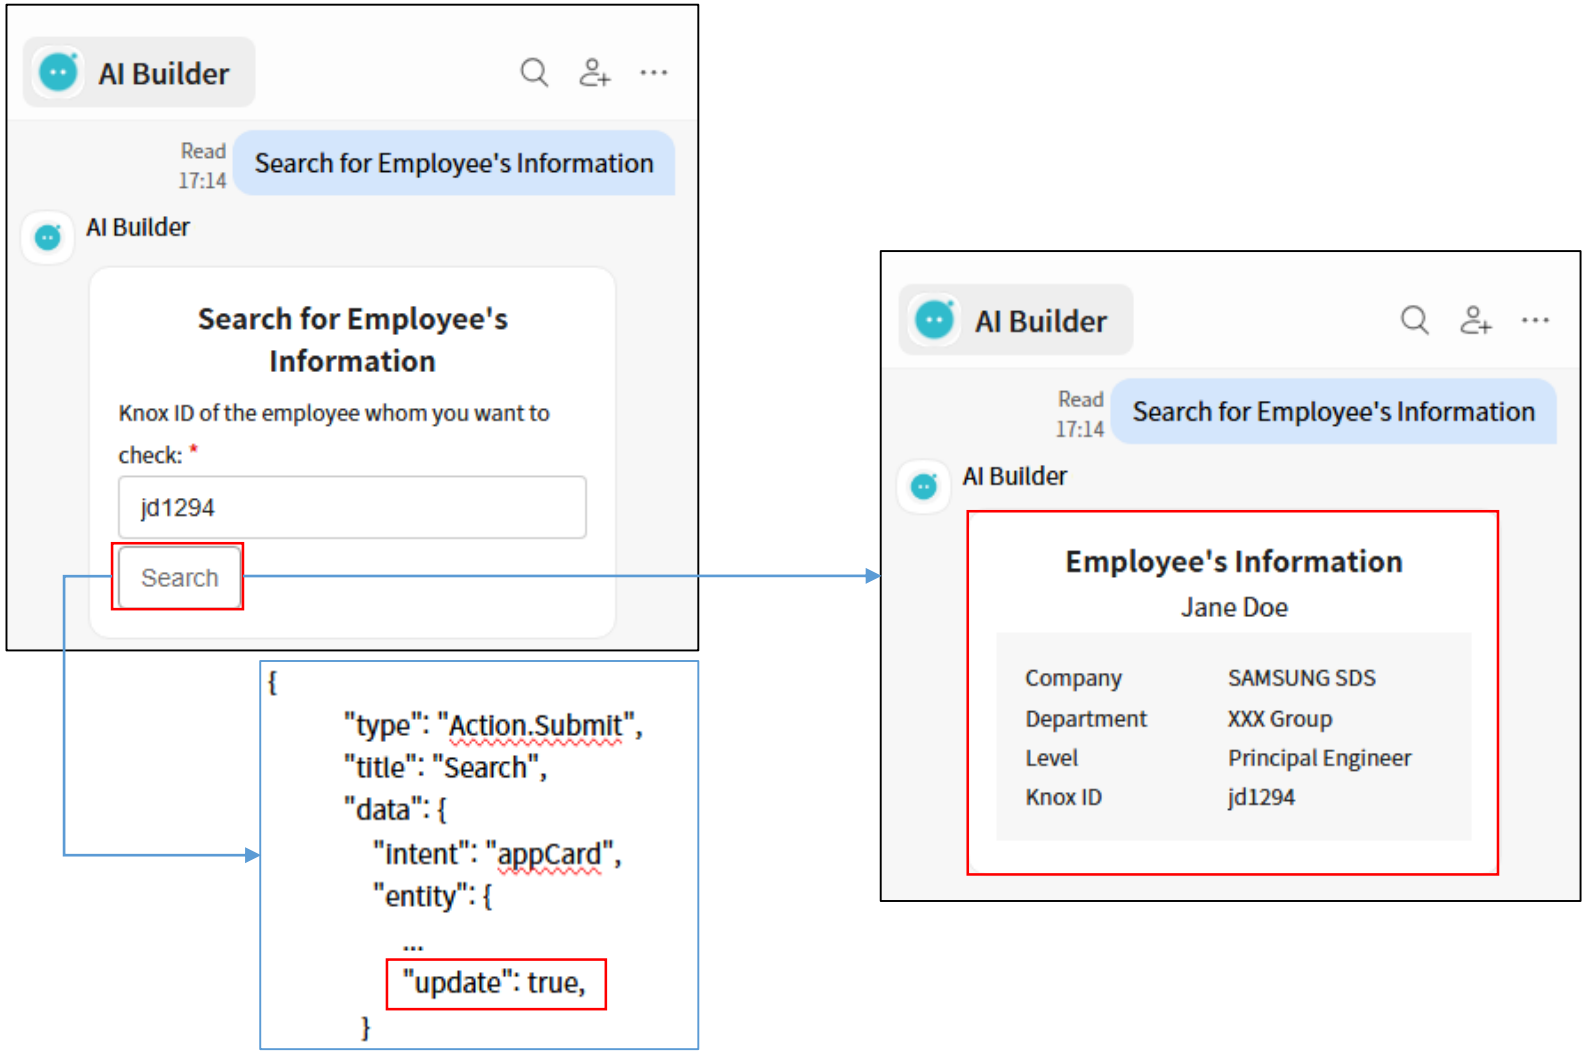


7. Others

After content inputted in an app card is checked and approved by specified user(s), task can be run.

User 1 - Request work

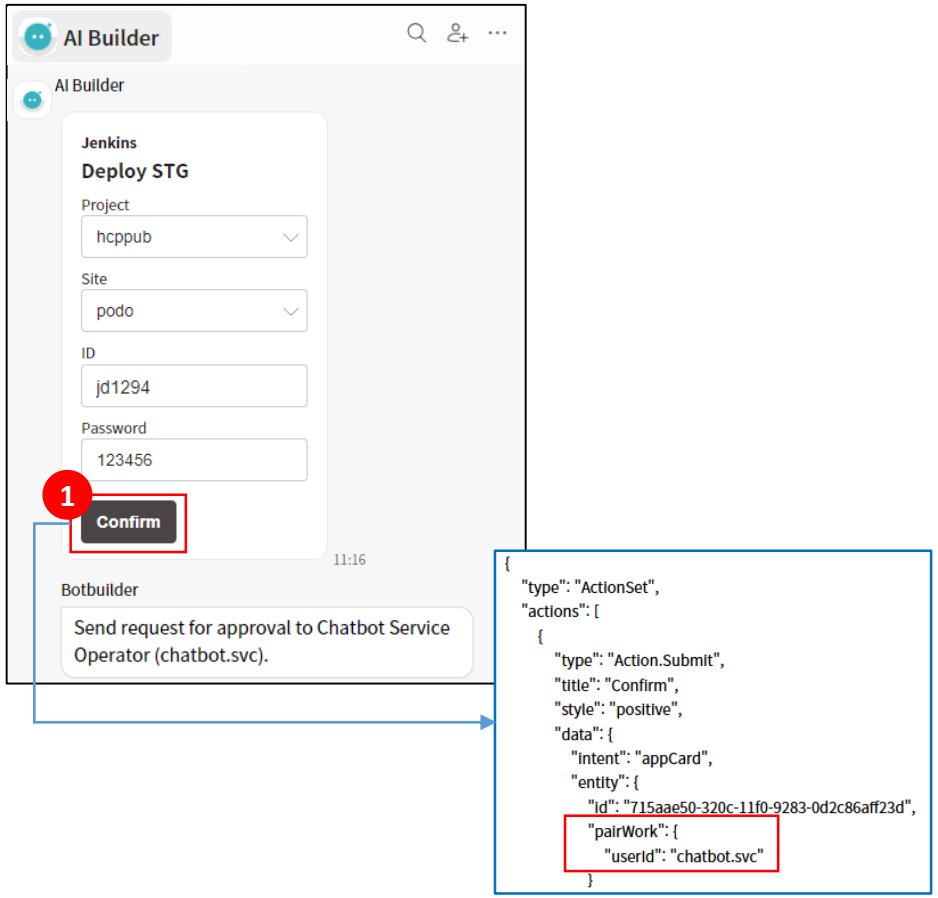



User 2 - Approve the work and write own opinion

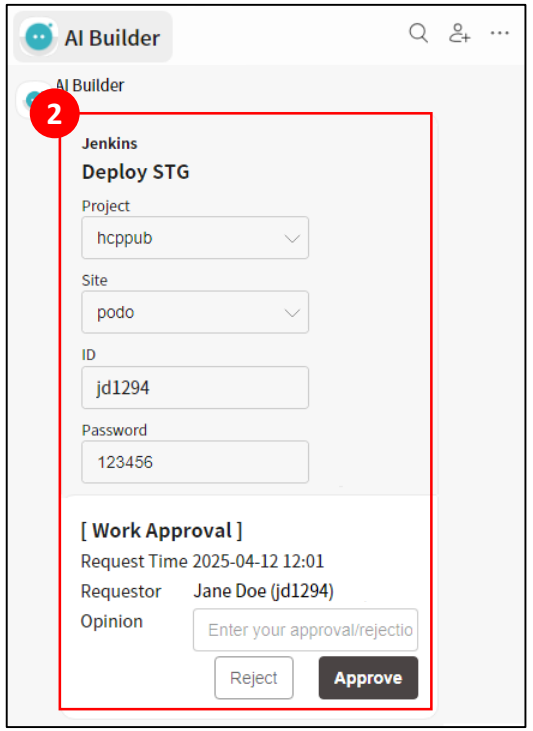

7. Others


Select approver(s) or directly input their ID(s).

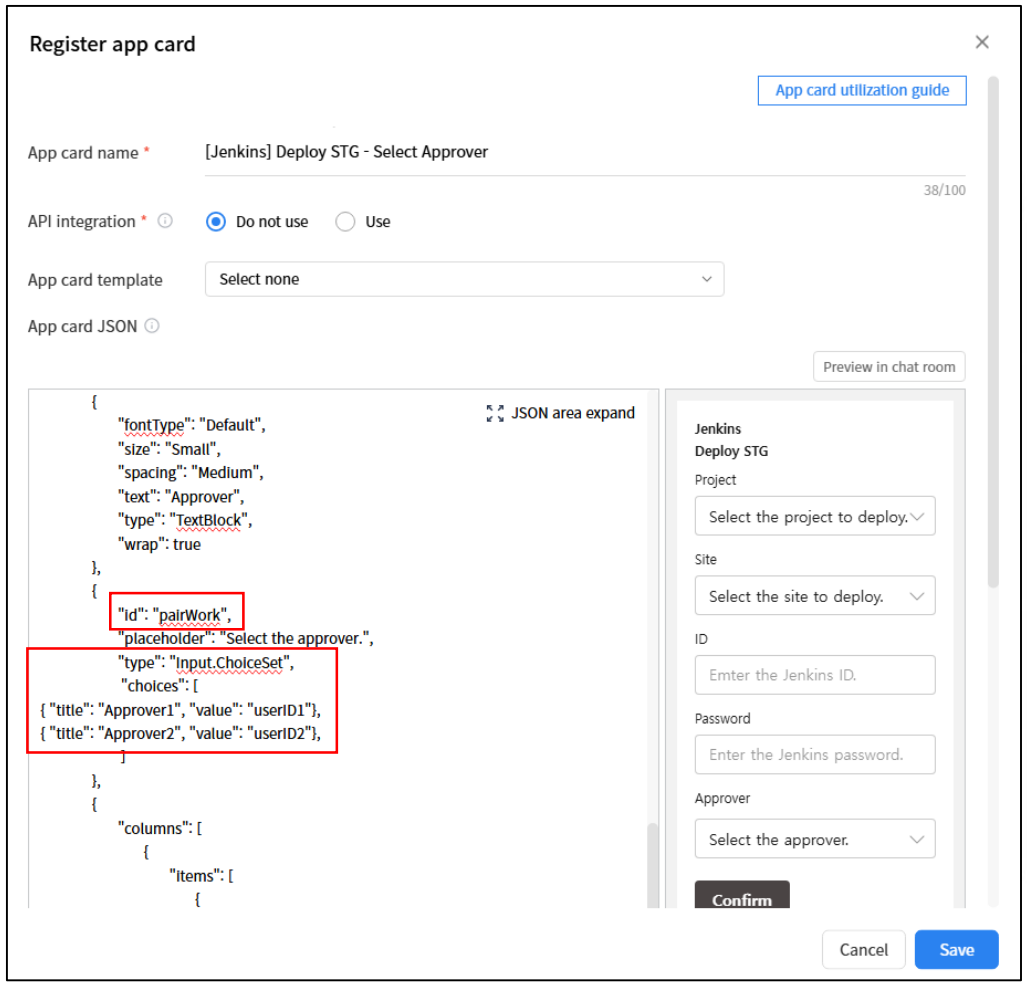

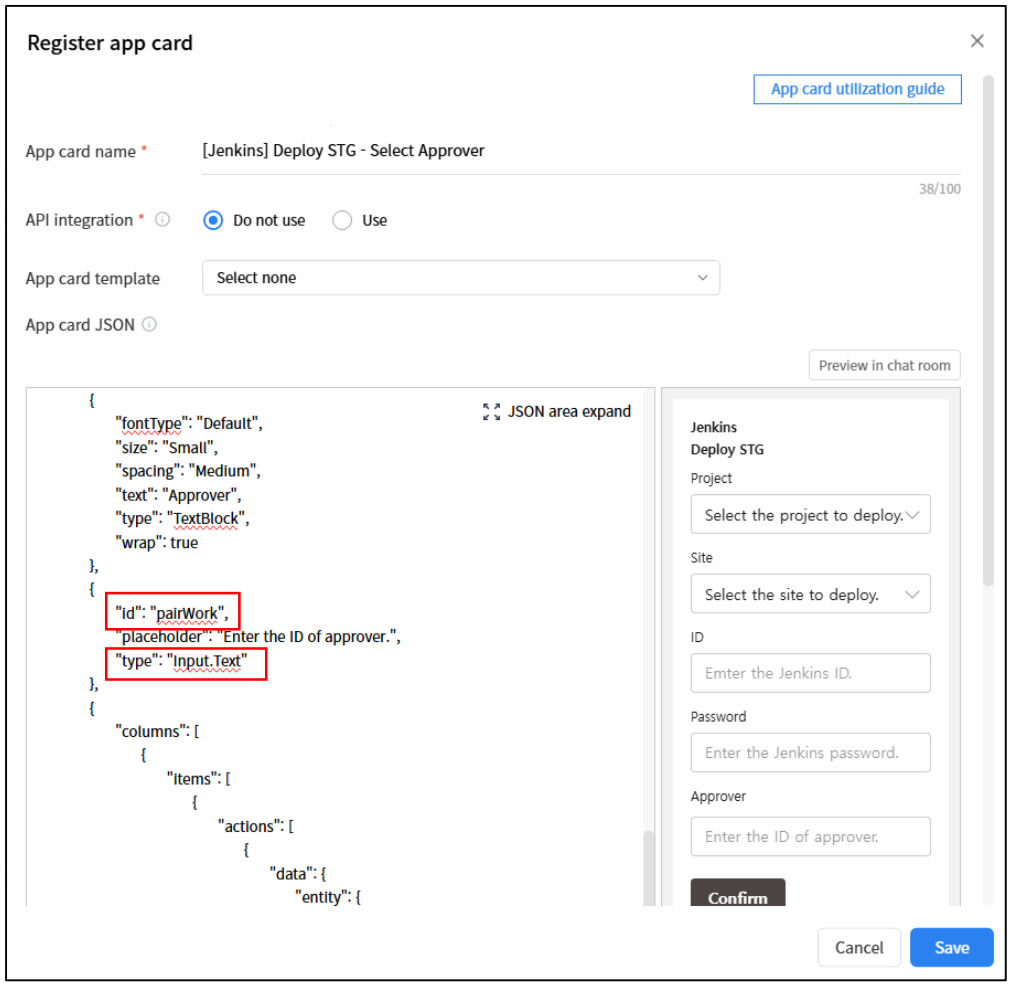

7. Others

Input OTP to get the task done.

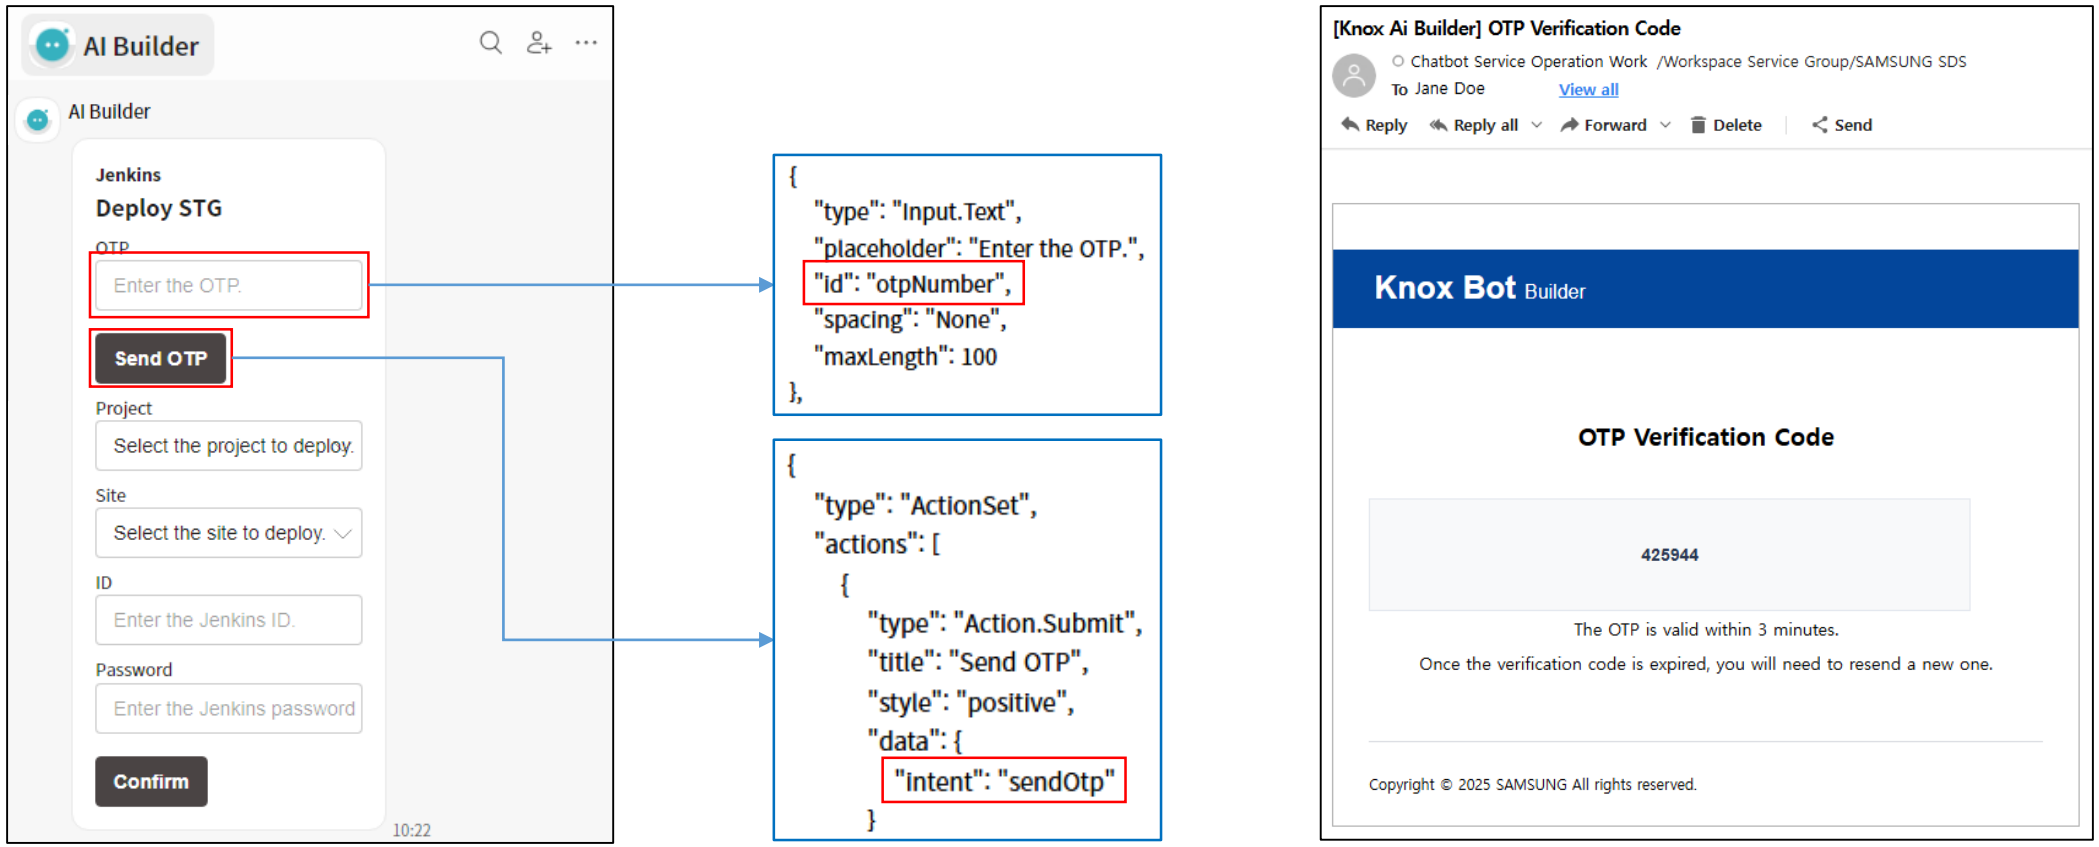


7. Others

The contents inputted in the app card can be sent as a notification to other users and chat rooms.

Click the button


Send a notification to other user(s) in other chatroom(s)

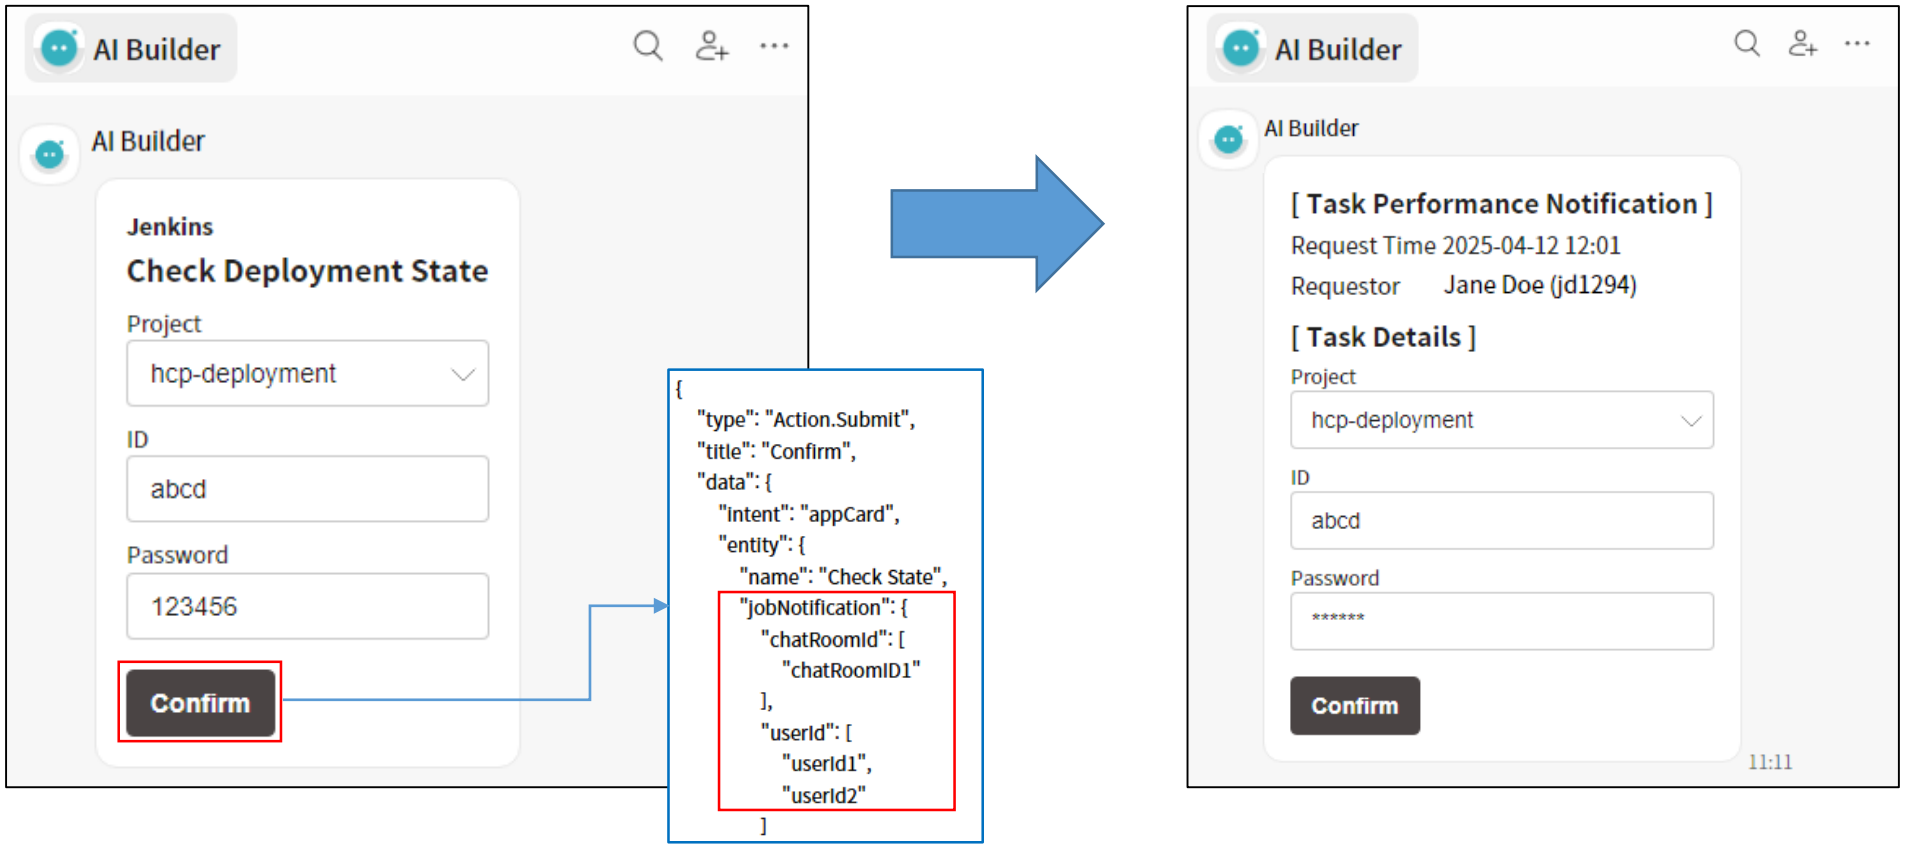


7. Others

Limit the button click, and only allow in need.

Unable to perform the task

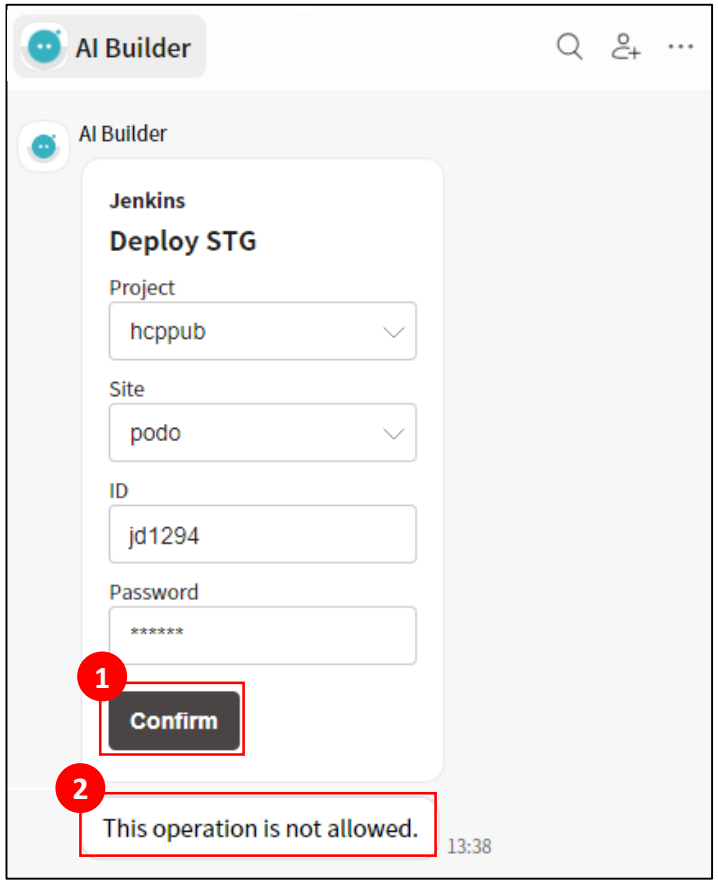

Able to perform the task

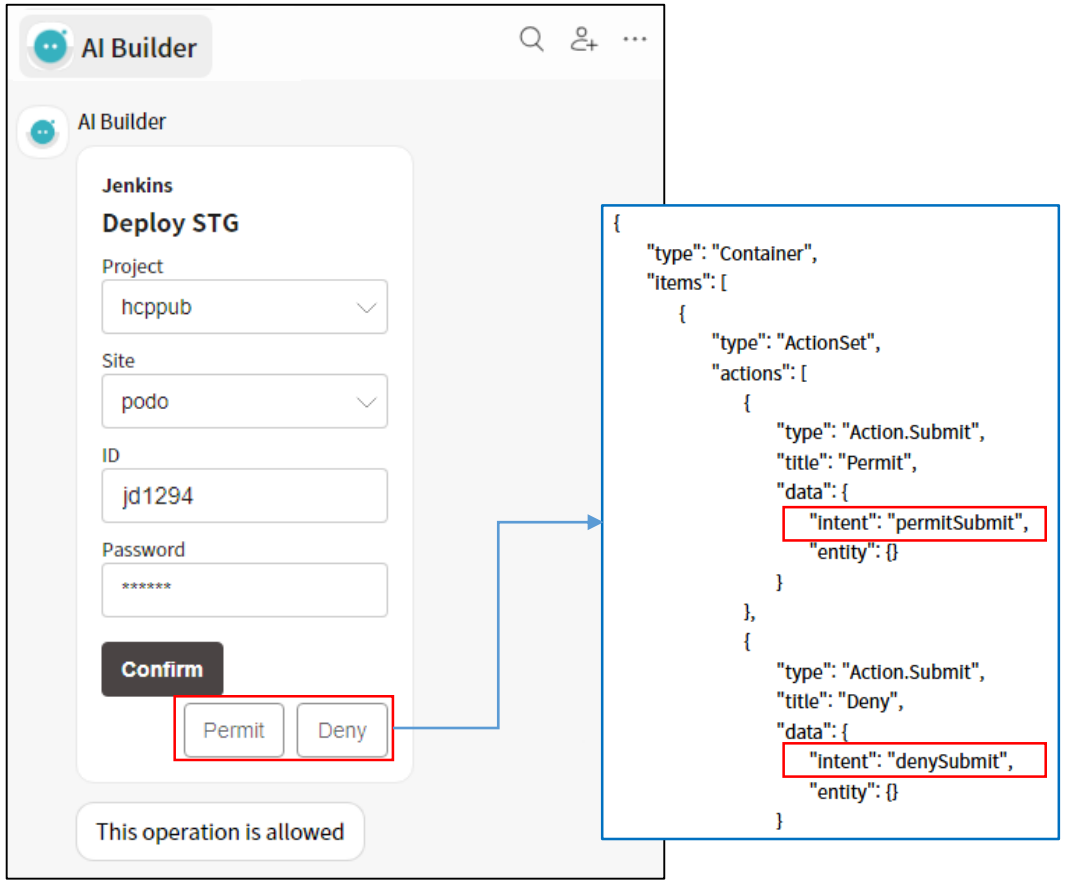

7. Others

Allow to click the button only in the specified chat room.

Chat room unable to perform the task

