


(a) Local multi-fragment development

Shared folder or repository server

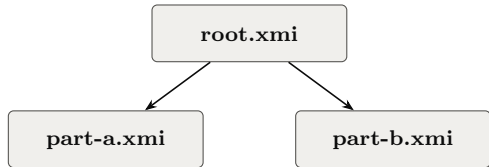

references by path, href="part-a.xmi#//..."

read and write in place


Developer A

Developer B

A path names a location. An edit in place changes what every reader sees, and every reader needs the shared location.

(b) Decentralized development

IPFS network

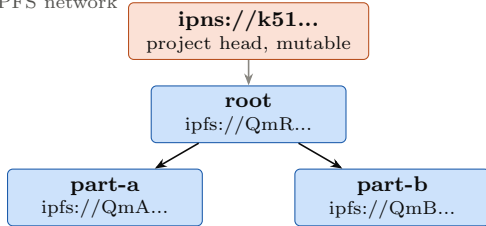

references by content, href="ipfs://QmA...#//..."

add and fetch
by content

Node of A

Node of B

Pinning node

A content identifier names a version. A reference stays fixed, and a reader fetches a fragment from whichever node holds a copy.