

(a) Local multi-fragment development

One location, for example



local disk



shared network drive



HTTP service

root.xmi

part-a.xmi

part-b.xmi

references by path or URL, href="part-a.xmi#//..."


read and write in place

Developer A

Developer B

A path or URL names a location. An edit in place changes what every reader sees, and every reader needs that location.

(b) Decentralized development

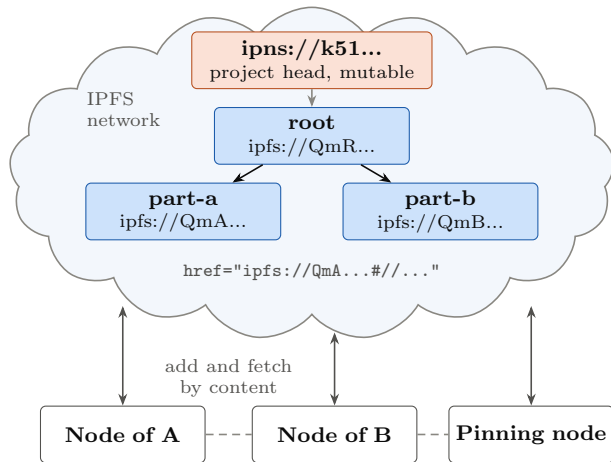

A content identifier names a version. The blocks live somewhere in the network, and a reader fetches a fragment from whichever node holds a copy.